



INSTITUT DE FRANCE  
Académie des sciences

# *Comptes Rendus*

---

## *Chimie*

Lamia Ben Gaida, Hana Gannoun, Laurence Casalot, Sylvain Davidson and Pierre-Pol Liebgott

**Biohydrogen production by *Thermotoga maritima* from a simplified medium exclusively composed of onion and natural seawater**


Volume 25, Special Issue S2 (2022), p. 129-143

Published online: 7 February 2022

<https://doi.org/10.5802/crchim.136>

**Part of Special Issue:** Sustainable Biomass Resources for Environmental, Agronomic, Biomaterials and Energy Applications 3

**Guest editors:** Mejdi Jeguirim (Université de Haute-Alsace, Institut de Sciences des Matériaux de Mulhouse, France), Salah Jellali (Sultan Qaboos University, Oman) and Besma Khiari (Centre of Water Researches and Technologies, Tunisia)

 This article is licensed under the  
CREATIVE COMMONS ATTRIBUTION 4.0 INTERNATIONAL LICENSE.  
<http://creativecommons.org/licenses/by/4.0/>



*Les Comptes Rendus. Chimie* sont membres du  
Centre Mersenne pour l'édition scientifique ouverte  
[www.centre-mersenne.org](http://www.centre-mersenne.org)  
e-ISSN : 1878-1543



---

Sustainable Biomass Resources for Environmental, Agronomic, Biomaterials and Energy Applications 3 / *Ressources de biomasse durables pour des applications environnementales, agronomiques, de biomatériaux et énergétiques 3*

# Biohydrogen production by *Thermotoga maritima* from a simplified medium exclusively composed of onion and natural seawater

Lamia Ben Gaida<sup>a</sup>, Hana Gannoun<sup>a</sup>, Laurence Casalot<sup>® b</sup>, Sylvain Davidson<sup>b</sup> and Pierre-Pol Liebgott<sup>® \*, a, b</sup>

<sup>a</sup> Université de Tunis El Manar, Laboratoire des Matériaux et de l'Environnement pour le Développement Durable, ISSBAT, 9 Avenue Zouhaïer Essafi, 1006 Tunis, Tunisia

<sup>b</sup> Aix-Marseille Université, Université de Toulon, IRD, CNRS MIO UM 110, 13288 Marseille, France

*E-mails:* lamia.bengaida@issbat.utm.tn (L. Ben Gaida), hana.gannoun@issbat.utm.tn (H. Gannoun), laurie.casalot@mio.osupytheas.fr (L. Casalot), sylvain.davidson@mio.osupytheas.fr (S. Davidson), pierre-pol.liebgott@mio.osupytheas.fr (P.-P. Liebgott)

**Abstract.** Biohydrogen production by the anaerobic hyperthermophilic and halophilic bacterium, *Thermotoga maritima* (TM), was conducted using a mixture of Onion Waste Juice (OWJ) and seawater (SW). The highest production of biohydrogen (H<sub>2</sub>) with OWJ, as the exclusive source of carbon and energy, was obtained for an optimum volume of 50% (v/v), with the highest overall productivity of biohydrogen (15.6 mM/h) and a maximum yield of 2.6 (mol<sub>H<sub>2</sub></sub>/mol<sub>Hexose</sub>). This was mainly due to the presence of organosulfur compounds and the natural presence of ammonium contained in OWJ. The addition of inorganic nitrogen and iron sources in the mixture of SW and OWJ has improved biohydrogen production, achieving productivity yield (23.0 mM/h for 3.2 mol<sub>H<sub>2</sub></sub>/mol<sub>Hexose</sub>) close to the maximum obtained for TM. Above 600 mL, the high concentration of substrate (>30 gCOD/L) led the metabolism to deviate towards lactate production at the expense of H<sub>2</sub> production. A fed-batch culture with the sequential addition of concentrated OWJ mixed with only sea salt was investigated for the prevention of substrate-associated growth inhibition by controlling the nutrient supply. The total cumulative biohydrogen produced was about 300 mM after 30 h of incubation.

**Keywords.** Biohydrogen, Onion waste juice, Seawater, Dark fermentation, *Thermotoga maritima*, Hyperthermophilic, Bioreactor.  
*Published online:* 7 February 2022

---

\* Corresponding author.

## 1. Introduction

In the coming years, the increase in world population and in average per capita income would inexorably lead to the growth of fossil fuel demand. However, this heavy dependence on fossil fuels results in a series of environmental problems, e.g., global warming and air pollution, and generates sustainability problems in the face of a continuously increasing demand. Thus, to solve the energy crisis and environmental degradation, exploring clean and renewable energy alternatives is crucial [1,2].

In Tunisia, the vast majority of renewable energy capacity comes nowadays from wind (46%) and solar photovoltaic (42%) sources, which are expected to increase by 2030. With a high percentages of organic waste (nearly 70% of organic waste released in landfills) and only 12% of total energy production expected to come from biomass sources, Tunisia should consider focusing more research on renewable energy recovery from biomass. The biomass resources are often locally available as is waste. Hence, biomass allows not only waste management but also energetic conversion of fermentable waste [3].

Among the organic substrates, onion (*Allium cepa L.*) is the second most commonly cultivated vegetable worldwide, after tomatoes [4]. Its production is witnessing an annual growth given a consumer demand increase (the current annual production of onions is around 93 million tons). Simultaneously, huge amounts of onion waste are produced from different parts and onions processing, affecting the environment in various ways [5]. These onion waste materials are problematic for the industry as they are not suitable as feed for livestock due to their unpleasant smell while the phytopathogenic agents presence makes them also unsuitable as organic fertilizers [6,7]. So far, the main solution for onion waste management was to discharge it in landfills, which has high economic and environmental impacts. However, onion waste consists of a significant amount of functional components as flavonoids, organosulfur and phenolic compounds [8]; its dry weight is composed roughly of 65% of nonstructural/soluble carbohydrates including glucose, fructose, sucrose, and fructooligosaccharides, which are specific functional compounds of onion waste that should be valorized.

Onion valorization is part of some pretreatment

methods based on technologies such as organic extraction, supercritical carbon dioxide, supercritical water treatment, microwave, assisted microwave, hydro diffusion, and gravity or high-pressure processing [5]. However, few studies looked into the fermentable potential of onion waste as a renewable raw material for biohydrogen production identified as a clean renewable energy carrier and an ideal candidate to replace fossil fuels [4]. Among the biological processes for waste treatment, anaerobic digestion (AD) is suggested as a truly sustainable process which can handle the contained high organic contents [9].

Dark fermentation (DF) is considered as the simplest process of anaerobic digestion of organic matter, since it is a pollution-free, renewable, and low-cost alternative to conventional processes [10]. Theoretically, in DF processes, the yield of hydrogen production depends on the bacteria involved and acid formation. The various metabolic pathways are influenced by the operating conditions (substrate concentration, pH, temperature, hydraulic retention time, reactor type, and seed sludge). Temperature is one of the most influencing factors since thermophilic conditions are widely used in H<sub>2</sub> production from organic waste [11]. High temperature accelerates reaction rates and offers technical advantages including reduction of viscosity, improvement of mixing efficiency, reduction of the contamination risk, absence of reactor cooling, and enhancement of hydrolysis complex substrates rate [12,13]. The majority of (hyper) thermophilic microbial species producing hydrogen belong to *Clostridium*, *Caldicellulosiruptor*, *Thermoanaerobacter*, *Thermotoga*, *Thermococcus*, and *Pyrococcus* genus. *Thermotoga maritima* (TM) is one of several hyperthermophilic bacteria (optimal growth temperature around 80 °C), which have received considerable interest recently as potential sources of hydrogen [14]. TM can produce H<sub>2</sub> at levels that approach the Thauer limit (theoretical H<sub>2</sub>/C<sub>6max</sub> = 4; [15]), using a wide range of inexpensive polysaccharide sources, such as cheese whey, molasse, potato starch, or fruit and vegetable waste [16,17]. Nevertheless, it is needed to add inorganic sulfur and nitrogen sources to enhance TM growth. These additions could be replaced by using cost-effective fruits or vegetables providing the whole essential components for its growth. Among the different fruit and vegetable, onion (*Allium cepa L.*)

is a vegetable rich in carbohydrates (structural and nonstructural) being a good source of dietary fiber and fructooligosaccharides [18] as well as organic acids [19]. It also has significant amounts of vitamins, minerals, and trace elements [20]. Moreover, onion represents one of the main sources of bioactive compounds, such as flavonols and organosulfur compounds (e.g., S-alk(en)yl-L-cysteine sulfoxides) [21], and as nitrogen inorganic source in the ammonium form [22].

In the past years, several research studies focused on the production of hydrogen from a variety of waste mixtures in the form of complex substrates, such as lignocellulosic waste, combinations of fruit and vegetable, sewage sludge, and livestock waste. However, a limited number of studies considered the energy recovery of a single waste—as a rich and complete substrate. In this study, we tested the ability of TM to ferment carbohydrates naturally present in onion in a batch stirred tank reactor (STR) supplemented with seawater. The stated objectives were (i) to use a cost-effective simplified medium providing all the needed components for TM growth and biohydrogen production and (ii) to preserve fresh water considered as a scarce resource. Thus, several onion concentrations were tested to evaluate the maximum concentration that TM could tolerate. Thereafter, to optimize biohydrogen production, essential microelements, for the optimal growth of TM, were added in low concentrations in the mixture of seawater and OWJ. Finally, a sequential fed-batch culture was conducted to remove the substrate limitation and optimize the biohydrogen production.

## 2. Material and methods

### 2.1. Strain and culture medium


*T. maritima* (TM) strain MSB8 (DSMZ 3109) was cultivated as previously described [23]. The Basal medium contained, per liter:  $\text{NH}_4\text{Cl}$  0.5 g,  $\text{K}_2\text{HPO}_4$  0.3 g,  $\text{KH}_2\text{PO}_4$  0.3 g,  $\text{CaCl}_2$  0.1 g,  $\text{KCl}$  0.1 g,  $\text{NaCl}$  20 g,  $\text{MgCl}_2$  0.2 g, yeast extract 2.0 g and glucose 20 mM. Balch trace-mineral-element solution (10 mL) was added [23]. The inoculum was obtained from three bottles of 100 mL each, containing 50 mL of liquid culture.

### 2.2. Experimental system and operating conditions

TM was batch cultivated in a 2L well-mixed double-jacket glass bioreactor (STR) (FairMenTec, France) with a 1.5-L working volume [23]. The pH was controlled at  $7.0 \pm 0.1$  by the addition of sodium hydroxide ( $\text{NaOH} = 0.5 \text{ mM}$ ) and the temperature was maintained constant at  $80 \pm 1 \text{ }^\circ\text{C}$  (Figure 1). The inlet gas stream of  $\text{N}_2$  was controlled at 50 standard cubic centimeters per minute (SCCM) via a mass-flow meter (Bronkhorst, range 0–500 SCCM). The online measurements of bioreactor liquid volume,  $\text{NaOH}$  consumption,  $\text{CO}_2$  and  $\text{H}_2$  concentrations, were as previously described [23]. The stirring was set to 500 rpm. For each experiment, three successive batches were carried out. Fermentation juice samples were taken every two hours and the kinetics of substrate consumption, metabolite productions, and biohydrogen production were analyzed. The sequential fed-batch operation was carried out after a first batch mode, more precisely after the decrease of the maximal  $\text{H}_2$  production rate. The sequential feeding in fed-batch mode was realized using a controlled peristaltic pump connected to a serum bottle containing 1 L of concentrated OWJ supplemented with 30 g/L of sea salt. Each addition was of 10% (v/v) of OWJ about the final volume of the bioreactor. During the experiments, the data of  $\text{N}_2$  flow rates and the gas analyses ( $\text{N}_2$ ,  $\text{H}_2$ , and  $\text{CO}_2$ ) were recorded and used to calculate  $\text{CO}_2$  and  $\text{H}_2$  flows, which then led to the cumulative amounts of  $\text{CO}_2$  and  $\text{H}_2$  produced in the bioreactor [23].

### 2.3. Culture medium for the bioreactor experiments

A culture medium was made with natural SW taken directly from the “Bay of Gammarth” located near Tunis (Tunisia). This SW was filtered under vacuum through a  $0.45 \text{ }\mu\text{m}$  cellulose nitrate filter (Sartorius, Germany). White Onions used in this work came from municipal markets in Tunis. For the OWJ, onions were crushed with an electric juice extractor (OMEGA J8226) fitted with a worm screw system and an Ultem-plastic sieve to filter (0.3 mm) for the filtration and separation of liquid–solid phases. The separated OWJ was directly stored at  $-20 \text{ }^\circ\text{C}$ . First, the TM growth was studied in a rich complete medium

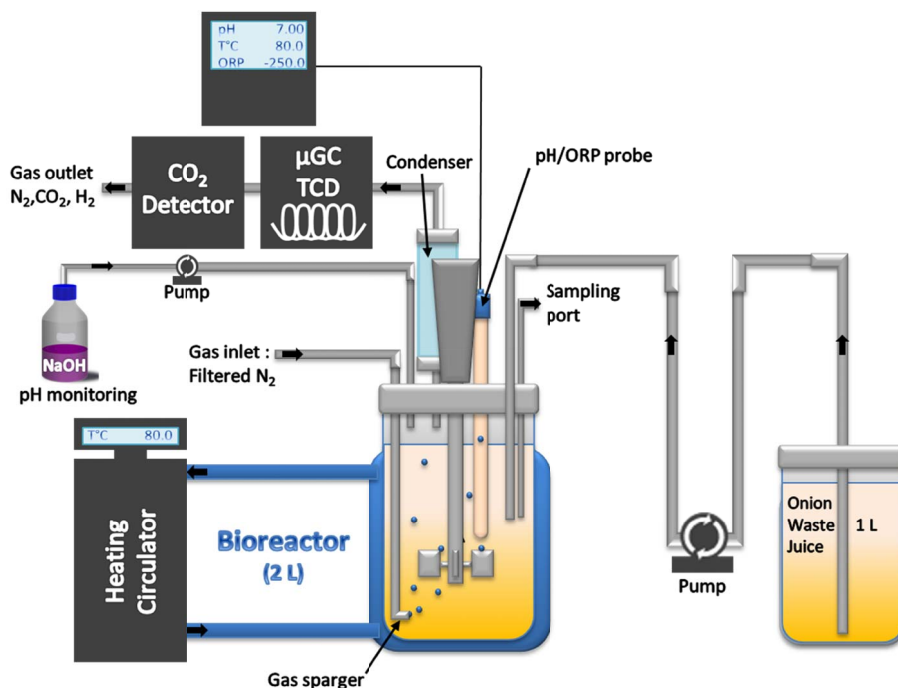

**Figure 1.** Experimental set-up for batch and fed-batch cultures.

in presence of 17% (v/v) of OWJ (~20 mM of Glucose and 20 mM fructose), 0.5 g/L of NH<sub>4</sub>Cl, 0.25 g/L of Cysteine-HCl, 2 g/L of yeast extract, and 1% (v/v) of Balch's oligoelement [24], complemented at 1200 mL with natural seawater (experiment E1), to evaluate the ability of TM to ferment the sugar fraction of OWJ. Thereafter, experiments (E2, E3, E4, E5 and E6) were carried out in bioreactor using 17% of OWJ as a basal medium for biohydrogen production with and without NH<sub>4</sub>Cl (0.5 g/L as a source of nitrogen), FeCl<sub>2</sub> (10 mg/L as a source of iron) and yeast extract (YE: 2 g/L) to evaluate (i) the efficiency of TM fermentative H<sub>2</sub> production using OWJ as a limiting factor and (ii) the importance of nitrogen, iron and YE in presence of onion. Elsewhere, several experiments (E2, E7, E8, E9 and E10) including respectively different volumes of OWJ (200, 400, 600, 800, and 1000 mL) supplemented with natural seawater (SW) for a final volume of 1200 mL were prepared in order to increase the TM growth and fermentative performance. The fermentability of onion waste under the best conditions was finally tested in a culture medium containing the optimal volume of OWJ.

#### 2.4. Analytical methods

The total solids (TS), volatile solids (VS), humidity, chemical oxygen demand (COD) and the pH of the substrates were estimated according to the procedure listed in Standards Methods for the Examination of Water and Wastewater [25]. Glucose, acetate, lactate, and fructose concentrations were determined by HPLC as previously described [23]. Pyruvate was determined with Waters equipment comprising a 1525 pump, a 2996 diode array detector, a Rheodyne injector fitted with a 20 μl loop, a temperature control system, and a degasser. The separation was performed with an Amidex HPX-87H strong cation exchange column (Biorad 300 × 7.8 mm) protected with a pre-column. The column was thermostated at 60 °C and the mobile phase was composed of 0.01 M H<sub>2</sub>SO<sub>4</sub> with a flow of 0.5 mL/min. The eluent was monitored at 210 nm. Standard solutions of pyruvate were run from 0.5 to 20 mM. The calibration curve was linear within this range. An injection volume of 20 μl was used for standard and samples. These were harvested immediately after the OWJ was added to the SW. All analyses were performed in triplicate. For

each batch experiment, liquid samples of 2 mL were collected and centrifuged for 5 min at 14,000 g. The supernatants were filtered through Minisart cellulose acetate syringe filters (0.22  $\mu\text{m}$ ) and the filtrate (20  $\mu\text{L}$ ) was then injected into the column eluted with a sulfuric acid solution (5 mM) with a fixed flow rate of 0.5 mL/min. The data were presented in the Agilent ChemStation software. The analyses were performed in triplicate and the average values were expressed in millimoles per liter corresponding to standard solutions. For total carbohydrate concentration, the anthrone sulfuric acid method was used [26] with modifications. A 0.2% solution of anthrone (w/v) was made up fresh in 75% (v/v) sulfuric acid on the day of measurement. The procedure consists in mixing a 1 mL sample with 2 mL of 75%  $\text{H}_2\text{SO}_4$  and 4 mL of anthrone reagent by a vortex. Samples were placed on the heating block at 105  $^\circ\text{C}$  for 15 min and then cooled down to room temperature. The absorbance of each sample was determined at 625 nm using a UV-visible spectrophotometer. The gas produced during fermentation runs was analyzed continuously with a micro-GC and a  $\text{CO}_2$  probe [23]. The micro-GC was dedicated to  $\text{H}_2$  and  $\text{N}_2$  measurements with temperatures of injector, column, and detector adjusted to 90, 120, and 100  $^\circ\text{C}$ , respectively. Argon was used as carrier gas with a pressure of 200 kPa. The gas-analysis frequency was 2 min.

### 2.5. Determination of kinetic parameters

It is important to note that the kinetic parameters reported to compare the efficiency of hydrogenogenic fermentation are:  $\text{H}_2$  total production (HP in mM);  $\text{H}_2$  production rate or  $\text{H}_2$  productivity (HPR in mM/h) and molar  $\text{H}_2/\text{C}_6$  yield (HY in  $\text{mol}_{\text{H}_2}/\text{mol}_{\text{Hexose}}$ ). All these kinetic parameters have been obtained from experimental data and their processing using part of the models presented in [23,27].

## 3. Results and discussion

### 3.1. Onion composition

The sugars and pyruvate concentrations were determined in four preparations of OWJ in 1000 mL:  $139 \pm 14$  mM of glucose;  $143.2 \pm 8.4$  mM of fructose;  $8.3 \pm 2.6$  mM of sucrose and  $14.8 \pm 1.8$  mM of pyruvate

**Table 1.** Onion waste characterization (g/100 g)


Parameter	Values	Ref.
Humidity	$90.3 \pm 3.5$	
Total solids (TS)	$6.7 \pm 0.5$	
Volatile solids (%TS)	$90.0 \pm 1.0$	
Ashes	$0.7 \pm 0.2$	
COD	$6.1 \pm 0.9$	This study
pH	$4.4 \pm 0.5$	
Total sugars	$5.7 \pm 1.3$	
Glucose	$2.5 \pm 0.2$	
Sucrose	$0.3 \pm 0.1$	
Fructose	$2.6 \pm 0.4$	
Pyruvate/ammonium	$0.13 \pm 0.03$	
Iron, Fe (mg/100 g)	0.21	[15]
Total protein	1.1	
Organic acids	0.17	[5]
Sulfur compounds	0.09	

(equivalent ammonium). None other volatile fatty acids or sugars were detected (Table 1). These values were close to those found in the literature with a difference related to the solubility of sugars essentially present in the juice part [8,28] and the decrease of sucrose after OWJ preparation attributed to sucrose hydrolysis to glucose and fructose due to the acidic pH of 4.0–4.8.

The carbon to nitrogen ratio (C/N) of the onion was 15.3 [29]; this ratio was considered appropriate for prototroph anaerobic bacteria and therefore no additional nutrients were necessary [9,30].

### 3.2. The onion waste juice fermentation

The fermentative potential of onion indigenous bacterial communities was initially evaluated in anaerobic batch STR reactor with a culture medium containing 200 mL of OWJ mixed with SW in a total volume of 1200 mL (~17% OWJ) without TM (abiotic control). The operating conditions were the same than with TM culture (80  $^\circ\text{C}$ , pH 7.0). During these experiments, no production of  $\text{H}_2$  nor other compounds (acetate and lactate) was observed. This

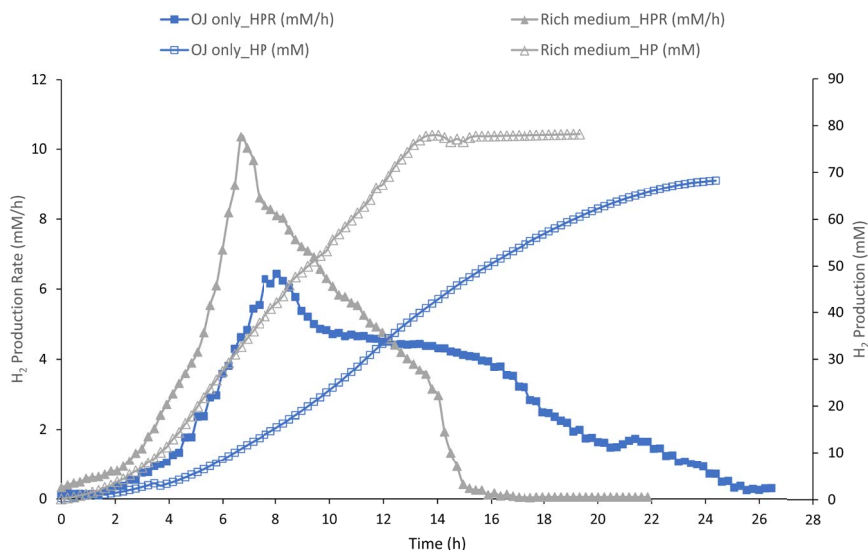

**Figure 2.** H<sub>2</sub> Production (HP, empty symbol) and H<sub>2</sub> production rate (HPR, full symbol) by *Thermotoga maritima* with 200 mL (17% v/v) onion waste juice (OJ) as the sole carbon and energy source (blue square) and in rich medium in presence of 200 mL onion waste juice (gray triangle).

could be explained by the absence of indigenous extremophilic and/or halotolerant microflora able to produce H<sub>2</sub> by fermentation.

### 3.2.1. OWJ fermentation in rich medium

To evaluate the ability of TM to ferment the sugar fraction of OWJ, rich in inhibiting compounds, the TM growth was studied in a rich complete medium in presence of 17% (v/v) of OWJ. This was considered as a complete medium limited only by the substrate (glucose). The kinetic parameters (HPR and HP) for this experiment (E1) are represented in Figure 2.

The maximal HPR with the rich medium was 10.3 mM/h  $\pm$  1.1 with a total HP of 78 mM  $\pm$  4.3. The molar H<sub>2</sub> yield (HY) was 2.40 (mM<sub>H<sub>2</sub></sub>/mM<sub>Hexose</sub>) (Table 2, E1). Maximal HPR of some *Thermotoga* strains was reported between 2.7 and 12.4 mM/h from equivalent carbohydrate concentrations [31]. In this condition, the H<sub>2</sub> productivity was close to the highest values obtained during other experiments using various biomass-based materials as feedstock [32]. In our conditions, TM was able to ferment sugars, without significant inhibition. Indeed, the onion has been used in biomedicine since antiquity and has long been known to have antibacterial, antifungal, and antiviral effects [33]. The broad-spectrum activity of onion waste juice has been attributed to

phytotherapeutic sulfur compounds mainly represented by allicin [34] and by aromatic compounds. However, TM was capable to ferment the soluble sugar present in the liquid fraction of onion waste despite the presence of inhibitory compounds. We could assume that in our conditions these inhibitory compounds did not act on the strain performances. Allicin is a thermolabile compound with a half-life of approximately 17 h at 42 °C [35] which could explain its non-inhibition at 80 °C.

### 3.2.2. OWJ as a basal medium for biohydrogen production

A minimum culture medium containing only 17% of OWJ (200 mL in 1200 mL final) and SW, as a sole micro/macroelement, energy and carbon sources, was inoculated with TM (10% v/v) for a total volume of 1200 mL. The aim was to evaluate the efficiency of TM fermentative H<sub>2</sub> production using OWJ as a limiting factor. The results are presented in Figure 2 and Table 2, E2.

TM produced H<sub>2</sub> with increasing productivity reaching maximum values of 7.4 mM/h  $\pm$  0.6. The H<sub>2</sub> total production (or cumulative production) reached the maximum value of 71.8 mM  $\pm$  2.3 mM after 24 h of growth. In parallel, simple sugars (glucose and fructose) consumption as well as volatile fatty acids

**Table 2.** Average results obtained for batch fermentations for experiments in a rich medium, and in presence of only 200 mL of onion juice or supplemented with NH<sub>4</sub>Cl, and/or FeCl<sub>2</sub> and/or YE. Each experiment was performed in triplicate

OWJ volume (ml or gram) in 1200 mL	E1 200+Rich medium	E2 200	E3 200+NH <sub>4</sub>	E4 200+Fe	E5 200 Fe+NH <sub>4</sub>	E6 200 Fe+NH <sub>4</sub> +YE
Total carbohydrates (mM)	47.4 ± 2.7	44.6 ± 0.8	48.8 ± 2.9	44.0 ± 1.2	44.6 ± 1.6	46.9 ± 2.1
Glucose (mM)	22.6 ± 0.8	23.2 ± 1.2	23.7 ± 1.5	22.5 ± 1.3	21.4 ± 0.6	23.6 ± 1.5
Fructose (mM)	24.8 ± 1.8	21.4 ± 1.5	25.2 ± 3.1	21.6 ± 2.1	23.2 ± 1.3	23.4 ± 1.4
Consumed carbohydrates (mM)	32.5 ± 1.1	32.8 ± 1.7	33.9 ± 0.9	30.8 ± 1.7	31.3 ± 2.3	34.1 ± 1.0
Glucose (mM)	22.6 ± 0.8	23.2 ± 1.2	23.7 ± 1.2	22.5 ± 0.8	21.4 ± 0.7	23.6 ± 0.6
Fructose (mM)	9.9 ± 1.6	11.3 ± 1.3	10.2 ± 0.6	8.3 ± 0.6	9.9 ± 0.5	10.5 ± 0.6
Total volatil fatty acids (mM)	49.7 ± 1.1	47.7 ± 5.6	53.9 ± 4.5	45.32 ± 2.6	48.1 ± 0.8	57.2 ± 0.9
Acetate production (mM)	43.8 ± 1.9	38.6 ± 3.0	43.1 ± 2.1	39.8 ± 1.2	43.2 ± 1.6	52.0 ± 1.8
Lactate production (mM)	5.9 ± 0.5	9.1 ± 3.2	10.8 ± 0.7	5.53 ± 0.8	4.8 ± 0.4	5.2 ± 0.4
Total H <sub>2</sub> production (mM)	78 ± 4.3	71.8 ± 5.3	81.5 ± 5.4	76.1 ± 5.2	86.2 ± 4.6	98.0 ± 3.7
H <sub>2</sub> yield Y <sub>H<sub>2</sub>/C<sub>6</sub></sub>	2.4	2.2	2.4	2.5	2.7	2.9
Maximal H <sub>2</sub> production rate (mM/h)	10.3 ± 0.3	7.4 ± 0.6	7.5 ± 0.9	8.7 ± 0.3	9.4 ± 0.6	9.7 ± 0.3
Produced CO <sub>2</sub> (mM)	35.8 ± 3.2	32.9 ± 4.6	38.6 ± 3.7	33.8 ± 2.5	42.4 ± 2.8	47.6 ± 2.6
NH <sub>4</sub> Cl* (mM)	10.9 ± 0.2	1.9 ± 0.2	2.0 ± 0.2	1.9 ± 0.2	1.9 ± 0.2	1.9 ± 0.2
Y <sub>H<sub>2</sub>/acetate</sub>	1.78	1.86	1.89	1.91	1.99	1.88
Y <sub>VFA/C<sub>6</sub></sub>	1.53	1.46	1.59	1.47	1.54	1.68
Y <sub>Glc/Lac</sub>	0.18	0.28	0.32	0.18	0.15	0.15
Y <sub>H<sub>2</sub>/CO<sub>2</sub></sub>	2.18	2.18	2.11	2.25	2.03	2.06
Y <sub>acetate/C<sub>6</sub></sub>	1.35	1.18	1.27	1.29	1.38	1.52

\*NH<sub>4</sub>Cl is the concentration equivalent to pyruvate measured.


(acetate and lactate) production by TM during the fermentation was followed by HPLC and represented in Figure 3.

Organic waste has been used for the first time as the sole carbon, oligoelement and energy source for TM growth. Onion has the particularity to contain mainly monosaccharides (glucose and fructose) which are TM choice substrates. During the fermentation (E2), the sugars concentrations gradually decreased in correlation with increasing acetate concentration, reaching a maximum value of 43.8 mM. In fact, TM can ferment soluble sugars present in the OWJ liquid fraction and produce hydrogen following the “acetate” pathway. After 22 h, glucose (22.6 mM ± 0.8), considered as a limiting


substrate, was completely consumed by TM which led to growth inhibition and biohydrogen production by directing the metabolism of TM towards the “lactate” pathway. Indeed, fructose is hardly degraded by TM because it does not have a specific fructose transferase system [36].

Although TM was able to grow on onion as a sole oligoelement, carbon and energy sources, kinetic parameters obtained for the experiment with 200 mL of OWJ and SW, were lower than those obtained in complete rich medium. This demonstrated a lack of essential elements in OWJ which limit the dihydrogen production compared to a rich medium. In previous work focusing on H<sub>2</sub> production from organic waste, the medium culture has to contain preferen-



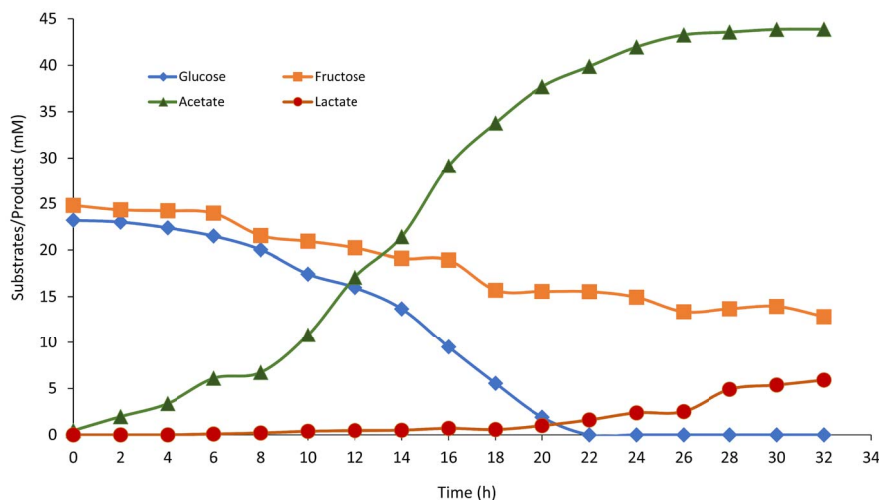

**Figure 3.** Simple sugar consumption (glucose: blue diamond and fructose: orange square) and volatile fatty acid production (acetate: green triangle and lactate: red circle) over time by *Thermotogamaritima* in presence of 200 mL (17% v/v) onion waste juice as the sole carbon and energy source.

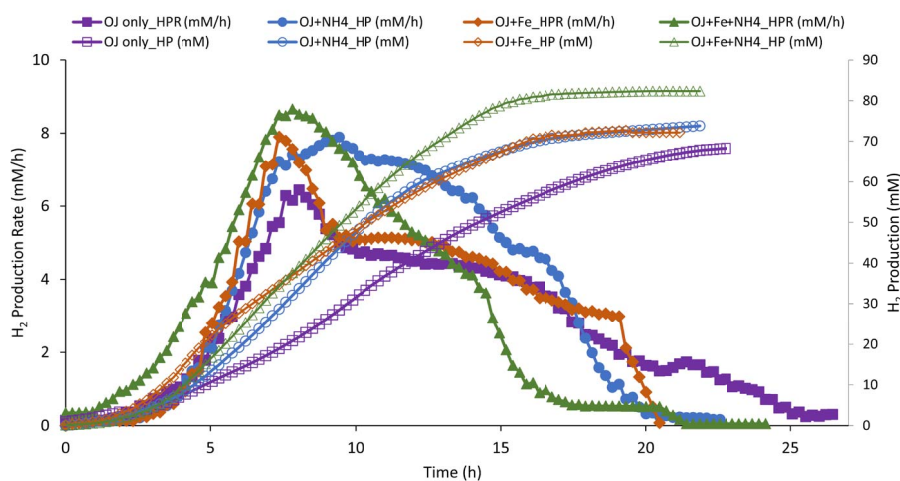

**Figure 4.** H<sub>2</sub> production (HP; empty symbol) and H<sub>2</sub> production rate (HPR, full symbol) by *Thermotoga maritima* with 200 mL (17% v/v) onion waste juice (OJ) as the sole carbon and energy source (purple square) plus: NH<sub>4</sub>Cl (blue circle); FeCl<sub>2</sub> (orange diamond); FeCl<sub>2</sub>+NH<sub>4</sub>Cl (green triangle).

tially reduced sulfur compounds, an inorganic nitrogen source and oligoelements especially iron [31]. Since onion is known to be one of the richest vegetables in organosulfur compounds, represented by cysteine derivatives such as S-alk(en)yl-L-cysteine sulfoxides [21], the addition of Cys-HCl did not give any significant difference on the fermentative kinetic

parameters, whatever the culture conditions tested (data not shown). In OWJ, the sulfur compounds would bring the organosulfur compounds easily assimilable by TM. Moreover, these sulfur compounds and the antioxidant ones naturally present in onion could protect TM from free radicals produced during oxidative stress. Along the same line, these sul-

fur compounds allow rapid reduction of the medium redox potential, inducing the metabolic activity initiation of TM.


### 3.3. Supplied compounds for fermentation optimization

Results of H<sub>2</sub> productivity and total H<sub>2</sub> production during fermentation from culture mediums containing NH<sub>4</sub>Cl and/or FeCl<sub>2</sub>, as a sources of nitrogen and iron respectively, are represented in Figure 4 and Table 2.

#### 3.3.1. Nitrogen supply

To determine if the only ammonium source provided by OWJ was limiting for H<sub>2</sub> production by TM, 0.5 g/L of NH<sub>4</sub>Cl (NH<sub>4</sub><sup>+</sup> = 9 mM) was added to 17% of OWJ mixed with SW. Results showed (Figure 4 and Table 2, E3) that HPR (7.52 mM/h ± 0.93), HY (2.41), and THP (81.5 mM ± 7.4) were appreciably equal to those obtained without the addition of nitrogen.

Nitrogen is an essential component of proteins, nucleic acids, and enzymes and thus, of a great importance for hydrogen producers. In previous study, a significant increase in biomass yields was observed with NH<sub>4</sub>Cl feed concentrations ranging from 0.5 to 1.0 g/L in continuous culture [33]. In our conditions, OWJ preparation led to pyruvic-acid release accompanied by equimolar ammonium production. Early studies showed that the perceived pungency of fresh onions is correlated with high levels of pyruvate, a by-product of the enzymatic hydrolysis, catalyzed by alliinase, of the alliin (alkyl-cysteine sulphoxide) into allicin, pyruvic acid, and ammonium [28]. After cutting the onion, this enzyme, originally present in the vacuole, is released into the cytoplasm, where is its substrate. Under these conditions, the enzymatic transformation of this major sulfur compound by the alliinase into allicin and pyruvic acid [37] leads to the stoichiometric production of ammonium:



The measured pyruvate concentration (ammonium equivalent) is presented in Table 2. The mix of 200 mL of OWJ and 1000 mL of SW supplied only 2 mM ± 0.2 of ammonium (~0.1 g/L) while the optimum is between 0.5–1 g/L [38].

#### 3.3.2. Iron supply

Biohydrogen production requires essential oligoelements for microbial metabolism during fermentation. Among these, iron represents the most important nutrient element to form hydrogenase or other iron proteins required for almost all biohydrogen production [39].

In our conditions, iron concentrations supplied by OWJ (the natural seawater contains between 0.05–2 nM; [40]) did not exceed 0.07 mg/L (0.21 mg/100 g of fresh onion; [20]).

The Fe ion supplementation in fermentative H<sub>2</sub> production processes influences them positively and increases the hydrogen activity [35]. Indeed, iron is a major constituent of bifurcating Fe–Fe hydrogenase in TM, the key enzyme involved in pyruvate oxidation to acetyl-CoA and CO<sub>2</sub> and proton reduction to molecular H<sub>2</sub> [41]. The Fe–Fe hydrogenase contains a bimetallic Fe–Fe active center and Fe–S centers and its limitation reduces biohydrogen production by decreasing the TM growth. A previous report revealed that temperature was a governing factor in determining the Fe<sup>2+</sup> effect on hydrogen production. It was observed that optimum Fe<sup>2+</sup> concentrations decreased at higher temperatures [42].

Elbeshbishy *et al.* [43] presented a summary of optimal iron concentrations in several hydrogen-producing microorganisms with concentrations ranging from 10 to 1600 mg/L. Laboratory experiments have shown that the optimal iron supply (FeCl<sub>2</sub>) did not exceed 10 mg/L for an optimal fermentation with TM. Beyond this concentration, the additional iron did not increase the TM fermentative metabolism (data not shown). Thus, 10 mg/L have been supplied in media culture comprising 17% (v/v) of OWJ with SW (Figure 4, Table 2, E4). HPR (8.66 mM/h ± 0.9), HY (2.47 mol<sub>H<sub>2</sub></sub>/mol<sub>Hexose</sub>), THP (76.1 mM ± 5.2) were significantly higher than those obtained with only OWJ. Little lactate quantity (5.53 mM ± 0.8) was produced during the fermentation into an iron supply medium comparatively with 200 mL OWJ, with or without NH<sub>4</sub>Cl (10.8 and 9.1 mM). Lactate is a byproduct of TM metabolism from the reduction of pyruvate by lactate dehydrogenase when the hydrogenase no longer oxidizes NADH [12]. Lactate levels reported during fermentation by *Thermotoga* species have varied from trace amounts up to levels rivaling that of acetate [44].

Dabrock *et al.* [45] demonstrated that a lactate significant amount was produced during glucose fermentation by *Clostridium pasteurianum* when the iron concentration was limiting. In our case, during growth in  $\text{NH}_4\text{Cl}$  condition, lack of TM iron led to process the pyruvate into acetyl-CoA and shifted its metabolism towards lactate production.

### 3.3.3. Iron plus nitrogen supply

Effect of iron on ammonia-based cultures was further investigated by adding 10 mg/L of  $\text{FeCl}_2$  and 0.5 g/L of  $\text{NH}_4\text{Cl}$  to OWJ medium mixed with SW (E5). The batch culture in this condition showed a distinct improvement in the fermentation of onion waste by TM (Figure 4). The HPR, HY and THP values with  $\text{NH}_4\text{Cl}+\text{FeCl}_2$  were of  $9.42 \text{ mM/h} \pm 0.6$ ,  $2.76$  and  $86.2 \text{ mM} \pm 4.6$  respectively (Table 2, E5). These values were similar to results obtained in the presence of a rich medium ( $10.34 \text{ mM/h} \pm 0.3$ ,  $2.4$ ,  $78 \text{ mM} \pm 4.3$ ). Effect of yeast extract on biohydrogen production was also investigated (Figure 5, Table 2, E6). A comparison was established between  $\text{H}_2$  productivities and maximum production rates for a mixture (200 mL OWJ+ $\text{NH}_4$ +Fe) supplemented or not with yeast extract (E6 and E5). Results showed that HPR, THP, and HY were similar with or without YE (Figure 4 and Table 2). This indicated that OWJ contained amino acids and micro/macronutrients, necessary for TM growth.

These results proved that despite the presence of appropriate materials in OWJ for TM growth, this substrate was not sufficient on its own to ensure optimal growth and  $\text{H}_2$  productivity. It is therefore required to provide OWJ with a source of iron and inorganic nitrogen to optimize the TM fermentation performance.

### 3.4. Optimization of OWJ concentration


To increase the TM growth and fermentative performance and confirm whether the  $\text{H}_2$  production inhibition was related to a limitation of the OWJ organic load, the experiments using different volumes of OWJ (from 0 to 1000 mL) supplemented with natural seawater (SW) were initially carried out in flasks and then in bioreactor. No production of  $\text{H}_2$  or other compounds (acetate and lactate) was observed (data

not shown) for the mixture without OWJ (only seawater). The maximum production rate, as well as the total  $\text{H}_2$  production, is represented in Figure 6 and Table 3 (E2, E7, E8, E9 and E10) for the different volumes of OWJ (200, 400, 600, 800, and 1000 mL).


The optimum OWJ volume was 600 mL (50% of volume, v/v) (E8) with a corresponding HPR ( $15.6 \text{ mM/h} \pm 0.7$ ) and THP ( $156.1 \text{ mM} \pm 7.5$ ), correlated with the greater degradation of sugar ( $59.1 \text{ mM} \pm 2.5$ ). These values were the highest compared to the other volumes used. Over 600 mL, the onion started to inhibit hydrogen production correlated with a metabolism deviation towards lactate production. The HPR ( $8.8 \text{ mM/h} \pm 1.6$ ) and HY (2.3) decrease, correlated with high lactate production ( $31.5 \text{ mM} \pm 4.8$ ) for a volume of 800 mL (E9), could be explained by the high substrate concentrations [11,46]. Most of the batch studies were carried out with initial substrate concentrations of 1–50 gCOD/L and a majority of these studies have suggested that initial substrate concentrations above 20 gCOD/L may decrease  $\text{H}_2$ /substrate yields via substrate inhibition for both thermophilic and mesophilic bacteria [43,47,48]. The total measured COD in the prepared OWJ was  $61.2 \text{ g/L} \pm 9.3$ . At 800 mL of OWJ, the COD was about 41 gCOD/L whereas for 1000 mL of OWJ no fermentation was performed in these conditions with a COD supply of about 50 gCOD/L.

### 3.5. Optimal hydrogen production from 50% OWJ (v/v)

To evaluate the fermentability of OWJ under the best conditions, we tested the TM fermentation in a culture medium containing 50% v/v of OWJ supplemented with iron (10 mg/L of  $\text{FeCl}_2$ ) and ammonium (0.5 g/L of  $\text{NH}_4\text{Cl}$ ). This experiment provided a total production of 272.4 mM of biohydrogen. The maximum HPR and HY were also increased to 23 mM/h and  $3.2 \text{ mol}_{\text{H}_2}/\text{mol}_{\text{Hexose}}$  respectively. These values were close to the highest obtained with TM during a batch culture, under pH and temperature regulation conditions. Interestingly, the addition of YE in the latter condition showed a significant decrease in the kinetic parameters (Figure 7). The addition of YE could lead to a fermentative process limitation due to a COD increase in the culture medium. As beyond about 30 gCOD/L, TM seemed to undergo an inhibition by the substrate. The exact

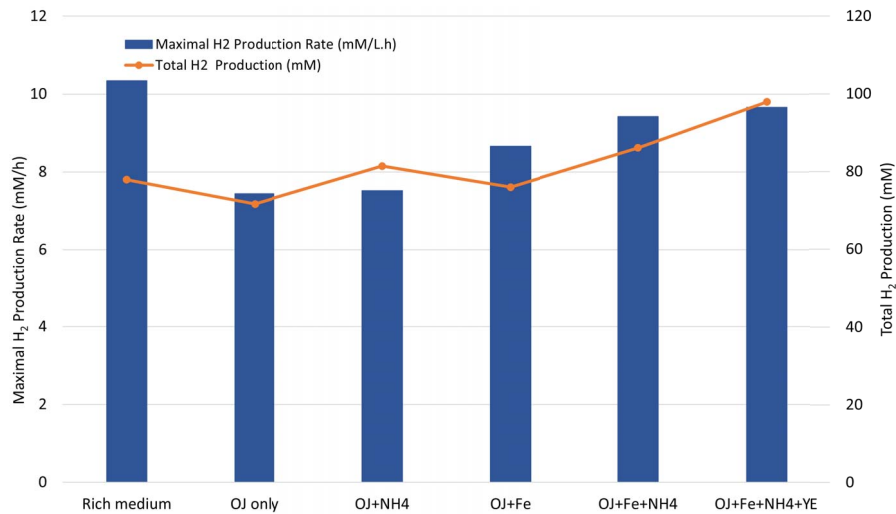

**Figure 5.** Maximal H<sub>2</sub> production rate (blue bar chart) and total H<sub>2</sub> production (orange curve) by *Thermotoga maritima* with 200 mL (17% v/v) onion waste juice (OJ) as the sole carbon and energy source (OJ only) plus: NH<sub>4</sub>Cl (OJ+NH<sub>4</sub>); FeCl<sub>2</sub> (OJ+Fe); FeCl<sub>2</sub>+NH<sub>4</sub>Cl (OJ+Fe+NH<sub>4</sub>); FeCl<sub>2</sub>+NH<sub>4</sub>Cl+YE (OJ+Fe+NH<sub>4</sub>+YE).

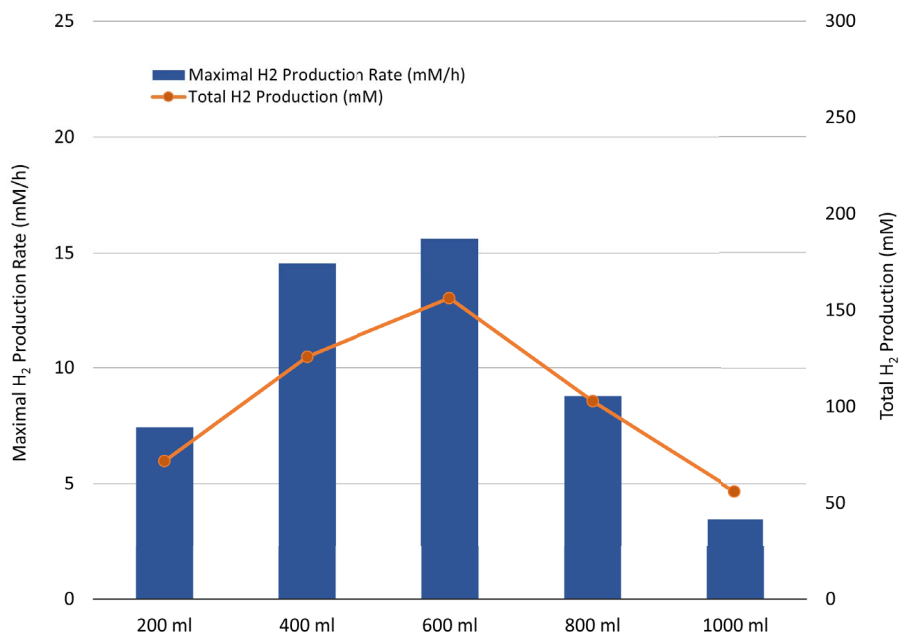

**Figure 6.** Maximal H<sub>2</sub> production rate (blue bar chart) and total H<sub>2</sub> production (orange curve) by *Thermotoga maritima* with increasing volumes of onion waste juice (OJ) (for 1200 mL final volume: 200; 400; 600; 800 and 1000 mL of onion waste juice).

**Table 3.** Average results obtained for batch fermentations for experiments in different volumes of onion juice. Each experiment was performed in triplicate, except for the condition with 1000 mL of onion juice performed only in duplicate

OWJ volume (ml or gram) in 1200 mL	E2	E7	E8	E9	E10
	200	400	600	800	1000
Total carbohydrates (mM)	44.6 ± 2.1	93.2 ± 3.9	131.6 ± 5.2	189 ± 6.3	255.6
Glucose (mM)	23.2 ± 1.2	45.4 ± 2.8	71.6 ± 1.2	111.6 ± 1.4	130.2
Fructose (mM)	21.4 ± 1.5	49.8 ± 3.2	61.6 ± 4.9	76.2 ± 9.2	125.4
Consumed carbohydrates (mM)	32.8 ± 1.7	56.3 ± 3.8	59.01 ± 2.5	44.6 ± 1.3	nd
Glucose (mM)	23.2 ± 1.2	35.6 ± 0.8	37.16 ± 0.5	39.26 ± 1.2	nd
Fructose (mM)	11.3 ± 1.3	20.7 ± 1.3	21.85 ± 1.4	5.34 ± 0.8	nd
Total volatil fatty acids (mM)	47.7 ± 5.6	83.3 ± 7.4	97.9 ± 4.8	88.3 ± 3.7	nd
Acetate production (mM)	38.6 ± 6.0	72.6 ± 3.6	82 ± 3.2	56.8 ± 4.6	nd
Lactate production (mM)	9.1 ± 3.2	10.7 ± 2.3	15.9 ± 3.6	31.5 ± 4.8	nd
Total H <sub>2</sub> production (mM)	71.8 ± 5.3	125.7 ± 9.6	156.1 ± 7.5	102.6 ± 10.8	55.9
H <sub>2</sub> yield $Y_{H_2/C_6}$	2.2	2.2	2.6	2.3	nd
Maximal H <sub>2</sub> production rate (mM/h)	7.4 ± 0.6	14.6 ± 0.9	15.6 ± 0.7	8.8 ± 1.6	1.5
Produced CO <sub>2</sub> (mM)	32.9 ± 4.6	55.6 ± 5.7	70.7 ± 10.3	69.5 ± 5.3	nd
NH <sub>4</sub> Cl* (mM)	1.9 ± 0.2	3.9 ± 0.3	5.9 ± 0.6	7.0 ± 0.7	9.2
$Y_{H_2/acetate}$	1.86	1.73	1.90	1.81	nd
$Y_{VFA/C_6}$	1.46	1.48	1.66	1.98	nd
$Y_{Glc/Lac}$	0.28	0.19	0.27	0.71	nd
$Y_{H_2/CO_2}$	2.18	2.26	2.21	1.48	nd
$Y_{acetate/C_6}$	1.18	1.29	1.39	1.27	nd


\*NH<sub>4</sub>Cl is the concentration equivalent to pyruvate measured. Nd: not defined.

inhibitory substrate concentration requires further experiments in synthetic culture medium in the presence of increasing concentrations of glucose and YE, while following conventional growth kinetic parameters (growth rate, H<sub>2</sub> productivity, total H<sub>2</sub> production ...). However, these results showed that the YE contribution seems unnecessary to improve the OWJ nutritional intake, which consequently would contribute to reducing the synthetic compounds price in feedstocks.

### 3.6. Optimization of fermentation mode

Most of the dark fermentation studies for hydrogen gas production from feedstock substrates were performed by discontinuous cultures. Batch fermentations are usually subject to substrate and product limitations yielding low hydrogen gas produc-

tivities. In our conditions, above 50% v/v of OWJ (31 gCOD/L), hydrogen production decreased due to the inhibition by the substrate charge. In this case, the fed-batch operation could have considerable advantages as compared to batch operation and could be used to overcome substrate/product and toxic compound inhibitions encountered at high substrate concentrations. The substrate solution was added with a rate sufficient to support the bacterial community and to eliminate the substrate inhibition with no effluent removal. To develop a larger-scale H<sub>2</sub> production system in overcoming the problem linked to the substrate limitation in batch cultures, fermentation in the fed-batch mode was carried out with OWJ addition in different stages (Figure 8). Each addition of concentrated OWJ mixed with sea salt was performed when the HPR began to decrease. Figure 8

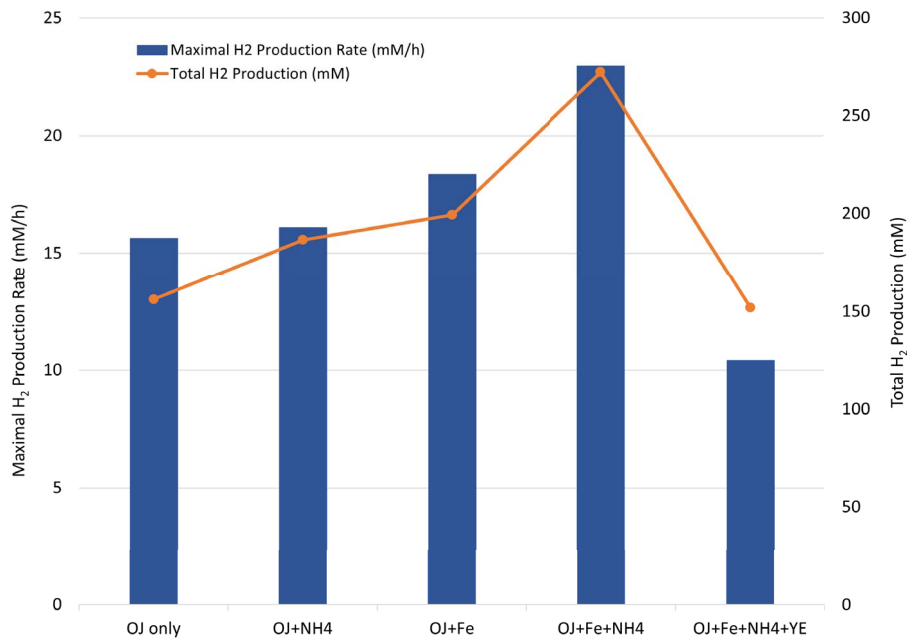


**Figure 7.** Maximal H<sub>2</sub> production rate (blue bar chart) and total H<sub>2</sub> production (orange curve) by *Thermotoga maritima* with 600 mL (50% v/v) onion waste juice (OJ) as the sole carbon and energy source (OJ only) plus: NH<sub>4</sub>Cl (OJ+NH<sub>4</sub>); FeCl<sub>2</sub> (OJ+Fe); FeCl<sub>2</sub>+NH<sub>4</sub>Cl (OJ+Fe+NH<sub>4</sub>); FeCl<sub>2</sub>+NH<sub>4</sub>Cl+YE (OJ+Fe+NH<sub>4</sub>+YE).

shows the comparison between batch and fed-batch cultures with 50% OWJ as the only sources of oligoelements, energy and carbon. The first addition of 120 mL of OWJ (10% v/v) in the batch culture condition was made one hour after the HPR was decreased. H<sub>2</sub> production increased again but with a significant decrease in the previous maximum hydrogen production rate (Figure 8). Subsequent additions showed the same effect with an overall decrease in H<sub>2</sub> production. As noted, ammonium and iron are essential for optimal growth. Cell multiplication is dependent on these micro/macro elements. In our Fed-batch experiments, we assumed that the lack of iron and ammonium led to this decrease in hydrogen production combined with a significant COD-increasing effect. However, this experiment showed that it is possible to exceed the limiting concentration of COD in our culture media with TM. After four additions and about 40 h of growth, the maximum H<sub>2</sub> production reached 330 mM. Under optimal conditions with iron and ammonium addition, this H<sub>2</sub> production was dou-

bled (data not shown) showing the efficiency of the fed-batch operation with TM to produce biohydrogen from OWJ.

#### 4. Conclusion

Onion is one of the world's most versatile and traded vegetables (85 million tons) generating a lot of waste at a low cost. These waste materials represent an environmental problem since they are not suitable, in high concentration, for livestock feeding due to onion unpleasant smell and as an inorganic fertilizer given the rapid herbicide and antimicrobial agents development. To date, only few studies focused on the onion waste recycling process for the production of value-added by-products as functional compounds, or of biogas (methane and H<sub>2</sub>) by anaerobic digestion [26]. In this work, biohydrogen fermentation by *Thermotoga maritima* (TM) was successfully performed from a mixture of Onion Waste Juice and seawater, in a batch STR system. The presented results indicated that the highest H<sub>2</sub> production parameters were obtained for mixture of OWJ

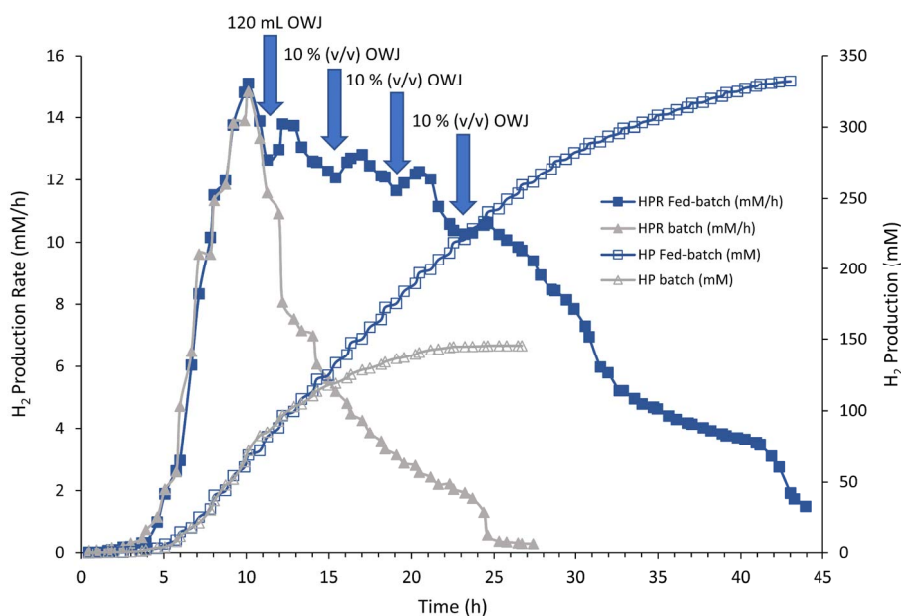

**Figure 8.** H<sub>2</sub> production (HP; empty symbol) and H<sub>2</sub> production rate (HPR, solid symbol) by *Thermotoga maritima* with 600 ml (50% v/v) onion waste juice (OWJ) as the sole carbon and energy source under batch (gray triangle) and fed-batch (blue square) conditions. In the fed-batch operation, an initial addition of 120 ml of onion waste juice was performed followed by the sequential addition of 10% (v/v) of the initial volume of the culture medium.

with SW and iron/ammonium input. These results were nearly 1.3-fold greater than those in batch cultures without iron/ammonium supply. The fed-batch culture of TM in the 2-L STR bioreactor showed a high production of H<sub>2</sub> despite a COD above 30 gCOD/L. The maximal H<sub>2</sub> production achieved was 330 mM at 40 h. These results could potentially be used in assessing the feasibility of TM use in OWJ conversion into H<sub>2</sub> on an industrial scale.

### Conflicts of interest

Authors have no conflict of interest to declare.

### Acknowledgements

This work received financial support from the IRD JEAI program (JEAI BIOTECH2). The authors are grateful to Richard Auria, Guillaume Pillot, Yannick Combet-Blanc and Jean Lorquin for their support.

Many thanks to the Higher Institute of Applied Biological Sciences of Tunis (ISSBAT) and Tunisian Ministry of Higher Education and Scientific Research for providing their facilities to the research team.

### References

- [1] N. Boukaous, L. Abdelouahed, M. Chikhi, C. Mohabeer, A. H. Meniai, B. Taouk, *C. R. Chim.*, 2021, **23**, 623-634.
- [2] M. Jeguirim, S. Jellali, B. Khiari, *C. R. Chim.*, 2020, **23**, 583-587.
- [3] H. Hammani, M. El Achaby, K. El Harfi, M. A. El Mhammedi, A. Aboulkas, *C. R. Chim.*, 2020, **23**, 589-606.
- [4] J. S. Sidhu, M. Ali, A. Al-Rashdan, N. Ahmed, *J. Food Sci. Technol.*, 2019, **56**, 1811-1819.
- [5] K. Sharma, N. Mahato, S. H. Nile, E. T. Lee, Y. R. Lee, *Food Funct.*, 2016, **7**, 3354-3369.
- [6] A. Chorolque, G. Pellejero, M. C. Sosa, J. Palacios, G. Aschkar, C. García-Delgado, R. Jimvénez-Ballesta, *Int. J. Environ. Sci. Technol.*, 2021.
- [7] K. Waldron, *Food Sci. Technol. Today*, 2001, **15**, 38-39.
- [8] L. Liguori, R. Califano, D. Albanese, F. Raimo, A. Crescitelli, M. Di Matteo, *J. Food Quality*, 2017, **2017**, 1-9.
- [9] S. Zara, R. Rihani, W. Blel, F. Bentahar, *C. R. Chim.*, 2021, **24**, 1-15.
- [10] A. Tamošiūnas, P. Valatkevičius, V. Valinčius, R. Levinskas, *C. R. Chim.*, 2016, **19**, 433-440.

- [11] T. de Vrije, M. A. W. Budde, S. J. Lips, R. R. Bakker, A. E. Mars, P. A. M. Claassen, *Int. J. Hydrog. Energy*, 2010, **35**, 13206-13213.
- [12] M. R. A. Verhaart, A. A. M. Bielen, J. van der Oost, A. J. M. Stams, S. W. M. Kengen, *Environ. Technol.*, 2010, **31**, 993-1003.
- [13] O. Elsharnouby, H. Hafez, G. Nakhla, M. H. El Naggari, *Int. J. Hydrog. Energy*, 2013, **38**, 4945-4966.
- [14] C.-J. Chou, F. E. Jenney, M. W. W. Adams, R. M. Kelly, *Metabol. Eng.*, 2008, **10**, 394-404.
- [15] R. Thauer, "Limitation of microbial H<sub>2</sub>-formation via fermentation", in *Microbial Energy Conversion* (H. G. Schlegel, J. Barnea, eds.), Pergamon, 1977, 201-204.
- [16] M. Cappelletti, G. Bucchi, J. De Sousa Mendes, A. Alberini, S. Fedi, L. Bertin, D. Frascari, *J. Chem. Technol. Biotechnol.*, 2012, **87**, 1291-1301.
- [17] R. Saidi, P. P. Liebgott, H. Gannoun, L. Ben Gaida, B. Miladi, M. Hamdi, H. Bouallagui, R. Auria, *Waste Manag.*, 2018, **71**, 474-484.
- [18] L. Jaime, E. Mollá, A. Fernández, M. A. Martín-Cabrejas, F. J. López-Andréu, R. M. Esteban, *J. Agric. Food Chem.*, 2002, **50**, 122-128.
- [19] B. Rodríguez Galdón, E. M. Rodríguez Rodríguez, C. Díaz Romero, *J. Food Sci.*, 2008, **73**, C599-C605.
- [20] S. Pareek, N. A. Sagar, S. Sharma, V. Kumar, "Onion (*Allium cepa* L.)", in *Fruit and Vegetable Phytochemicals* (E. M. Yahia, ed.), John Wiley & Sons, Ltd, Chichester, 2017, 1145-1162.
- [21] C. Colina-Coca, B. de Ancos, C. Sánchez-Moreno, *Food Bioproc. Tech.*, 2014, **7**, 289-298.
- [22] L. J. W. Shimon, A. Rabinkov, I. Shin, T. Miron, D. Mirelman, M. Wilchek, F. Frolow, *J. Mol. Biol.*, 2007, **366**, 611-625.
- [23] C. Boileau, R. Auria, S. Davidson, L. Casalot, P. Christen, P.-P. Liebgott, Y. Combet-Blanc, *Biotechnol. Biofuels*, 2016, **9**, 269-286.
- [24] W. E. Balch, G. E. Fox, L. J. Magrum, C. R. Woese, R. S. Wolfe, *Microbiol. Rev.*, 1979, **43**, 260-296.
- [25] A.A. WEF, *Standard Methods for the Examination of Water and Wastewater*, 21st ed., American Public Health Association, American Water Works Association, Water Environmental Federation, Washington DC, 2005.
- [26] K. Raunkjær, T. Hvitved-Jacobsen, P. H. Nielsen, *Water Res.*, 1994, **28**, 251-262.
- [27] R. Auria, C. Boileau, S. Davidson, L. Casalot, P. Christen, P. P. Liebgott, Y. Combet-Blanc, *Biotechnol. Biofuels*, 2016, **9**, article no. 268.
- [28] C. J. Clark, M. L. Shaw, K. M. Wright, J. A. McCallum, *J. Sci. Food Agric.*, 2018, **98**, 5525-5533.
- [29] J. A. Domínguez-Maldonado, L. Alzate-Gaviria, H. A. Milquez-Sanabria, R. Tapia-Tussell, R. M. Leal-Bautista, E. I. España-Gamboa, *Waste Biomass Valor.*, 2020, **11**, 4181-4194.
- [30] R. T. Romano, R. Zhang, *Bioresour. Technol.*, 2008, **99**, 631-637.
- [31] M. Lanzilli, N. Esercizio, M. Vastano, Z. Xu, G. Nuzzo, C. Gallo, E. Manzo, A. Fontana, G. d'Ippolito, *Int. J. Mol. Sci.*, 2020, **22**, article no. 341.
- [32] N. Esercizio, M. Lanzilli, M. Vastano, S. Landi, Z. Xu, C. Gallo, G. Nuzzo, E. Manzo, A. Fontana, G. d'Ippolito, *Resources*, 2021, **10**, article no. 34.
- [33] A. Hannan, T. Humayun, M. B. Hussain, M. Yasir, S. Sikandar, *J. Ayub Med. Coll. Abbottabad*, 2010, **22**, 4.
- [34] M. Focke, A. Feld, H. K. Lichtenthaler, *FEBS Lett.*, 1990, **261**, 106-108.
- [35] H. Fujisawa, K. Suma, K. Origuchi, T. Seki, T. Ariga, *Biosci. Biotechnol. Biochem.*, 2008, **72**, 2877-2883.
- [36] A. D. Frock, S. R. Gray, R. M. Kelly, *Appl. Environ. Microbiol.*, 2012, **78**, 1978-1986.
- [37] J. R. Bacon, G. K. Moates, A. Ng, M. J. C. Rhodes, A. C. Smith, K. W. Waldron, *Food Chem.*, 1999, 5.
- [38] K. D. Rinker, R. M. Kelly, *Biotechnol. Bioeng.*, 2000, **69**, 537-547.
- [39] G. J. Schut, M. W. W. Adams, *J. Bacteriol.*, 2009, **191**, 4451-4457.
- [40] E. P. Achterberg, T. W. Holland, A. R. Bowie, R. F. C. Mantoura, P. J. Worsfold, *Anal. Chim. Acta*, 2001, **442**, 1-14.
- [41] D.-J. Lee, K.-Y. Show, A. Su, *Bioresour. Technol.*, 2011, **102**, 8393-8402.
- [42] Y. Zhang, J. Shen, *Int. J. Hydrog. Energy*, 2006, **31**, 441-446.
- [43] E. Elbeshbishy, B. R. Dhar, G. Nakhla, H.-S. Lee, *Renew. Sustain. Energy Rev.*, 2017, **79**, 656-668.
- [44] A. D. Frock, J. S. Notey, R. M. Kelly, *Environ. Technol.*, 2010, **31**, 1169-1181.
- [45] B. Dabrock, H. Bahl, G. Gottschalk, *Appl. Environ. Microbiol.*, 1992, **58**, 1233-1239.
- [46] S.-H. Kim, S.-K. Han, H.-S. Shin, *Process Biochem.*, 2006, **41**, 199-207.
- [47] D. Frascari, M. Cappelletti, J. D. S. Mendes, A. Alberini, F. Scimonelli, C. Manfreda, L. Longanesi, D. Zannoni, D. Pinelli, S. Fedi, *Bioresour. Technol.*, 2013, **147**, 553-561.
- [48] H. Argun, P. Gokfiliz, I. Karapinar, "Biohydrogen production potential of different biomass sources", in *Biohydrogen Production: Sustainability of Current Technology and Future Perspective* (A. Singh, D. Rathore, eds.), Springer India, New Delhi, 2017, 11-48.