

**UCC Library and UCC researchers have made this item openly available.
Please [let us know](#) how this has helped you. Thanks!**

Title	6G for vehicle-to-everything (V2X) communications: Enabling technologies, challenges, and opportunities
Author(s)	Noor-A-Rahim, Md.; Liu, Zilong; Lee, Haeyoung; Khyam, Mohammad Omar; He, Jianhua; Pesch, Dirk; Moessner, Klaus; Saad, Walid; Poor, H.Vincent
Publication date	2022-05-20
Original citation	Noor-A-Rahim, Md., Liu, Z., Lee, H., Khyam, M.O., He, J., Pesch, D., Moessner, K., Saad, W. and Poor, H.V. (2022) '6g for vehicle-to-everything (V2x) communications: enabling technologies, challenges, and opportunities', Proceedings of the IEEE, 110(6), pp. 712–734. doi: 10.1109/JPROC.2022.3173031
Type of publication	Article (peer-reviewed)
Link to publisher's version	https://doi.org/10.1109/JPROC.2022.3173031 http://dx.doi.org/10.1109/JPROC.2022.3173031 Access to the full text of the published version may require a subscription.
Rights	© 2022 the authors. Published by IEEE. This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see https://creativecommons.org/licenses/by/4.0/ https://creativecommons.org/licenses/by/4.0/
Item downloaded from	http://hdl.handle.net/10468/13690

Downloaded on 2022-12-08T08:59:21Z



UCC

University College Cork, Ireland
Coláiste na hOllscoile Corcaigh

6G for Vehicle-to-Everything (V2X) Communications: Enabling Technologies, Challenges, and Opportunities

This article provides a comprehensive overview of the scientific and technological advances that have the capability to shape future 6G vehicle-to-everything (6G-V2X) communications.

By MD. NOOR-A-RAHIM^{ID}, ZILONG LIU^{ID}, HAEYOUNG LEE^{ID}, *Member IEEE*,
MOHAMMAD OMAR KHYAM^{ID}, JIANHUA HE^{ID}, *Senior Member IEEE*,
DIRK PESCH^{ID}, *Senior Member IEEE*, KLAUS MOESSNER, *Senior Member IEEE*,
WALID SAAD^{ID}, *Fellow IEEE*, AND H. VINCENT POOR^{ID}, *Life Fellow IEEE*

Manuscript received December 26, 2020; revised March 14, 2022; accepted April 30, 2022. Date of publication May 20, 2022; date of current version June 3, 2022. This work was supported in part by Science Foundation Ireland under Grant 16/RC/3918 (Confirm Centre for Smart Manufacturing) and Grant 13/RC/2077_P2 (CONNECT: The Centre for Future Networks & Communications); in part by the European Union's Horizon 2020 Research and Innovation Programme under the EDGE CO-FUND Marie Skłodowska Curie Grant 713567; in part by the EU H2020 Research and Innovation Programme through the 5G-HEART Project under Grant Agreement 857034 and the DEDICAT 6G Project under Grant Agreement 101016499; in part by the European Union's Horizon 2020 Research and Innovation Programme through the Marie Skłodowska-Curie Grant COSAFE under Agreement 824019 and the Marie Skłodowska-Curie Grant VESAFE under Agreement 101022280; and in part by the U.S. National Science Foundation under Grant CCF-0939370, Grant CNS-1836802, Grant CNS-1814477, and Grant CCF-1908308. (Corresponding author: Md. Noor-A-Rahim.)

Md. Noor-A-Rahim and **Dirk Pesch** are with the School of Computer Science and Information Technology, University College Cork, T12 XF62 Cork, Ireland (e-mail: m.rahim@cs.ucc.ie; d.pesch@cs.ucc.ie).

Zilong Liu and **Jianhua He** are with the School of Computer Science and Electronics Engineering, University of Essex, Colchester CO4 3SQ, U.K. (e-mail: zilong.liu@essex.ac.uk; j.he@essex.ac.uk).

Haeyoung Lee is with the 5G & 6G Innovation Centre (5GIC/6GIC), Institute for Communication Systems (ICS), University of Surrey, Guildford GU2 7XH, U.K. (e-mail: haeyoung.lee@surrey.ac.uk).

Mohammad Omar Khyam is with the School of Engineering and Technology, Central Queensland University, Melbourne, VIC 3000, Australia.

Klaus Moessner is with the Institute for Communication Systems (ICS), University of Surrey, Guildford GU2 7XH, U.K., and also with the Faculty of Electronics and Information Technology, Chemnitz University of Technology, 09111 Chemnitz, Germany (e-mail: klaus.moessner@etit.tu-chemnitz.de).

Walid Saad is with Wireless@VT, Bradley Department of Electrical and Computer Engineering, Virginia Tech, Blacksburg, VA 24061 USA (e-mail: walids@vt.edu).

H. Vincent Poor is with the Department of Electrical and Computer Engineering, Princeton University, Princeton, NJ 08544 USA (e-mail: poor@princeton.edu).

Digital Object Identifier 10.1109/JPROC.2022.3173031

ABSTRACT | We are on the cusp of a new era of connected autonomous vehicles with unprecedented user experiences, tremendously improved road safety and air quality, highly diverse transportation environments and use cases, and a plethora of advanced applications. Realizing this grand vision requires a significantly enhanced vehicle-to-everything (V2X) communication network that should be extremely intelligent and capable of concurrently supporting hyperfast, ultrareliable, and low-latency massive information exchange. It is anticipated that the sixth-generation (6G) communication systems will fulfill these requirements of the next-generation V2X. In this article, we outline a series of key enabling technologies from a range of domains, such as new materials, algorithms, and system architectures. Aiming for truly intelligent transportation systems, we envision that machine learning (ML) will play an instrumental role in advanced vehicular communication and networking. To this end, we provide an overview of the recent advances of ML in 6G vehicular networks. To stimulate future research in this area, we discuss the strength, open challenges, maturity, and enhancing areas of these technologies.

KEYWORDS | Blockchain; brain-controlled vehicle (BCV); federated learning; intelligent reflective surfaces (IRSs); machine learning (ML); nonorthogonal multiple access (NOMA); quantum; radio frequency (RF)-visible light communication (VLC) vehicle-to-everything (V2X); sixth-generation (6G)-V2X; tactile-V2X; terahertz (THz)

This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see <https://creativecommons.org/licenses/by/4.0/>

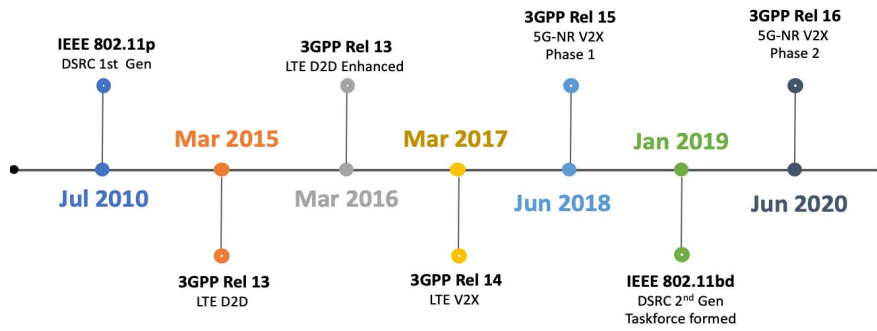


Fig. 1. Evolution of V2X communications.

communications; unmanned-aerial-vehicle (UAV)/satellite-assisted V2X.

I. INTRODUCTION

In recent years, vehicle-to-everything (V2X) communication has attracted significant research interest from both academia and industry. As a key enabler for intelligent transportation systems (ITSs), V2X encompasses a broad range of wireless technologies, including vehicle-to-vehicle (V2V) communications, vehicle-to-infrastructure (V2I) communications, and vehicle-to-pedestrian (V2P) communications, as well as communications with vulnerable road users (VRUs) and with cloud networks (V2N) [1]. The grand vision is that V2X communications, supported by the sixth generation (6G) of wireless systems [2], will be an instrumental element of future connected autonomous vehicles. Furthermore, V2X communications will bring far-reaching and transformative benefits, such as unprecedented user experience, tremendously improved road safety and air quality, diverse transportation applications and use cases, and a plethora of advanced applications.

So far, there have been two main technologies for V2X communications: 1) dedicated short-range communication (DSRC)-based vehicular network and 2) the cellular-based vehicular network [3]. Standards laying the foundation of DSRC include IEEE 802.11p for Wireless Access in Vehicular Environments (WAVE) and IEEE 1609.1.4 for resource management, security, network service, and multichannel operation [4]. For many years, DSRC was the only technology for V2X communication. In dense and high-mobility environments, however, DSRC suffers from major drawbacks, such as limited coverage, low data rate, limited quality-of-service (QoS) guarantees, and unbounded channel access delay. Leveraging standard cellular technologies, 3GPP has been developing a cellular vehicular communications standard, known as C-V2X. C-V2X enables every vehicle to communicate with different entities of a V2X network (such as V2V, V2I, V2P, and V2N) [5]. In March 2017, 3GPP Release 14 proposed LTE V2X communication with two air interfaces: a wide area network LTE interface (LTE-Uu) and a direct communications interface (PC5, also known as LTE side-link). The LTE-Uu is responsible for vehicle-to-network (V2N) communication, while the LTE side-link is responsible for V2V and V2I communications,

which may operate without support from cellular network infrastructure [6]. The main focus of Release 14 is to deliver data transport services for fundamental road safety services, such as cooperative awareness messages (CAMs), basic safety messages (BSMs), or decentralized environmental notification messages (DENMs).

In Release 15 (announced in 2018), 5G New Radio (5G NR) V2X technology was introduced to support advanced V2X services, such as vehicle platooning, advanced driver assistance, remote driving, and extended sensors [7], [8]. In addition, the performance of the PC5 interface has been enhanced in Release 15 (known as LTE-eV2X) in terms of higher reliability (employing transmit diversity), lower latency (with the aid of resource selection window reduction), and higher data rates (using carrier aggregation and higher order modulation, e.g., 64-QAM) while retaining backward compatibility with Release 14 LTE-V2X. In 2020, 3GPP announced the second phase of 5G NR in Release 16, which aims at bringing enhanced ultrareliable low-latency communication (URLLC) and higher throughput. Note that 3GPP is currently working on Release 17, which aims to provide architectural enhancements to support advanced V2X services. The evolution of V2X communications is summarized in Fig. 1.

From an industry standpoint, there has been a major debate on which V2X technology should be adopted. Government regulations and public acceptance are two additional major factors that affect the real rollout of V2X technologies. Take the United States (U.S.) as an example, during the Obama administration, a mandate was proposed by the National Highway Traffic Safety Administration to support DSRC in all new vehicles, but no progress has been made during the Trump administration. Although Europe and Japan are in favor of DSRC, C-V2X has received tremendous support from the U.S. and China, mainly driven by large telecommunication companies, such as Qualcomm and Huawei, respectively. As a result, automakers may need to investigate and accommodate different V2X technologies according to their market shares in different jurisdictions and the interworking of both DSRC and C-V2X [9]. For instance, although Toyota was the first global automaker to sell connected vehicles equipped with DSRC technology, it is also testing C-V2X in China, and both DSRC and C-V2X in Australia [10]. In 2019,

Volkswagen, a German motor vehicle manufacturer, made a move to fully embrace DSRC [11], while Ford in the U.S. plans to enable all of its new vehicles to be able to “Talk and Listen” by 2022 through 5G NR-based C-V2X [12]. Road safety and traffic efficiency are two important aspects of public acceptance. Albeit autonomous vehicles have been actively studied and tested by companies such as Tesla, Uber, Waymo, and Toyota, the safety of driverless cars remains of utmost concern for the public, especially after the pedestrian death caused by a self-driving Uber car in 2018 and the Tesla car crash in 2021. Therefore, it is pressing for V2X to evolve to facilitate advanced orchestrations of communication, sensing, learning, and decision-making.

A. Contribution and Organization

The main contribution of this article is a comprehensive overview of the scientific and technological advances that have the capability to shape future 6G-V2X communications. In contrast to the survey in [13], which focuses on the evolution of the two major V2X technologies (i.e., DSRC/802.11p-based V2X and C-V2X), as well as big-data-driven Internet-of-Vehicle (IoV) and cloud-based IoV, we take a forward-looking and inclusive approach from various perspectives (such as new materials, algorithms, and system structures), aiming to stimulate many forthcoming research activities for 6G-V2X and beyond. We also emphasize that the instrumental role machine learning (ML) will play for advanced use cases in future vehicular communication networking.

This article is organized as follows. We start our discourse in Section II with a high-level overview of 6G-V2X communications. Revolutionary 6G-V2X technologies, such as brain-vehicle interfacing, tactile communication, and terahertz (THz) communications, will be introduced in Section III. In Section IV, we present major 6G-V2X technologies (e.g., integrated localization and communications (ILACs), satellite/unmanned-aerial-vehicle (UAV)-aided V2X, and integrated computing) that have evolved over recent years and are going through further enhancements. The recent advances in ML for 6G vehicular networks are summarized in Section V. Finally, conclusions are drawn in Section VI.

II. OVERVIEW OF 6G-V2X COMMUNICATIONS

This section first discusses why 6G-V2X is necessary and then summarizes key technologies that will enable 6G-V2X.

A. Why 6G-V2X?

Although 5G-NR V2X offers improved performance with advanced services, its improved performance is achieved through investing more in spectral and hardware resources while inheriting the underlying mechanisms and system architectures of LTE-based V2X [14]. Meanwhile, it is anticipated that the number of autonomous vehicles will grow rapidly in the future due to urbanization, increased

living standards, and technological advancements. This will drive explosive growth of communications devices and digital applications to enable intelligent autonomous vehicles. In addition, the rising demand for many emerging services in autonomous vehicles ranging from 3-D displays that offer more depth and more natural viewing experience and free-floating, to holographic control display systems, to immersive entertainment, and to improved in-car infotainment, will bring forth new communication challenges to the V2X network [14]–[18]. All these advances will drastically push the capacity limits of existing wireless networks, posing new scientific and technical challenges for vehicular networks in terms of data rate, latency, coverage, spectral/energy/cost efficiency, intelligence level, networking, and security, among others.

With this vision in mind, 5G NR-based V2X networks may be unable to meet such a wide range of requirements and use cases. Moreover, while the concepts associated with ITS have been studied for many years, legacy V2X communication systems can only provide limited intelligence. Therefore, a significant paradigm shift away from traditional communication networks to more versatile and diversified network approaches is needed. It is anticipated that such a transformation will start from the recently proposed 6G wireless communication network, which aims to combine terrestrial and several nonterrestrial communication networks, such as satellite and UAV communication networks. This will enable genuinely intelligent and ubiquitous V2X systems with significantly enhanced reliability and security, extremely high data rates (e.g., terabits per seconds), and massive and hyperfast wireless access (i.e., down to submilliseconds with billions of communications devices connected), as well as much smarter, longer, and greener (energy-efficient) 3-D communication coverage [2]. Because of the extremely heterogeneous network composition, diverse communication scenarios, and stringent service requirements, new techniques are needed to enable adaptive learning and intelligent decision-making in future V2X networks. It is foreseen that 6G will work in conjunction with ML not only to unfold the full capability of the radio signals by evolving to intelligent and autonomous radios but also to bring a series of new features, such as enhanced context-awareness, self-aggregation, adaptive coordination, and self-configuration [14].

B. Key 6G-V2X Technologies

To achieve the aforementioned ambitious goals, 6G will require the integration of a range of disruptive technologies, including more robust and efficient air interfaces, resource allocation, decision-making, and computing. Fig. 2 illustrates such a 6G-V2X system where a range of vehicular communication technologies is adopted to serve various advanced use cases. For example, UAVs and low Earth orbit satellites can support V2X systems with significantly enlarged and seamless coverage, helping to

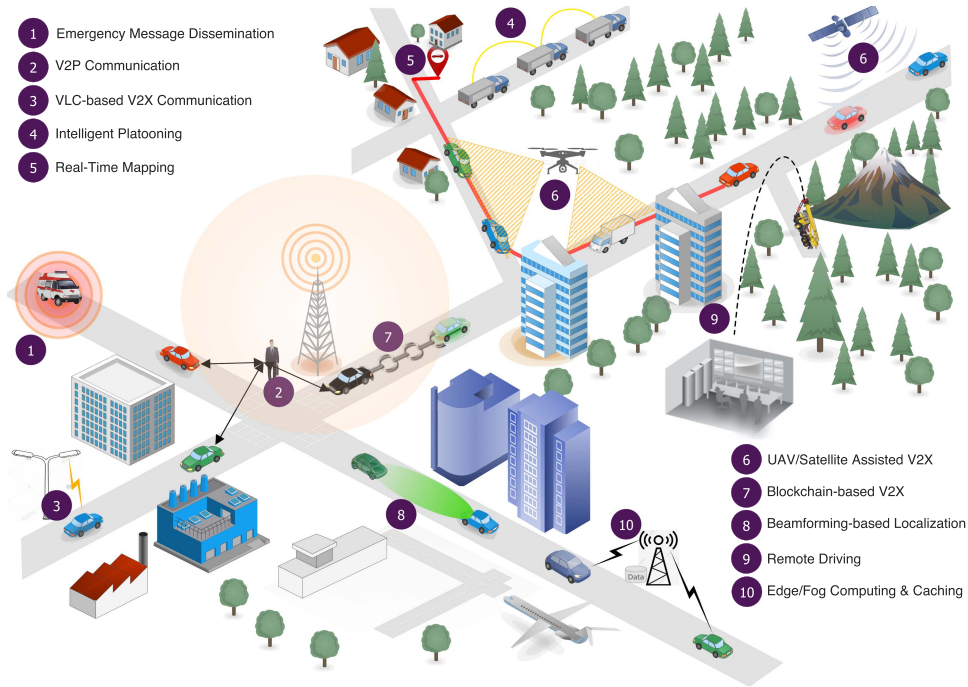


Fig. 2. Overview of V2X communications.

enhance the communication QoS, particularly in certain blind spots that might exist in traditional terrestrial communication systems. Edge/fog computing and caching will help V2X communication devices achieve faster computation, optimized decisions, and longer battery life. Visible light communication (VLC)-aided V2X communications will operate along with traditional RF-based communications to achieve ultrahigh data rates, low setup cost, low power consumption, and enhanced security.

There is a range of key technologies that we believe will enable the future vision of 6G-V2X as an intelligent, autonomous, user-driven connectivity and service platform for ITS. We will introduce these technologies in the following with more detail in Sections III–V. We classify these technologies into two categories: *revolutionary* V2X technologies and *evolutionary* V2X technologies. Strength, open challenges, maturity, and enhancing areas of these technologies are summarized in Table 1. First, we consider technology areas, such as intelligent reflective surfaces (IRSs), a range of new ML techniques, and brain–vehicle interfacing as key enablers (from the perspectives of new materials, algorithms, and neuroscience, respectively) for more intelligent V2X, which will further enhance and revolutionize evolving V2X technologies. Tactile communication will provide drivers and passengers with an unprecedented travel experience in the future by exchanging sensory information, such as haptics anytime and anywhere. Emerging quantum computing technology will endow 6G-V2X systems with superior computational capabilities, while we will also see significantly enhanced security along with the use of blockchain technologies. Furthermore, THz communications will enable ultrahigh data rates never experienced before.

Here, the various technologies listed in Table 1 may interact with each other to deliver an unprecedented driving experience, especially for fully autonomous vehicles. First, many gigabits per second data rates can be enabled via millimeter-wave communication, VLC, and THz communications, whereas ultralow latency and reliable information exchange can be supported by multiple radio access technologies, new multicarrier scheme, and advanced resource allocation. For massive and ubiquitous vehicular access, nonorthogonal multiple access (NOMA) and satellite-/UAV-aided V2X are two promising wireless paradigms. In addition, integrated sensing, localization, and communication will contribute to cm-level positioning and cm/s-level velocity estimation accuracy; artificial intelligence and brain–vehicle interfacing will lead to augmented awareness of both the complex physical and electromagnetic environments.

For example, NOMA has been employed in [19] to support low-latency tactile internet for autonomous vehicles thanks to its enabling of massive connectivity and, thus, faster random access. In NOMA-based V2X, data security is a real issue as one user’s decoding often involves the decoding of other users. Such an issue may be addressed by utilizing blockchain for secured networking, as reported in [20]. On the other hand, the low-latency nature of NOMA may help tackle the slow access problem in blockchain-based V2X networking, imposed by the inherent algorithm in attaining consensus among decentralized entities, such as vehicles and infrastructure. Also, to realize both the orthogonal multiple access (OMA) and sparse-code multiple access (SCMA) [21] (one of the typical code-domain NOMA schemes [22]) according to the requirements of specific V2X use cases, a highly flexible

Table 1 Overview of Key 6G-V2X Technologies

Category	Technology	Strength	Open Challenges	Maturity	Enhancing Areas
Revolutionary Tech.	Programmable V2X Environment	<ul style="list-style-type: none"> Intelligent V2X environments; Effective mitigation of path loss, shadowing, multipath and Doppler effect 	<ul style="list-style-type: none"> Reflection optimization Channel estimation in highly dynamic V2X environment 	★☆☆	PHY layer, safety
	Tactile Communication	<ul style="list-style-type: none"> Real-time transmission of haptic information Enhanced vehicle platooning and remote driving 	<ul style="list-style-type: none"> Simultaneous requirements for high rates, ultra-low latency, and high reliability in high mobility environments Suitable codecs and efficient reconstruction for the haptic data 	★☆☆	Haptic interactions, remote driving
	Quantum Computing	<ul style="list-style-type: none"> Superior computational capability Enhanced security 	<ul style="list-style-type: none"> Design of quantum devices Security architecture, characterization of entanglement distribution 	★☆☆	Computing & security
	Brain-Vehicle Interfacing	<ul style="list-style-type: none"> Enables brain controlled connected vehicles Managing uncertainties 	<ul style="list-style-type: none"> Scalability of brain-controlled vehicles Comprehensive real-world testing 	★☆☆	Driving experience, disabled people driving
	Blockchain	<ul style="list-style-type: none"> Highly distributed Significantly enhanced security 	<ul style="list-style-type: none"> Algorithm design for ultra-low latency application Increasing throughput and scalability 	★★☆	Security, safety, EV charging efficiency
	THz Communications	<ul style="list-style-type: none"> Extremely high throughput Higher spectrum 	<ul style="list-style-type: none"> Design of transceiver architectures Propagation measurement and channel modeling 	★☆☆	PHY layer, intra-vehicle communication
	ML-aided V2X Design	<ul style="list-style-type: none"> Suitable for highly adaptive and complex V2X environments Performance enhancement 	<ul style="list-style-type: none"> Performing effective training in highly dynamic environments Processing big-data in real-time 	★★☆	PHY & MAC layers, Security, self driving vehicle
Evolving Tech.	Hybrid RF-VLC V2X	<ul style="list-style-type: none"> Ultra-high data rates Low setup cost 	<ul style="list-style-type: none"> Inter-compatibility between VLC and RF Interference management 	★★★	PHY & MAC layers
	Multiple Radio Access Technologies	<ul style="list-style-type: none"> Inherent benefits of sub-6 GHz, mmWave and/or THz for long communication range Hyper-high data throughput 	<ul style="list-style-type: none"> Dynamic configurations meet different QoS requirements Beam and interference management 	★★☆	PHY & MAC layers
	Non-orthogonal Multiple Access (NOMA)	<ul style="list-style-type: none"> Massive connectivity Ultra-low latency 	<ul style="list-style-type: none"> Cross-layer optimization for grant-free NOMA Adaptive NOMA and OMA 	★★☆	PHY & MAC layers
	New Multicarrier Scheme	<ul style="list-style-type: none"> Significantly enhanced resilience to Doppler Higher spectrum- and power-efficiencies 	<ul style="list-style-type: none"> Backwards-compatibility with LTE and 5G NR Scalable multicarrier schemes in highly dynamic vehicular environments 	★★☆	PHY layer
	Advanced Resource Allocation	<ul style="list-style-type: none"> Cross-layer resource allocation Context and situation awareness 	<ul style="list-style-type: none"> Efficient and scalable deployments Distributed intelligent solutions 	★★☆	PHY & MAC layers
	Integrated Sensing, Localization and Communications	<ul style="list-style-type: none"> Higher spectral efficiency Lower hardware cost Improved situational awareness 	<ul style="list-style-type: none"> Unified design of transceivers New signal processing algorithms Optimal waveform design 	★★☆	PHY layer, positioning, parking efficiency
	Satellite/UAV Aided V2X	<ul style="list-style-type: none"> Extra wide coverage Flexible aerial base-station 	<ul style="list-style-type: none"> Energy-efficient computation & transmission Robust reception in high mobility environments 	★★☆	PHY & MAC layers, accident/hazard monitoring
	Integrated Computing	<ul style="list-style-type: none"> Faster computing and enhanced security Low operational cost 	<ul style="list-style-type: none"> Integration of cloud, edge, and fog computing Heterogeneous design to support different data sources 	★★★	Computing, efficient navigation
	Integrated Control and Communications	<ul style="list-style-type: none"> Control-communications co-design Enhanced platooning 	<ul style="list-style-type: none"> Derivation of fundamental limits Understanding of control and wireless networks interaction 	★★☆	Control, vehicle platooning

and scalable multicarrier system is preferred. The selection of a new multicarrier waveform for OMA or SCMA and with respect to different QoS requirements (e.g., mobility, spectral efficiency, and error rate performance) is of strong interest for reliable, ubiquitous, fast, and efficient wireless access in 6G V2X. Enhanced integrated sensing, localization, and communication for autonomous vehicles may also be carried out with the aid of IRS and THz mapping [23]–[25].

In addition, enhanced vehicular message dissemination is also expected to transform the future of electric vehicles (EVs), which are the automotive industry’s response to address fossil fuel depletion and environmental pollution [26]. It is anticipated that 6G V2X will significantly improve both the driving efficiency and battery efficiency of EVs. As the road conditions and the best routes are predictable, optimized driving modes for EVs can be applied for battery and travel time-saving [27], [28]. With 6G

V2X, the EV battery status can be better monitored and configured through cloud-based computation or ML [29], [30]. EV charging times can also be optimized as 6G V2X can guide an EV to find the most convenient charging stations at different periods of a day/season. In this case, the nearest charging station may not be the best as there might be many EVs queuing for charging, and also the driving time to that charging station may be longer during peak-hour periods. Fig. 3 illustrates the connection between different technologies and three important aspects of 6G-V2X, namely, communication, computing, and security.

III. REVOLUTIONARY TECHNOLOGIES FOR 6G-V2X

In this section, we introduce some of the promising revolutionary technologies with the potential to be used in 6G-V2X.

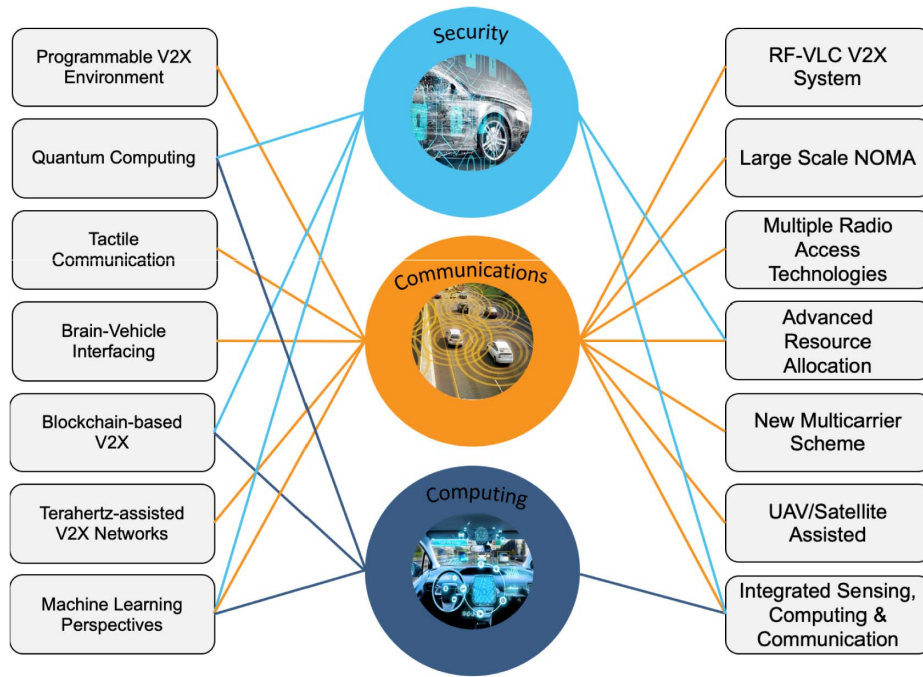


Fig. 3. Connection between different technologies and three important aspects of 6G-V2X, namely, communication, computing, and security.

A. Programmable V2X Environment

In conventional communication theory, wireless channels are regarded as a destructive and adversarial entity, yielding distorted received signals, causing excessive training overhead, yet having limited channel capacity. One of the most destructive wireless channels is called a doubly selective channel (i.e., time-and-frequency selective), which widely appears in vehicular communication systems due to the mobility of the transmitter and/or receiver. Furthermore, V2X communication signals may experience significant shadowing effects due to high-rise buildings in urban areas or hills and major vegetation in rural environments. To achieve robust information flow in high-mobility channels, LTE- and 5G NR-based V2X systems are configured with large subcarrier spacing¹ as well as dense pilot placement. However, this may result in considerably reduced spectral efficiency, not to mention very complex signal processing algorithms at the receiver.

More recently, a disruptive communication technique called IRSs [31], [32] has attracted increased attention, aiming at creating a smart radio environment by customizing the propagation of radio wavefronts. Specifically, IRSs are man-made programmable metasurfaces (consisting of a vast amount of tiny and passive antenna elements with reconfigurable processing networks), which

¹A relatively large subcarrier spacing is needed in high-mobility channels due to the frequency dispersion incurred by the Doppler spread, or the V2X communication system could suffer from a substantial increase of intercarrier interference, which, in turn, leads to drastic deterioration of the error rate performance. Such a phenomenon has been highlighted in [3] where NR V2X with a subcarrier spacing of 60 kHz enjoys considerable gains at high velocities (280 and 500 km/h) compared to that with a subcarrier spacing of 15 kHz.

can effectively control the phase, amplitude, frequency, and even polarization of the incident wireless signals to overcome the negative effects of natural wireless propagation. As such, IRSs allow the environment itself to be considered as an element of the communication system, whose operation can be optimized to enable higher rates, enlarged coverage, and uninterrupted connectivity. The recent work in [33] shows that sufficiently large IRSs can outperform traditional relay-aided systems in terms of throughput while allowing nearly passive implementation with reduced complexity.

6G-V2X can take advantage of IRS in coverage-limited scenarios (e.g., V2X communications operating at millimeter-wave (mmWave) or THz bands) or unfavorable propagation conditions (e.g., non-line-of-sight communication links). In such scenarios, the use of an IRS can enhance the vehicular channel conditions by introducing enhanced multipath propagation, which will result in larger transmission coverage. An out-of-coverage traffic intersection is an ideal use case scenario for using an IRS because the V2V communication links may be blocked by buildings and other obstructions. Measurements have shown that the strength of the received V2V signal power reduces quickly over distance away from the intersection due to such blockages [34], [35]. As such, vehicles located on perpendicular streets may not communicate with each other very well, which could result in significant degradation of V2V communication performance. To mitigate this issue, IRS may be installed on the surfaces of buildings around the intersection. The communication coverage of transmitting vehicles in the perpendicular streets can, thus, be enhanced by fine-tuning the reflecting elements of IRS. An IRS-assisted vehicular communication

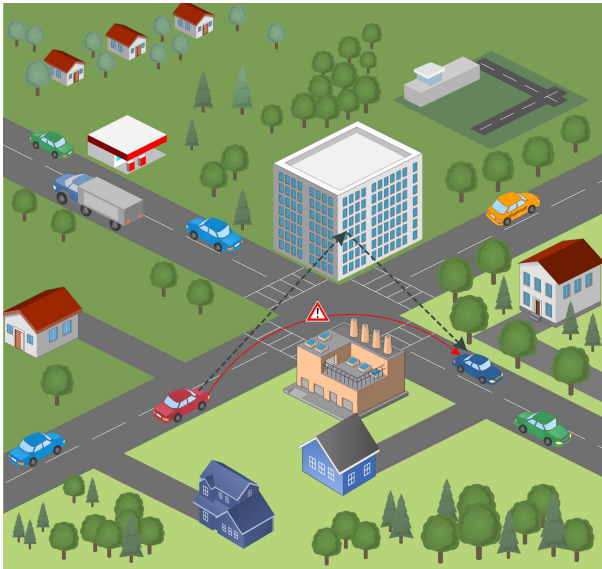


Fig. 4. Intelligent reflecting surface at the intersection.

scenario is illustrated in Fig. 4. It is interesting to point out that IRS can be employed for mitigation/suppression of the Doppler effect and multipath fading, making IRS an appealing research direction for significantly enhanced V2X communication in 6G. Specifically, recent work [36] has shown that: 1) the rapid fluctuations in the received signal strength due to the Doppler effect can be effectively reduced by using real-time tunable IRS and 2) for more general propagation environments with several interacting objects, even a few real-time tunable IRS can remarkably reduce the Doppler spread and the deep fades in the received signal. For a high-mobility wireless channel, a Doppler mitigation method by novel transmission protocol and real-time phase control of IRS has been developed in [37]. To efficiently integrate with 6G-V2X, IRS needs to overcome some fundamental challenges, such as reflection optimization, optimal placement of IRS, channel estimation in a highly dynamic vehicular environment, and adaptation to different spectrum ranges.

B. Tactile Communication in V2X

Tactile communication is a revolutionary technology, which enables a paradigm shift from the current digital content-oriented communications to steer/control-oriented communications by allowing real-time transmission of haptic or sensual information (i.e., touch, motion, vibration, and surface texture) [38]. By integrating human sensual information, tactile communication in 6G-V2X is expected to provide a truly immersive experience for onboard vehicle users [39]. In addition to traditional applications of multimedia communications (e.g., onboard meetings/demonstrations and infotainment), tactile communication will enhance vehicular specific applications, such as remote driving, vehicle platooning, and driver training by enabling fast and reliable transfer of

sensor data along with the haptic information related to driving experience and trajectories. Several haptic-based warning signals (e.g., waking up drowsy drivers or catching distracted drivers' attention) have been developed and tested for automotive applications to improve driving safety [40]–[42]. On the other hand, tactile-based V2X can be extremely helpful to VRUs by providing them with appropriate haptic signals that will enhance their safety and activity. For instance, Cespedes *et al.* [43] used haptic signals to combine cycling with cooperative driving while supporting cyclists moving in a platoon. The authors observed that the proposed system enhanced cycling behavior without negatively impacting concentration levels.

Despite tactile communication's immense potential, there are still many challenges. For example, tactile communication requires extremely high-speed and extremely low-latency communication to ensure reliable and real-time exchange of large volumes of haptic information [19]. These stringent connectivity constraints are very difficult to meet in high-mobility vehicular environments. This is because they require higher frequencies (e.g., mmWave or even THz) to meet their data demand. However, those higher frequencies are not very reliable, particularly in mobile environments. For example, in [44], we showed that, even in an indoor environment, THz networks may not be able to provide highly reliable high-rate communications. This, in turn, motivates research to develop a new breed of services called highly reliable high rate low-latency communications (HRLLCs) that can provide a combination of traditional 5G services (e.g., enhanced mobile broadband (eMBB) services that ignore reliability and URLLC services that ignore rate). Apart from the above challenges, tactile communication poses several fundamental challenges, including the design of application-specific control and communication protocols, the development of human-to-machine interfaces for wireless haptic interactions, and the design of suitable haptic codecs to capture and represent the haptic data and exact reconstruction of received haptic data.

C. Brain–Vehicle Interfacing

In a brain-controlled vehicle (BCV), the vehicle is controlled by the human mind rather than any physical interaction of the human with the vehicle. For people with disabilities, BCV may offer great potential for improved independence by providing an alternative interface for them to control vehicles [45]. On the other hand, brain–vehicle interfacing may lead to an improvement in manual driving by predicting a driver's actions and detecting discomfort [46]. Although the current vision is for fully automated vehicles, the adaptability of humans will play an irreplaceable role in managing the uncertainties and complexity of autonomous driving [47]. By keeping humans in the loop, a BCV is expected to mitigate the limitations of autonomous driving in challenging and

uncertain environments, such as rural and unstructured areas. Current wireless communication (e.g., 5G) and computation technologies are not able to realize BCV as services related to brain-machine interactions will require simultaneously ultrahigh reliability, ultralow latency, and ultrahigh data rate communication and ultrahigh-speed computation. For example, a coarse estimation of the whole brain recording demand is about 100 Gb/s [48], the transmission of which is not supported by existing wireless technologies. However, through full-phased brain-vehicle interfacing and ML techniques, 6G-V2X must support the learning and adapt to the behavior of human drivers.

Recently, the feasibility of BCV has been demonstrated in academia (e.g., [49] and [50]) and by the car industry (e.g., [45] and [46]). Bi *et al.* [49] and Fan *et al.* [50] have shown a brain-computer interface-based vehicle destination selection system. Although successfully tested under different conditions, the currently designed BCV is not a scalable solution since this would require a wireless connection to support brain-machine interactions with high coverage, availability, speed, and low latency to provide reliability and safety for the end-users. THz communications can be a potential solution to enable high-throughput and low-latency brain-vehicle interfacing. Fundamentally different performance metrics [e.g., quality of physical experience (QoPE)] need to be introduced and quantified to capture the physiological characteristics and then map into the conventional wireless QoS metrics [48]. Moreover, extensive real-world experiments are required to demonstrate the effectiveness of BCVs, as most of the existing works on BCVs have been verified through simulation only.

D. Blockchain-Based V2X

The widespread deployment of V2X networks very much relies on significantly enhanced security for large-scale vehicular message dissemination and authentication. The consideration for this imposes new constraints for resource allocation in V2X networks. For example, mission-critical messages should have ultraresilient security to deal with potential malicious attacks or jamming, while multimedia data services may require only lightweight security due to a large amount of data. These two types of security requirements lead to different frame structures, routing/relaying strategies, and power/spectrum allocation approaches. 6G-V2X can adopt a blockchain system that is viewed as a disruptive technology for secured decentralized transactions involving multiple parties. Compared to traditional security and privacy techniques, the use of blockchain can provide a wide range of enhanced security and privacy services without requiring any third parties [51]. Through the inherently distributed ledger technology of blockchain, 6G-V2X communication can perform distributed security management, offloading certain tasks with mobile cloud/edge/fog computing, and content caching. A blockchain-based security solution (e.g., smart contract or consensus mechanism) in 6G-V2X is expected to not only allow verification of the authenticity of a

message but also preserve the privacy of the sender [52], [53]. Moreover, the characteristics of blockchains are of interest for the management of unlicensed spectrum, which allows different users to share the same spectrum. 6G-V2X may also utilize a blockchain-based spectrum sharing approach, which has the potential to provide secure, smarter, low-cost, and highly efficient decentralized spectrum sharing [54].

While several attempts have been made to realize a blockchain-based communication network [51], a straightforward adoption of existing blockchain technology is not suitable for a V2X communication scenario due to its dynamic network characteristics and real-time data processing requirements. Despite blockchain's great potential in enabling enhanced security and network management, the technology itself suffers from high latency, and hence, new blockchain algorithms with ultralow latency need to be developed before they can be applied to 6G-V2X. Limited throughput and scalability of current blockchain technology are also major open problems that require a thorough investigation.

E. Terahertz-Assisted V2X Networks

THz communication, which operates at THz bands (0.1–10 THz), is envisioned as a promising approach to alleviate increasingly congested spectrum [16], [55] at lower frequencies. Leveraging the availability of ultrawide bandwidth, THz communication will be able to provide transmission rates ranging from hundreds of gigabits per second to several terabits per second. Such an extremely high throughput will enable a plethora of new V2X application scenarios, such as ultrafast massive data transfer between vehicles and haptic communications. Since THz communication is able to provide fiber-like data rates without the need for wires between multiple devices at a distance of a few meters, it may also be used in onboard use cases, such as the BCV scenario, where extremely high throughput and low-latency wireless communication is required.

While the THz spectrum brings a number of unique benefits, there are many major challenges to be addressed, such as transceiver architectures, materials, antenna design, propagation measurement, channel modeling, and new waveforms. In particular, it is essential to characterize and understand THz radio propagation in different V2X scenarios, such as highway, urban, and in-vehicle. One of the main challenges in THz-assisted 6G-V2X will be the effective use of traditional cellular and new THz bands. As such, suitable dynamic resource scheduling is required to exploit their unique benefits. For example, while THz communication offers very high data rates, it is only suitable for short-range V2X communications. In this case, resources may be allocated in THz bands to those transmitters with receivers within a short range. Note that appropriately designed relaying or IRS techniques (as done in [56]) can be potential solutions to extend the coverage of TH-based V2X communications.

F. Quantum Computing-Aided V2X

Quantum computing is considered one of the revolutionary technologies for generic 6G wireless communications in a number of seminal works (e.g., [14], [16], [54], [57], and [58]). However, the development of practical quantum computing and communication systems is in its infancy, and practical solutions may be quite some time off. Therefore, as mentioned in [2], quantum computing and communications may potentially play a role toward the end of the 6G development or even beyond for 6G+ technologies. Nevertheless, once some form of quantum computing is available for 6G communications, it can be expected to make its way into V2X applications as well.

If available, we can envision that quantum computing will offer enhanced security in V2X communications. Note that security in V2X communications is significantly more important than in traditional communications since, for example, a security breach in an autonomous vehicle can cause fatal accidents. As the wireless spectrum is shared between vehicles and other types of cellular users (e.g., pedestrians), V2X communications may be vulnerable to malicious attacks, and traditional encryption strategies may not be adequate. Quantum computing has the inherent security feature of quantum entanglement that cannot be cloned or accessed without tampering with it [14], making it an appropriate technology to enhance 6G-V2X communications security. Moreover, quantum domain security is based on the quantum key distribution (QKD) framework that allows detecting any malicious eavesdropping attempt. For example, the use of quantum federated learning to securely execute learning tasks among vehicles can be an important use case [59].

In addition to the enhanced security feature, the advent of quantum computing promises a radically enhanced computational capability offering to significantly enhance and optimize 6G-V2X services through the fast execution of extremely complex and currently time-consuming optimization algorithms. For example, the implementation of advanced ML algorithms that require big data processing and massive training (e.g., finding an optimum geographic route with multiple objectives) is a very challenging task. In such scenarios, traditional computing often sacrifices optimality, while quantum computing can efficiently achieve optimality with reduced complexity [16], [60].

Although quantum computing is seen as a promising technology, much more research is required to turn it into a widely usable technology in order to exploit its potential. For example, current quantum computer chips can only operate at extremely low temperatures (close to zero Kelvin), which makes them at best only usable on the vehicular infrastructure side. To use them in vehicles, significant research is needed on the thermal stability of quantum computer chips. Other fundamental challenges include the development of large-scale quantum computing, the design of quantum security architectures, and the characterization of entanglement distribution.

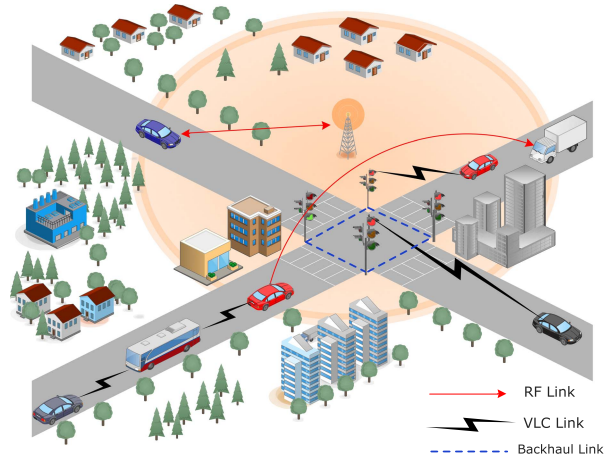


Fig. 5. Hybrid RF-VLC-based V2X communications.

IV. EVOLUTIONARY TECHNOLOGIES FOR 6G-V2X

In this section, we present a range of technologies that may be classified as evolutionary. While they have reached a certain maturity due to extensive research, testing, and deployment in the past, significant further development and trials are needed to adapt them to meet the new challenges and requirements in 6G-V2X.

A. Hybrid RF-VLC V2X System

In 6G-V2X, it is expected that the vehicle and its occupants will be served at extraordinarily high data rates and with extremely low latency. However, this feature may not be feasible with standalone radio frequency (RF)-based V2X communication as conventional RF-based vehicular communication often suffers from high interference, large latency, and low packet delivery rates in highly dense scenarios [61], [62]. One alternative approach may be the combination of RF and VLC-based V2X communications, where, along with radio waves, visible light can be used as a medium of communication in vehicular networks. A hybrid RF-VLC-based V2X communication scenario is shown in Fig. 5. The ultrahigh data rate (potentially up to 100 Gb/s) achieved by light-emitting diode (LED) or laser diode (LD)-based VLC [63] and its inherent features (such as low power consumption, enhanced security, and antielectromagnetic interference) make VLC technology an ideal candidate for future ITS. Moreover, a VLC-based V2X communication system will require minimum setup cost as VLC-based V2X can be implemented by using the existing LEDs/LDs in vehicle headlights or preinstalled street/traffic lights.

In V2X networks, VLC can be mainly used in the following three scenarios: V2V communication through headlights/backlights, V2X communication through traffic lights, and V2X communication through street lights. Note that the traffic/street lights can be used to establish backhaul links with one another by using free-space coherent optical communications [55]. In addition to enhancing the

data rate, VLC can boost the performance of V2X networks by eliminating the limitations of traditional RF-based V2X communications. For example, in the presence of big vehicle shadowing, RF-based V2V communication suffers from severe packet drop due to high path-loss and packet collision [64]. In this scenario, the transmitting vehicle can communicate with the big vehicle through VLC, and then, the big vehicle can relay the messages to the vehicles in the shadow region. Similarly, using VLC, traffic/street lights can also be used in the urban intersections to relay the messages to facilitate communication between vehicles from perpendicular streets, where traditional RF-based V2V communication often suffers from severe packet loss. Note that, while RF-based solutions (e.g., big vehicle or roadside unit (RSU) relaying) to the above problems are studied in the literature, such solutions can cause severe interference in the high-density scenarios due to the RF-based re-transmissions [34].

Although extensive research has been carried out on VLC-based V2X communication in the past decade, VLC has not been included in the 5G-V2X standard. Several open issues still need to be solved for enabling hybrid RF-VLC V2X. These include interoperability between VLC and RF technologies, and deployment issues. In an outdoor environment, the performance of VLC degrades due to the interference caused by natural and artificial light sources. On the other hand, the received signal strength in VLC may dramatically vary due to the vehicles' mobility [65], [66]. Hence, ambient lighting-induced interference and mobility-induced channel variations need to be properly addressed before deploying VLC in 6G-V2X systems.

B. Large-Scale Nonorthogonal Multiple Access

6G-V2X will require massive connectivity for timely, reliable, seamless, and ubiquitous exchange of V2X messages. This is to allow connected vehicles to constantly sense and interact with the environments for full situational awareness and, hence, considerably improved safety. A key enabling technology for 6G-V2X networks to meet these requirements is NOMA. Compared to traditional OMA schemes, NOMA allows multiple users to utilize time and frequency resources concurrently for both random access and multiplexing [67], [68]. There are two main types of NOMA: power-domain NOMA [69], [70] and code-domain NOMA [22], [71], such as SCMA [21], [72]–[74] and resource spread multiple access [75], in which multiple users are separated by different power levels and different codebooks/sequences, respectively. In recent years, NOMA has been proposed for grant-free access to achieve ultralow-latency massive connectivity while achieving superior spectrum efficiency.

As a matter of fact, NOMA can be a strong complement to other aforementioned 6G-V2X enabling technologies for use in both V2V and V2I communications. For example, NOMA can be used for distributed V2V autonomous scheduling, where connected vehicles need to contend with the random access control channel to

reserve resources for data packet transmissions. In large-scale 6G-V2X networks, the control channel with traditional random access schemes may be saturated, leading to severe collisions on scheduling assignment packets and significant loss of data packet reliability. With the application of NOMA (e.g., SCMA) for control channels, collisions of scheduling packets can be significantly reduced, and the reliability of data packets can, thus, be improved. NOMA can also be applied in large-scale 6G-V2X networks to achieve efficient data packet transmission. This requires multiple communication modes, such as unicast and multicast, which have been added for V2X communications (in addition to broadcast) since Release 15. These multiple communication modes pave the way for the application of NOMA, where broadcast packets may be superimposed by unicast or multicast packets targeting very close neighboring vehicles [76]. In this scenario, power-domain NOMA, in which a large portion of transmit power is allocated to broadcast packets and the remaining for unicast or multicast packets, may be used.

Despite significant research efforts by both academia and industry, however, NOMA has not been adopted in 5G NR as no consensus has been achieved in 3GPP. While existing research works have been reported on the applications of NOMA to V2X networks, they are mainly focused on the V2I links and centralized resource allocation. Many problems of NOMA remain open. For example, how to efficiently coordinate and schedule different users for NOMA transmissions to co-exist with the current OMA (e.g., orthogonal frequency-division multiple access) communications? How to design a highly flexible and scalable NOMA scheme that can strike a balance between overloading factor, reliability, and user fairness? How to design practical and efficient large-scale NOMA for connected and autonomous vehicle (CAV) applications, especially in distributed V2V network scenarios?

C. Exploration of Multiple Radio Access Technologies

Exploiting the higher frequency spectrum in the mmWave and THz range is vital to achieve the 6G KPIs (e.g., terabits per seconds data rates, billions of connected devices, and submilliseconds of access latency). The rich frequency resources at mmWave and THz bands can provide larger bandwidth (e.g., multigigabits and tens of gigahertz for mmWave and THz, respectively) than the one available at sub-6 GHz, which is highly congested in existing cellular systems. These rich frequency resources are needed to enable high data rates and low latency for 6G-V2X communications. Extensive research has been carried out studying infrastructure-based 5G mmWave communications, such as channel modeling and massive multiple-input–multiple-output (MIMO) beamforming. However, V2X communications in mmWave and THz frequency bands suffer from excessive propagation loss and susceptibility to blockage by obstacles such as vehicles and buildings. In addition, the much smaller cells

in mmWave and THz bands may significantly increase the frequencies of handovers. These problems make it challenging for mmWave and THz communication systems to provide the relevant QoSs needed for the expected advanced V2X applications [44]. It is foreseen that multiradio access technologies with sub-6 GHz, mmWave, and/or THz will be needed to work together in future 6G-V2X networks [77]. For example, while mmWave and THz radios will provide extra bandwidth and capacity to 6G-V2X networks, sub-6 GHz radios are critical for the enabling long communication ranges and connectivity stability.

There are a number of challenges to be addressed for efficient usage of multiradio access technologies. From the perspectives of mmWave and THz V2X communications, the excessive propagation loss and signal blockage necessitate the use of directional beamforming. The directional connectivity makes V2V operation with mmWave and/or THz radios very challenging for vehicles with high moving speeds. Communication between two vehicles over a mmWave link, including the physical channel and communications of mmWave for V2V, has been studied [78]. However, the challenges that mmWave and THz introduce at the MAC layer due to beamforming communications remain largely open for 6G V2V networks. Novel schemes for coordination and collaboration among these multiradio access technologies are needed in order to tackle MAC layer challenges, such as fast link configuration and beam management, contention-based channel access, sidelink autonomous scheduling, distributed congestion control, and interference management at the MAC layer. Moreover, the use of IRS combined with high frequencies is worthy of a close investigation as it has the potential to help alleviate some of those challenges, as shown in [56].

D. Advanced Resource Allocation

Radio resource management (RRM) will play a crucial role in 6G-V2X networks, especially for providing the QoS required by advanced V2X applications. The base stations usually take the main responsibility for RRM in the current cellular V2X networks, which has been widely studied in the literature [79]–[81]. However, there are several major challenges for RRM in 6G-V2X networks. As previously mentioned, 6G-V2X networks will very likely need multiradio technologies to deliver the expected QoS. The resources of different technologies will need to be taken into account in the RRM decision-making. Solutions that smartly use the characteristics of different technologies (e.g., higher rate for mmWave and better reliability for sub-6 GHz) are needed. Moreover, most current RRM approaches in the literature use either fixed rules, analytical models, or supervised learning in relatively low-dimensional scenarios. However, existing 5G RRM research has mainly focused on infrastructure-based communications [82]–[84]. The expected problem dimensionality will significantly increase for 6G-V2X networks partly due to

mmWave deployment and coexistence of multiple V2X use cases with additional direct V2V communications and autonomous resource control operational modes. Moreover, the fast-moving nature of V2X networks and the stringent QoS requirements that must be met to support advanced V2X use cases make the RRM problems more challenging.

In order to address the above challenges of supporting multiradio technologies and increased algorithm complexity, advanced resource allocation schemes are needed, which could be built with the support of context awareness and cross-layer design. A hybrid RRM framework can be created, in which both dedicated radio resources and a shared resource pool are allocated to the connected vehicles for V2V and V2I communications. The dedicated radio resources to the individual CAVs ensure that a basic but critical level of QoS is guaranteed for various CAV applications. The shared resource pools are then provided to flexibly accommodate the temporary loss of mmWave or THz connections and adapt to fast-changing network conditions. The allocation can be adjusted adaptively according to the QoS feedback and the context. Context awareness of the communication system and the driving environment could be pivotal for the cross-layer design of RRM solutions. For instance, in [85], we showed how one could use such smart multiradio solutions (at mmWave and sub-6 GHz) with context-awareness to provide a reliable video performance at high mobility. To deal with the very large action space and time complexity of RRM and QoS control problems, distributed intelligent solutions over multiradios that are able to dynamically allocate resource blocks (RBs) and power should be designed following the hybrid RRM framework. Reinforcement learning (RL) could be applied to design such intelligent solutions. More discussion on the ML-based resource allocation will be presented in Section V.

E. New Multicarrier Scheme

6G should provide ultrareliable high-rate V2X communications in high-mobility environments. Connected vehicles and high-speed trains, moving at speeds of 1000 km/h or even higher [16], [54], will communicate with each other and the surroundings including various sensors, infrastructure nodes (e.g., RSUs, base stations, and robots), satellites, and the internet cloud. Such high speeds may lead to significantly reduced channel coherence time and as a result, the vehicular channel fading coefficients are rapidly time-varying. Considering the effects of large Doppler and multipath propagation, innovation is needed to cope with the increased interference seen by the receiver [86]. In both LTE and 5G NR, OFDM and its variants are adopted for high-rate transmissions [87], [88]. Nevertheless, OFDM is very sensitive to the Doppler effect, which may destroy the multicarrier orthogonality and result in increased amounts of intercarrier interference and intersymbol interference. To overcome this drawback, some

advanced multicarrier waveforms [89] may be excellent candidates for 6G V2X. A promising multicarrier waveform is filter-bank multicarrier (FBMC), which enjoys tight spectrum containment and relatively strong resilience to carrier frequency offsets and Doppler spreads. These advantages give FBMC a great potential for the support of a diverse range of modern use cases where flexible time–frequency allocations are highly demanded [90].

Recently, orthogonal time–frequency space (OTFS) has emerged as an effective multicarrier scheme by spreading each information symbol over a 2-D orthogonal basis function spanning across the time–frequency domain [91]–[93]. In principle, OTFS is capable of converting a time-varying multipath channel into a relatively static delay-Doppler image of the constituent reflectors. The 2-D basis function in OTFS, called discrete symplectic Fourier transform (DSFT), is essentially orthogonal precoding transform to harvest the diversity gain from time, frequency, and space domains. Thus, it would be interesting to investigate new multicarrier transforms with reference to OTFS for enhanced performance in high-mobility environments. Besides, the existing NOMA studies are mostly focused on its application for massive machine-type communications with low-mobility and low-rate transmissions. To provide ultrareliable high-rate massive connectivity (driven by augmented reality/virtual reality (AR/VR) and autonomous driving), it is also promising to study the integration of NOMA (e.g., SCMA) and OTFS (or its variants) to exploit the benefits of these two disruptive techniques.

F. UAV-/Satellite-Assisted V2X

Due to the inherent property of wide-area coverage, UAVs can be used as aerial radio access points in the 6G-V2X network. UAVs can provide different types of services for vehicular users, such as relaying, caching, and computing [94]. Particularly, in a highly dense vehicular environment, UAVs can cooperate with the static network infrastructure nodes (i.e., base stations) in managing the wireless network to enhance the user experience. Because of their nearly unrestricted 3-D movement, UAVs can offer a number of unique V2X applications as a flying agents such as: 1) providing an advance road accident report prior to the arrival of a rescue team; 2) monitoring traffic violations to assist law enforcement agencies; and 3) broadcasting warning about road hazards that occurred in an area not preequipped with an RSU [95]. Despite significant advancements in UAV technology, there exist several challenges in the area of UAV-enabled V2X systems. For example, it is highly challenging to maintain reliable and high-speed wireless communication between UAVs and ground vehicles, as the mobility of both UAVs and ground vehicles will lead to highly dynamic channel characteristics. While line-of-sight links are expected for UAV-ground vehicle channels, systematic measurements and modeling of such channels are still ongoing [96].

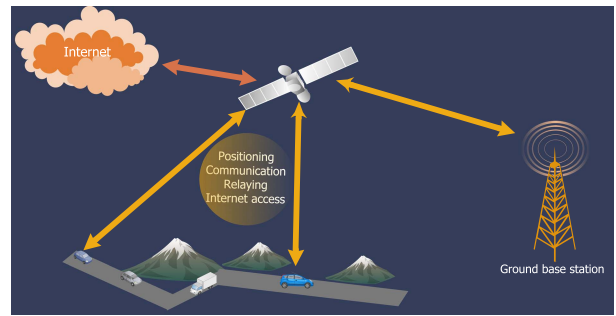


Fig. 6. Satellite-assisted V2X communications.

Several other key challenges include safety and regulations, seamless integration with existing networks, and the limited battery life of UAVs.

Satellites are another potential aerial communication platform for 6G-V2X communications. An example of a satellite-assisted V2X communication system is illustrated in Fig. 6. In current V2X standards, satellites are currently only used for localization purposes. It is worth mentioning that the data rates of satellite communication have been increasing significantly in recent years. For example, multi-beam satellites [97] have been widely adopted in satellite communication systems due to their capability to enhance wireless data rates. Thus, communication via satellite can be a potential technique for 6G-V2X to assist the communication between vehicle and remote data server in an out-of-terrestrial-coverage scenario. Similar to the UAV-based V2X communication, a satellite can also perform computing and network management tasks. To enable satellite-assisted V2X communications, an extensive investigation is required to accurately model the characteristics of the channels between satellites and high-mobility vehicles. It will also be challenging to integrate the different communication mechanisms (e.g., PHY or MAC layer transmission protocol) adopted in V2X and satellite communications.

From the PHY point of view, another key research problem is how to attain the highest power transmission efficiency for high-rate and long-range satellite communications. This may not be attained by OFDM due to its high peak-to-average power ratio (PAPR), which ultimately limits its maximum communication coverage. The time has come for the research community to rethink and revisit several traditional modulation schemes that enjoy constant signal envelopes, such as continuous phase modulation (CPM) [98]. A drawback of conventional CPM is that it may not be suitable to support high-rate communication as OFDM does [99]. Although MIMO could be a way to address this problem, CPM's continuous phase constraint prevents its straightforward integration with MIMO. Recently, a new phase modulation on the hypersphere (PMH) has been developed for load-modulated MIMO [100], [101]. It is noted that PMH is capable of

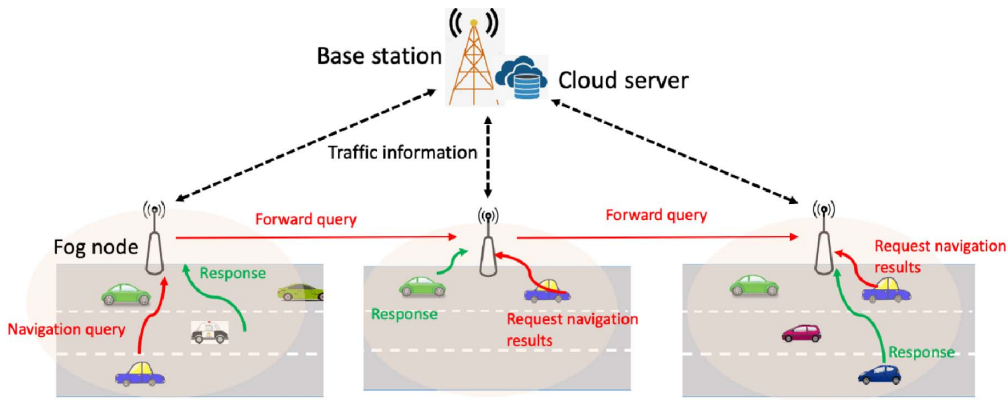


Fig. 7. Fog node-assisted traffic navigation.

achieving the highest power efficiency while having the advantage of approaching the capacity of Gaussian inputs. The application of PMH for satellite-aided long-distance V2X deserves a close investigation.

G. Integrated Computing for V2X

Although cloud computing has been widely used in vehicular networks, on its own, cloud-based solutions may not be able to meet many of the very delay-sensitive applications of V2X networks. Edge/fog computing is a newly introduced paradigm, which enables faster distributed computing and better security at a low operational cost. Edge computing operates in a stand-alone mode, whereby the data processing is performed on the nodes that are close to the end users. On the other hand, fog computing has multiple interconnected layers and could interact with the distant cloud and edge nodes [18]. By leveraging computing resources at edge/fog nodes located at the edge of the network, 6G is expected to provide more user aware, scalable, and low-latency services for vehicles. Complex algorithms used in the V2X network can be solved in real time by offloading complex computational tasks to the edge/fog nodes. One of the use cases of fog computing can be navigation under real-time traffic conditions. For example, fog computing can be used to provide navigation-based real-time traffic conditions, as illustrated in Fig. 7. The navigation query generated by a vehicle can be sent to the nearest fog node and then relayed to the destination fog node by a hop-by-hop relaying mechanism, where each fog node in the hopping chain collects real-time traffic information in its coverage area. Upon receiving the traffic reports from the other fog nodes, the originated fog node computes the optimal path for the vehicle that generated the query.

Integration of cloud, edge, and fog computing is required in 6G-V2X to exploit the unique benefits of the computing technologies. For instance, together with the edge, fog can perform timely data processing, situation analysis, and decision-making in close proximity to the locations where the data are generated, while, together

with the cloud, fog can support more sophisticated applications, such as data analysis, pattern recognition, and behavior prediction [18]. Moreover, it has been demonstrated that network coding [102] can be effectively used to trade abundant computing resources at the network edge for communication bandwidth and latency. 6G-V2X can exploit the inherent benefits of edge/fog computing and network coding by properly integrating these two techniques. While edge/fog computing provides a number of unique benefits for the V2X network, there exist some fundamental challenges and open problems, such as building an integrated computing architecture, handling security and privacy issues, managing handover, and optimizing computing resources.

H. Integrated Sensing, Localization, and Communication

Attaining improved situational awareness for connected vehicles is dependent on not just rapid and reliable communication but also high-resolution sensing and high-accuracy localization (or positioning/mapping). While sensing helps extract key information (such as ranges, speeds, and moving directions) of vehicles, pedestrians, obstacles, and infrastructure, localization permits every vehicle to acquire its precise position, which is of utmost importance for the safe maneuvering of vehicles (especially autonomous vehicles). The improved situational awareness will, in turn, facilitate the exploration of endless opportunities for position-based services and advanced V2X applications, such as real-time 3-D mapping for building an accurate environment model. Like communication, both sensing and localization rely on electromagnetic radio waves to measure, track, and interact with the driving surroundings. Hence, it is worthy to explore the natural synergy of sensing, localization, and communication by observing the fact that they share similar signal processing operations (e.g., carrier modulation/demodulation and synchronization) and hardware implementation. Very recently, in the 6G research community, there has been

a strong voice to integrate these three into one converged RF system for higher spectrum and energy efficiencies, lower hardware cost/storage, and mutually enhanced functionalities [24], [25].

Among others, there have already been tremendous research attempts concerning the integration of sensing and communication (ISAC) [103] and ILAC [17]. ISAC, also known as a fusion of radar and communication (RadCom) [104] and dual-function RadCom (DFRC), has emerged recently as a disruptive design paradigm for 6G mobile networks with an important application for connected vehicles. For example, in [105], the preambles of the single-carrier 802.11ad system have been exploited to carry out long-range radar sensing in the 60-GHz unlicensed band. It is shown in [105] that a gigabits-per-second data rate is achieved simultaneously with cm-level range accuracy and cm/s-level velocity accuracy for a single-target scenario. An architecture for an OFDM-based RadCom system has been studied in [104] with unique advantages to the radar application, such as very high dynamic range, independence from the transmitted user data, the enabling of relative velocity estimation, and efficient implementation based on the fast Fourier transform.

Similar to the state-of-the-art of ISAC, centimeter-level localization accuracy is expected by leveraging ultramassive MIMO, mmWave technologies, and UAV/satellite networks. On the other hand, the vehicles' location information can assist wireless networks with a wide range of information such as location-aided channel state information, beam processing, routing, network design, operations, and optimization to effectively utilize network infrastructure and radio resources. Research has already started in this direction. In [106], location information has been used in cognitive radios and for network optimization applications, whereas, in [107] and [108], resource allocation utilizing location information has been proposed for a multiuser and multicell system. A comprehensive survey can be found in [109] on location-aware communication across various layers of the protocol stack. In [110]–[114], joint localization and data transmission have been studied for 5G networks using different beamforming schemes. A key challenge here is how to allocate the radio resources effectively between localization and communication while maintaining their QoS requirements. To tackle this problem, ML-based approaches can be used since ML can unfold the full capability of the radio resources intelligently [17]. In both ISAC and ILCA, optimal waveform design with ultrahigh spectral efficiency is another challenge, which can be solved through effective spectrum sharing techniques or by properly sharing one waveform. The unified design of transceivers also needs to be considered for the seamless integration of localization and communication.

I. Integrated Control and Communication

Integrated communication and control will play a crucial role in 6G and could potentially help in improving

advanced and autonomous V2X services. One of the use cases of integrated communication and control is *vehicle platooning* [115]–[117], where a group of vehicles travels closely together in a coordinated movement without any mechanical linkage. The key benefits of vehicle platooning include increased road capacity, a rise in fuel efficiency, and comfortable road trips. Each vehicle in the platoon must know its relative distance and velocity with its neighboring vehicles in vehicle platooning to coordinate their acceleration and deceleration. Most of the prior works in this direction are either communication-centric [118]–[120] or control-centric [121]–[123]. The former entirely abstracts the control mechanism, while the latter assumes that the performance of the communication networks is deterministic. However, such an assumption can impair the performance of the system. For example, if the exchange of information is delayed, which can be caused by the uncertainty of the wireless channel, the stable operation of the platoon will be jeopardized. Therefore, to enable autonomous platooning, integrated communication and control will play an important role. Few studies have been reported in the literature, such as [124] and [125], which jointly studied the communication and control systems in a V2X network, particularly for vehicle platooning. Although control and communication theories are well studied in the past, existing tools are not yet adequate for analyzing integrated control and communication design [126]. For example, the fundamental limits of wireless control in real-time applications (e.g., vehicle platooning) are still unknown. On the other hand, the tight interaction between vehicle control and wireless networks is not yet well-understood. Understanding this interaction will play an important role in the field of integrated communication-control design for autonomous vehicles.

V. KEY MACHINE LEARNING PERSPECTIVES

Recent advances in ML research with the availability of large datasets and storage, and high computational power [127] have enabled various novel technologies, such as self-driving vehicles and voice assistants [128]. In view of this background, ML has become increasingly indispensable and instrumental toward highly autonomous and intelligent operation of tomorrow's 6G vehicular networks [129].

The design of traditional wireless communication systems heavily relies on model-based approaches in which various building blocks of communication systems are judiciously modeled based on analysis of measurement data. While these model-based approaches have demonstrated their successes in traditional communication system design, there may be some scenarios in 6G-V2X in which accurate modelings (e.g., interference model and accurate channel estimation) are unlikely [127]. Since ML is capable of extracting the characteristics and identifying (even certain deeply hidden) relationships between input

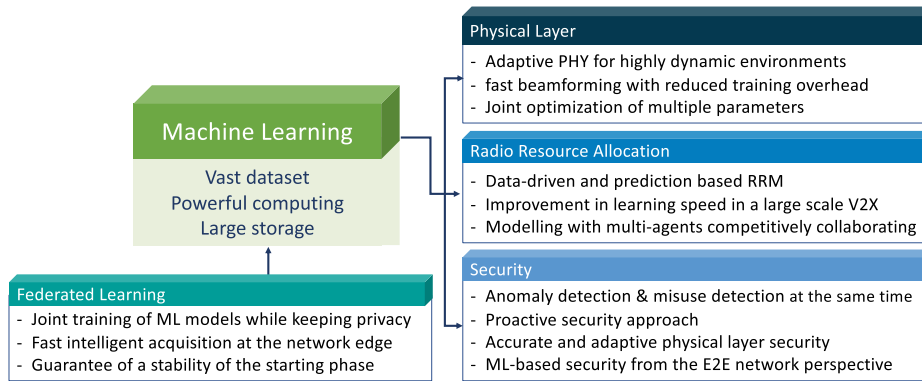


Fig. 8. Summary of potentials and open issues of ML for 6G-V2X.

and output data, it can be adopted as a powerful tool in the aforementioned scenarios where traditional communication system design may suffer from model mismatches. In addition, the data-driven nature of ML can help inferences and predictions about channel dynamics, user behavior, network traffic, application requirements, and security threats, thus leading to better resource provisioning and improved network operation [127]. In addition to the key role that ML plays in improving road safety and driver experiences, the latest progress in ML techniques is advancing the realization of autonomous cars [130]. For instance, the data streams of the observed information from cameras, LiDARs, GPS units, and sensors can be processed, with which data-driven intelligent decision-making takes place through modular perception-planning-action or by end-to-end learning methods for autonomous driving [131]. As far as vision-based ML is concerned, multimodal reasoning by fusing camera frames and LiDAR scans is investigated in [132] for better object detection to help autonomous driving. While numerous ML-based smart driving applications are expected for future driving, we focus in this article on the network perspective and highlight the impact of ML in 6G-V2X networks. We discuss the grand vision, significant opportunities, and major challenges of ML with a key focus on the physical layer, radio resource allocation, and system security. In addition, we introduce federated learning, which is one of the most promising ML technologies. A summary of this section is shown in Fig. 8.

A. ML for New Physical Layer

The vast range of data services in future V2X communications necessitates the judicious selection of coding, modulation, waveform, and multiple access schemes. In 6G-V2X, it is highly desirable to design an adaptive PHY, which can accommodate diverse use cases and the corresponding technological requirements.

The large Doppler spread may cause very rapid channel fading due to the high mobility, preventing accurate channel estimation. Although linear minimum mean square

error (LMMSE) estimation produces optimal performance for linear and stationary channel environments [133], it may not be effective for complicated channel conditions, especially in highly dynamic environments. Moreover, since conventional methods generally estimate the channel state information first and then recover the transmit signals, excessive signal processing latency at the receiver may be incurred [134]. From this point of view, ML is envisaged to help improve channel estimation in future 6G-V2X networks. In [135]–[137], deep learning has been adopted to optimize the channel estimation through the training of neural networks. However, due to the long training period and large training data, the learning-based channel estimation in [135]–[137] includes off-line training. In this case, the potential mismatch between the real channels and the channels considered in the training phases could result in performance degradation [128]. How to carry out effective channel estimation/prediction in highly dynamic environments is a challenging and interesting research problem.

Furthermore, the design of channel codes, such as low-density parity-check (LDPC) or polar codes, for example, is usually handcrafted with a relatively simple channel model (e.g., Gaussian or Rayleigh). Such a handcrafted channel code may lead to compromised error correction capabilities when it is adopted over a high-mobility V2X environment. In such a scenario, a connected vehicle may experience a rapid variation of interference when it moves from one location to another at a high speed. Therefore, it is of strong interest to investigate how to efficiently generate channel code *on-the-fly* for more flexible rates, lengths, and structures that are well adaptive to the rapidly varying communication environments.

As mmWave communication is expected to be widely used in 6G-V2X, beamforming and massive MIMO technologies are desired to overcome the notorious high path loss problem. The works in [138] and [139] pointed out that the existing beamforming methods for vehicular communication networks suffer from the overload problem incurred by frequent switching. Adaptive beamforming in a vehicular communication scenario [139] and [140] is

possible, but frequent beam training may be needed. Thus, it is desirable to develop new approaches to help reduce frequent training and heavy overhead while guiding the design of intelligent ML-based beamforming.

The high heterogeneity and dynamics of vehicular networks will increase the complexity of the environment including the varying wireless channels. As discussed, in legacy communication systems, different blocks of the PHY layer are usually optimized independently for ease of design. Such a design paradigm may not be optimal when different QoS requirements (e.g., latency, reliability, spectrum and energy efficiencies, and implementation cost) have to be met, particularly over very complex vehicular channels. Different functional blocks at the PHY layer would need to be configured jointly and adaptively according to the dynamically varying environment [128]. For instance, ML-based enhanced adaptive coding and modulation (ACM) is likely to significantly reduced communication latency and improved robustness [141], [142]. ML can also be applied to jointly optimize multiple configurations. In this case, an ML-based joint optimization needs to be developed while taking into account the entire end-to-end physical layer architecture [143].

B. ML for Improved Radio Resource Management

Radio resource allocation, as a classical problem in wireless networks [144], has received tremendous research attention in the past years. Although numerous radio resource allocation approaches (e.g., based on the greedy algorithm, game theory, and optimization) have been investigated, investigations on RRM are needed to satisfy certain new features of 6G-V2X networks, such as high mobility, heterogeneous structure, and various types of QoS requirements.

First, the mobility of vehicles leads to fast handovers over the links, leading to frequent resource allocation. While the channel quality and network topology may vary continuously, conventional resource allocation approaches would potentially need to be rerun for every small change, incurring huge overhead [145]. Here again, ML-based approaches offer promise as an efficient tool for data-driven decisions to enhance vehicular network performance [146]. For example, in [147], the prediction capability of ML is adopted to facilitate rapid response to dynamic changes in traffic loads. Their proposed ML-based approach is able to predict the future traffic load (about bursty traffic patterns) and assign the available channel to certain links, thus helping avoid potential network congestion and rapid channel allocation.

The scarcity of qualified real datasets for vehicular networks is considered a big challenge for the use of ML [148]. RL may be exploited when pre-labeled datasets are not available. For instance, in [149], RL is adopted for a vertical handoff strategy of V2I networks, in which RSUs, as learning agents, take into account the information from vehicles (i.e., average received signal strength,

vehicle velocity, and the data type), as well as traffic load for optimal handoff decisions. Without prior knowledge of handoff behavior, their proposed RL-based method can achieve rapid and accurate handoff to ensure seamless mobility management. In [150], RL is employed for a user association solution in heterogeneous vehicular networks (i.e., macrocells, picocells, and femtocells). It is shown that a high data rate with load balancing is attainable by learning an enhanced association policy based on the data of traffic loads and the pilot signal strengths received at vehicles. As indicated in [149] and [150], RL, which does not require prior knowledge of the vehicular environment, is expected to attract increasing research attention compared to learning approaches requiring datasets obtained in advance (i.e., supervised and unsupervised learning).

To use RL for RRM problems, it is imperative to seek RL solutions that can quickly converge. In this regard, one of the major challenges in RL is the so-called exploration and exploitation dilemma [151]. Specifically, an RL agent has to decide between exploration or exploitation, i.e., whether to explore the unknown states and try new actions in search of better ones for future adoption or to exploit those examined actions and adopt them. While exploration increases the flexibility of the agent to adapt to a dynamic environment at the expense of a possible degradation in the agent's learning accuracy, exploitation drives the agent's learning process to local optimal solutions [152]. When resource allocation problems are modeled with the large state/action space, finding a good tradeoff between exploration and exploitation is indispensable in order to improve computational time and convergence speed [153]. For a large-scale network with multiple vehicles, the state and action space in RL may grow very large. In this case, it is likely that a large number of states are not frequently visited, and therefore, a much longer time would be required for convergence.

To alleviate this problem, deep RL (DRL) has been investigated recently. In [154], multiple parameters of local observations, including channel information of V2V and V2I links and interference levels, are considered to manage the subband and power allocation issues. With their problem modeled with a large state/action space, DRL is adopted to extract the mapping relationship between the local observations and the resource allocation-and-scheduling solution. Moreover, DRL is particularly effective in dealing with the high complexity of joint optimization problems that often arise when dealing with wireless V2X resource allocation [155].

It is worth mentioning that a single-agent learning framework is considered in prior art (e.g., see [154]), where each agent in the same network may take its action without collaborating with any of the others [156]. Such independent choice of actions could influence other agents' rewards, hindering the convergence of the learning process [157]. Thus, when ML is applied to a vehicular network with multiple agents, the challenge of competitive collaboration should be considered for effective multiagent

learning. As an example, in [158], the problem of joint channel assignment and power allocation in C-V2X networks is studied with multiagent learning. When dealing with multiagent RL, it is often meaningful to use game-theoretic tools [159] to provide fundamental and rigorous analysis of the RL process.

C. ML for Security Management

The integration of diverse connectivity and the stringent data provision of services for 6G-V2X will exacerbate the security challenges. While 6G-V2X aims at providing seamless connectivity between infrastructural nodes and vehicles, the broadcast nature of vehicular communication makes it susceptible to malicious attacks. Various types of malicious attacks (e.g., authentication and authorized attacks, and data forgery and distributions [160]) could target a vehicular network. Given that, in a V2X system, private user information, such as user identity or trajectory, is exchanged over wireless link, the development of new user identification and authentication scheme is of particular importance to maintain secure and legitimate access to data/services/systems [161].

ML can be adopted for the detection and prevention of intrusions. In [162] and [163], supervised learning with classification capability is proposed as an effective mean to identify vehicles' abnormal behavior. It is noted that the training and detection process relies on existing labeled data, and therefore, such supervised learning may be incapable of detecting novel/unknown attacks. In [164] and [165], unsupervised learning that is capable of clustering and does not require labeled data is considered for real-time detection. Specifically, intrusion detection by using K-means clustering is proposed for vehicular networks in [164]. To deal with attacks that can dynamically in real time, anomaly detection using unsupervised learning is studied in [165]. However, since these approaches consider either misuse detection or anomaly detection, they may not be effective in a real scenario where known and unknown attacks can take place at the same time. In addition, reactive detection is mainly considered in the existing detection approaches to save communication costs. However, in a 6G-V2X network where the communication resources are relatively abundant, proactive exploration-based security approaches are expected to be useful for the enhanced security level [129]. For example, in [166], a proactive anomaly detection approach is adopted to connected cars for cyberthreat prevention.

Security issues in wireless communication are usually managed in the upper layers of the protocol stack using cryptographic-based methods. However, the management and exchange of secret keys will be challenging in heterogeneous and dynamic V2X networks in which vehicles may randomly access or leave the network at any time [167]. In this regard, one can complement standard cryptographic approaches with physical layer security (PLS) solutions [168]. While PLS techniques exploit

the randomness and the physical characteristics of wireless channels to thwart eavesdropping, these methods can be sensitive to channel modeling accuracy. Due to the high mobility and consequently the channel variations in a V2X scenario, ML can be useful for accurate channel estimation and tracking, which may benefit the design of more effective PLS-based techniques. Furthermore, depending on the scenarios and services, different security levels are expected. For example, consider two vehicles that follow each other either on a deserted road or at a busy intersection. Due to the vehicles' movement, the latter has a higher amount of factors, which may affect the decision-making, resulting in stringent security requirements [169]. ML may be employed in the latter case to dynamically decide the required security level and the most appropriate PLS solution.

ML can also be used to design better control and communication mechanisms that can prevent data injection attacks on vehicular networks, in general, and vehicular platoons, in particular, as shown in [170].

When ML is adopted to improve the security, ML-based solution needs to be validated with respect to the end-to-end network performance. As already mentioned, ML can be used in functional modules in multiple layers of the networks. Thus, the use of ML should be synchronized across the network [171] to ensure overall secure communications [172].

D. Federated Learning for 6G-V2X

A critical issue for efficient applications of ML is the training of ML models, which may be used at the base stations or in the vehicles. The training of large ML models in remote clouds is an obvious solution but could be time-consuming. One problem is that the fast-changing vehicular network and communication conditions may lead to a slow response to environmental changes, thus resulting in degraded performance. Furthermore, most training samples are generated at the network edges, such as base stations and vehicles, and hence, the cost and latency of transferring such data to a remote cloud could be very high. Against this background, local training of ML models is a desirable solution in 6G-V2X networks. As each base station or vehicle may hold only a small number of training samples, joint training of ML models with shared training samples is a potential way to improve ML model accuracy and generalization of performance. However, a major concern for the joint training is privacy, in which base stations and vehicles may not want to compromise by sharing training samples. Federated learning, emerged in recent years to address the privacy and communication overhead issues associated with the training of ML models, has attracted extensive research interest for enhanced wireless networks [173]–[176].

Deemed to be an excellent ML approach for more efficient 6G-V2X networks, there are several technical challenges to be tackled for effective applications of federated

learning. In the existing research works on federated learning of wireless networks, supervised learning is mainly considered. As RL models are more likely to be used, a scalable federated RL framework, which can cover many different 6G-V2X use cases, is needed. In addition, since many V2X applications are mission-critical, it is often not possible to allow federated RL to learn from scratch to avoid an unstable phase at the beginning of the learning process. Another challenge of federated learning involving vehicles is the short interconnectivity between the vehicles. The vehicles may be out of communication range with the base stations or other vehicles that are involved in the federated learning. Hence, the vehicles may need to participate in federated learning, while they are parked. Finally, the impact of the wireless channel on the federated learning performance deserves a deeper investigation. As shown in [174], wireless errors and delays can affect the accuracy of federated learning. This effect can be further exacerbated in a mobile V2X network due to the high-speed mobility of the vehicles and the dynamics of the

channel. Further research on the joint design of wireless and learning mechanisms for V2X is needed.

VI. CONCLUSION

In this article, we have identified a number of key enabling technologies and revolutionary elements of next-generation 6G-V2X networks by unfolding their potential features and advantages that are far beyond the capabilities of 5G. Furthermore, we have provided an overview of recent advances in applications of ML in 6G vehicular networks, which is widely regarded as a key to pave the way toward truly ITSs. For each enabling technology, we have highlighted and discussed the major advances, the most pressing challenges, and the potential opportunities. We expect this article to provide academic and industry professionals with key insight into 6G-based next-generation V2X, which, in turn, will stimulate more research with innovative solutions toward the practical design, testing, and deployment of these technologies. ■

REFERENCES

- [1] S. Chen et al., "Vehicle-to-everything (v2x) services supported by LTE-based systems and 5G," *IEEE Commun. Standards Mag.*, vol. 1, no. 2, pp. 70–76, Jun. 2017.
- [2] W. Saad, M. Bennis, and M. Chen, "A vision of 6G wireless systems: Applications, trends, technologies, and open research problems," *IEEE Netw.*, vol. 34, no. 3, pp. 134–142, May 2020.
- [3] G. Naik, B. Choudhury, and J.-M. Park, "IEEE 802.11bd & 5G NR V2X: Evolution of radio access technologies for V2X communications," *IEEE Access*, vol. 7, pp. 70169–70184, 2019.
- [4] J. B. Kenney, "Dedicated short-range communications (DSRC) standards in the United States," *Proc. IEEE*, vol. 99, no. 7, pp. 1162–1182, Dec. 2011.
- [5] H. Seo, K.-D. Lee, S. Yasukawa, Y. Peng, and P. Sartori, "LTE evolution for vehicle-to-everything services," *IEEE Commun. Mag.*, vol. 54, no. 6, pp. 22–28, Jun. 2016.
- [6] O. Sadio, I. Ngom, and C. Lishou, "Controlling WiFi direct group formation for non-critical applications in C-V2X network," *IEEE Access*, vol. 8, pp. 79947–79957, 2020.
- [7] *Study on Enhancement of 3GPP Support for 5G V2X Services*, document 3GPP TR 22.886, 2016.
- [8] H. Bagheri et al., "5G NR-V2X: Toward connected and cooperative autonomous driving," *IEEE Commun. Standards Mag.*, vol. 5, no. 1, pp. 48–54, Mar. 2021.
- [9] K. Abboud, H. A. Omar, and W. Zhuang, "Interworking of DSRC and cellular network technologies for V2X communications: A survey," *IEEE Trans. Veh. Technol.*, vol. 65, no. 12, pp. 9457–9470, Dec. 2016.
- [10] *TOYOTA ITS Web Exhibition 2021—V2X*. Accessed: May 10, 2022. [Online]. Available: https://www.toyota.co.jp/its/en/2021/v2x_technology/
- [11] *NXP, Volume Kswagen and Partners Continue to Accelerate the V2X Rollout*. Accessed: May 10, 2022. [Online]. Available: <https://www.nxp.com/company/blog/nxp-volkswagen-and-partners-continue-to-accelerate-the-v2x-rollout:BL-THE-V2X-ROLLOUT>
- [12] *Ford Says All of its Vehicles Will 'Talk and Listen' by 2022 Via 5G C-V2X*. Accessed: May 10, 2022. [Online]. Available: <https://www.dbusiness.com/daily-news/ford-says-all-of-its-vehicles-will-talk-and-listen-by-2022-via-5g-c-v2x/>
- [13] H. Zhou, W. Xu, J. Chen, and W. Wang, "Evolutionary V2X technologies toward the internet of vehicles: Challenges and opportunities," *Proc. IEEE*, vol. 108, no. 2, pp. 308–323, Feb. 2020.
- [14] F. Tariq, M. R. A. Khandaker, K.-K. Wong, M. A. Imran, M. Bennis, and M. Debbah, "A speculative study on 6G," *IEEE Wireless Commun.*, vol. 27, no. 4, pp. 118–125, Aug. 2020.
- [15] S. Nayak and R. Patgiri, "6G communications: A vision on the potential applications," 2020, *arXiv:2005.07531*.
- [16] I. F. Akyildiz, A. Kak, and S. Nie, "6G and beyond: The future of wireless communications systems," *IEEE Access*, vol. 8, pp. 133995–134030, 2020.
- [17] Z. Xiao and Y. Zeng, "An overview on integrated localization and communication towards 6G," 2020, *arXiv:2006.01535*.
- [18] Y. Xiaohu et al., "Towards 6G wireless communication networks: Vision, enabling technologies, and new paradigm shifts," *Sci. China Inf. Sci.*, vol. 20300, no. 2016, pp. 1–76, 2020.
- [19] S. Tanwar, S. Tyagi, I. Budhiraja, and N. Kumar, "Tactile internet for autonomous vehicles: Latency and reliability analysis," *IEEE Wireless Commun.*, vol. 26, no. 4, pp. 66–72, Aug. 2019.
- [20] A. Islam, M. B. Uddin, M. F. Kader, and S. Y. Shin, "Blockchain based secure data handover scheme in non-orthogonal multiple access," in *Proc. 4th Int. Conf. Wireless Telematics (ICWT)*, Jul. 2018.
- [21] M. Taherzadeh, H. Nikopour, A. Bayesteh, and H. Baligh, "SCMA codebook design," in *Proc. IEEE 80th Veh. Technol. Conf. (VTC-Fall)*, Sep. 2014, pp. 1–5.
- [22] Z. Liu and L.-L. Yang, "Sparse or dense: A comparative study of code-domain NOMA systems," *IEEE Trans. Wireless Commun.*, vol. 20, no. 8, pp. 4768–4780, Aug. 2021.
- [23] A. Bourdoux et al., "6G white paper on localization and sensing," 2020, *arXiv:2006.01779*.
- [24] H. Wymeersch et al., "Integration of communication and sensing in 6G: A joint industrial and academic perspective," in *Proc. IEEE 32nd Annu. Int. Symp. Pers., Indoor Mobile Radio Commun. (PIMRC)*, Sep. 2021, pp. 66–72.
- [25] S. Bartoletti et al., "Positioning and sensing for vehicular safety applications in 5G and beyond," *IEEE Commun. Mag.*, vol. 59, no. 11, pp. 15–21, Nov. 2021.
- [26] E. ElGhanam, M. Hassan, A. Osman, and I. Ahmed, "Review of communication technologies for electric vehicle charging management and coordination," *World Electr. Vehicle J.*, vol. 12, no. 3, p. 92, Jun. 2021.
- [27] G. Fridgen, M. Thimmel, M. Weibelzahl, and L. Wolf, "Smarter charging: Power allocation accounting for travel time of electric vehicle drivers," *Transp. Res. D, Transp. Environ.*, vol. 97, Aug. 2021, Art. no. 102916.
- [28] C.-K. Chau, K. Elbassioni, and C.-M. Tseng, "Drive mode optimization and path planning for plug-in hybrid electric vehicles," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 12, pp. 3421–3432, Dec. 2017.
- [29] J. Wang, K. Zhu, and E. Hossain, "Green Internet of Vehicles (IoV) in the 6G era: Toward sustainable vehicular communications and networking," *IEEE Trans. Green Commun. Netw.*, vol. 6, no. 1, pp. 391–423, Mar. 2022.
- [30] W. Li et al., "Cloud-based health-conscious energy management of hybrid battery systems in electric vehicles with deep reinforcement learning," *Appl. Energy*, vol. 293, Jul. 2021, Art. no. 116977.
- [31] Q. Wu and R. Zhang, "Towards smart and reconfigurable environment: Intelligent reflecting surface aided wireless network," *IEEE Commun. Mag.*, vol. 58, no. 1, pp. 106–112, Jan. 2020.
- [32] E. Basar, M. Di Renzo, J. De Rosny, M. Debbah, M. Alouini, and R. Zhang, "Wireless communications through reconfigurable intelligent surfaces," *IEEE Access*, vol. 7, pp. 116753–116773, 2019.
- [33] M. Di Renzo et al., "Reconfigurable intelligent surfaces vs. relaying: Differences, similarities, and performance comparison," *IEEE Open J. Commun. Soc.*, vol. 1, pp. 798–807, 2020.
- [34] M. Noor-A-Rahim, G. G. M. N. Ali, H. Nguyen, and Y. L. Guan, "Performance analysis of IEEE 802.11p safety message broadcast with and without relaying at road intersection," *IEEE Access*, vol. 6, pp. 23786–23799, 2018.
- [35] M. Noor-A-Rahim, G. G. M. N. Ali, Y. L. Guan, B. Ayalew, P. H. J. Chong, and D. Pesch, "Broadcast performance analysis and improvements of the LTE-V2V autonomous mode at road intersection," *IEEE Trans. Veh. Technol.*, vol. 68, no. 10, pp. 9359–9369, Oct. 2019.
- [36] E. Basar, "Reconfigurable intelligent surfaces for Doppler effect and multipath fading mitigation," *Frontiers Commun. Netw.*, vol. 2, pp. 1–33, May 2021.
- [37] W. Wu, H. Wang, W. Wang, and R. Song, "Doppler mitigation method aided by reconfigurable intelligent surfaces for high-speed channels," *IEEE*

- Wireless Commun. Lett.*, vol. 11, no. 3, pp. 627–631, Mar. 2022.
- [38] S. K. Sharma, I. Woungang, A. Anpalagan, and S. Chatzinotas, "Toward tactile internet in beyond 5G era: Recent advances, current issues, and future directions," *IEEE Access*, vol. 8, pp. 56948–56991, 2020.
- [39] E. C. Strinati et al., "6G: The next frontier: From holographic messaging to artificial intelligence using subterahertz and visible light communication," *IEEE Veh. Technol. Mag.*, vol. 14, no. 3, pp. 42–58, Sep. 2019.
- [40] C. Spence and C. Ho, "Tactile and multisensory spatial warning signals for drivers," *IEEE Trans. Haptics*, vol. 1, no. 2, pp. 121–129, Jul. 2008.
- [41] P. Bazilinskyy, S. M. Petermeijer, V. Petrovych, D. Dodou, and J. C. F. de Winter, "Take-over requests in highly automated driving: A crowdsourcing survey on auditory, vibrotactile, and visual displays," *Transp. Res. F Traffic Psychol. Behaviour*, vol. 56, pp. 82–98, Jul. 2018.
- [42] Y. Gaffary and A. Lécuyer, "The use of haptic and tactile information in the car to improve driving safety: A review of current technologies," *Frontiers ICT*, vol. 5, p. 5, Mar. 2018.
- [43] S. Cespedes, J. Salamanca, A. Yanez, C. Rivera, and J. C. Sacanamboy, "Platoon-based cyclists cooperative system," in *Proc. IEEE Veh. Netw. Conf. (VNC)*, Dec. 2015, pp. 112–118.
- [44] C. Chaccour, M. N. Soorki, W. Saad, M. Bennis, and P. Popovski, "Can terahertz provide high-rate reliable low latency communications for wireless VR?" 2020, *arXiv:2005.00536*.
- [45] *Brain Computer Interface Enables People With Disabilities to Drive Autonomously | Audi.com*. Accessed: May 10, 2022. [Online]. Available: <https://www.audi.com/en/innovation/autonomous-driving/brain-computer-interface-to-drive-autonomously.html>
- [46] *Nissan Brain-to-Vehicle Technology Redefines Future of Driving*. Accessed: May 10, 2022. [Online]. Available: <https://usa.nissannews.com/en-US/releases/nissan-brain-to-vehicle-technology-redefines-future-of-driving>
- [47] Y. Lu, L. Bi, and H. Li, "Model predictive-based shared control for brain-controlled driving," *IEEE Trans. Intell. Transp. Syst.*, vol. 21, no. 2, pp. 630–640, Feb. 2020.
- [48] R. C. Muioli et al., "Neurosciences and 6G: Lessons from and needs of communicative brains," 2020, *arXiv:2004.01834*.
- [49] L. Bi, X.-A. Fan, N. Luo, K. Jie, Y. Li, and Y. Liu, "A head-up display-based P300 brain-computer interface for destination selection," *IEEE Trans. Intell. Transp. Syst.*, vol. 14, no. 4, pp. 1996–2001, Dec. 2013.
- [50] X. Fan, L. Bi, T. Teng, H. Ding, and Y. Liu, "A brain-computer interface-based vehicle destination selection system using P300 and SSVEP signals," *IEEE Trans. Intell. Transp. Syst.*, vol. 16, no. 1, pp. 274–283, Feb. 2015.
- [51] D. C. Nguyen, P. N. Pathirana, M. Ding, and A. Seneviratne, "Blockchain for 5G and beyond networks: A state of the art survey," *J. Netw. Comput. Appl.*, vol. 166, Sep. 2020, Art. no. 102693.
- [52] J. Kang, Z. Xiong, D. Ye, D. I. Kim, J. Zhao, and D. Niyato, "Toward secure blockchain-enabled Internet of Vehicles: Optimizing consensus management using reputation and contract theory," *IEEE Trans. Veh. Technol.*, vol. 68, no. 3, pp. 2906–2920, Mar. 2019.
- [53] A. Yazdinejad, R. M. Parizi, A. Dehghantaha, and K.-K. R. Choo, "Blockchain-enabled authentication handover with efficient privacy protection in SDN-based 5G networks," *IEEE Trans. Netw. Sci. Eng.*, Aug. 2019.
- [54] Z. Zhang et al., "6G wireless networks: Vision, requirements, architecture, and key technologies," *IEEE Veh. Technol. Mag.*, vol. 14, no. 3, pp. 28–41, Sep. 2019.
- [55] Y. Yuan, Y. Zhao, B. Zong, and S. Parolari, "Potential key technologies for 6G mobile communications," *Sci. China Inf. Sci.*, vol. 63, no. 8, Aug. 2020, Art. no. 183301.
- [56] C. Chaccour, M. N. Soorki, W. Saad, M. Bennis, and P. Popovski, "Risk-based optimization of virtual reality over terahertz reconfigurable intelligent surfaces," in *Proc. IEEE Int. Conf. Commun. (ICC)*, Jun. 2020.
- [57] G. Gui, M. Liu, F. Tang, N. Kato, and F. Adachi, "6G: Opening new horizons for integration of comfort, security, and intelligence," *IEEE Wireless Commun.*, vol. 27, no. 5, pp. 126–132, Oct. 2020.
- [58] P. Yang, Y. Xiao, M. Xiao, and S. Li, "6G wireless communications: Vision and potential techniques," *IEEE Netw.*, vol. 33, no. 4, pp. 70–75, Jul. 2019.
- [59] M. Chehimi and W. Saad, "Entanglement rate optimization in heterogeneous quantum communication networks," in *Proc. 17th Int. Symp. Wireless Commun. Syst. (ISWCS)*, Sep. 2021, pp. 1–6.
- [60] P. Botsinis et al., "Quantum search algorithms for wireless communications," *IEEE Commun. Surveys Tuts.*, vol. 21, no. 2, pp. 1209–1242, Apr. 2019.
- [61] C. F. Mecklenbrauker et al., "Vehicular channel characterization and its implications for wireless system design and performance," *Proc. IEEE*, vol. 99, no. 7, pp. 1189–1212, Jul. 2011.
- [62] J. Santa, R. Toledo-Moreo, M. A. Zamora-Izquierdo, B. Úbeda, and A. F. Gómez-Skarmeta, "An analysis of communication and navigation issues in collision avoidance support systems," *Transp. Res. C, Emerg. Technol.*, vol. 18, no. 3, pp. 351–366, Jun. 2010.
- [63] P. Ji, H.-M. Tsai, C. Wang, and F. Liu, "Vehicular visible light communications with LED taillight and rolling shutter camera," in *Proc. IEEE 79th Veh. Technol. Conf. (VTC Spring)*, May 2014, pp. 1–6.
- [64] H. Nguyen et al., "Impact of big vehicle shadowing on vehicle-to-vehicle communications," *IEEE Trans. Veh. Technol.*, vol. 69, no. 7, pp. 6902–6915, Jul. 2020.
- [65] A. Memedi and E. Dressler, "Vehicular visible light communications: A survey," *IEEE Commun. Surveys Tuts.*, vol. 23, no. 1, pp. 161–181, Oct. 2020.
- [66] P. H. Pathak, X. Feng, P. Hu, and P. Mohapatra, "Visible light communication, networking, and sensing: A survey, potential and challenges," *IEEE Commun. Surveys Tuts.*, vol. 17, no. 4, pp. 2047–2077, 4th. Quart., 2015.
- [67] A. C. Cirik, N. M. Balasubramanya, L. Lampe, G. Vos, and S. Bennett, "Toward the standardization of grant-free operation and the associated NOMA strategies in 3GPP," *IEEE Commun. Standards Mag.*, vol. 3, no. 4, pp. 60–66, Dec. 2019.
- [68] S. Guo and X. Zhou, "Robust resource allocation with imperfect channel estimation in NOMA-based heterogeneous vehicular networks," *IEEE Trans. Commun.*, vol. 67, no. 3, pp. 2321–2332, Mar. 2019.
- [69] S. M. R. Islam, N. Avazov, O. A. Dobre, and K.-S. Kwak, "Power-domain non-orthogonal multiple access (NOMA) in 5G systems: Potentials and challenges," *IEEE Commun. Surveys Tuts.*, vol. 19, no. 2, pp. 721–742, 2nd. Quart., 2017.
- [70] Y. Liu, Z. Qin, M. El-kashlan, Z. Ding, A. Nallanathan, and L. Hanzo, "Nonorthogonal multiple access for 5G and beyond," *Proc. IEEE*, vol. 105, no. 12, pp. 2347–2381, Dec. 2017.
- [71] M. Mohammadkarimi, M. Ahmad Raza, and O. A. Dobre, "Signature-based nonorthogonal massive multiple access for future wireless networks," *IEEE Veh. Technol. Mag.*, vol. 13, no. 4, pp. 40–50, Dec. 2018.
- [72] R. Hoshyar, F. P. Wathan, and R. Tafazolli, "Novel low-density signature for synchronous CDMA systems over AWGN channel," *IEEE Trans. Signal Process.*, vol. 56, no. 4, pp. 1616–1626, Apr. 2008.
- [73] X. Li, Z. Gao, Y. Gui, Z. Liu, P. Xiao, and L. Yu, "Design of power-imbalanced SCMA codebook," *IEEE Trans. Veh. Technol.*, vol. 71, no. 2, pp. 2140–2145, Feb. 2022.
- [74] Z. Liu, P. Xiao, and Z. Mheich, "Power-imbalanced low-density signatures (LDS) from Eisenstein numbers," in *Proc. IEEE VTS Asia Pacific Wireless Commun. Symp. (APWCS)*, Singapore, Aug. 2019, pp. 1–5.
- [75] Qualcomm, *RSMA*, document R1-164688, 3GPP TSG RAN WG1 Meeting #85, Nanjing, China, May 2016.
- [76] Z. Tang and J. He, "NOMA enhanced 5G distributed vehicle to vehicle communication for connected autonomous vehicles," in *Proc. ACM MobiArch 15th Workshop Mobility Evolving Internet Archit.*, Sep. 2020, pp. 42–47.
- [77] B. Coll-Perales, J. Gosalvez, and M. Gruteser, "Sub-6GHz assisted MAC for millimeter wave vehicular communications," *IEEE Commun. Mag.*, vol. 57, no. 3, pp. 125–131, Mar. 2019.
- [78] T. Zugno, M. Drago, M. Giordani, M. Polese, and M. Zorzi, "Towards standardization of millimeter wave vehicle-to-vehicle networks: Open challenges and performance evaluation," 2019, *arXiv:1910.00300*.
- [79] F. D. Calabrese, L. Wang, E. Ghadimi, G. Peters, L. Hanzo, and P. Soldati, "Learning radio resource management in RANs: Framework, opportunities, and challenges," *IEEE Commun. Mag.*, vol. 56, no. 9, pp. 138–145, Sep. 2018.
- [80] T. O. Olwal, K. Djouani, and A. M. Kurien, "A survey of resource management toward 5G radio access networks," *IEEE Commun. Surveys Tuts.*, vol. 18, no. 3, pp. 1656–1686, Jul. 2016.
- [81] C. She, C. Yang, and T. Q. S. Quek, "Radio resource management for ultra-reliable and low-latency communications," *IEEE Commun. Mag.*, vol. 55, no. 6, pp. 72–78, Jun. 2017.
- [82] J. Gang and V. Friderikos, "Inter-tenant resource sharing and power allocation in 5G virtual networks," *IEEE Trans. Veh. Technol.*, vol. 68, no. 8, pp. 7931–7943, Aug. 2019.
- [83] L. Ferdouse, A. Anpalagan, and S. Erkcucuk, "Joint communication and computing resource allocation in 5G cloud radio access networks," *IEEE Trans. Veh. Technol.*, vol. 68, no. 9, pp. 9122–9135, Sep. 2019.
- [84] F. Fossati, S. Moretti, P. Perny, and S. Secci, "Multi-resource allocation for network slicing," *IEEE/ACM Trans. Netw.*, vol. 28, no. 3, pp. 1311–1324, Jun. 2020.
- [85] O. Semiyari, W. Saad, M. Bennis, and B. Maham, "Caching meets millimeter wave communications for enhanced mobility management in 5G networks," *IEEE Trans. Wireless Commun.*, vol. 17, no. 2, pp. 779–793, Feb. 2018.
- [86] W. Zhou, J. Wu, and P. Fan, "High mobility wireless communications with Doppler diversity: Fundamental performance limits," *IEEE Trans. Wireless Commun.*, vol. 14, no. 12, pp. 6981–6992, Dec. 2015.
- [87] X. Zhang, L. Chen, J. Qiu, and J. Abdoli, "On the waveform for 5G," *IEEE Commun. Mag.*, vol. 54, no. 11, pp. 74–80, Nov. 2016.
- [88] S.-Y. Lien, S.-L. Shieh, Y. Huang, B. Su, Y.-L. Hsu, and H.-Y. Wei, "5G new radio: Waveform, frame structure, multiple access, and initial access," *IEEE Commun. Mag.*, vol. 55, no. 6, pp. 64–69, Jun. 2017.
- [89] M. Renfors, X. Mestre, E. Kofidis, and F. Bader, *Orthogonal Waveforms and Filter Banks for Future Communication Systems*. New York, NY, USA: Academic, 2017.
- [90] R. Nessel, S. Schwarz, and M. Rupp, "Filter bank multicarrier modulation schemes for future mobile communications," *IEEE J. Sel. Areas Commun.*, vol. 35, no. 8, pp. 1768–1781, Aug. 2017.
- [91] R. Hadani et al., "Orthogonal time frequency space modulation," in *Proc. IEEE Wireless Commun. Netw. Conf. (WCNC)*, Mar. 2017, pp. 1–6.
- [92] P. Raviteja, K. T. Phan, Y. Hong, and E. Viterbo, "Interference cancellation and iterative detection for orthogonal time frequency space modulation," *IEEE Trans. Wireless Commun.*, vol. 17, no. 10, pp. 6501–6515, Oct. 2018.
- [93] G. D. Surabhi, R. M. Augustine, and A. Chockalingam, "On the diversity of uncoded OTFS modulation in doubly-dispersive channels," *IEEE Trans. Wireless Commun.*, vol. 18, no. 6, pp. 3049–3063, Jun. 2019.

- [94] X. Cao, P. Yang, M. Alzenad, X. Xi, D. Wu, and H. Yanikomeroglu, "Airborne communication networks: A survey," *IEEE J. Sel. Areas Commun.*, vol. 36, no. 10, pp. 1907–1926, Sep. 2018.
- [95] H. Menouar, I. Guvenc, K. Akkaya, A. S. Uluagac, A. Kadri, and A. Tuncer, "UAV-enabled intelligent transportation systems for the smart city: Applications and challenges," *IEEE Commun. Mag.*, vol. 55, no. 3, pp. 22–28, Mar. 2017.
- [96] Y. Zeng, R. Zhang, and T. J. Lim, "Wireless communications with unmanned aerial vehicles: Opportunities and challenges," *IEEE Commun. Mag.*, vol. 54, no. 5, pp. 36–42, May 2016.
- [97] O. Vidal, G. Verelst, J. Lacan, E. Alberty, J. Radzik, and M. Bousquet, "Next generation high throughput satellite system," in *Proc. IEEE 1st AESS Eur. Conf. Satell. Telecommun.*, Oct. 2012, pp. 1–7.
- [98] J. B. Anderson, T. Aulin, and C. E. Sundberg, *Digital Phase Modulation*. New York, NY, USA: Plenum, 1986.
- [99] M. P. Wylie-Green, E. Perrins, and T. Svensson, "Introduction to CPM-SC-FDMA: A novel multiple-access power-efficient transmission scheme," *IEEE Trans. Commun.*, vol. 59, no. 7, pp. 1904–1915, Jul. 2011.
- [100] M. A. Sedaghat, R. R. Müller, and C. Rachinger, "(Continuous) phase modulation on the hypersphere," *IEEE Trans. Wireless Commun.*, vol. 15, no. 8, pp. 5763–5775, Aug. 2016.
- [101] S. Bhat and A. Chockalingam, "Detection of load-modulated multiuser MIMO signals," *IEEE Wireless Commun. Lett.*, vol. 7, no. 2, pp. 266–269, Apr. 2018.
- [102] R. Ahlswede, N. Cai, S.-Y. R. Li, and R. W. Yeung, "Network information flow," *IEEE Trans. Inf. Theory*, vol. 46, no. 4, pp. 1204–1216, Jul. 2000.
- [103] F. Liu, C. Masouros, A. P. Petropulu, H. Griffiths, and L. Hanzo, "Joint radar and communication design: Applications, state-of-the-art, and the road ahead," *IEEE Trans. Commun.*, vol. 68, no. 6, pp. 3834–3862, Jun. 2020.
- [104] C. Sturm and W. Wiesbeck, "Waveform design and signal processing aspects for fusion of wireless communications and radar sensing," *Proc. IEEE*, vol. 99, no. 7, pp. 1236–1259, Jul. 2011.
- [105] P. Kumari, J. Choi, N. Gonzalez-Prelcic, and R. W. Heath, Jr., "IEEE 802.11ad-based radar: An approach to joint vehicular communication-radar system," *IEEE Trans. Veh. Technol.*, vol. 67, no. 4, pp. 3012–3027, Apr. 2018.
- [106] H. Celebi and H. Arslan, "Utilization of location information in cognitive wireless networks," *IEEE Wireless Commun.*, vol. 14, no. 4, pp. 6–13, Aug. 2007.
- [107] D. Slock, "Location aided wireless communications," in *Proc. 5th Int. Symp. Commun., Control Signal Process.*, May 2012, pp. 1–6.
- [108] A. Dammann et al., "WHERE2 Location aided communications," in *Proc. 19th Eur. Wireless Conf.*, 2013, pp. 1–8.
- [109] R. Di Taranto, S. Muppirisetty, R. Raulefs, D. Slock, T. Svensson, and H. Wymeersch, "Location-aware communications for 5G networks: How location information can improve scalability, latency, and robustness of 5G," *IEEE Signal Process. Mag.*, vol. 31, no. 6, pp. 102–112, Nov. 2014.
- [110] G. Ghatak, R. Koirala, A. De Domenico, B. Denis, D. Dardari, and B. Uguen, "Positioning data-rate trade-off in mm-wave small cells and service differentiation for 5G networks," in *Proc. IEEE 87th Veh. Technol. Conf. (VTC Spring)*, Jun. 2018, pp. 1–5.
- [111] S. Jeong, O. Simeone, A. Haimovich, and J. Kang, "Beamforming design for joint localization and data transmission in distributed antenna system," *IEEE Trans. Veh. Technol.*, vol. 64, no. 1, pp. 62–76, Jan. 2015.
- [112] G. Destino and H. Wymeersch, "On the trade-off between positioning and data rate for mm-wave communication," in *Proc. IEEE Int. Conf. Commun. Workshops (ICC Workshops)*, May 2017, pp. 797–802.
- [113] G. Destino, J. Saloranta, H. Wymeersch, and G.-S. Granados, "Impact of imperfect beam alignment on the rate-positioning trade-off," in *Proc. IEEE Wireless Commun. Netw. Conf. (WCNC)*, Apr. 2018, pp. 1–5.
- [114] D. Kumar, J. Saloranta, G. Destino, and A. Tolli, "On trade-off between 5G positioning and mmWave communication in a multi-user scenario," in *Proc. 8th Int. Conf. Localization GNSS (ICL-GNSS)*, Jun. 2018, pp. 1–5.
- [115] D. Jia, K. Lu, J. Wang, X. Zhang, and X. Shen, "A survey on platoon-based vehicular cyber-physical systems," *IEEE Commun. Surveys Tuts.*, vol. 18, no. 1, pp. 263–284, 1st Quart., 2016.
- [116] J. Thunberg, N. Lyamin, K. Sjöberg, and A. Vinel, "Vehicle-to-vehicle communications for platooning: Safety analysis," *IEEE Netw. Lett.*, vol. 1, no. 4, pp. 168–172, Dec. 2019.
- [117] H. Hu, R. Lu, Z. Zhang, and J. Shao, "REPLACE: A reliable trust-based platoon service recommendation scheme in VANET," *IEEE Trans. Veh. Technol.*, vol. 66, no. 2, pp. 1786–1797, Feb. 2017.
- [118] L. Xu, L. Y. Wang, G. Yin, and H. Zhang, "Communication information structures and contents for enhanced safety of highway vehicle platoons," *IEEE Trans. Veh. Technol.*, vol. 63, no. 9, pp. 4206–4220, Nov. 2014.
- [119] A. Sarker, C. Qiu, and H. Shen, "Connectivity maintenance for next-generation decentralized vehicle platoon networks," *IEEE/ACM Trans. Netw.*, vol. 28, no. 4, pp. 1449–1462, Aug. 2020.
- [120] P. Fernandes and U. Nunes, "Platooning with IVC-enabled autonomous vehicles: Strategies to mitigate communication delays, improve safety and traffic flow," *IEEE Trans. Intell. Transp. Syst.*, vol. 13, no. 1, pp. 91–106, Mar. 2012.
- [121] L. Xiao and F. Gao, "Practical string stability of platoon of adaptive cruise control vehicles," *IEEE Trans. Intell. Transp. Syst.*, vol. 12, no. 4, pp. 1184–1194, Dec. 2011.
- [122] V. S. Dolk, J. Ploeg, and W. P. M. H. Heemels, "Event-triggered control for string-stable vehicle platooning," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 12, pp. 3486–3500, Dec. 2017.
- [123] Y. Liu, C. Zong, and D. Zhang, "Lateral control system for vehicle platoon considering vehicle dynamic characteristics," *IET Intell. Transp. Syst.*, vol. 13, no. 9, pp. 1356–1364, Sep. 2019.
- [124] T. Zeng, O. Semiari, W. Saad, and M. Bennis, "Joint communication and control for wireless autonomous vehicular platoon systems," *IEEE Trans. Commun.*, vol. 67, no. 11, pp. 7907–7922, Nov. 2019.
- [125] T. R. Goncalves, V. S. Varma, and S. E. Elayoubi, "Vehicle platooning schemes considering V2V communications: A joint communication/control approach," in *Proc. IEEE Wireless Commun. Netw. Conf. (WCNC)*, May 2020.
- [126] G. Zhao, M. A. Imran, Z. Pang, Z. Chen, and L. Li, "Toward real-time control in future wireless networks: Communication-control co-design," *IEEE Commun. Mag.*, vol. 57, no. 2, pp. 138–144, Feb. 2019.
- [127] D. Gunduz, P. de Kerret, N. Sidiropoulos, D. Gesbert, C. Murthy, and M. van der Schaar, "Machine learning in the air," *IEEE J. Sel. Areas Commun.*, vol. 37, no. 10, pp. 2184–2199, Oct. 2019.
- [128] S. Ali, W. Saad, and D. Steinbach, *White Paper Mach. Learn. 6G Wireless Communication Networks*, ser. 6G Research Visions. 6G Flagship, University of Oulu, Jun. 2020, no. 7.
- [129] F. Tang, Y. Kawamoto, N. Kato, and J. Liu, "Future intelligent and secure vehicular network toward 6G: Machine-learning approaches," *Proc. IEEE*, vol. 108, no. 2, pp. 292–307, Feb. 2020.
- [130] E. S. Ali et al., "Machine learning technologies for secure vehicular communication in internet of vehicles: Recent advances and applications," *Secur. Commun. Netw.*, vol. 2021, pp. 1–23, Mar. 2021.
- [131] S. Grigorescu, B. Trasnea, T. Cocias, and G. Macesanu, "A survey of deep learning techniques for autonomous driving," *J. Field Robot.*, vol. 37, no. 3, pp. 362–386, Apr. 2020.
- [132] A. Prakash, K. Chitta, and A. Geiger, "Multi-modal fusion transformer for end-to-end autonomous driving," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2021, pp. 6995–7004.
- [133] V. Savaux and Y. Louët, "LMMSE channel estimation in OFDM context: A review," *IET Signal Process.*, vol. 11, no. 2, pp. 123–134, Apr. 2017.
- [134] Z. Gong, F. Jiang, and C. Li, "Angle domain channel tracking with large antenna array for high mobility V2I millimeter wave communications," *IEEE J. Sel. Topics Signal Process.*, vol. 13, no. 5, pp. 1077–1089, Sep. 2019.
- [135] T.-H. Li, M. R. A. Khandaker, F. Tariq, K.-K. Wong, and R. T. Khan, "Learning the wireless V2I channels using deep neural networks," in *Proc. IEEE 90th Veh. Technol. Conf. (VTC-Fall)*, Sep. 2019.
- [136] R. Sattiraju, A. Weinand, and H. D. Schotten, "Channel estimation in C-V2X using deep learning," 2020, [arXiv:2003.02617](https://arxiv.org/abs/2003.02617).
- [137] S. Moon, H. Kim, and I. Hwang, "Deep learning-based channel estimation and tracking for millimeter-wave vehicular communications," *J. Commun. Netw.*, vol. 22, no. 3, pp. 177–184, Jun. 2020.
- [138] V. Va, T. Shimizu, G. Bansal, and R. W. Heath, Jr., "Position-aided millimeter wave V2I beam alignment: A learning-to-rank approach," in *Proc. IEEE Int. Symp. Pers., Indoor Mobile Radio Commun.*, Oct. 2017, pp. 1–5.
- [139] A. Klautau, P. Batista, N. González-Prelcic, Y. Wang, and R. W. Heath, Jr., "5G MIMO data for machine learning: Application to beam-selection using deep learning," in *Proc. Inf. Theory Appl. Workshop (ITA)*, Feb. 2018, pp. 1–9.
- [140] W. Xia, G. Zheng, Y. Zhu, J. Zhang, J. Wang, and A. P. Petropulu, "A deep learning framework for optimization of MISO downlink beamforming," *IEEE Trans. Commun.*, vol. 68, no. 3, pp. 1866–1880, Mar. 2020.
- [141] F.-L. Luo, "Machine learning-based adaptive modulation and coding design," in *Machine Learning for Future Wireless Communications*. Hoboken, NJ, USA: Wiley, Feb. 2020, pp. 157–180.
- [142] L.-S. Chen, W.-H. C. Chung, I.-Y. Chen, and S.-Y. Kuo, "AMC with a BP-ANN scheme for 5G enhanced mobile broadband," *IEEE Access*, early access, Sep. 18, 2020, doi: [10.1109/ACCESS.2020.3024726](https://doi.org/10.1109/ACCESS.2020.3024726).
- [143] T. O'Shea and J. Hoydis, "An introduction to deep learning for the physical layer," *IEEE Trans. Cogn. Commun. Netw.*, vol. 3, no. 4, pp. 563–575, Dec. 2017.
- [144] Y. L. Lee, T. C. Chuah, J. Loo, and A. Vinel, "Recent advances in radio resource management for heterogeneous LTE/LTE-A networks," *IEEE Commun. Surveys Tuts.*, vol. 16, no. 4, pp. 2142–2180, 4th Quart., 2014.
- [145] M. Noor-A-Rahim, Z. Liu, H. Lee, G. G. M. N. Ali, D. Pesch, and P. Xiao, "A survey on resource allocation in vehicular networks," *IEEE Trans. Intell. Transp. Syst.*, vol. 23, no. 2, pp. 701–721, Sep. 2020.
- [146] L. Liang, H. Ye, and G. Y. Li, "Toward intelligent vehicular networks: A machine learning framework," *IEEE Internet Things J.*, vol. 6, no. 1, pp. 124–135, Feb. 2019.
- [147] F. Tang, Z. Md Fadlullah, B. Mao, and N. Kato, "An intelligent traffic load prediction-based adaptive channel assignment algorithm in SDN-IoT: A deep learning approach," *IEEE Internet Things J.*, vol. 5, no. 6, pp. 5141–5154, Dec. 2018.
- [148] M. E. Morocho-Cayamela, H. Lee, and W. Lim, "Machine learning for 5G/B5G mobile and wireless communications: Potential, limitations, and future directions," *IEEE Access*, vol. 7, pp. 137184–137206, 2019.
- [149] Y. Xu, L. Li, B.-H. Soong, and C. Li, "Fuzzy Q-learning based vertical handoff control for vehicular heterogeneous wireless network," in *Proc. IEEE Int. Conf. Commun. (ICC)*, Jun. 2014, pp. 5653–5658.

- [150] Z. Li, C. Wang, and C.-J. Jiang, "User association for load balancing in vehicular networks: An online reinforcement learning approach," *IEEE Trans. Intell. Transp. Syst.*, vol. 18, no. 8, pp. 2217–2228, Aug. 2017.
- [151] Y. Shen and C. Zeng, "An adaptive approach for the exploration-exploitation dilemma in non-stationary environment," in *Proc. Int. Conf. Comput. Sci. Softw. Eng.*, 2008, pp. 497–500.
- [152] M. Yogeswaran and S. G. Ponnambalam, "Reinforcement learning: Exploration–exploitation dilemma in multi-agent foraging task," *OPSEARCH*, vol. 49, no. 3, pp. 223–236, Apr. 2012.
- [153] R. S. Sutton and A. G. Barto, *Reinforcement Learning, Second Edition: An Introduction* (Adaptive Computation and Machine Learning). Cambridge, MA, USA: MIT Press, 2018.
- [154] H. Ye, G. Y. Li, and B.-H. F. Juang, "Deep reinforcement learning based resource allocation for V2V communications," *IEEE Trans. Veh. Technol.*, vol. 68, no. 4, pp. 3163–3173, Apr. 2019.
- [155] H. Ye, L. Liang, G. Y. Li, J. Kim, L. Lu, and M. Wu, "Machine learning for vehicular networks: Recent advances and application examples," *IEEE Veh. Technol. Mag.*, vol. 13, no. 2, pp. 94–101, Jun. 2018.
- [156] N. Zhao, Y.-C. Liang, D. Niyato, Y. Pei, M. Wu, and Y. Jiang, "Deep reinforcement learning for user association and resource allocation in heterogeneous cellular networks," *IEEE Trans. Wireless Commun.*, vol. 18, no. 11, pp. 5141–5152, Nov. 2019.
- [157] K.-L. A. Yau, P. Komisarczuk, and P. D. Teal, "Reinforcement learning for context awareness and intelligence in wireless networks: Review, new features and open issues," *J. Netw. Comput. Appl.*, vol. 35, no. 1, pp. 253–267, 2011.
- [158] H. V. Vu, Z. Liu, D. H. N. Nguyen, R. Morawski, and T. Le-Ngoc, "Multi-agent reinforcement learning for joint channel assignment and power allocation in platoon-based C-V2X systems," 2020, *arXiv:2011.04555*.
- [159] Z. Han, D. Niyato, W. Saad, and T. Basar, *Game Theory for Next Generation Wireless and Communication Networks: Modeling, Analysis, and Design*. Cambridge, U.K.: Cambridge Univ. Press, 2019.
- [160] V. Sharma, I. You, and N. Guizani, "Security of 5G-V2X: Technologies, standardization, and research directions," *IEEE Netw.*, vol. 34, no. 5, pp. 306–314, Sep. 2020.
- [161] Z. MacHardy, A. Khan, K. Obana, and S. Iwashina, "V2X access technologies: Regulation, research, and remaining challenges," *IEEE Commun. Surveys Tuts.*, vol. 20, no. 3, pp. 1858–1877, 3rd Quart., 2018.
- [162] J. Grover, N. K. Prajapati, V. Laxmi, and M. S. Gaur, "Machine learning approach for multiple misbehavior detection in VANET," in *Proc. Adv. Comput. Commun.*, vol. 192, 2011, pp. 644–653.
- [163] M. Scalabrin, M. Gadaleta, R. Bonetto, and M. Rossi, "A Bayesian forecasting and anomaly detection framework for vehicular monitoring networks," in *Proc. IEEE 27th Int. Workshop Mach. Learn. Signal Process. (MLSP)*, Sep. 2017.
- [164] L. A., "A novel distributed intrusion detection system for vehicular ad hoc networks," *Int. J. Adv. Comput. Sci. Appl.*, vol. 6, no. 4, pp. 101–106, 2015.
- [165] K. Sequeira and M. Zaki, "ADMIT: Anomaly-based data mining for intrusions," in *Proc. 8th ACM SIGKDD Int. Conf. Knowl. Discovery Data Mining*, 2002, pp. 386–395.
- [166] H. Al-Khateeb et al., "Proactive threat detection for connected cars using recursive Bayesian estimation," *IEEE Sensors J.*, vol. 18, no. 12, pp. 4822–4831, Jun. 2018.
- [167] B. M. ElHalawany, A. A. El-Banna, and K. Wu, "Physical-layer security and privacy for vehicle-to-everything," *IEEE Commun. Mag.*, vol. 57, no. 10, pp. 84–90, Oct. 2019.
- [168] Y. Liu, H.-H. Chen, and L. Wang, "Physical layer security for next generation wireless networks: Theories, technologies, and challenges," *IEEE Commun. Surveys Tuts.*, vol. 19, no. 1, pp. 347–376, 1st Quart., 2017.
- [169] H. M. Furqan, M. Sohaib J. Solajia, J. M. Hamamreh, and H. Arslan, "Intelligent physical layer security approach for V2X communication," 2019, *arXiv:1905.05075*.
- [170] A. Ferdowsi, S. Ali, W. Saad, and N. B. Mandayam, "Cyber-physical security and safety of autonomous connected vehicles: Optimal control meets multi-armed bandit learning," *IEEE Trans. Commun.*, vol. 67, no. 10, pp. 7228–7244, Oct. 2019.
- [171] M. Ylianttila, R. Kantola, A. Gurtov, L. Mucchi, and I. Opperman, *6G White Paper: Research Challenges for Trust, Security and Privacy* (6G Research Visions). Oulu, Finland: Univ. of Oulu, Jun. 2020.
- [172] K. A. Kumari, G. S. Sadasivam, S. S. Gowri, S. A. Akash, and E. G. Radhika, "An approach for End-to-End (E2E) security of 5G applications," in *Proc. IEEE 4th Int. Conf. Big Data Secur. Cloud (BigDataSecurity)*, *Int. Conf. High Perform. Smart Comput. (HPSC)*, *IEEE Int. Conf. Intell. Data Secur. (IDS)*, May 2018, pp. 133–138.
- [173] J. Park, S. Samarakoon, M. Bennis, and M. Debbah, "Wireless network intelligence at the edge," *Proc. IEEE*, vol. 107, no. 11, pp. 2204–2239, Nov. 2019.
- [174] M. Chen, Z. Yang, W. Saad, C. Yin, H. V. Poor, and S. Cui, "A joint learning and communications framework for federated learning over wireless networks," *IEEE Trans. Wireless Commun.*, vol. 20, no. 1, pp. 269–283, Jan. 2021.
- [175] Q. Yang, Y. Liu, T. Chen, and Y. Tong, "Federated machine learning: Concept and applications," *ACM Trans. Intell. Syst. Technol.*, vol. 10, no. 2, pp. 1–19, Jan. 2019.
- [176] S. Niknam, H. S. Dhillon, and J. H. Reed, "Federated learning for wireless communications: Motivation, opportunities, and challenges," *IEEE Commun. Mag.*, vol. 58, no. 6, pp. 46–51, Jun. 2020.

ABOUT THE AUTHORS


Md. Noor-A-Rahim received the Ph.D. degree from the Institute for Telecommunications Research, University of South Australia, Adelaide, SA, Australia, in 2015.

He was a Postdoctoral Research Fellow with the Centre for Infocomm Technology (INFINITUS), Nanyang Technological University (NTU), Singapore. He is currently a Senior Researcher with the School of Computer Science and Information Technology, University College Cork, Cork, Ireland. His research interests include intelligent transportation systems, machine learning, the Internet of Things, and signal processing.

Dr. Noor-A-Rahim was a recipient of the Michael Miller Medal from the Institute for Telecommunications Research (ITR), University of South Australia, for the most outstanding Ph.D. thesis in 2015.



Zilong Liu received the bachelor's degree from the School of Electronics and Information Engineering, Huazhong University of Science and Technology (HUST), Wuhan, China, in 2004, the master's degree from the Department of Electronic Engineering, Tsinghua University, Beijing, China, in 2007, and the Ph.D. degree from the School of Electrical and Electronic Engineering, Nanyang Technological University (NTU), Singapore, in 2014.



From January 2018 to November 2019, he was a Senior Research Fellow with the Home of the 5G Innovation Centre (5GIC), Institute for Communication Systems (ICS), University of Surrey, Guildford, U.K., during which he studied the air-interface design of 5G communication networks (e.g., machine-type communications, vehicle-to-everything (V2X) communications, and 5G new radio). Prior to his career in the U.K., he spent nine and half years at NTU, first as a Research Associate from July 2008 to October 2014 and then as a Research Fellow from November 2014 to December 2017. He is currently a Lecturer (an Assistant Professor) with the School of Computer Science and Electronic Engineering, University of Essex, Colchester, U.K. His Ph.D. thesis "Perfect- and Quasi-Complementary Sequences," focusing on fundamental limits, algebraic constructions, and applications of complementary sequences in wireless communications, has settled a few long-standing open problems in the field. His research lies in the interplay of coding, signal processing, and communications, with a major objective of bridging theory and practice as much as possible.

Dr. Liu was/is a TPC Member of a number of IEEE conferences/workshops (e.g., ICC, GLOBECOM, WCSP, ICCS, and SETA). He is/was the General Co-Chair of the 2022 International Workshop on Signal Design and its Applications in Communications (IWSDA 2022) and the TPC Co-Chair of the 2020 IEEE International Conference on Advanced Networks and Telecommunications Systems (ANTS 2020). He was a Tutorial Speaker of VTC-Fall 2021 and APCC 2021 on code-domain NOMA. He is also an Associate Editor of IEEE TRANSACTIONS ON NEURAL NETWORKS AND LEARNING SYSTEMS, IEEE WIRELESS COMMUNICATIONS LETTERS, IEEE ACCESS, and *Frontiers in Communications and Networks*. Details of his research can be found at <https://sites.google.com/site/zilongliu2357>.

Haeyoung Lee (Member, IEEE) received the M.Sc. degree in information and communication engineering from the Gwangju Institute of Science and Technology, Gwangju, South Korea, in 2004, and the Ph.D. degree from the Centre for Communication Systems (CCSR), University of Surrey, Guildford, U.K., in 2015.



From 2004 to 2007, she was a Research Engineer with the Mobile Communication R&D Centre, Samsung Electronics, Suwon-si, South Korea, where she developed a mobile internet platform of CDMA systems. In 2007, she joined the National Radio Research Agency, Naju, South Korea, and worked on spectrum regulation frameworks for flexible spectrum use and spectrum harmonization. She is currently a Senior Research Fellow with the Institute of Communication Systems and the 5G/6G Innovation Centre, University of Surrey. Her research interests include radio resource management in wireless communication, optimization and machine learning, and vehicular networks.

Mohammad Omar Khyam received the B.Sc. degree in electronics and telecommunication engineering from the Rajshahi University of Engineering & Technology, Rajshahi, Bangladesh, in 2010, and the Ph.D. degree in electrical engineering from the University of New South Wales, Sydney, NSW, Australia, in 2015.



He is currently a Lecturer in electrical engineering with the School of Engineering and Technology, Central Queensland University, Melbourne, VIC, Australia. His research interests include signal processing and wireless communication.

Jianhua He (Senior Member, IEEE) received the Ph.D. degree from Nanyang Technological University, Singapore, in 2002.

He worked at the University of Bristol, Bristol, U.K., Swansea University, Swansea, U.K., and Aston University, Birmingham, U.K. He is currently a Reader with the University of Essex, Colchester, U.K. He has published more than 150 research papers in refereed international journals and conferences. His main research interests include 5G/6G wireless communications and networks, connected vehicles, autonomous driving, the Internet of Things, mobile edge computing, intelligent transport systems, data analytics, AI, and machine learning.



Dr. He was a Steering Committee Member of MobiArch 2021 and a member of the editorial board for several international journals. He is also a Coordinator of EU Horizon 2020 projects COSAFE and VESAFE on cooperative connected autonomous vehicles. He was the Workshop Chair of MobiArch 2020 and ICAV 2021.

Dirk Pesch (Senior Member, IEEE) received the Dipl.Ing. degree from RWTH Aachen University, Aachen, Germany, in 1993, and the Ph.D. degree from the University of Strathclyde, Glasgow, Scotland, in 1999.



He was the Head of the Nimbus Research Centre, Cork Institute of Technology, Cork, Ireland. He is currently a Professor with the School of Computer Science and Information Technology, University College Cork, Cork. He has over 25 years of research and development experience in both industry and academia and has (co)authored over 200 scientific articles and book

chapters. He is also a Principle Investigator of the National Science Foundation Ireland-funded collaborative centers CONNECT (Future Networks), Ireland, and CONFIRM (Smart Manufacturing), Ireland, and the Director of the SFI Centre for Research Training in Advanced Networks for Sustainable Societies, Ireland. He has also been involved in a number of EU-funded research projects on smart and energy-efficient buildings and urban neighborhoods, including as a coordinator. His research interests focus on problems associated with architecture, design, algorithms, and performance evaluation of low power, dense and vehicular wireless/mobile networks and services for the Internet of Things and cyber-physical system's applications in building management, smart connected communities, independent living, and smart manufacturing.

Dr. Pesch contributes to international conference organizations by being the Technical Programme Chair of IEEE WoWMoM 2020 and the Executive Vice-Chair of IEEE ICC 2020.

Klaus Moessner (Senior Member, IEEE) is currently a Professor of communications engineering with the Chemnitz University of Technology, Chemnitz, Germany, and also a Professor of cognitive networks with the Institute for Communication Systems, University of Surrey, Guildford, U.K. He was involved in a large number of projects in the cognitive communications, service provision, and Internet-of-Things (IoT) areas. He was responsible for the work on cognitive decision-making mechanisms in the CR Project ORACLE and led the work on radio awareness in the ICT FP7 Project QoS MOS and the H2020 Speed5G Project. He led the EU-Taiwan Project Clear5G investigating the extensions 5G systems need to serve the particular requirements of the Factories of the Future. His research interests include cognitive networks, IoT deployments, and sensor data-based knowledge generation, as well as reconfiguration and resource management.



Dr. Moessner was the Founding Chair of the IEEE DYS PAN Working Group (WG6) on Sensing Interfaces for Future and Cognitive Communication Systems.

Walid Saad (Fellow, IEEE) received the Ph.D. degree from the University of Oslo, Oslo, Norway, in 2010.

He is currently a Professor with the Department of Electrical and Computer Engineering, Virginia Tech, Blacksburg, VA, USA, where he leads the Network sciEence, Wireless, and Security (NEWS) Laboratory. He was the author/coauthor of 11 conference best paper awards at WiOpt in 2009, ICIMP in 2010, IEEE WCNC in 2012, IEEE PIMRC in 2015, IEEE SmartGridComm in 2015, EuCNC in 2017, IEEE GLOBECOM in 2018, IFIP NTMS in 2019, IEEE ICC in 2020 and 2022, and IEEE GLOBECOM in 2020. He was also a coauthor of the 2019 IEEE Communications Society Young Author Best Paper and the 2021 IEEE Communications Society Young Author Best Paper. His research interests include wireless networks (5G/6G/beyond), machine learning, game theory, security, unmanned aerial vehicles, semantic communications, cyber-physical systems, and network science.



Dr. Saad was a recipient of the NSF CAREER Award in 2013, the AFOSR Summer Faculty Fellowship in 2014, and the Young Investigator Award from the Office of Naval Research (ONR) in 2015. He was a recipient of the 2015 and 2022 Fred W. Ellersick Prizes from the IEEE Communications Society, the 2017 IEEE ComSoc Best Young Professional in Academia Award, the 2018 IEEE ComSoc Radio Communications Committee Early Achievement Award, and the 2019 IEEE ComSoc Communication Theory Technical Committee. From 2015 to 2017, he was named the Stephen O. Lane Junior Faculty Fellow at Virginia Tech. In 2017, he was named the College of Engineering Faculty Fellow. He received the Dean's Award for Research Excellence from Virginia Tech in 2019. He was also an IEEE Distinguished Lecturer from 2019 to 2020. He currently serves as an Editor for the IEEE TRANSACTIONS ON MOBILE COMPUTING and the IEEE TRANSACTIONS ON COGNITIVE COMMUNICATIONS AND NETWORKING. He is also an Area Editor of the IEEE TRANSACTIONS ON NETWORK SCIENCE AND ENGINEERING, an Associate Editor-in-Chief of the IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS (JSAC)—Special issue on Machine Learning for Communication Networks, and an Editor-at-Large of the IEEE TRANSACTIONS ON COMMUNICATIONS.

H. Vincent Poor (Life Fellow, IEEE) received the Ph.D. degree in electrical engineering and computer science (EECS) from Princeton University, Princeton, NJ, USA, in 1977.

From 1977 to 1990, he was on the faculty of the University of Illinois at Urbana-Champaign, Urbana, IL, USA. Since 1990, he has been on the faculty at Princeton, where he is currently the Michael Henry Strater University Professor. From 2006 to 2016, he was the Dean of Princeton's School of Engineering and Applied Science. He has also held visiting appointments at several other universities, including most recently at Berkeley and Cambridge. His research interests are in the areas of information theory, machine learning, and network science, and their applications in wireless networks, energy systems, and related fields. Among his publications in these areas is the forthcoming book *Machine Learning and Wireless Communications* (Cambridge University Press).

Dr. Poor is also a member of the National Academy of Engineering and the National Academy of Sciences and a foreign member of the Chinese Academy of Sciences, the Royal Society, and other national and international academies. He received the IEEE Alexander Graham Bell Medal in 2017.

