

Article

# The Effect of Pre-Drying Treatment and Drying Conditions on Quality and Energy Consumption of Hot Air-Dried Celeriac Slices: Optimisation

Tina Nurkhoeriyati <sup>1,2,\*</sup>, Boris Kulig <sup>1</sup> , Barbara Sturm <sup>3,4</sup>  and Oliver Hensel <sup>1</sup> 

<sup>1</sup> Department of Agricultural Engineering, Faculty of Organic Agricultural Sciences, University of Kassel, 37213 Witzenhausen, Germany; bkulig@uni-kassel.de (B.K.); agrartechnik@uni-kassel.de (O.H.)

<sup>2</sup> Study Program of Food Technology, Faculty of Life Sciences, International University Liaison Indonesia, Tangerang 15345, Indonesia

<sup>3</sup> Leibniz Institute for Agricultural Engineering and Bioeconomy (ATB), 14469 Potsdam, Germany; BSturm@atb-potsdam.de

<sup>4</sup> Albrecht Daniel Thaer Institute for Agricultural and Horticultural Sciences, Humboldt Universität zu Berlin, 10115 Berlin, Germany

\* Correspondence: tina.nurkhoeriyati@student.uni-kassel.de; Tel.: +49-5542-98-1224

**Abstract:** Celeriac is a good source of fibre, trace minerals, and phenolic compounds; it has a pleasant aroma but is a perishable material, prone to discolouration. This research investigated the optimisation of the quality and energy demand in hot-air dried celeriac slices. The experiment utilised the I-optimal design of response surface methodology with 30 experiment runs. Pre-drying treatments (blanching at 85 °C, three minutes; dipping in 1% citric acid solution, three minutes; no pre-drying treatment), drying temperatures (50, 60, and 70 °C), air velocities (1.5, 2.2, and 2.9 m/s), and thickness (three-, five, and seven-mm) were applied. The drying conditions affected drying time significantly ( $p < 0.0001$ ). The model by Midilli and others and the logarithmic model fitted best with celeriac slices drying kinetics. Blanched samples had a higher  $\Delta E^*_{ab}$  (total colour difference) and  $BI$  (browning index) but lower  $WI$  (whiteness index) than samples with other pre-drying treatments. The rehydration ratio decreased with the increase of sample thickness and blanching ( $p < 0.0001$ ). A quadratic model described the specific energy consumption ( $E_s$ ) best. The dried samples compared with fresh samples had increased antioxidant activity but decreased total phenolic compound value. The optimisation solution chosen was 58 °C drying temperature, 2.9 m/s air velocity, and 4.6 mm sample thickness with acid pre-drying treatment.

**Keywords:** antioxidant activity; browning index; celeriac; energy demand; hot air drying; optimisation; rehydration ratio; total colour difference; total phenolic compound



**Citation:** Nurkhoeriyati, T.; Kulig, B.; Sturm, B.; Hensel, O. The Effect of Pre-Drying Treatment and Drying Conditions on Quality and Energy Consumption of Hot Air-Dried Celeriac Slices: Optimisation. *Foods* **2021**, *10*, 1758. <https://doi.org/10.3390/foods10081758>

Academic Editor: Joaquina Pinheiro

Received: 23 June 2021

Accepted: 27 July 2021

Published: 29 July 2021

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Food manufacturers use drying as a primary technique in the preservation of perishable products. Drying allows the products to be available regardless of the season [1]. In addition, this process has the main objective of lowering water activity below 0.5 to inhibit microorganisms' growth [2]. Hot-air drying is the most widely used artificial drying technology [3].

Drying offers many benefits for food products, such as reduced weight and volume, to lower transportation costs and extend product shelf life without refrigeration. Furthermore, it produces intermediate or convenience food products. Drying consists of complex mechanisms, such as physical, chemical, and biochemical reactions, making it an unsteady, extremely non-linear, and dynamic, thermal process [4]. However, drying may also lead to undesirable quality changes [2], such as altering food quality parameters, such as colour [5–10], shrinkage [6,11], rehydration ratio [12], antioxidant activities [7,12–14], and total phenolic compound [5,7], to name but a few.

Celery and celeriac (*A. graveolens*) are aromatic vegetables produced worldwide with essential pharmacological attributes [15]. Celeriac (*A. graveolens* var. *rapaceum*), also known as root celery or turnip-rooted celery, is popular in Europe. The European Union (EU) produced 490,080 t celeriac in 2019 [16].

Celeriac is a good source of fibre, trace mineral, and phenolic compounds; it has a pleasant characteristic aroma but is prone to discolouration [17,18]. The latter case may influence the sensory quality and reduce consumer acceptance. Furthermore, celeriac is a wet perishable material due to its high moisture level of 88% (wet basis) [19]. The consequence of this high moisture content is that the product is vulnerable to deterioration. Therefore, drying enables celeriac to be more easily handled and transported, and for it to have an extended shelf-life. Moreover, after a further process, such as milling, the resulting dried celeriac result in flour for ingredients in various food products [20], and functional food development, e.g., high fibre products [21].

Researchers have carried out several studies related to celeriac drying with various quality attributes observed. The attributes studied included mass transfer coefficient and effective moisture diffusivity [22–24], heat transfer coefficient [25], drying period [24,26], energy consumption [26], dry matter, moisture content, and diffusion coefficient [27], drying rate [24,27,28], moisture content and moisture ratio [24], colour [26,28], rehydration and shrinkage [28], and natural antioxidants changes [29].

The studies paid particular attention to the evaluation of thermal properties. However, research regarding the optimisation of quality and energy demand in celeriac hot-air drying is not yet available. Meanwhile, it is essential to get insights into antioxidant changes during vegetable processing, such as drying, because vegetables are essential antioxidants (e.g., vitamin C, E, phenolic compounds) sources [29]. Furthermore, drying efficiency involves energy consumption, drying rate, and drying time to determine drying performance [30]. Hence, investigating the effect of the factors (drying temperature, air velocity, sample thickness, pre-drying treatment) on celeriac slices' quality and energy consumption during hot-air drying is essential.

## 2. Materials and Methods

### 2.1. Plant Material

Organic celeriac (*Apium graveolens* var. *Rapaceum*) for this research was obtained from a local farmer in Göttingen, Germany. The roots were harvested on 15th November 2020, stored at a temperature of 1 °C, and utilised in the experiment in January 2021.

### 2.2. Design of Experiment

This study investigated the effect of drying conditions (temperature, air velocity, sample thickness) and pre-drying treatments on drying time, quality (chromaticity, rehydration ratio, retention of antioxidant activity, retention of total phenolic compounds), and specific energy consumption. The experiment used the I-optimal design of response surface methodology (Design-Expert® version 12, Stat-Ease, Inc., Minneapolis, MN, USA) with 30 experiment runs (18 required model points, two additional model points, five lack-of-fit points, and five replicate points). I-optimal designs focus on designs that minimise the average prediction variance over the experimental space [31]. Equation (1) describes the common second-order model used in response surface methodology (RSM). Table 1 summarises the factors in this study.

$$y = \beta_0 + \sum_{i=1}^k \beta_i x_i + \sum_i \sum_j \beta_{ij} x_i x_j + \sum_{i=1}^k \beta_{ii} x_i^2 + \varepsilon, \quad (1)$$

where  $y$  is the response function;  $\beta_i$ ,  $\beta_{ii}$ , and  $\beta_{ij}$  are the coefficients of the linear, quadratic, and interaction terms, respectively;  $x_i$  and  $x_j$  are the factors or independent variables,  $k$  is the number of variables, and  $\varepsilon$  is error term [32].

**Table 1.** Factors and actual level corresponding with the coded level.

Factors	Coded Factors	Level		
		-1	0	+1
Drying temperature (°C)	x <sub>1</sub>	50	60	70
Air velocity (m/s)	x <sub>2</sub>	1.5	2.2	2.9
Sample thickness (mm)	x <sub>3</sub>	3	5	7
Pre-drying treatment	x <sub>4</sub>	N	B	A

N is without pre-drying treatment, B is blanching, A is acid dipping.

This study fitted the experimental data to the statistical model (linear, two factors interaction, quadratic or cubic model). Models were compared based on their coefficient of determination ( $R^2$ ), adjusted coefficient of determination ( $R^2$ -adj), and predicted coefficient of determination ( $R^2$ -pred). After selecting the adequate model, the investigators used the variance (ANOVA) analysis to investigate the statistical significance of the regression coefficients at a 95% confidence level. All non-significant ( $p > 0.05$ ) terms were eliminated from the model, not counting those required to support hierarchy. A desirable model is a model which is significant ( $p < 0.05$ ) with no significant Lack of Fit ( $p > 0.05$ ), post-ANOVA statistics with  $R^2$ -adj –  $R^2$ -pred  $< 0.2$ , and an adequate precision  $> 4$  [33].

### 2.3. Sample Preparation and Pre-Drying Treatment

The celeriac was washed, peeled, and sliced using a bench slicer (GRAEF GmbH, Berlin, Germany) to obtain the desired thickness level (three, five, or seven millimetres). Slices produced were cut to get pieces of 30 mm in diameter. Each drying run utilised a total of 12 celeriac slices (four slices for moisture content and colour analysis, four slices for rehydration ratio, and four slices for chemical analysis). Four pieces of fresh samples were measured for moisture content and chromaticity, and four slices for chemical analysis. For pre-drying treated samples, the moisture content was also recorded. The initial total weight of celeriac dried for three-, five-, or seven-mm initial thickness was  $29.10 \pm 1.12$  g,  $45.62 \pm 2.25$  g, and  $62.50 \pm 1.02$  g, respectively.

The celeriac slices were put on the perforated shelves of the dryer. The dryer has 420 mm × 440 mm × 470 mm (HT Mini, Innotech Ingenieursgesellschaft mbH, Altdorf, Germany) dimensions and was turned 30 min before each drying experiment to reach the steady-state condition. Pre-drying treatments applied for celeriac slices were blanching and acid dipping. The blanching was done at 85 °C in a water bath (Mettmert GmbH + Co. KG, Schwabach, Germany) for three minutes, which was immediately stopped with cold distilled water, and putting them on the blotting paper to remove excess water [28]. Acid dipping was done by immersing the samples in 1% citric acid solution at room temperature for three minutes and putting them on the blotting paper to remove excess water. Citric acid is the most widely used anti-browning acid because of its availability, price, and neutral impact on product sensory attributes [34]. Moreover, citric acid is considered an organic acid that allows pre-treatment organic food of plant origin [35]. Therefore, samples without pre-drying treatment were also prepared.

Drying experiments were performed at three levels of inlet temperatures of 50, 60, and 70 °C, which are commonly used in food drying because they are sufficient to promote water evaporation from the samples and, at the same time, preserve their volatile compound [36,37]. The levels of inlet air velocity of 1.5, 2.2, and 2.9 m/s were applied. A thickness of three-, five, and seven-mm was used. This range covered most thickness use in celeriac drying [23–28,38]. The final moisture content target was 10 g water/100 g sample (wet basis) or 0.11 g water/g dry solid (dry basis), which is sufficient to extend the shelf life of dried vegetables [39]. Samples taken for chemical analysis were vacuum-packed and stored at –28 °C for further analysis.

### 2.4. Drying Time ( $D_t$ ), Drying Rate (DR), Moisture Content (MC), and Moisture Ratio (MR)

Celeriac samples were weighed every 20 min during the initial two hours of the drying process, and hourly after that, to record the moisture weight reduction. The

moisture content of the dried celeriac at the end of drying was determined by drying the samples at 105 °C for 24 h in the oven (ULM 400, Memmert GmbH + Co. KG, Schwabach, Germany) [40] to obtain the dry matter percentage of the dried celeriac. Drying time ( $D_t$ ) is the time needed to dry a fresh sample until it reaches a final moisture content of 0.11 g water/g dry solid.

Moisture content (MC) was determined as calculated using Equation (2) and expressed as g water/g dry solid ( $g_w/g_{ds}$ ).

$$MC = \frac{W_0 - W_t}{W_t}. \quad (2)$$

$W_0$  and  $W_t$  are the weight of the initial sample and the dried sample. A dimensionless moisture ratio (MR) avoids ambiguity because of the initial MC difference among samples [28]. MR and the drying rate (DR) of celeriac drying were determined using Equations (3)–(5), as follows:

$$MR = \frac{MC_t - MC_e}{MC_0 - MC_e}. \quad (3)$$

$MC_e$  is negligible compared to  $MC_t$ ,  $MC_0$  during long-term drying [41]; only the first term is considered to be significant [42]. Thus, the formula becomes:

$$MR = \frac{MC_t}{MC_0}, \quad (4)$$

$$DR (g_w/g_{ds}.min) = \frac{MC_t - MC_{t+\Delta t}}{\Delta t}. \quad (5)$$

$MC_t$ ,  $MC_0$ ,  $MC_e$ ,  $MC_{t+\Delta t}$  are moisture content of the sample at any given time, at the initial, at the equilibrium, and at a specific time  $t+\Delta t$  on a dry basis, respectively [24].

### 2.5. Drying Kinetics Model Fitting

The drying kinetics curves of each experiment run were constructed by plotting drying time against moisture ratio. The drying experiments were fitted to 11 mathematical models commonly used for thin-layer drying [41]. Those mathematical models are semi-theoretical (Lewis, Page, Modified Page, Modified Page equation-II, Henderson and Pabis, Logarithmic, Approximation of diffusion, Midilli and others, Verma and others, Modified Henderson and Pabis) and empirical model (Wang and Singh) [41]. The use of these 11 mathematical models compared to fewer numbers had the advantage of having a greater chance of finding mathematical models applicable in describing the behaviour of celeriac during the drying process.

JMP<sup>®</sup> software version 15.2.0 (SAS Institute, Inc., Cary, NC, USA, 1989–2019) column formula function was assigned to analyse the non-linear regression and determine the model coefficient. We selected the best-fitted model based on the lowest Sum squared of Error (SSE) at the 0.05 level of significance [43]. SSE was calculated using Equation (6). Drying kinetics graph generation in this paper utilised Matplotlib: A 2D graphics environment [44].

$$SSE = \sum_{i=1}^n (MR_i - \widehat{MR}_i)^2, \quad (6)$$

where  $\widehat{MR}_i$  is the predicted moisture ratio.

### 2.6. Chromaticity

Celeriac chromaticity was measured every 20 min for the first two hours during drying, and then hourly, until the end of the process. Chromaticity changes measurement utilised the same samples as for the moisture content measurement. The chromaticity indices ( $L^*$ ,  $a^*$ , and  $b^*$  values) of each dried celeriac slice were measured in triplicate using a Minolta chromameter (model CR-400, Minolta Camera Co., Ltd., Osaka, Japan) [45]. CIE  $L^*a^*b^*$  colour space difference represents colour difference perceived by humans [46].

Several chromaticity indices were determined. Those indices under consideration were whiteness index (*WI*) [47], browning index (*BI*) [48], and total colour difference ( $\Delta E^*_{ab}$ ) [49], and they were calculated using Equations (7)–(10) below:

$$WI = 100 - \sqrt{(100 - L^*)^2 + a^{*2} + b^{*2}}, \quad (7)$$

$$BI = \frac{[100(x - 0.31)]}{0.172}, \quad (8)$$

where:

$$x = \frac{(a^*_t + 1.75L^*_t)}{5.645L^*_t + a^*_t - 3.012b^*_t}, \quad (9)$$

$$\Delta E^*_{ab} = \sqrt{(L^*_t - L^*_0)^2 + (a^*_t - a^*_0)^2 + (b^*_t - b^*_0)^2}. \quad (10)$$

$\Delta E^*_{ab}$  is the total colour difference (dimensionless), *BI* is the browning index (dimensionless), *WI* is whiteness index (dimensionless), *L\** is lightness coordinate, *a\** is red/green coordinate, *b\** is yellow/blue coordinate, subscript 0 indicates the initial value of the parameter, and subscript *t* indicates the value of the parameter at time *t*. Drying kinetics graph generation in this paper utilised Matplotlib: A 2D graphics environment [44].

### 2.7. Rehydration Ratio (RR)

The sample was placed in the beaker glass, and cold distilled water was added with a ratio of 1:40, and then it was covered with a watch glass. Then, the water was brought to a boil on the electric heater and boiled gently for five minutes. Then, the beaker was removed from the heater, and the water was drained. The rehydrated sample was kept over a sheet of blotting paper, to remove excess moisture adhering to surfaces, and quickly weighed [50]. The *RR* (dimensionless) was expressed as following Equation (11):

$$RR = \frac{W_r}{W_0}. \quad (11)$$

*W<sub>r</sub>* and *W<sub>0</sub>* are the weight (g) of drained samples after rehydration and fresh samples, respectively.

### 2.8. Antioxidant Activity (AA)

The fresh and the dried celeriac were subjected to DPPH free radical spectrophotometric assay for their antioxidant activity assessment. The analysis followed the procedure introduced by Brand-Williams et al. [51]. The extraction followed the process as described by Karabacak et al. [38], with modification. The dried samples were freeze-dried (Freeze-dryer Alpha 1-2 LDplus, Martin Christ Gefriertrocknungsanlagen GmbH, Osterode am Harz, Germany) for 48 h (condenser temperature:  $-30\text{ }^\circ\text{C}$ ; chamber pressure: 0.37 mbar). The extract of dried celeriac was obtained by mixing homogenised freeze-dried samples with  $\text{HCl}_{\text{conc}}$ /methanol/water (1:80:10, *v/v*) mixture with 1:10 ratio and shaken for two hours at room temperature at 150 rpm (Kottermann, GmbH, Uetze, Germany). Then, the mixture was centrifuged at 6000 rpm for five minutes at room temperature (ROTILABO<sup>®</sup>, Carl Roth, Karlsruhe, Germany). The analysis used 2,2-diphenyl-1-picrylhydrazyl (DPPH) (Merck, Taufkirchen, Germany) (molecular mass of 394.32 g/mol) reagent as a radical solution obtained by dissolving 1.182 mg DPPH in methanol (ROTIPURAN<sup>®</sup>  $\geq 99.9\%$  p.a. ACS, ISO, Carl Roth, Karlsruhe, Germany) to obtain 50 mL solution with  $6 \times 10^{-5}$  M concentration. Then, 3.90 mL of DPPH radical solution was mixed with 0.1 mL of methanolic solutions of samples and shaken using vortex for 10 s. The mixture was then incubated for 30 min at room temperature. After incubation, the absorbance decrease of the mixture was measured at 515 nm (Spectronic GENESYS 10 S UV—Vis Scanning Thermo Scientific<sup>™</sup>, Thermo Fisher Scientific, Inc., Waltham, MA, USA). Trolox was used as the positive control. Calibration was done by measuring the methanolic solution of (S)-6-Methoxy-2,5,7,8-tetramethylchromane-2-carboxylic acid (Trolox) (Merck, Taufkirchen, Germany)

with the concentrations of 0–1200  $\mu\text{M}$ . The antioxidant activity result was expressed as  $\mu\text{mol}$  Trolox equivalent/g dry solid sample ( $\mu\text{mol TE/g}_{\text{ds}}$ ). Retention of AA ( $\%_{\text{AA}}$ ) was described as in Equation (12).

$$\%_{\text{AA}} (\%) = \frac{AA_t}{AA_0} \times 100\%. \quad (12)$$

### 2.9. Total Phenolic Compound (TPC)

The phenolic compound is one of the nutritional quality benchmarks during drying [52]. Samples for the total phenolic compound were obtained from methanolic extract as made previously. The procedure followed Odeh et al. [53], with minor modification. Celeric extract or gallic acid standard (100  $\mu\text{L}$ ) were added with 1.8 mL of ten times distilled water-diluted Folin–Ciocalteu reagent (Th. Geyer GmbH & Co., KG, Hamburg, Germany). The mixture was rested for five minutes at room temperature and then mixed with 1.2 mL of sodium bicarbonate (7.5%,  $w/v$ ) ( $\geq 99.5\%$  p.a. ACS, ISO, Carl Roth, Karlsruhe, Germany). Afterwards, the samples were stood for 60 min at room temperature and dark condition. Finally, the samples' absorbance was measured at 765 nm. Calibration was done by measuring an aqueous solution of gallic acid (Merck, Taufkirchen, Germany) with 0–500 mg/L concentrations. The total phenolic compound result was expressed as mg gallic acid equivalents/g dry solid (mg GAE/ $g_{\text{ds}}$ ). Retention of TPC ( $\%_{\text{TPC}}$ ) was computed as in Equation (13).

$$\%_{\text{TPC}} (\%) = \frac{TPC_t}{TPC_0} \times 100\%. \quad (13)$$

### 2.10. Specific Energy Consumption ( $E_s$ )

Total energy consumption ( $E_s$ ) was computed according to Equation (14) [54] as follows:

$$E_t = A \times v \times \rho_a \times c_a \times \Delta T \times D_t. \quad (14)$$

$E_t$  is the total needed energy for drying;  $A$  is tray area;  $v$  is air velocity;  $\rho_a$  is air density;  $c_a$  is the specific heat;  $\Delta T$  is temperature differences;  $D_t$  is whole drying time. While specific energy consumption was expressed as in Equation (15) below:

$$E_s = \frac{E_t}{W_0}. \quad (15)$$

$E_s$  is specific energy consumption (kJ/kg), and  $W_0$  is the initial weight (kg).

### 2.11. Optimisation

This study applied numerical optimisation, which found a point with a maximum desirability function (optimum set condition). In addition, propagation of error (POE) was considered. POE plots showing how that error is transmitted to the response [55] to seek a robust formula for slight variations in the measured amounts by minimising transmitted variation [56].

Desirability, an objective function, optimises multiple response measures simultaneously [57]. This function can be optimised by univariate techniques to obtain an optimal solution and avoid investigators making trade-offs because of conflicting multiple response measures [58].

Derringer and Suich [59] modified the previously proposed desirability function approach by Harrington [60]. They outlined the desirability function by transforming each estimated response variable  $y_i$  to a desirability value  $d_i$ ,  $0$  (not acceptable)  $\leq d_i \leq 1$  (complete satisfaction). The investigator can assign  $d_i$  to minimise, maximise, or aim to a target value [58]. Individual desirability is then combined to result in the overall desirability as computed by geometric mean, as in Equation (16) below [59]:


$$D = (d_1 \times d_2 \times \dots \times d_k)^{1/k}. \quad (16)$$

$D$  is overall desirability,  $d$  is individual desirability, and  $k$  is the response variable.

### 3. Results and Discussion

#### 3.1. Effect of Drying Factors on Hot Air-Dried Celeriac Slices Drying Kinetic


The moisture content of samples without pre-drying treatment (N), blanched (B), or acid dipped (A) is  $6.96 \pm 0.58$  g<sub>w</sub>/g<sub>ds</sub>,  $7.51 \pm 0.28$  g<sub>w</sub>/g<sub>ds</sub>,  $8.77 \pm 0.79$  g<sub>w</sub>/g<sub>ds</sub>, respectively. The average final moisture content at all experiment runs was  $0.11 \pm 0.01$  g<sub>w</sub>/g<sub>ds</sub>. Drying time ranges from 100 min (60 °C, 2.9 m/s, 3 mm, acid) to 810 min (50 °C, 1.5 m/s, 7 mm, blanching). Figure 1 shows drying time as a function of factors.

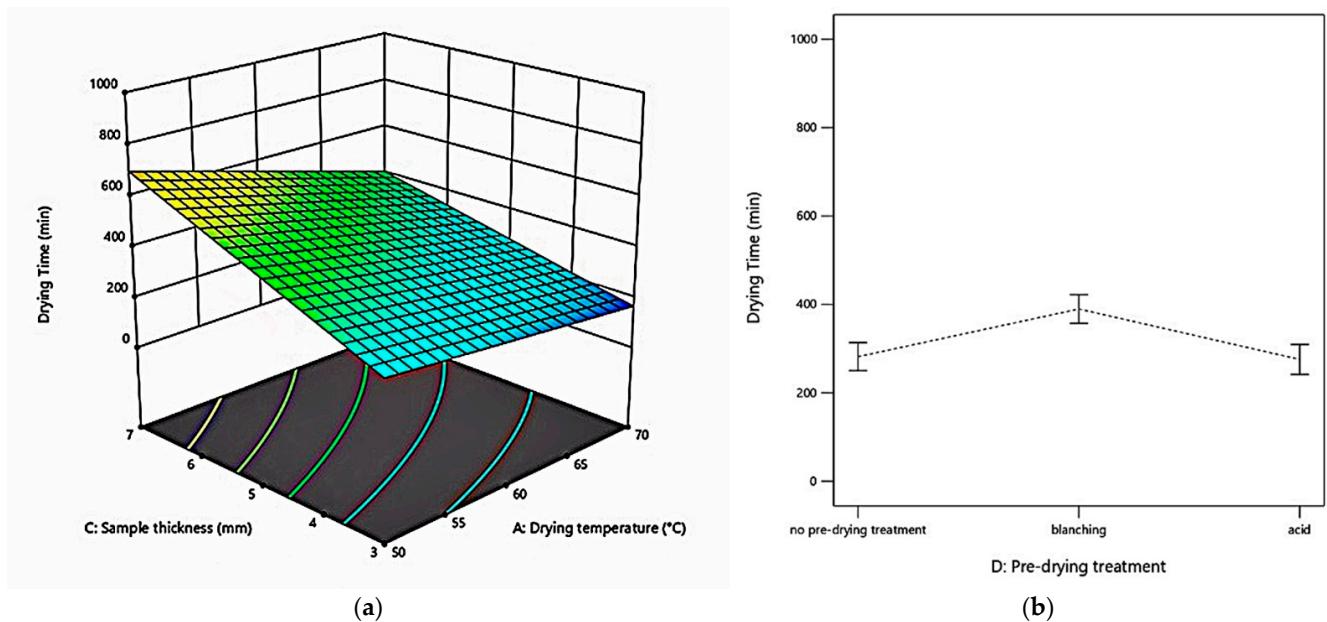

**Figure 1.** Drying time as a function of factors: (a) Drying time of celeriac slices at different drying temperatures and sample thicknesses, air velocity of 1.5 m/s, and blanching pre-drying treatment.; (b) drying time of celeriac slices at various pre-drying treatments, sample thickness of 5 mm, air velocity of 1.5 m/s, and drying temperature of 60 °C.

As expected, the drying time was directly proportional to the thickness of the sample ( $p < 0.0001$ ), but, with the increase of the temperature ( $p < 0.0001$ ) and drying air velocity ( $p < 0.001$ ), it declined. This finding is aligned with the results of other reports on celery root [24,26], carrot [61,62], potato [63], quinces [64], and pumpkin [65].

Thinner slices have less distance for the moisture to travel from the centre to the surface and have a larger surface and volume ratio, requiring a shorter time to dry [66]. As a result, the drying rate of thinner slices was higher than that of the thicker ones, as shown by Figure 2a. In addition, higher temperature and air velocity led to increased moisture removal rate, as shown in Figure 2c,d, so dried samples have a shorter time to attain final moisture content [67].

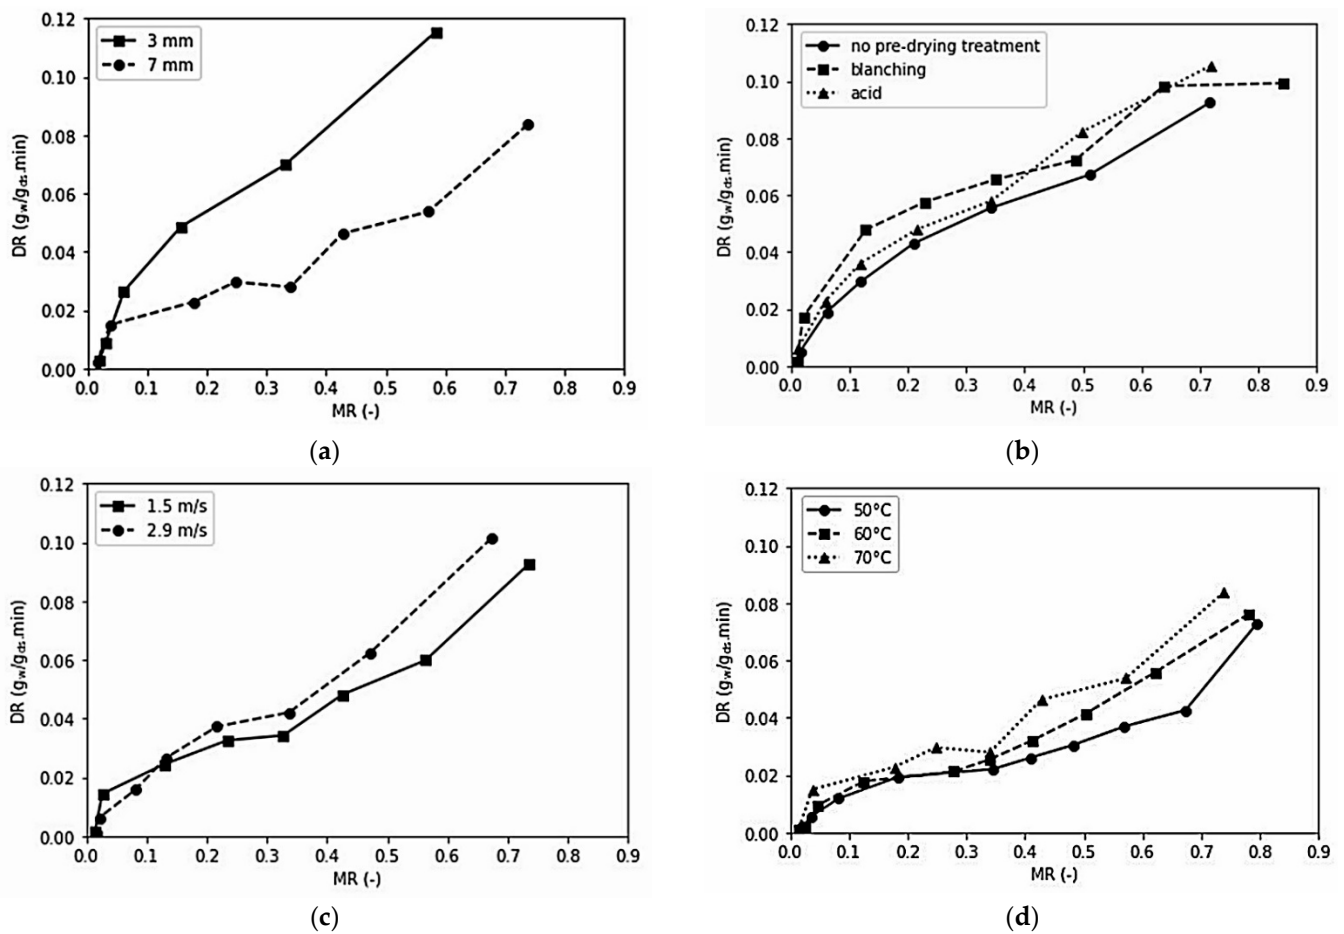

**Figure 2.** Drying rate as a function of moisture ratio at (a) 70 °C drying temperature, 2.2 m/s air velocity, no pre-drying treatment; (b) 50 °C drying temperature, 1.5 m/s air velocity, 3 mm sample thickness; (c) 60 °C drying temperature, 5 mm sample thickness, no pre-drying treatment; (d) 2.2 m/s air velocity, 7 mm sample thickness, no pre-drying treatment.

Pre-drying treatments affected the drying time ( $p < 0.0001$ ). Blanching increased the drying time. The blanched samples had higher initial moisture content than other samples, requiring a longer drying time to achieve a certain final moisture content, even though the drying rate was relatively higher than other treatments (Figure 2b). Ndisya et al. [68] also found that blanching pre-treated cocoyam had a longer drying time than non-treated samples. They hypothesised that the application of water soaking and heat during blanching enhanced the starch gelatinisation that involved water uptake and starch swelling.

Figure 2 does not indicate the drying constant rate stage in the drying rate curve. This finding aligns with the study on celeriac by Wei et al. [24]. The entire drying process occurred in the falling rate stage, which implied that diffusion was the most likely a physical mechanism that regulates the moisture movement in celeriac slices [66].


The best-fitted model for celeriac slices drying for a total of 30 experiment runs was chosen to have the lowest SSE value among all mathematical models applied. Investigators use drying models to predict moisture content and drying time at given drying conditions, improve drying performance, and generalise drying kinetics for the design and operation of dryers [69]. Table 2 shows that the model by Midilli and others [70] and the logarithmic model [71] fitted best with celeriac slices drying kinetics. Doymaz et al. [66] also found both models as the most suitable mathematical models to describe the characteristics of tomato drying kinetics. Both models are derived from Fick's second law of diffusion [64,72].



**Table 2.** The mathematical models fitted best the celeriac slices drying kinetics.

Model	Frequency	Model Formula	Reference
Midilli and others	24	$MR = a \times e^{(-k(t^n))} + b \times t$	[70]
Logarithmic	6	$MR = a \times e^{(-kt)} + c$	[71]

Figure 3 shows the drying kinetics of selected experiment runs. The graph presents the changes in moisture ratio during drying and the corresponding mathematical model that fits the drying kinetics. In general, celeriac drying characteristics were like most agricultural products, and the pre-drying treatments did not seem to impact its drying behaviour.

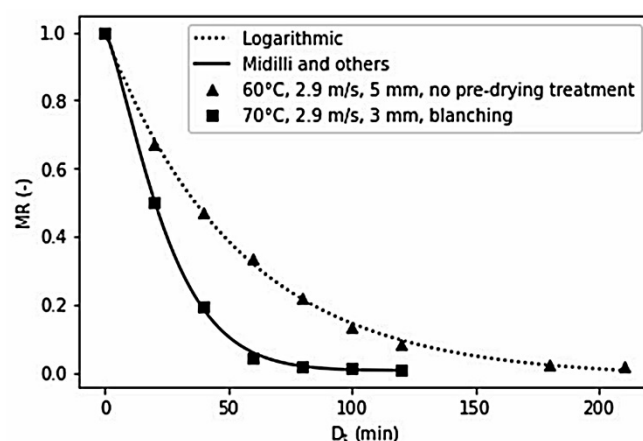**Figure 3.** Drying kinetics of selected experiment runs and the corresponding best-fitted model.

### 3.2. Effect of Drying Factors on Hot Air-Dried Celeriac Slices Quality

This section presents the quality of dried celeriac slices, which includes physical and functional properties. Physical properties observed were chromaticity ( $WI$ ,  $BI$ ,  $\Delta E^*_{ab}$ ) and  $RR$ . Meanwhile, the functional properties studied were retentions of antioxidant activity ( $\%_{AA}$ ) and total phenolic compound ( $\%_{TPC}$ ).


#### 3.2.1. Chromaticity and Rehydration Ratio ( $RR$ )

Colour affects consumers' preferences in choosing food products. It is interlinked with and may represent other properties of food. In addition, colour is controlled by reactions that occur during the supply chain. For these reasons, many researchers or food industries use this quality attribute to measure product quality [46]. Colour change in heat-treated foods may indicate the extent of corresponding quality degradation and estimate the heat exposure severity [73,74].

This study found the increase of  $BI$  and the decrease of  $WI$  of dried celeriac slices.  $WI$  indicates the intensity of whiteness in dried products [46], while browning is a critical phenomenon in food drying. The celeriac browning probably resulted from both enzymatic and non-enzymatic oxidation of phenolic compounds [46]. Analysis of total colour changes response help to optimise the food quality and process conditions [46]. Total colour difference ( $\Delta E^*_{ab}$ ) represents the magnitude of colour difference between fresh and dried samples.  $\Delta E^*_{ab}$  value of dried celeriac ( $\Delta E^*_{ab} > 3$ ) in all experiment runs indicated the colour difference of dried samples was very distinct compared to the fresh samples [75].

This research utilised the food colour modelling approach to optimise the drying factors. Table 3 shows the equation of all chromaticity indices. Pre-drying treatment ( $p < 0.0001$ ) affected all chromaticity indices ( $WI$ ,  $BI$ , and  $\Delta E^*_{ab}$ ). Figure 4a–c depicts selected drying conditions that describe that blanched celeriac samples have significantly different colour properties than samples dipped in acid and samples without treatment before drying. Blanched samples have a higher  $\Delta E^*_{ab}$  and  $BI$ , and vice versa lower  $WI$

than samples with other pre-drying treatments. This finding aligns with the report on cocoyam samples, where pre-drying blanched samples had reduced *WI* and elevated *BI* compared to dried samples without blanching [68]. Furthermore, the removal of intercellular air affected the samples' reflecting properties due to hot water blanching, resulting in translucent vegetables, and resulting in this noticeable shift of blanched samples' colour characteristics [76]. Ben Zid et al. [77] mentioned the same prediction on blanched albedo (white part) of citrus peel where it became transparent and darker due to blanching water absorption and a decrease of *WI* was observed.

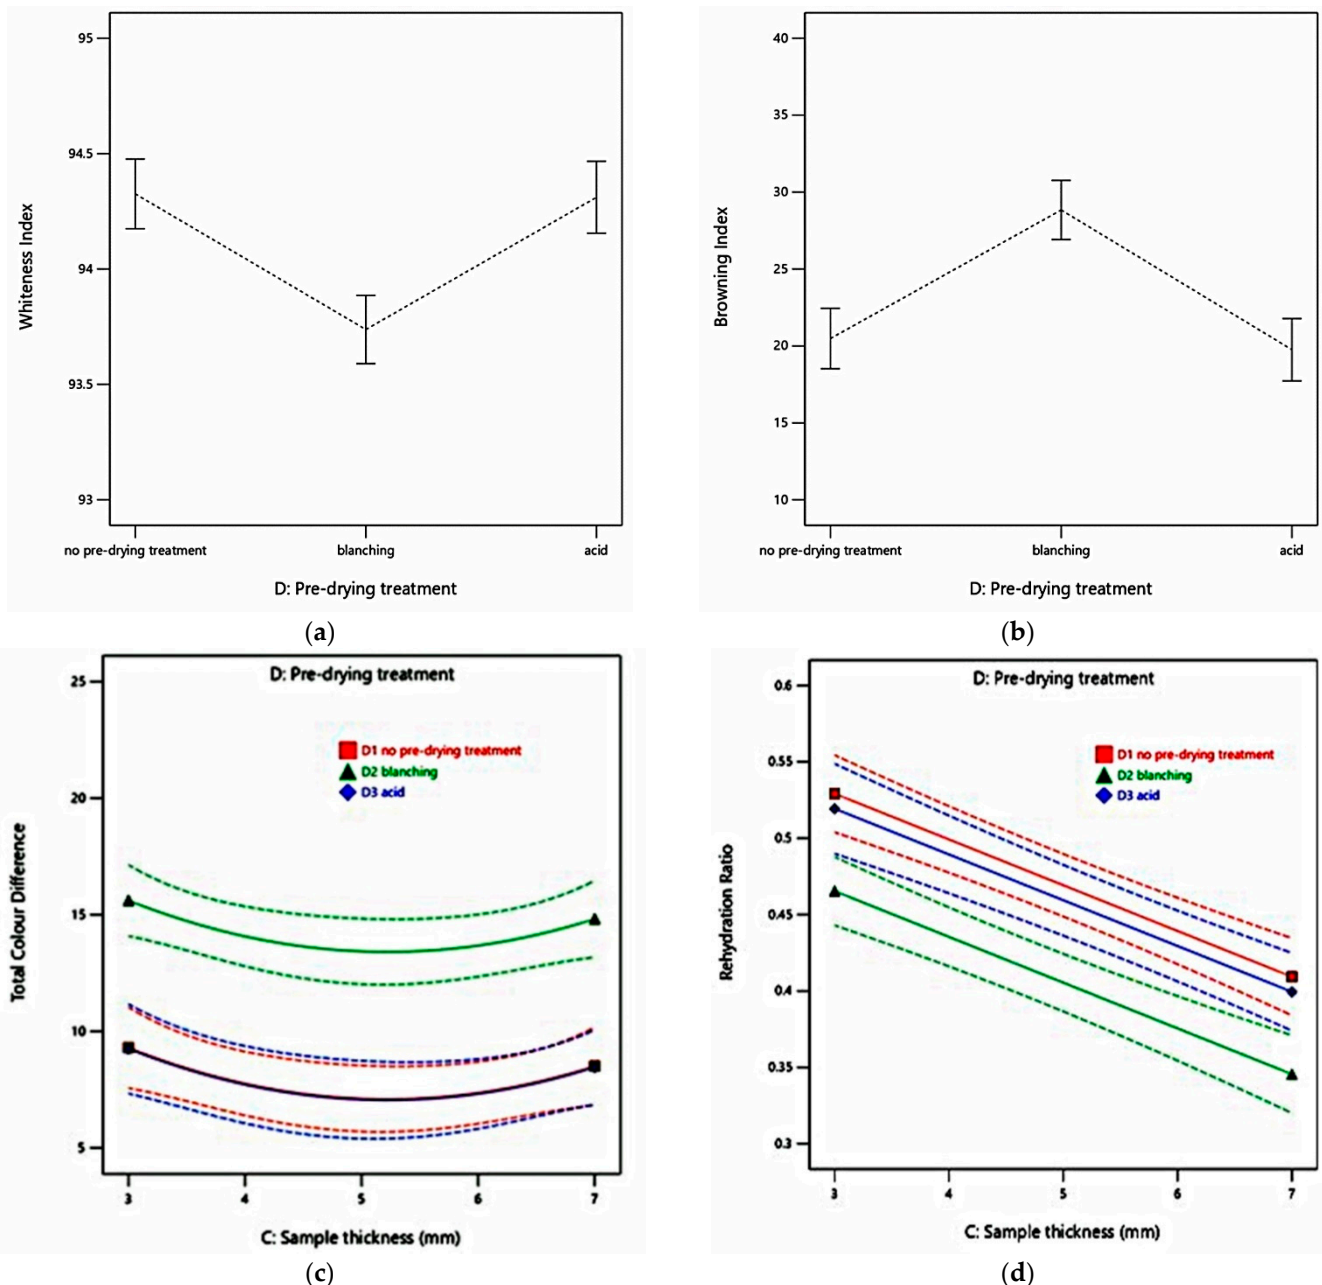

**Figure 4.** Physical properties as a function of factors: (a) *WI* of celeriac slices at different pre-drying treatments; (b) *BI* of celeriac slices at different pre-drying treatments; (c)  $\Delta E^*_{ab}$  of celeriac slices at different pre-drying treatments and sample thicknesses; (d) *RR* of celeriac slices at different sample thicknesses and pre-drying treatments.

This research also considered the rehydration ratio (*RR*) an essential indicator in determining the quality of dried celeriac. The rehydration ratio represents the extent to which dried material undergoes physical and chemical damages [78]. The more severe

the damage occurs on water binding compounds in the internal structure of materials, the lower the ability of dried material to reconstitute water, which is undesirable [79].


**Table 3.** Quality parameters and specific energy consumption of celeriac slices subjected to different drying temperatures, air velocities, sample thicknesses, and pre-drying treatments.

-	$D_t$ (min)	WI(-)	BI(-)	$\Delta E^*_{ab}$ (-)	RR(-)	$E_s$ (kJ/kg)	%AA (%)	%TPC (%)
Intercept	281.570	94.125	23.025	9.093	0.4447	5,590,060.360	186.909	66.633
$x_1$	-101.174 <sup>1</sup>	-	-	-	-	-310,381.836 <sup>2</sup>	-28.629 <sup>2</sup>	2.760 <sup>2</sup>
$x_2$	-34.327 <sup>2</sup>	-	-	-	-	1,076,236.090 <sup>1</sup>	-	-3.152 <sup>3</sup>
$x_3$	127.946 <sup>1</sup>	-	-	-0.395 <sup>4</sup>	-0.0600 <sup>1</sup>	359,674.738 <sup>2</sup>	-	-2.548 <sup>4</sup>
$x_4$ (1)	-33.874 <sup>1</sup>	0.201 <sup>2</sup>	-2.544 <sup>1</sup>	-2.086 <sup>1</sup>	0.0245 <sup>1</sup>	-358,525.812 <sup>1</sup>	-	-2.496 <sup>2</sup>
$x_4$ (2)	73.962 <sup>1</sup>	-0.387 <sup>2</sup>	5.814 <sup>1</sup>	4.224 <sup>1</sup>	-0.0392 <sup>1</sup>	1,104,370.500 <sup>1</sup>	-	-4.054 <sup>2</sup>
$x_1 x_2$	-	-	-	-	-	-	-	-7.348 <sup>2</sup>
$x_1 x_3$	-44.081 <sup>2</sup>	-	-	-	-	-	-	8.812 <sup>2</sup>
$x_1 x_4$ (1)	-	-	-	-	-	-	-	7.972 <sup>2</sup>
$x_1 x_4$ (2)	-	-	-	-	-	-	-	2.118 <sup>2</sup>
$x_2 x_3$	-37.198 <sup>2</sup>	-	-	-	-	-	-	-
$x_2 x_4$ (1)	-	-	-	-	-	-	-	4.624 <sup>2</sup>
$x_2 x_4$ (2)	-	-	-	-	-	-	-	-12.379 <sup>2</sup>
$x_3 x_4$ (1)	-	-	-	-	-	-	-	-10.827 <sup>2</sup>
$x_3 x_4$ (2)	-	-	-	-	-	-	-	12.038 <sup>2</sup>
$x_1^2$	-	-	-	-	-	-539,553.369 <sup>2</sup>	-	-
$x_2^2$	-	-	-	-	-	-680,688.662 <sup>2</sup>	-	-
$x_3^2$	-	-	-	1.788 <sup>2</sup>	-	-	-	-
Model F value	31.189 <sup>1</sup>	11.454 <sup>2</sup>	15.160 <sup>1</sup>	26.740 <sup>1</sup>	36.810 <sup>1</sup>	17.742 <sup>1</sup>	9.339 <sup>2</sup>	8.833 <sup>1</sup>
Lack of Fit F value	3.035 <sup>4</sup>	1.368 <sup>4</sup>	1.836 <sup>4</sup>	1.650 <sup>4</sup>	2.210 <sup>4</sup>	1.722 <sup>4</sup>	2.276 <sup>4</sup>	0.497 <sup>4</sup>
R <sup>2</sup> adj	0.879	0.419	0.494	0.780	0.787	0.802	0.223	0.778

<sup>1</sup>  $p < 0.0001$ , <sup>2</sup>  $p < 0.05$ , <sup>3</sup>  $0.05 \leq p \leq 0.1$ , <sup>4</sup>  $p > 0.1$ , - not significant model terms (not counting those required to support hierarchy);  $x_1$  = drying temperature (°C),  $x_2$  = air velocity (m/s),  $x_3$  = sample thickness (mm),  $x_4$  = pre-drying treatment;  $x_4$  (1) and  $x_4$  (2) are terms of the  $x_4$  (categorical) factor.

Figure 4d demonstrates that sample thickness and pre-drying treatments affected RR significantly ( $p < 0.0001$ ). The RR decreased with the increase of sample thickness and blanching. The thinly sliced samples underwent a shorter exposure time during drying than the thicker samples because of a larger surface and volume ratio [69], thus possibly less damaged than thicker ones. In addition, the thin samples rehydrated more water than thicker samples; probably, water on the surface concentrated almost instantaneously, led by rapid rehydration of capillaries and cavities close to the surface [80]. Another study on hot air-dried cocoyam indicated samples with four mm thickness feature the highest value of RR and decreased to the lowest value at 10 mm thickness [68]. Furthermore, this study found that blanched samples had a lower RR value, probably due to damage that occurred during drying in the form of irreversible cellular rupture and disintegration. These resulted in dense, considerably shrunken collapsed capillaries that had reduced hydrophilic capacity, reducing the ability of biological material to imbibe water [81].

Moisture content affected the reflectance colour values of dried samples [82]. Figure 5 shows the dynamic changes of chromaticity as a function of MR for each selected pre-drying treatment. The blanched celeriac slices perform higher  $\Delta E^*_{ab}$  and BI than the other two pre-drying treatments throughout the drying process. Shrestha et al. [83] also found that blanching was ineffective in preventing browning in apple slices under study. The authors argued that the blanching endorsed cellular integrity loss degraded natural pigments, which, in turn, enhanced the browning rate.

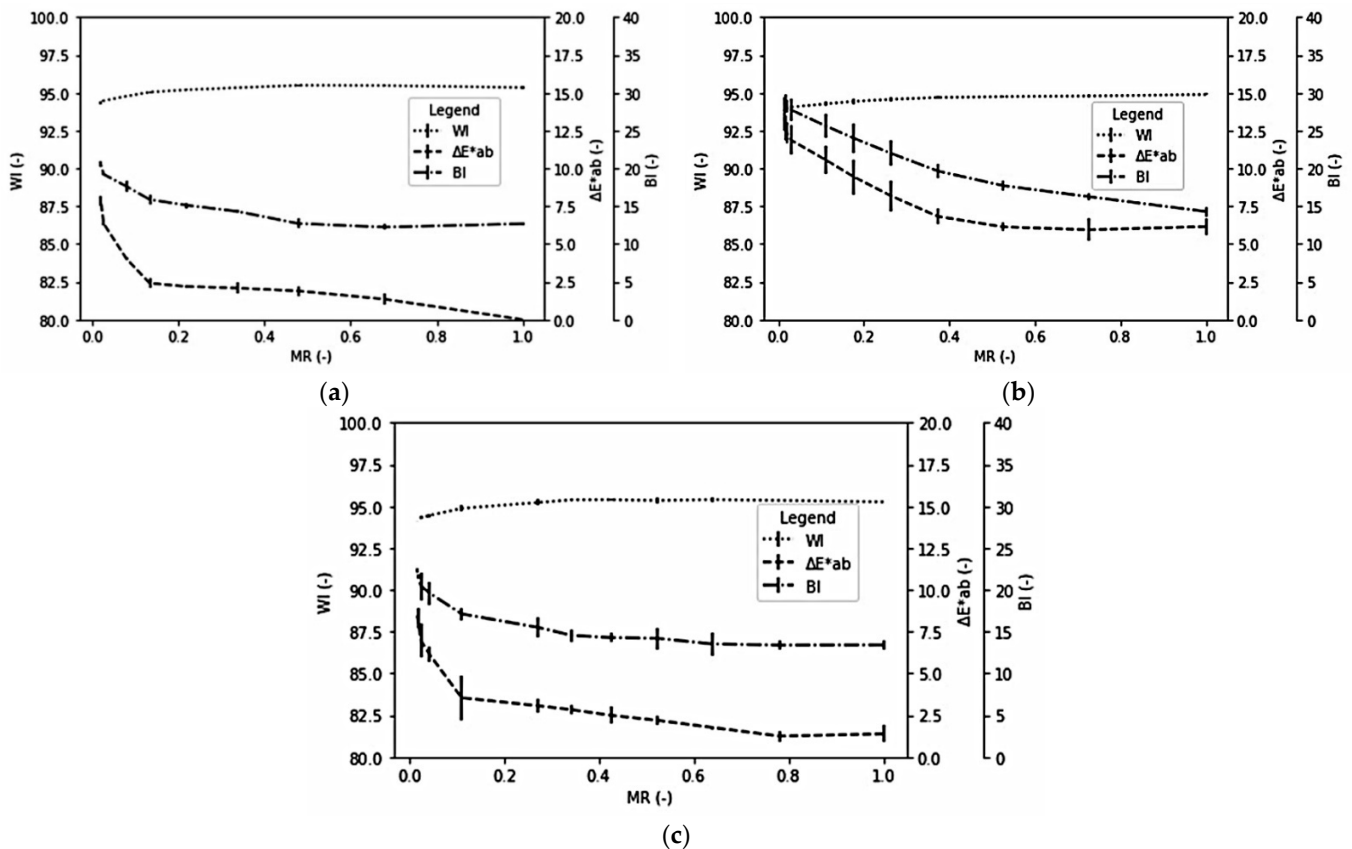

**Figure 5.** Dynamic changes of chromaticity indices as a function of MR at 60 °C drying temperature at (a) 2.9 m/s air velocity, 5 mm sample thickness, no pre-drying treatment; (b) 2.2 m/s air velocity, 5 mm sample thickness, blanching pre-drying treatment; (c) 2.2 m/s air velocity, 7 mm sample thickness, acid pre-drying treatment.


Blanched celeriac slices had a relatively stable  $\Delta E^*_{ab}$  and the  $BI$  in the initial phase of the drying process. Then, however, the value started to rise at  $MR$  below 0.4. The other two treatments initially increased slowly and began to increase sharply at  $MR$  below 0.1. Ndisya et al. [68] also had similar findings in drying blanched cocoyam. Therefore, they concluded that the blanching stage denatured heat-labile enzymes. At the same time, the heat-stable part dominated the colour changes during the drying process, together with optical properties changes, because of starch gelatinisation, resulting in the consistent reduction in lightness (increase in  $\Delta E^*_{ab}$ , and the  $BI$ , lower  $WI$ ).

### 3.2.2. Antioxidant Activity (AA) and Total Phenolic Compound (TPC)

The average initial antioxidant activity of fresh celeriac slices was  $5.63 \pm 1.32 \mu\text{mol TE/g}_{\text{ds}}$  and increased to  $7.95\text{--}10.94 \mu\text{mol TE/g}_{\text{ds}}$  after drying. The average initial total phenolic compound of fresh celeriac slices was  $1.16 \pm 0.17 \text{ mg GAE/g}_{\text{ds}}$ . The TPC value decreased to  $0.37\text{--}1.12 \text{ mg GAE/g}_{\text{ds}}$  after drying. Figure 6 presents the retention of antioxidant activity ( $\%_{AA}$ ) and retention of total phenolic compound ( $\%_{TPC}$ ).

This study found that dried samples compared with fresh samples increased AA values but decreased TPC values. This finding is in agreement with Madrau et al. [84], who studied apricot. They explained that the intermediate oxidation state of polyphenols, the increasing number of reducing sugar, and the Maillard reaction products formation resulted in a decrease in polyphenols and increased antioxidant activity. Heat treatment may trigger non-enzymatic browning that produces partially oxidised polyphenol with higher antioxidant activity capacity than non-oxidised phenols [85]. Lourenço et al. [86] also observed no correlation between TPC and AA in the spray-dried natural antioxidant extracts from pineapple peel. They hypothesised that it is probably due to the varied effectiveness among different phenolic compounds as antioxidants [87]. Figure 6a,b describe

the model of %<sub>AA</sub> and %<sub>TPC</sub> of not pre-drying treated celeriac slices, respectively. The figures showed decreased %<sub>AA</sub> when higher drying temperature was applied; however, the %<sub>TPC</sub> of not pre-drying treated samples was relatively stable over the experimental region. Setyawan et al. [88] also found that oven-dried samples without blanching or water-steeping before drying had the highest total phenolic compounds of yam flour because such pre-drying treatments caused the loss of phenolic compounds, which were water-soluble.

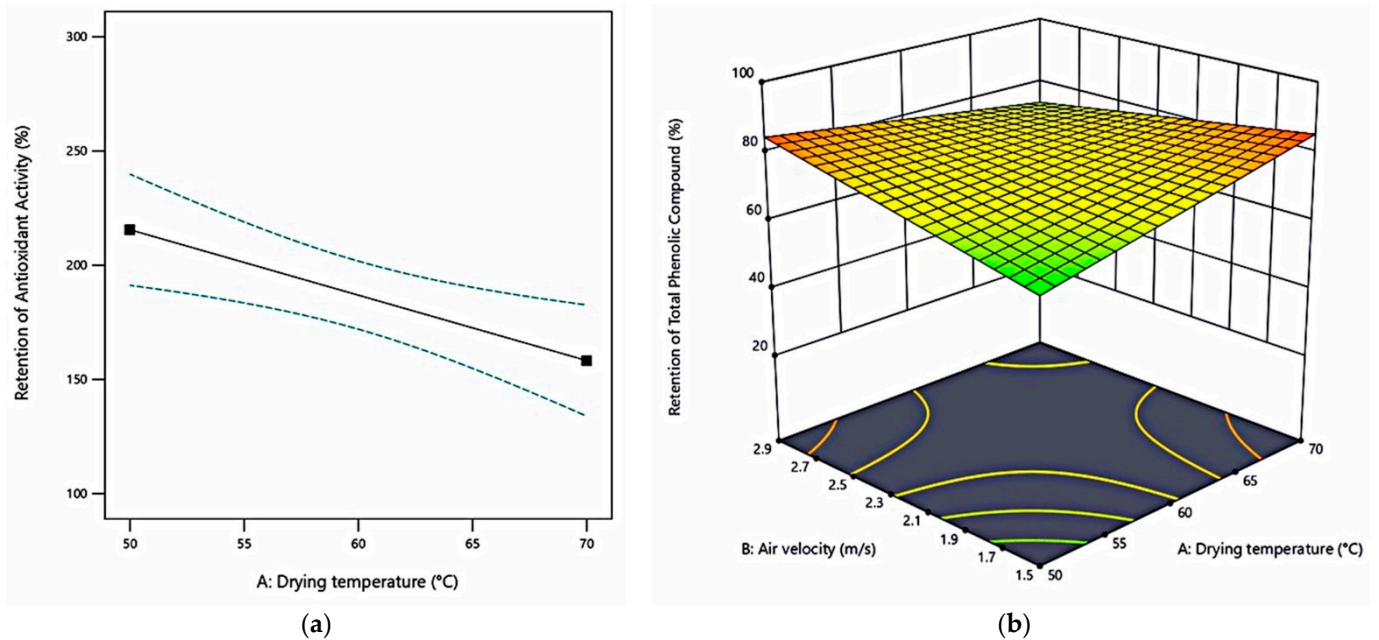


**Figure 6.** Functional properties function of factors: (a) %<sub>AA</sub> at different drying temperatures; (b) %<sub>TPC</sub> at different drying temperatures and air velocities, 3 mm sample thickness, no pre-drying treatment.

### 3.3. Effect of Drying Factors on Hot Air-Dried Celeriac Slices Energy Consumption ( $E_s$ )

The lowest specific energy consumption of  $2.7 \times 10^6$  kJ/kg ( $D_t = 180$  min) belonged to an experiment run at 50 °C, 1.5 m/s, 3 mm sample thickness without pre-drying treatment. Meanwhile, the highest specific energy consumption of  $7.7 \times 10^6$  kJ/kg belonged to the experiment run at 60 °C, 2.2 m/s, 5 mm sample thickness, and blanching pre-drying treatment ( $D_t = 420$  min). Figure 7 shows the specific energy consumption as a function of drying factors.

To evaluate drying performance, investigators must consider drying efficiency that involves drying time, drying rate, and energy consumption simultaneously [30]. Table 3 and Figure 7a show  $E_s$  initially increased with an increment in drying temperature up to around 60 °C and declined afterwards because of the quadratic effect of this factor. This result agrees with a cocoyam study because an increase in the drying rate and a reduction in the drying time compensate for the increment in drying temperature [68]. An increase in air velocity increased energy consumption, but the quadratic air velocity affected lowering energy consumption. This result is in line with the thin-layer drying of the Jujube study report, as increasing the air velocity decreases the drying time [89].

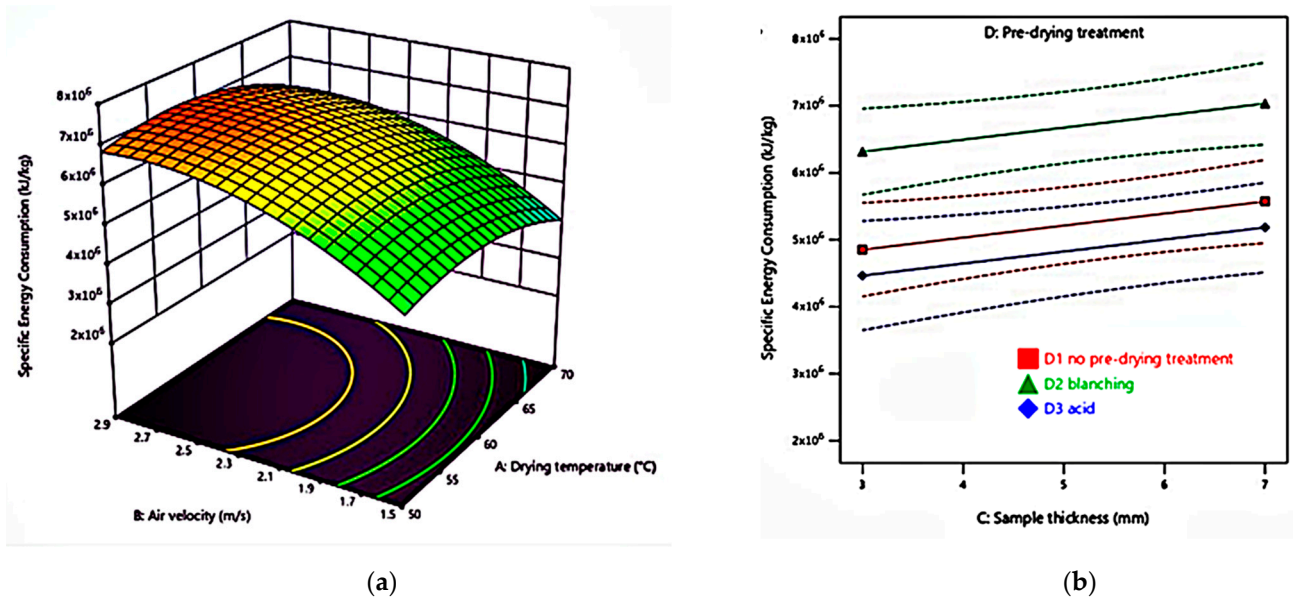

**Figure 7.** (a) Specific energy consumption of 5 mm sample thickness, blanching pre-drying treatment celeriac slices hot air at different drying temperatures and air velocities; (b) specific energy consumption of different sample thicknesses and pre-drying treatments of celeriac slices hot air at 60 °C of drying temperature and 2.2 m/s of air velocity.

Figure 7b shows an increase in sample thickness directly proportional to the  $E_s$  magnitude, and this was also the case with the blanched samples. This phenomenon occurred because a relatively smaller surface area to volume ratio that held more moisture while blanching led to the hard surface creation resulting from starch gelatinisation that prevented the water removal [68]. Both factors, the thicker or blanched samples, required longer drying time and, thus, had increased  $E_s$ .

### 3.4. Optimisation

The experiment design is relevant to experimentation at various scales, from laboratory to industry, and quality improvement [90]. This study demonstrated optimisation by considering important aspects for manufacturers (drying time and specific energy consumption) and consumers (functional and colour properties). This study applied the maximum importance level (scale 5) for all the responses of interest for both stakeholders in the desirability function. However, this method only considered post-process response without involving the products' dynamic changes during the drying process.

Optimisation of the processing period and pre-drying treatment are essential to produce high-quality products [83]. Figure 8 outlines the selected solution with the corresponding predicted response level. The drying temperature of 58 °C, air velocity of 2.9 m/s, sample thickness of 4.6 mm with acid pre-drying treatment gave a fair optimum desirability result for  $E_s$ ,  $RR$ , and  $\%_{AA}$  but high optimum desirability for  $D_t$ , chromaticity, and  $\%_{TPC}$ . The selected factor setting did not necessarily satisfy the maximum value of all responses but provided a balance between conflicting responses [68]. Today, the development of post-harvest quality inspection approaches is, in particular, targeted on their optimisation, making use of new opportunity techniques, which lessen processing times, decrease waste, and attain extra standardisation in their products [91]. One prospective technique is an in-process non-invasive quality inspection during drying that will also be considered for further studies.

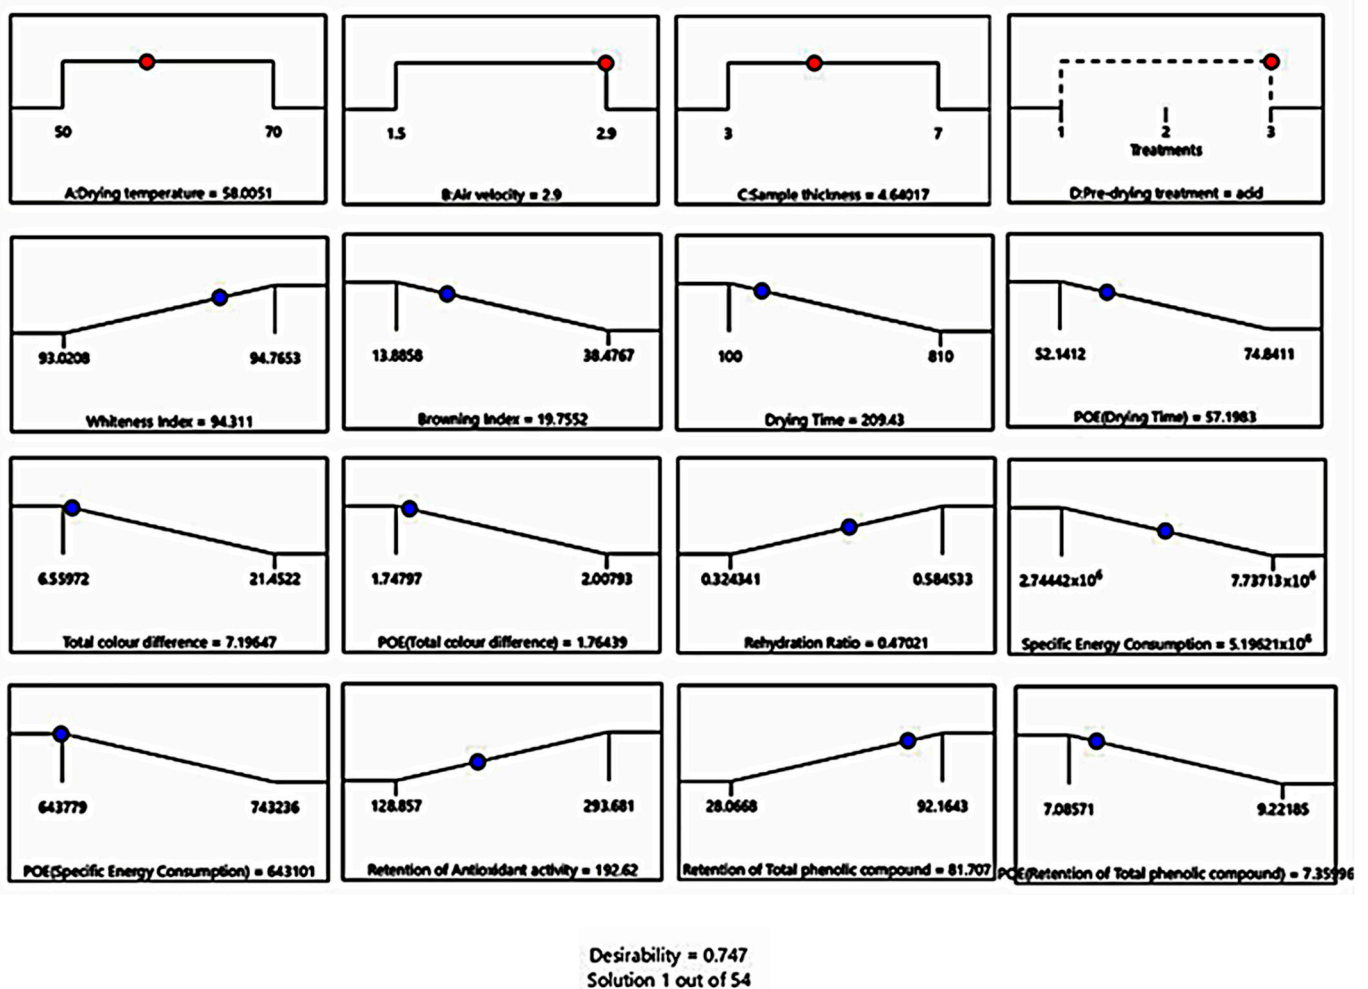


Figure 8. Numerical optimisation for quality and specific energy consumption of hot-dried celeriac slices.

Table 3 shows the coefficients of selected models with coded factors. As the model contains a categorical factor (pre-drying treatment,  $x_4$ ), there are two terms of  $x_4$  ( $x_4$  (1) and  $x_4$  (2)), which is one less term than the number of levels in the factor. The product of the number of terms in the main effects produces the number of interaction terms. To predict the first level of  $x_4$  (no pre-drying treatment), substitute +1 for  $x_4$  (1) and 0 for  $x_4$  (2). For the second level (blanching), substitute 0 for  $x_4$  (1) and +1 for  $x_4$  (2). For the third level (acid dipping), substitute −1 for  $x_4$  (1) and −1 for  $x_4$  (2)] [92].

#### 4. Conclusions

The experiment used the I-optimal design of response surface methodology to investigate the optimisation of hot air-drying celeriac slices' quality and energy consumption. As predicted,  $D_t$  was directly proportional to the thickness of the sample ( $p < 0.0001$ ), but, with the increase of the temperature ( $p < 0.0001$ ) and drying air velocity ( $p < 0.001$ ), it declined. Blanching increased the drying time because it enhanced water uptake and starch swelling, increasing the initial moisture content. Pre-drying treatment ( $p < 0.0001$ ) affected all chromaticity indices ( $WI$ ,  $BI$ , and  $\Delta E^*_{ab}$ ). Blanched samples had a higher  $\Delta E^*_{ab}$  and  $BI$  and lowered  $WI$  than samples with other pre-drying treatments. Sample thickness and pre-drying treatments affected  $RR$  significantly ( $p < 0.0001$ ). In general, celeriac drying characteristics are like most agricultural products, and pre-drying treatments did not impact its drying behaviour. The model by Midilli and others and the logarithmic model fitted best with celeriac slices drying kinetics. The  $RR$  decreased with the increase of sample thickness and blanching. The thin samples rehydrated more water than thicker samples, probably

because of the rehydration of capillaries and cavities close to the surface. In addition, the thin samples underwent minor damage because of shorter drying exposure. In addition, blanching caused cellular damage that prevented biological material from imbibing water. This study also found that dried slices compared with fresh slices increased AA value but decreased TPC value. Heat treatment may trigger non-enzymatic browning that produced partially oxidised polyphenol with higher antioxidant activity capacity than non-oxidised phenols.

$E_s$  initially increased with an increment in drying temperature up to around 60 °C and declined afterwards because of this factor's quadratic effect. An increase in air velocity increased  $E_s$ , but the quadratic air velocity affected lowering energy consumption. A smaller surface area to volume ratio in thicker slices that held more moisture while blanching led to the hard surface creation resulting from starch gelatinisation that prevented the water removal. Both factors, the thicker or blanched samples, required longer drying time and, thus, have increased  $E_s$ . The solution chosen for optimal responses was the drying temperature of 58 °C, air velocity of 2.9 m/s, and a sample thickness of 4.6 mm with acid pre-drying treatment. This study considered parameters that were critical for manufacturers and consumers for optimisation. The optimum drying factors were a balance between competing responses. Optimisation utilising the experiment design is relevant in quality improvement and is applicable in the food industry scale. However, this method only considered post-process response without involving the products' dynamic changes during the drying process. One prospective post-harvest quality inspection technique is an in-process non-invasive quality inspection during drying that will also be considered for further studies.

**Author Contributions:** Conceptualisation, T.N., B.K., B.S. and O.H.; methodology, T.N.; software, T.N. and B.K.; validation, T.N., B.K.; formal analysis, T.N., B.K.; investigation, T.N.; resources, O.H.; data curation, B.K.; writing—original draft preparation, T.N.; writing—review and editing, T.N., B.K., B.S. and O.H.; visualisation, T.N. and B.K.; supervision, B.S. and O.H.; funding acquisition, T.N., B.S. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research received no external funding, and the APC was funded by the University of Kassel, Germany.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Not applicable.

**Acknowledgments:** The first author would like to express gratitude to the Directorate General of Higher Education, Ministry of Education, Culture, Research and Technology, the Republic of Indonesia, for financial support. The authors also wish to thank Gardis J.E. von Gersdorff and Christian Schellert for their technical support and Michael AF Earley for this manuscript's spell and grammar check. Finally, the authors also acknowledge the University of Kassel, Germany, for providing the facilities utilised during this study.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. Vega-Gálvez, A.; Ah-Hen, K.; Chacana, M.; Vergara, J.; Martínez-Monzó, J.; García-Segovia, P.; Lemus-Mondaca, R.; Di Scala, K. Effect of temperature and air velocity on drying kinetics, antioxidant capacity, total phenolic content, colour, texture and microstructure of apple (var. Granny Smith) slices. *Food Chem.* **2012**, *132*, 51–59. [[CrossRef](#)] [[PubMed](#)]
2. Bonazzi, C.; Dumoulin, E.; Quality Changes in Food Materials as Influenced by Drying Processes. Wiley-VCH Verlag GmbH & Co. Wiley-VCH Verlag GmbH & Co. KGaA., 2011; Volume 3, pp. 1–20. Available online: [https://application.wiley-vch.de/books/sample/3527315586\\_c01.pdf](https://application.wiley-vch.de/books/sample/3527315586_c01.pdf) (accessed on 25 May 2021).
3. Menon, A.; Stojceska, V.; Tassou, S. A systematic review on the recent advances of the energy efficiency improvements in non-conventional food drying technologies. *Trends Food Sci. Technol.* **2020**, *100*, 67–76. [[CrossRef](#)]
4. Aghbashlo, M.; Hosseinpour, S.; Mujumdar, A.S. Application of Artificial Neural Networks (ANNs) in Drying Technology: A Comprehensive Review. *Dry. Technol.* **2015**, *33*, 1397–1462. [[CrossRef](#)]



5. Ertekin, C.; Gozlekci, S.; Heybeli, N.; Gencer, A.; Adak, N.; Sengul, B. Drying of Strawberries with Infrared Dryer. In Proceedings of the International Conference of Agricultural Engineering, Zürich, Switzerland, 6–10 July 2014; pp. 1–7.
6. Amjad, W.; Hensel, O.; Munir, A. Batch drying of potato slices: Kinetic changes of colour and shrinkage in response of uniformly distributed drying temperature. *Int. Agric. Eng. J.* **2015**, *17*, 296–308.
7. Moreno, G.D.C.; Díaz-Moreno, A.C. Effect of air drying process on the physicochemical, antioxidant, and microstructural characteristics of tomato cv. Chonto. *Agron. Colomb.* **2017**, *35*, 100–106. [[CrossRef](#)]
8. Silva, B.G.; Fileti, A.M.F.; Foglio, M.A.; Rosa, P.D.T.V.; Taranto, O.P. Effects of Different Drying Conditions on Key Quality Parameters of Pink Peppercorns (*Schinus terebinthifolius* Raddi). *J. Food Qual.* **2017**, *2017*, 1–12. [[CrossRef](#)]
9. Cui, L.; Niu, L.; Li, D.; Liu, C.; Liu, Y.; Liu, C.; Song, J. Effects of different drying methods on quality, bacterial viability and storage stability of probiotic enriched apple snacks. *J. Integr. Agric.* **2018**, *17*, 247–255. [[CrossRef](#)]
10. Ismail, O.; Kipcak, A.S.; Doymaz, I. Drying of Okra by Different Drying Methods: Comparison of Drying time, Product Color Quality, Energy Consumption and Rehydration. *Athens J. Sci.* **2019**, *6*, 155–168. [[CrossRef](#)]
11. Hafezi, N. Mohammad Javad Sheikhdavoodi; Sajadiye, S.M. The Effect of Drying Kinetic on Shrinkage of Potato Slices. *Int. J. Adv. Biol. Biomed. Res. J.* **2014**, *2*, 2779–2782. [[CrossRef](#)]
12. Macias, M.A. *Comparatives Studies of Different Drying Process of Strawberry Hot Air Drying Freeze-Drying and Swell-Drying: Application on the Biological Compounds Preservation*; Université de La Rochelle: La Rochelle, France, 2013.
13. Valdenegro, M.; Almonacid, S.; Henríquez, C.; Lutz, M.; Fuentes, L.; Simpson, R. The Effects of Drying Processes on Organoleptic Characteristics and the Health Quality of Food Ingredients Obtained from Goldenberry Fruits (*Physalis peruviana*). *Open Access Sci. Rep.* **2013**, *2*, 1–7. [[CrossRef](#)]
14. Ruttarattanamongkol, K.; Chittrakorn, S.; Weerawatanakorn, M.; Dangpium, N. Effect of drying conditions on properties, pigments and antioxidant activity retentions of pre-treated orange and purple-fleshed sweet potato flours. *J. Food Sci. Technol.* **2016**, *53*, 1811–1822. [[CrossRef](#)]
15. Bruznican, S.; De Clercq, H.; Eeckhaut, T.; Van Huylenbroeck, J.; Geelen, D. Celery and Celeriac: A Critical View on Present and Future Breeding. *Front. Plant Sci.* **2020**, *10*, 1699. [[CrossRef](#)] [[PubMed](#)]
16. Eurostat. *Crop Production in EU Standard Humidity*; Eurostat: Luxembourg, 2020.
17. Krešić, G.; Lelas, V.; Šimundić, B. Effects of processing on nutritional composition and quality evaluation of candied celeriac. *Sadhana-Acad. Proc. Eng. Sci.* **2004**, *29*, 1–12. [[CrossRef](#)]
18. Katarzyna, C. The effect of pre-treatment of shredded celeriac using solutions of enzymatic browning inhibitors on the quality of minimally processed product. *J. Food Qual.* **2007**, *30*, 594–608.
19. U.S. Department of Agriculture. *Food Data Central Search Results*; U.S. Department of Agriculture: Washington, DC, USA, 2019.
20. Silva International Celery Root. Available online: <https://silva-intl.com/products/celery-root> (accessed on 20 November 2020).
21. Minarovičová, L.; Lauková, M.; Kohajdová, Z.; Karovičová, J.; Dobrovická, D.; Kuchtová, V. Qualitative properties of pasta enriched with celery root and sugar beet by-products. *Czech J. Food Sci.* **2018**, *36*, 66–72. [[CrossRef](#)]
22. Białobrzewski, I. Determination of the mass transfer coefficient during hot-air-drying of celery root. *J. Food Eng.* **2007**, *78*, 1388–1396. [[CrossRef](#)]
23. Beigi, M. Mass transfer parameters of celeriac during vacuum drying. *Heat Mass Transf.* **2017**, *53*, 1327–1334. [[CrossRef](#)]
24. Wei, X.; Fan, K.; He, J.; Yan, F. Characterization of thin layer hot air drying of celery root. *Adv. J. Food Sci. Technol.* **2015**, *9*, 412–421. [[CrossRef](#)]
25. Białobrzewski, I. Determination of the heat transfer coefficient by inverse problem formulation during celery root drying. *J. Food Eng.* **2006**, *74*, 383–391. [[CrossRef](#)]
26. Alibaš, I. Determination of Vacuum and Air Drying Characteristics of Celeriac Slices. *J. Biol. Environ. Sci.* **2012**, *6*, 1–13.
27. Ježek, D.; Tripalo, B.; Brnčić, M.; Karlović, D.; Brnčić, S.R.; Vikić-Topić, D.; Karlović, S. Dehydration of celery by infrared drying. *Croat. Chem. Acta* **2008**, *81*, 325–331.
28. Velić, D.; Bilić, M.; Tomas, S.; Planinić, M.; Bucić, A.; Svoboda, Z. The effect of temperatures and pre-treatments on the quality of celery root drying in fluid bed drier the effect of temperatures and pre-treatments on the quality of celery. In Proceedings of the 4th International Conference SIPA'05, Timișoara, Romania, 24–26 November 2005; pp. 173–180.
29. Pricina, L.; Karklina, D. Natural Antioxidant Changes in Fresh and Dried Spices and Vegetables. *Int. J. Biol. Biomol. Agric. Food Biotechnol. Eng.* **2014**, *8*, 492–496.
30. Jin, W.; Mujumdar, A.S.; Zhang, M.; Shi, W. Novel Drying Techniques for Spices and Herbs: A Review. *Food Eng. Rev.* **2018**, *10*, 34–45. [[CrossRef](#)]
31. Akkermans, W.G.M.; Coppenolle, H.; Goos, P. Optimal design of experiments for excipient compatibility studies. *Chemom. Intell. Lab. Syst.* **2017**, *171*, 125–139. [[CrossRef](#)]
32. Nooraziah, A.; Tiagrajah, V.J. A study on regression model using response surface methodology. *Appl. Mech. Mater.* **2014**, *666*, 235–239. [[CrossRef](#)]
33. Response Surface. Available online: <https://www.statease.com/docs/v11/tutorials/multifactor-rsm/> (accessed on 23 June 2021).
34. Otwell, W.S.; Iyengar, R. Inhibition of Enzymatic Browning in Foods and Beverages. *Crit. Rev. Food Sci. Nutr.* **1992**, *32*, 253–273. [[CrossRef](#)]

35. The Commission of the European Communities. *Commission Regulation (EC) No 889/2008*; The Commission of the European Communities: Luxembourg, 2008; Volume 16, pp. 1–9.
36. Guimarães, R.M.; de Oliveira, D.E.C.; Resende, O.; Silva, J.; de S. Silva, J.; de Rezende, T.A.M.; Egea, M.B. Thermodynamic properties and drying kinetics of 'okara'. *Rev. Bras. Eng. Agrícola e Ambient.* **2018**, *22*, 418–423. [[CrossRef](#)]
37. Correia, A.F.K.; Loro, A.C.; Zanatta, S.; Spoto, M.H.F.; Vieira, T.M.F.S. Effect of temperature, time, and material thickness on the dehydration process of tomato. *Int. J. Food Sci.* **2015**, *2015*, 1–7. [[CrossRef](#)]
38. Karabacak, A.Ö.; Suna, S.; Tamer, C.E.; Çopur, U. Effects of oven, microwave and vacuum drying on drying characteristics, colour, total phenolic content and antioxidant capacity of celery slices. *Qual. Assur. Saf. Crop. Foods* **2018**, *10*, 193–205. [[CrossRef](#)]
39. Afolabi, I.S. Moisture Migration and Bulk Nutrients Interaction in a Drying Food Systems: A Review. *Food Nutr. Sci.* **2014**, *05*, 692–714. [[CrossRef](#)]
40. Nielsen, S.S. *Food Analysis Laboratory Manual*, 2nd ed.; Nielsen, S.S., Ed.; Springer: New York, NY, USA, 2010; ISBN 978-1-4419-1462-0.
41. Faal, S.; Tavakoli, T.; Ghobadian, B. Mathematical modelling of thin layer hot air drying of apricot with combined heat and power dryer. *J. Food Sci. Technol.* **2015**, *52*, 2950–2957. [[CrossRef](#)]
42. Aral, S.; Beşe, A.V. Convective drying of hawthorn fruit (*Crataegus* spp.): Effect of experimental parameters on drying kinetics, color, shrinkage, and rehydration capacity. *Food Chem.* **2016**, *210*, 577–584. [[CrossRef](#)] [[PubMed](#)]
43. Wang, J. A single-layer model for far-infrared radiation drying of onion slices. *Dry. Technol.* **2002**, *20*, 1941–1953. [[CrossRef](#)]
44. Hunter, J.D. Matplotlib: A 2D Graphics Environment. *Comput. Sci. Eng.* **2007**, *9*, 90–95. [[CrossRef](#)]
45. CHROMA METER CR-400/410. Available online: [https://www.konicaminolta.com/instruments/download/instruction\\_manual/color/pdf/cr-400-410\\_instruction\\_eng.pdf](https://www.konicaminolta.com/instruments/download/instruction_manual/color/pdf/cr-400-410_instruction_eng.pdf) (accessed on 23 June 2021).
46. Pathare, P.B.; Opara, U.L.; Al-Said, F.A.J. Colour Measurement and Analysis in Fresh and Processed Foods: A Review. *Food Bioprocess Technol.* **2013**, *6*, 36–60. [[CrossRef](#)]
47. Boun, H.R.; Huxsoll, C.C. Control of Minimally Processed Carrot (*Daucus carota*) Surface Discoloration Caused by Abrasion Peeling. *J. Food Sci.* **1991**, *56*, 416–418. [[CrossRef](#)]
48. Palou, E.; López-Malo, A.; Barbosa-Cánovas, G.; Welti-Chanes, J.; Swanson, B.G. Polyphenoloxidase activity and color of blanched and high hydrostatic pressure treated banana puree. *J. Food Sci.* **1999**, *64*, 42–45. [[CrossRef](#)]
49. Konica Minolta Identifying Color Differences Using L\*a\*b\* or L\*C\*H\* Coordinates. Available online: <https://sensing.konicaminolta.us/us/blog/identifying-color-differences-using-l-a-b-or-l-c-h-coordinates/> (accessed on 16 March 2021).
50. Akhtar, J.; Kumar, J.; Malik, S. Optimization of Quality Parameters of Dehydrated Potato under Combined Microwave-Fluidized Bed Drying. *J. Food Res. Technol.* **2015**, *3*, 71–82.
51. Brand-Williams, W.; Cuvelier, M.E.; Berset, C. Use of a Free Radical Method to Evaluate Antioxidant Activity. *LWT-Food Sci. Technol.* **1995**, *28*, 25–30. [[CrossRef](#)]
52. Raponi, F.; Moscetti, R.; Monarca, D.; Colantoni, A.; Massantini, R. Monitoring and optimization of the process of drying fruits and vegetables using computer vision: A review. *Sustainability* **2017**, *9*, 2009. [[CrossRef](#)]
53. Odeh, I.; Al-Rimawi, F.; Abbadi, J.; Obayat, L.; Qabbajeh, M.H.A. Effect of Harvesting Date and Variety of Date Palm on Antioxidant Capacity, Phenolic and Flavonoid Content of Date Palm (*Phoenix Dactylifera*). *J. Food Nutr. Res.* **2014**, *2*, 499–505. [[CrossRef](#)]
54. Aghbashlo, M.; Kianmehr, M.H.; Samimi-Akhijahani, H. Influence of drying conditions on the effective moisture diffusivity, energy of activation and energy consumption during the thin-layer drying of berberis fruit (*Berberidaceae*). *Energy Convers. Manag.* **2008**, *49*, 2865–2871. [[CrossRef](#)]
55. Response Surface (pt 3). Available online: <https://www.statease.com/docs/latest/tutorials/multifactor-rsm-pt3/> (accessed on 22 June 2021).
56. Mixture Design (pt 2). Available online: <https://www.statease.com/docs/v11/tutorials/mixture-designs-2/> (accessed on 22 June 2021).
57. He, Z.; Zhu, P.F.; Park, S.H. A robust desirability function method for multi-response surface optimization considering model uncertainty. *Eur. J. Oper. Res.* **2012**, *221*, 241–247. [[CrossRef](#)]
58. Optimizing Formulation Performance with Desirability Functions. Available online: [https://cdnm.statease.com/pubs/optimizing\\_formulation\\_performance\\_with\\_desirability\\_functions.pdf](https://cdnm.statease.com/pubs/optimizing_formulation_performance_with_desirability_functions.pdf) (accessed on 20 June 2021).
59. Derringer, G.; Suich, R. Simultaneous Optimization of Several Response Variables. *J. Qual. Technol.* **1980**, *12*, 214–219. [[CrossRef](#)]
60. Harrington, E.C.J. The desirability function. *Ind. Qual. Control* **1965**, *21*, 494–498.
61. Md Saleh, R.; Kulig, B.; Hensel, O.; Sturm, B. Investigation of dynamic quality changes and optimization of drying parameters of carrots (*Daucus carota* var. *laguna*). *J. Food Process. Eng.* **2019**, *43*, 1–17. [[CrossRef](#)]
62. Doymaz, İ. Drying kinetics, rehydration and colour characteristics of convective hot-air drying of carrot slices. *Heat Mass Transf.* **2017**, *53*, 25–35. [[CrossRef](#)]
63. Taye, A.H. *Optimization of Drying Process for Better Quality Retention of Dried Potato*; Universität Kassel: Witzenhausen, Germany, 2018.
64. Tzempelikos, D.A.; Vouros, A.P.; Bardakas, A.V.; Filios, A.E.; Margaritis, D.P. Case studies on the effect of the air drying conditions on the convective drying of quinces. *Case Stud. Therm. Eng.* **2014**, *3*, 79–85. [[CrossRef](#)]

65. Limpai boon, K.; Technology, A.; Thammarat, N.S. Effects of Temperature and Slice Thickness on Drying Kinetics of Pumpkin Slices. *Walailak J. Sci Technol.* **2011**, *8*, 159–166. [[CrossRef](#)]
66. Doymaz, I.; Özdemir, Ö. Effect of air temperature, slice thickness and pre-treatment on drying and rehydration of tomato. *Int. J. Food Sci. Technol.* **2014**, *49*, 558–564. [[CrossRef](#)]
67. Velić, D.; Planinić, M.; Tomas, S.; Bilić, M. Influence of airflow velocity on kinetics of convection apple drying. *J. Food Eng.* **2004**, *64*, 97–102. [[CrossRef](#)]
68. Ndisya, J.; Mbuge, D.; Kulig, B.; Gitau, A.; Hensel, O.; Sturm, B. Hot air drying of purple-speckled Cocoyam (*Colocasia esculenta* (L.) Schott) slices: Optimisation of drying conditions for improved product quality and energy savings. *Therm. Sci. Eng. Prog.* **2020**, *18*, 100557. [[CrossRef](#)]
69. Ertekin, C.; Firat, M.Z. A comprehensive review of thin-layer drying models used in agricultural products. *Crit. Rev. Food Sci. Nutr.* **2017**, *57*, 701–717. [[CrossRef](#)]
70. Midilli, A.; Kucuk, H.; Yapar, Z. A new model for single-layer drying. *Dry. Technol.* **2002**, *20*, 1503–1513. [[CrossRef](#)]
71. Yağcıoğlu, A.K.; Değirmencioglu, A.; Çağatay, F. Drying Characteristics of Laurel Leaves Under Different Drying Conditions. In Proceedings of the 7th Int Congress Agricultural Mechanisation and Energy, Adana, Türkiye, 26–27 May 1999; pp. 565–569.
72. Erbay, Z.; Icier, F. A review of thin layer drying of foods: Theory, modeling, and experimental results. *Crit. Rev. Food Sci. Nutr.* **2010**, *50*, 441–464. [[CrossRef](#)]
73. Shin, S.; Bhowmik, S.R. Thermal kinetics of color changes in pea puree. *J. Food Eng.* **1995**, *24*, 77–86. [[CrossRef](#)]
74. Lozano, J.E.; Ibarz, A. Colour changes in concentrated fruit pulp during heating at high temperatures. *J. Food Eng.* **1997**, *31*, 365–373. [[CrossRef](#)]
75. Adekunle, A.O.; Tiwari, B.K.; Cullen, P.J.; Scannell, A.G.M.; O'Donnell, C.P. Effect of sonication on colour, ascorbic acid and yeast inactivation in tomato juice. *Food Chem.* **2010**, *122*, 500–507. [[CrossRef](#)]
76. Severini, C.; Giuliani, R.; De Filippis, A.; Derossi, A.; De Pilli, T. Influence of different blanching methods on colour, ascorbic acid and phenolics content of broccoli. *J. Food Sci. Technol.* **2016**, *53*, 501–510. [[CrossRef](#)]
77. Ben Zid, M.; Dhuique-Mayer, C.; Bellagha, S.; Sanier, C.; Collignan, A.; Servent, A.; Dornier, M. Effects of Blanching on Flavanones and Microstructure of Citrus aurantium Peels. *Food Bioprocess Technol.* **2015**, *8*, 2246–2255. [[CrossRef](#)]
78. Doymaz, I. Drying of Potato Slices: Effect of Pretreatments and Mathematical Modeling. *J. Food Process. Preserv.* **2012**, *36*, 310–319. [[CrossRef](#)]
79. Krokida, M.K.; Philippopoulos, C. Rehydration of Dehydrated Foods. *Dry. Technol.* **2005**, *23*, 37–41. [[CrossRef](#)]
80. Markowski, M.; Bondaruk, J.; Błaszczak, W. Rehydration behavior of vacuum-microwave-dried potato cubes. *Dry. Technol.* **2009**, *27*, 296–305. [[CrossRef](#)]
81. Krokida, M.K.; Marinou-Kouris, D. Rehydration kinetics of dehydrated products. *J. Food Eng.* **2003**, *57*, 1–7. [[CrossRef](#)]
82. Özkan, M.; Kirca, A.; Cemeroglu, B. Effect of moisture content on CIE color values in dried apricots. *Eur. Food Res. Technol.* **2003**, *216*, 217–219. [[CrossRef](#)]
83. Shrestha, L.; Kulig, B.; Moscetti, R.; Massantini, R.; Pawelzik, E.; Hensel, O.; Sturm, B. Optimisation of physical and chemical treatments to control browning development and enzymatic activity on fresh-cut apple slices. *Foods* **2020**, *9*, 76. [[CrossRef](#)] [[PubMed](#)]
84. Madrau, M.A.; Piscopo, A.; Sanguinetti, A.M.; Del Caro, A.; Poiana, M.; Romeo, F.V.; Piga, A. Effect of drying temperature on polyphenolic content and antioxidant activity of apricots. *Eur. Food Res. Technol.* **2009**, *228*, 441–448. [[CrossRef](#)]
85. Manzocco, L.; Calligaris, S.; Mastrocola, D.; Nicoli, M.C.; Lericci, C.R. Review of non-enzymatic browning and antioxidant capacity in processed foods. *Trends Food Sci. Technol.* **2000**, *11*, 340–346. [[CrossRef](#)]
86. Lourenço, S.C.; Campos, D.A.; Ricardo, G.; Pintado, M.; Conceiç, M.; Santos, D.I.; Corr, L.C.; Mold, M. Optimization of Natural Antioxidants Extraction from Pineapple Peel and Their Stabilization by Spray Drying. *Foods* **2021**, *10*, 1255. [[CrossRef](#)]
87. Ismail, A.; Marjan, Z.M.; Foong, C.W. Total antioxidant activity and phenolic content in selected vegetables. *Food Chem.* **2004**, *87*, 581–586. [[CrossRef](#)]
88. Setyawan, N.; Maninang, J.S.; Suzuki, S.; Fujii, Y. Variation in the Physical and Functional Properties of Yam (*Dioscorea* spp.) Flour Produced by Different Processing Techniques. *Foods* **2021**, *10*, 1341. [[CrossRef](#)] [[PubMed](#)]
89. Motevali, A.; Abbaszadeh, A.; Minaei, S.; Khoshtaghaza, M.H.; Ghobadian, B. Effective Moisture diffusivity, activation energy and energy consumption in thin-layer drying of jujube (*Zizyphus jujube* Mill). *J. Agric. Sci. Technol.* **2012**, *14*, 523–532.
90. Pederson, S.J. *Design of Experiments for Food Engineering*; National Food Institute, Technical University of Denmark: Søborg, Denmark, 2015.
91. López, V.C. *Innovations in Non-Destructive Techniques for Fruit Quality Control Applied to Manipulation and Inspection Lines*; Universitat Politècnica de València: València, Spain, 2018.
92. Stat-Ease Inc Interpreting the Categorical Model. Available online: <https://www.statease.com/docs/v11/contents/hints-and-faqs/interpreting-the-categorical-model/> (accessed on 15 February 2021).