



## Exploiting a Wearable Extra-Finger for Haptic Applications

This is a pre print version of the following article:

*Original:*

Dragusanu, M., Iqbal, Z., Prattichizzo, D., Malvezzi, M. (2022). Exploiting a Wearable Extra-Finger for Haptic Applications. In Haptics: Science, Technology, Applications (pp.366-368). Cham : Springer [10.1007/978-3-031-06249-0].

*Availability:*

This version is available <http://hdl.handle.net/11365/1226017> since 2023-02-11T12:22:11Z

*Publisher:*

Springer

*Published:*

DOI:10.1007/978-3-031-06249-0

*Terms of use:*

Open Access

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. Works made available under a Creative Commons license can be used according to the terms and conditions of said license.

For all terms of use and more information see the publisher's website.

(Article begins on next page)

# Exploiting a wearable extra-finger for haptic applications

Mihai Dragusanu<sup>1</sup>, Zubair Iqbal<sup>1</sup>, Domenico Prattichizzo<sup>1,2</sup>[0000–0001–9051–9698], and Monica Malvezzi<sup>1</sup>[0000–0002–2158–5920]

<sup>1</sup> Department of Information Engineering and Mathematics, University of Siena, 53100 Siena, Italy

<sup>2</sup> Humanoids & Human Centered Mechatronics Research Line, Istituto Italiano di Tecnologia, Genoa, Italy

**Abstract.** This extended abstract presents the design of a wearable device for haptic stimulation of hand palms and phalanges. Most of the wearable haptic devices for hand palms are based on a parallel structure, that guarantees good precision and stiffness but presents workspace limitations and encumbrance problems. In this work, we improve the design of a wearable extra-finger, previously designed to augment human hands and to provide assistance for people affected by hand and upper-limb diseases to apply as a haptic device. To employ this device for haptics applications, we provided it an additional adduction/abduction degree of freedom and we modified the fingertip/end-effector to include a micro force sensor.

**Keywords:** Haptic devices · Wearable Devices · Rehabilitation.

## 1 Introduction

Human augmentation by means of supernumerary robotic limbs (SRLs) represents a recent and lively research topic [1]. SRLs are developed to allow humans to perform complex actions with increased strength and precision, and also to enlarge the human workspace. Our research group has been involved in particular in the development of supernumerary extra-fingers [2, 3]. Adding a single or double extra robotic finger can improve the grasping capabilities of the human hand and its dexterity even in complex actions.

In this work we propose to exploit supernumerary extra fingers as wearable haptic devices for cutaneous stimuli of hand palm and phalanges. Although the hand is one of the primary interfaces between humans and the surrounding environment, most of the haptic devices that return tactile stimuli are focused on the fingers [4], while fewer of them are developed specifically for the palm. Most of the wearable haptics devices developed for hand palm are based on parallel mechanisms, i.e. mechanical systems using multiple serial chains (typically varying from 3 to 6) to support a single platform, or end-effector [5–7]. One of the main drawbacks of parallel mechanisms is that their workspace, i.e. the set of possible configurations that can be reached by the end effector is rather limited,

and in haptics context this means that a limited part of the hand can be stimulated. Serial mechanisms, on the other hand, typically are more flexible and less precise than parallel ones, but their open structure allows to reach a wider workspace.

## 2 The improvement of the sixth finger

As mentioned in the previous section, in this work we improved the wearable extra finger developed in [8, 3] to exploit it in haptic applications.

The robotic extra finger [8] has a modular structure, each module is composed of a rigid part realized in ABS (Acrylonitrile Butadiene Styrene, ABSPlus, Stratasys, USA) and flexible part, made of TPU (thermoplastic polyurethane, Lulzbot, USA). We selected TPU in particular because the high elongation of this material allows for repeated movement and impact without wear or cracking proving. Seven modules were employed in order to achieve a length of the finger similar to the average size of human hand. The robotic extra finger is tendon-driven and is actuated by only one motor, providing the flexion movement.


To exploit the extra finger in haptic applications, we increased its workspace by providing it the adduction/abduction motion, by connecting the proximal module to a platform orientable by means of a gear system. To reduce the encumbrance on the wrist, the motor was substituted by a linear actuator. Furthermore the distal module was sensorised with a microforce sensor, necessary to control haptic interaction with human hand. CAD model of the proposed device is shown in Figure 1. Furthermore, the stiffness of the flexible elements connecting finger phalanges has been calculated using the procedure proposed in [8] so that when the actuator pull the tendon, the extra-finger flexes by keeping the distal phalanx approximately perpendicular to hand palm.

## 3 Future works

The device is currently in the prototyping phase. A first set of experimental tests will be aimed at verifying its functional characteristics, in particular, we will identify the part of the hand that can be stimulated with the device and the corresponding force that can be applied. Then in a second experimental phase we will compare it with the device presented in [7]. Then, users studies will be carried out to assess device usability in VR and AR contexts.

## References

1. D. Prattichizzo, M. Pozzi, T. L. Baldi, M. Malvezzi, I. Hussain, S. Rossi, and G. Salvietti, "Human augmentation by wearable supernumerary robotic limbs: review and perspectives," *Progress in Biomedical Engineering*, vol. 3, no. 4, p. 042005, 2021.

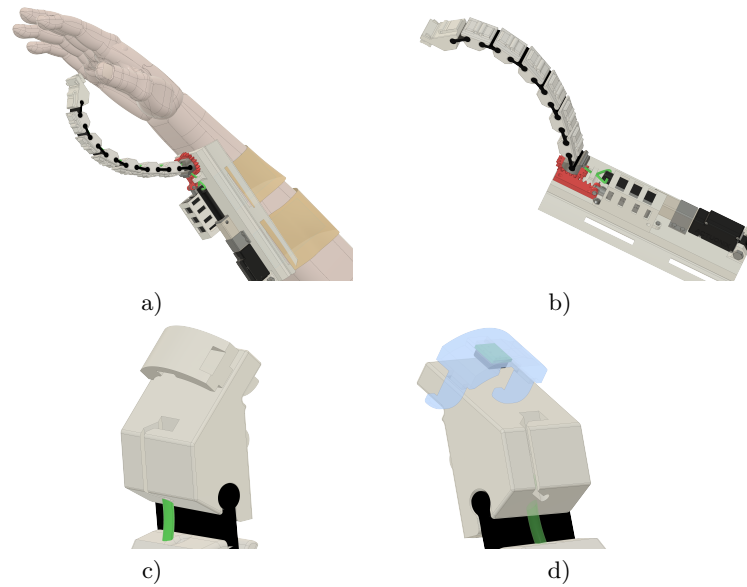

**Fig. 1.** (a) CAD model of the wearable extra finger exploited for haptic applications, worn by the user. (b) CAD model of the wearable extra finger, showing the actuation. (c) Fingertip module. (d) Sensing elements in the fingertip module.

2. D. Prattichizzo, G. Salvietti, F. Chinello, and M. Malvezzi, "An object-based mapping algorithm to control wearable robotic extra-fingers," in *2014 IEEE/ASME International Conference on Advanced Intelligent Mechatronics*, pp. 1563–1568, IEEE, 2014.
3. M. Malvezzi, Z. Iqbal, M. C. Valigi, M. Pozzi, D. Prattichizzo, and G. Salvietti, "Design of multiple wearable robotic extra fingers for human hand augmentation," *Robotics*, vol. 8, no. 4, p. 102, 2019.
4. D. Prattichizzo, F. Chinello, C. Pacchierotti, and M. Malvezzi, "Towards wearability in fingertip haptics: a 3-dof wearable device for cutaneous force feedback," *IEEE Transactions on Haptics*, vol. 6, no. 4, pp. 506–516, 2013.
5. D. Trinitatova and D. Tsetserukou, "Touchvr: A wearable haptic interface for vr aimed at delivering multi-modal stimuli at the user's palm," in *SIGGRAPH Asia 2019 XR*, pp. 42–43, 2019.
6. K. Minamizawa, S. Kamuro, N. Kawakami, and S. Tachi, "A palm-worn haptic display for bimanual operations in virtual environments," in *International Conference on Human Haptic Sensing and Touch Enabled Computer Applications*, pp. 458–463, Springer, 2008.
7. M. Dragusanu, A. Villani, D. Prattichizzo, and M. Malvezzi, "Design of a wearable haptic device for hand palm cutaneous feedback," *Frontiers in Robotics and AI*, vol. 8, 2021.
8. G. Salvietti, I. Hussain, M. Malvezzi, and D. Prattichizzo, "Design of the passive joints of underactuated modular soft hands for fingertip trajectory tracking," *IEEE Robotics and Automation Letters*, vol. 2, no. 4, pp. 2008–2015, 2017.