

AperTO - Archivio Istituzionale Open Access dell'Università di Torino

## Tunable gas permeability of 3D printed azobased membranes

### This is the author's manuscript

*Original Citation:*

*Availability:*

This version is available <http://hdl.handle.net/2318/1806065> since 2021-09-28T12:04:18Z

*Terms of use:*

Open Access

Anyone can freely access the full text of works made available as "Open Access". Works made available under a Creative Commons license can be used according to the terms and conditions of said license. Use of all other works requires consent of the right holder (author or publisher) if not exempted from copyright protection by the applicable law.

(Article begins on next page)

# Tunable gas permeability of 3D printed azobased membranes

Matteo Gastaldi<sup>a,b</sup>, Andrea Fin<sup>c</sup>, Ignazio Roppolo<sup>d</sup>, Matteo Bonomo<sup>a,b</sup>, Matteo Signorile<sup>a,b</sup>, Silvia Bordiga<sup>a,b</sup>, Marco Zanetti<sup>a,b</sup>, Guido Viscardi<sup>a,b</sup>, Claudia Barolo<sup>a,b</sup>



UNIVERSITÀ  
DEGLI STUDI  
DI TORINO

<sup>a</sup> Dipartimento di Chimica e Centro Interdipartimentale NIS, Università di Torino, Via Pietro Giuria 7, 10125-Torino, Italy


<sup>b</sup> INSTM Reference Centre, Università degli Studi di Torino, Via G. Quarello 15A, 10135 – Turin, Italy

<sup>c</sup> Dipartimento di Scienza e Tecnologia del Farmaco, Università di Torino, Via Pietro Giuria 9, 10125-Torino, Italy

<sup>d</sup> Dipartimento di Scienza Applicata e Tecnologia, Politecnico di Torino, C.so Duca degli Abruzzi 24, 10129-Torino, Italy



POLITECNICO  
DI TORINO

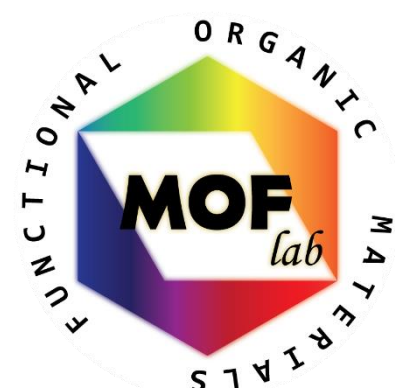


matteo.gastaldi@unito.it




## Introduction

**Three-Dimensional printing (3DP)** is an innovative technique, nowadays used both in industrial and academic fields. The high versatility and user-friendliness, the progressive printers' price knock off and the considerable saving of raw materials are just few advantages of these technologies. Among others, the **Digital Light Project (DLP)** printer is under investigation to widen the palette of printable formulations, producing innovative functional 3D printed devices. The exploitation of new functional materials, for example **temperature-, light- and pH-responsive polymers**, is one of the most interesting survey field [1]. **Azodyes** are typically used in the formulation to confer innovative features due to the ability to undergo **cis/trans isomerization under light (UV or laser) irradiation** [2]. In this work we designed, synthesized, and characterized azo benzene methacrylated monomers (Figure 1) with different groups in ortho position respect to the azo bridge, exploiting the methacrylic functional group to covalently connect the dye with the polymeric chains. It is well known in literature that the ortho position in the azodyes can interact with the polymeric matrix [3].


## Synthesis and photopolymerization

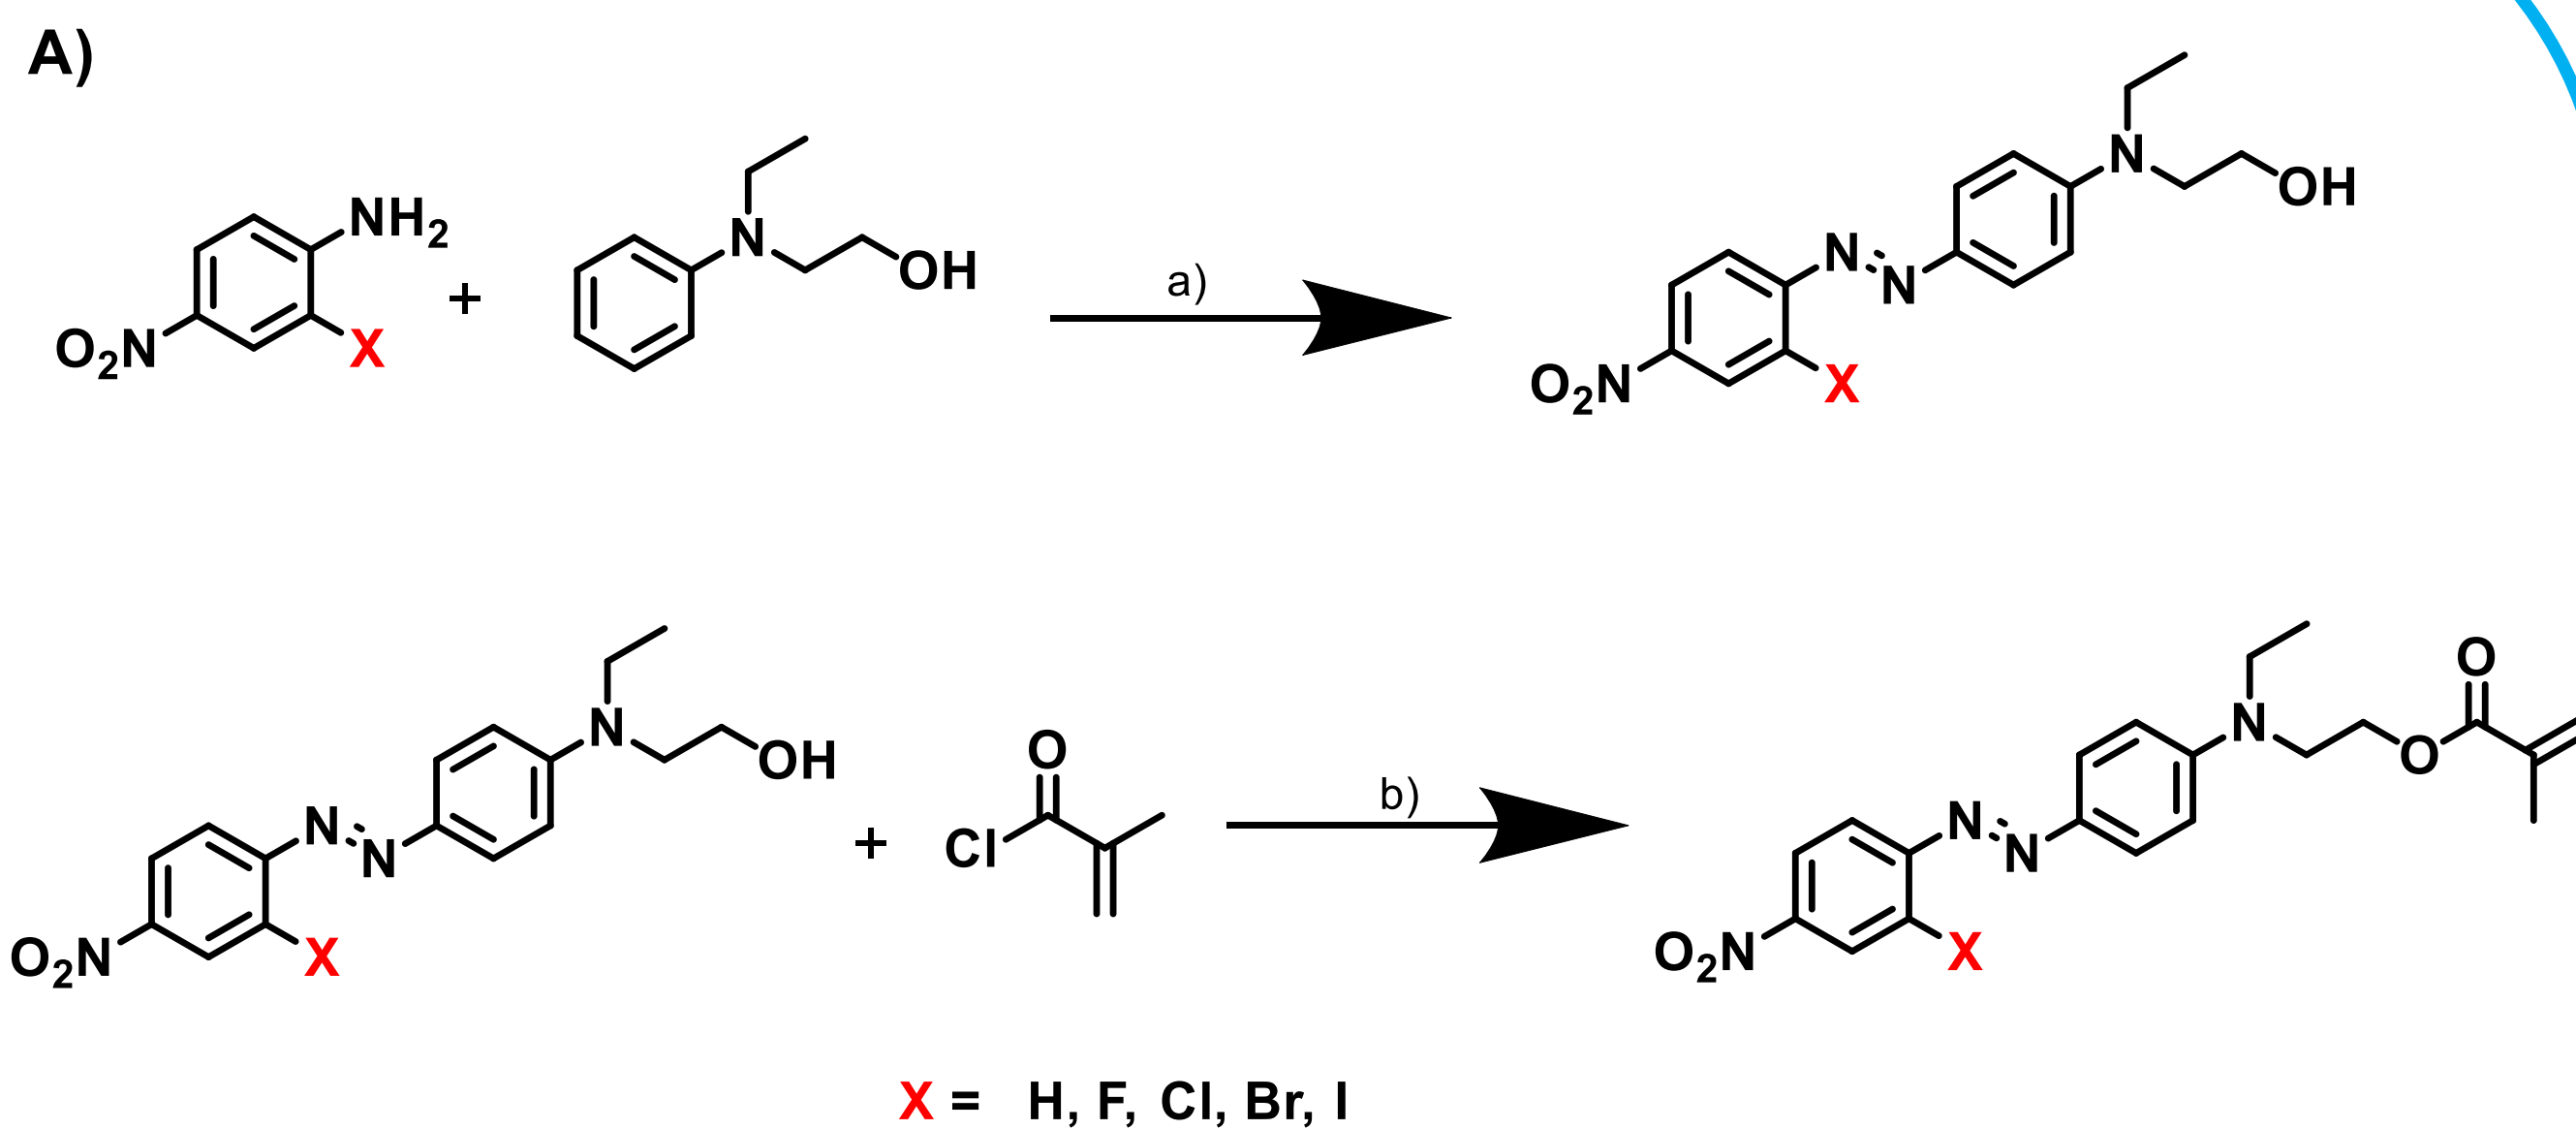

A) Schematic representation of the monomer preparation: a) NaNO<sub>2</sub>, AcOH, HCl, H<sub>2</sub>O, 0 to 5°C to rt, 4 hours. b) TEA, THF, rt, 18 hours.

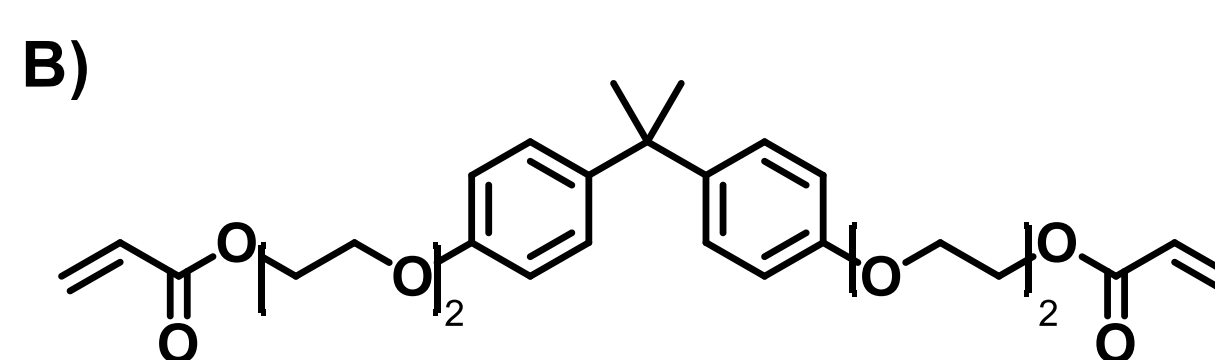

Bisphenol A ethoxylate diacrylate


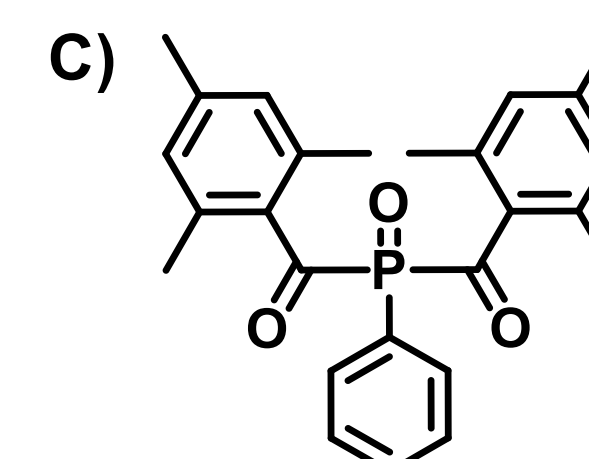


Phenylbis(2,4,6-trimethylbenzoyl)phosphine oxide

B) Monomer used in the formulation for the Digital Light Processing (DLP).



C) Photoinitiator used to start the radical polymerization.

## Permeability

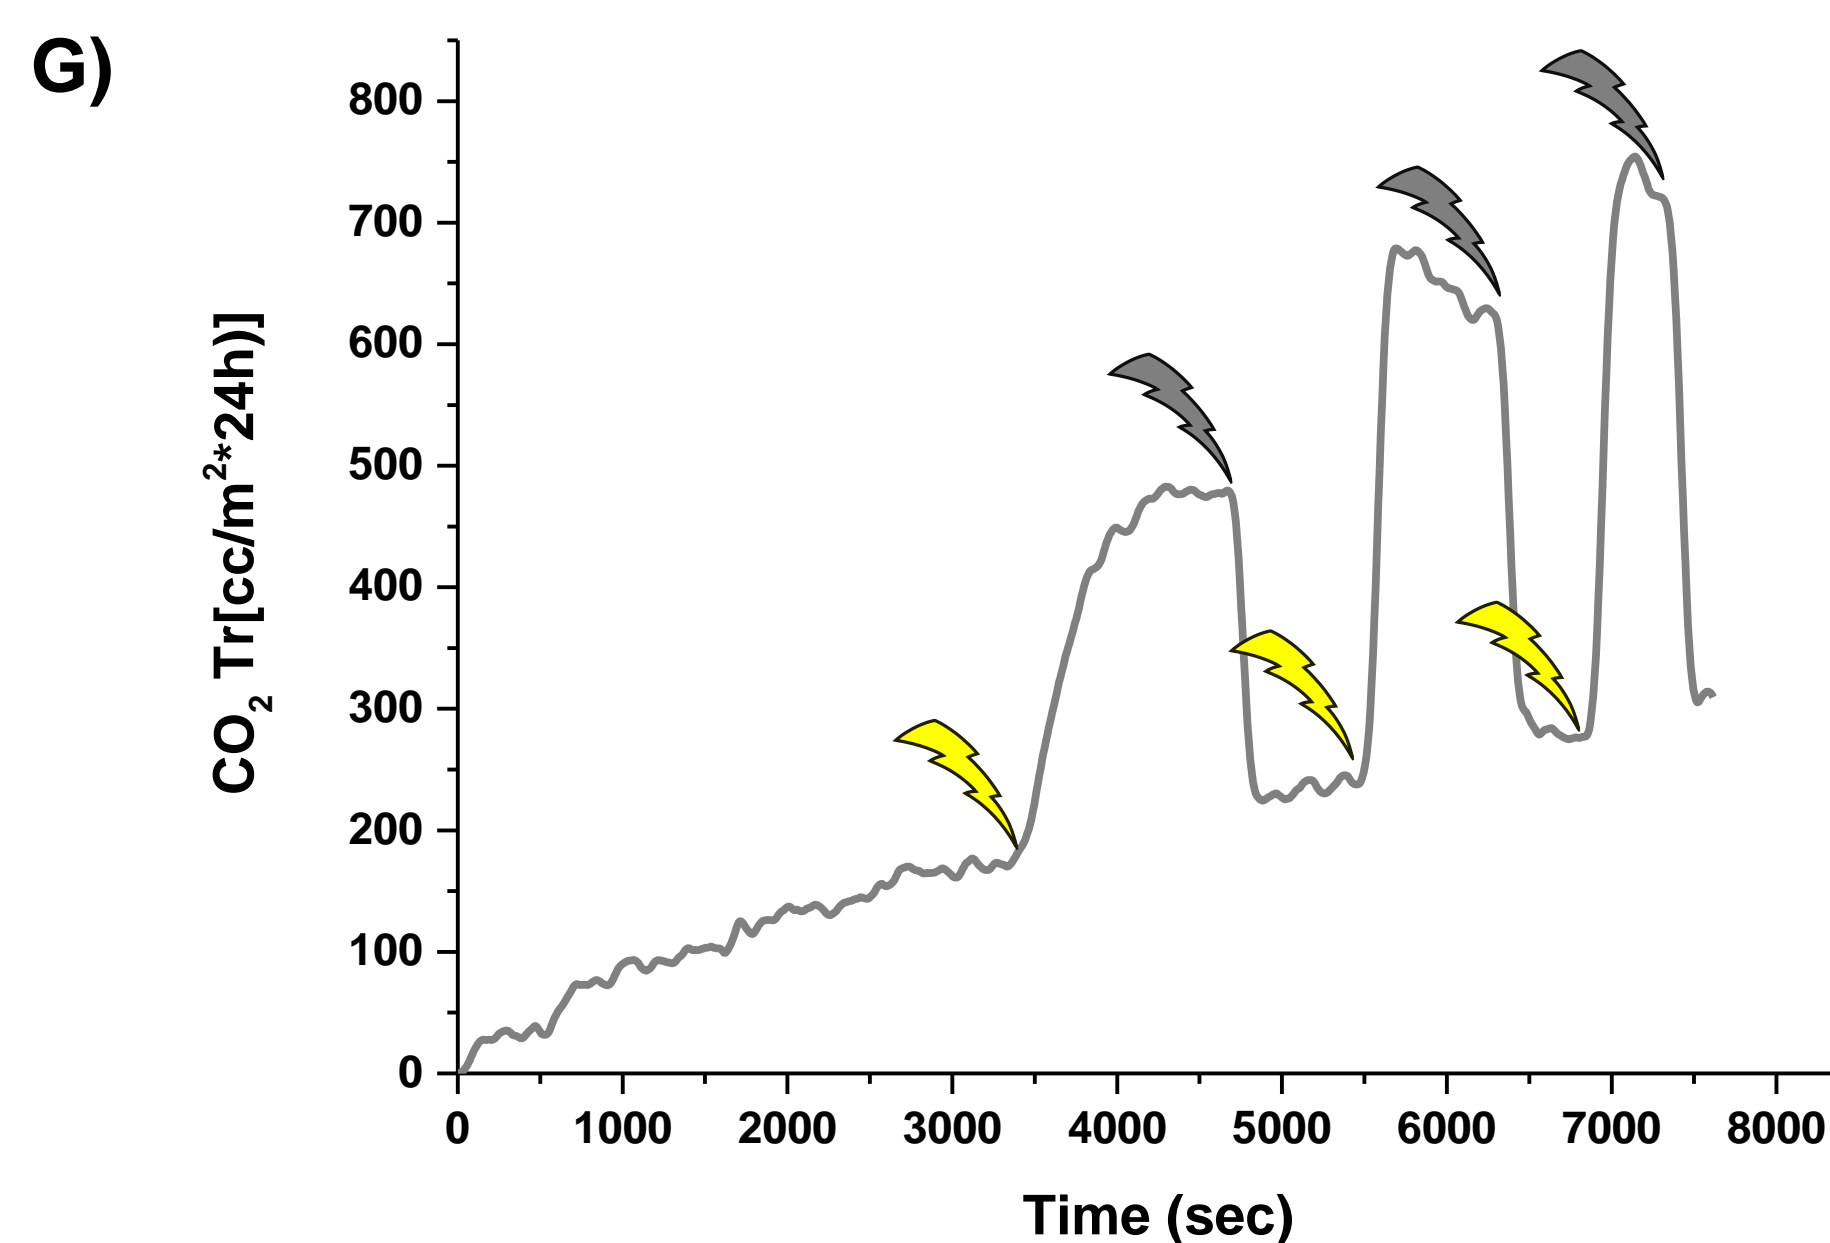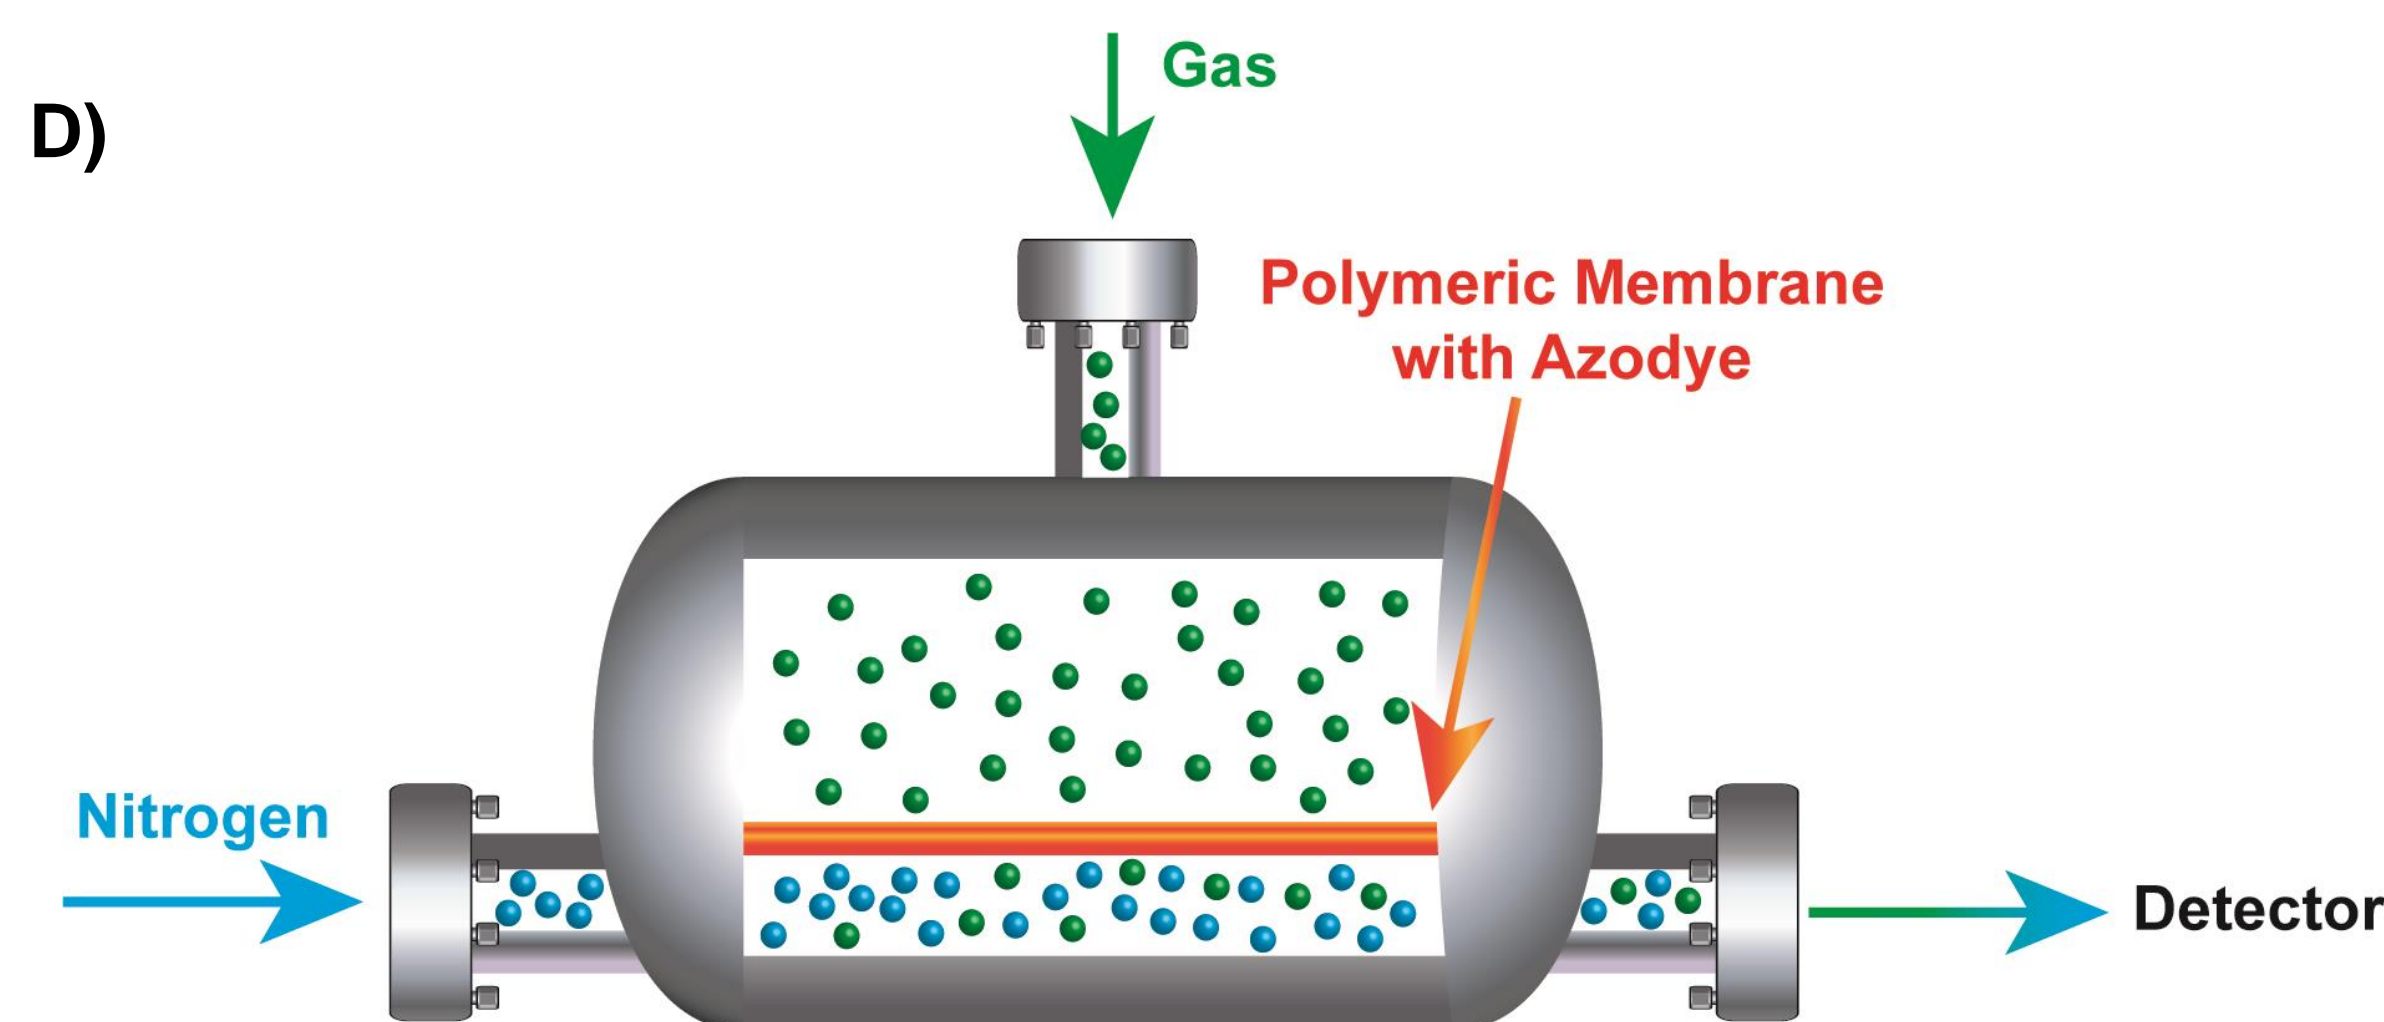

D) Schematic representation of permeometer with polymeric azo-based membrane. Nitrogen is used as gas carrier while the analyte gas is introduced in the first chamber, it pass through the membrane and is led to the detector.

E) O<sub>2</sub> and F) CO<sub>2</sub> permeability trend for each sample according to the steric hindrance of the *ortho* group. G) The transmission rate over time for CO<sub>2</sub> under laser irradiation. When the laser is switched on, a rapid increase in Tr is registered, in a totally reversible and repeatable way.

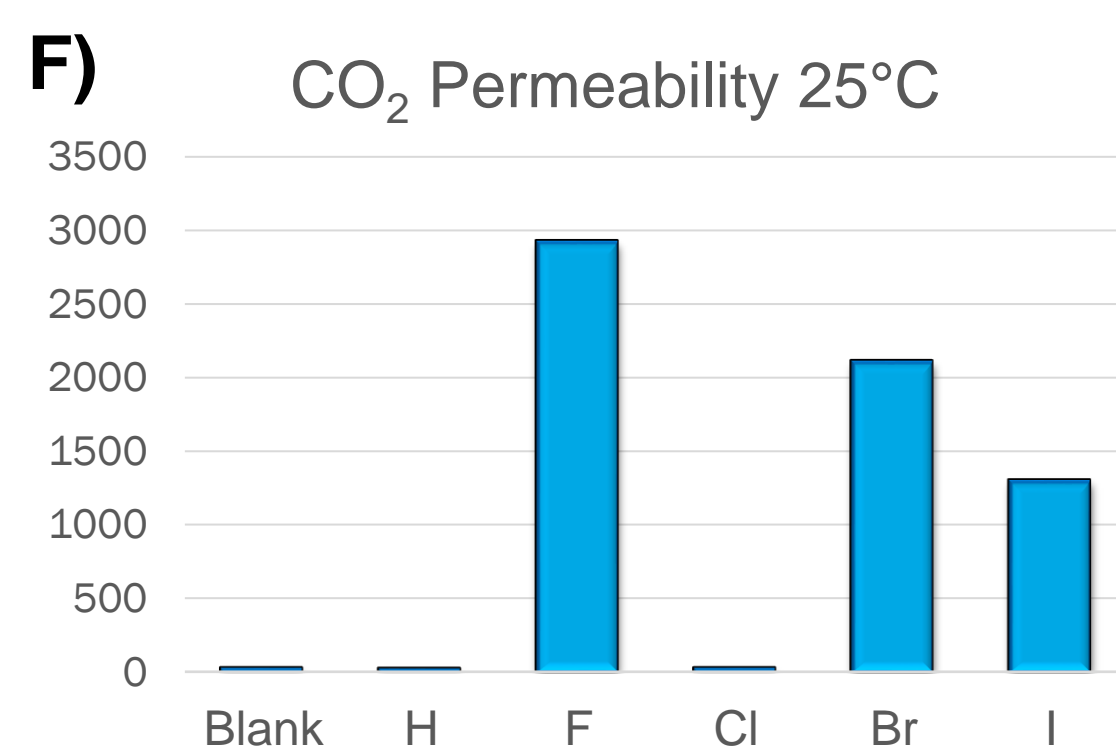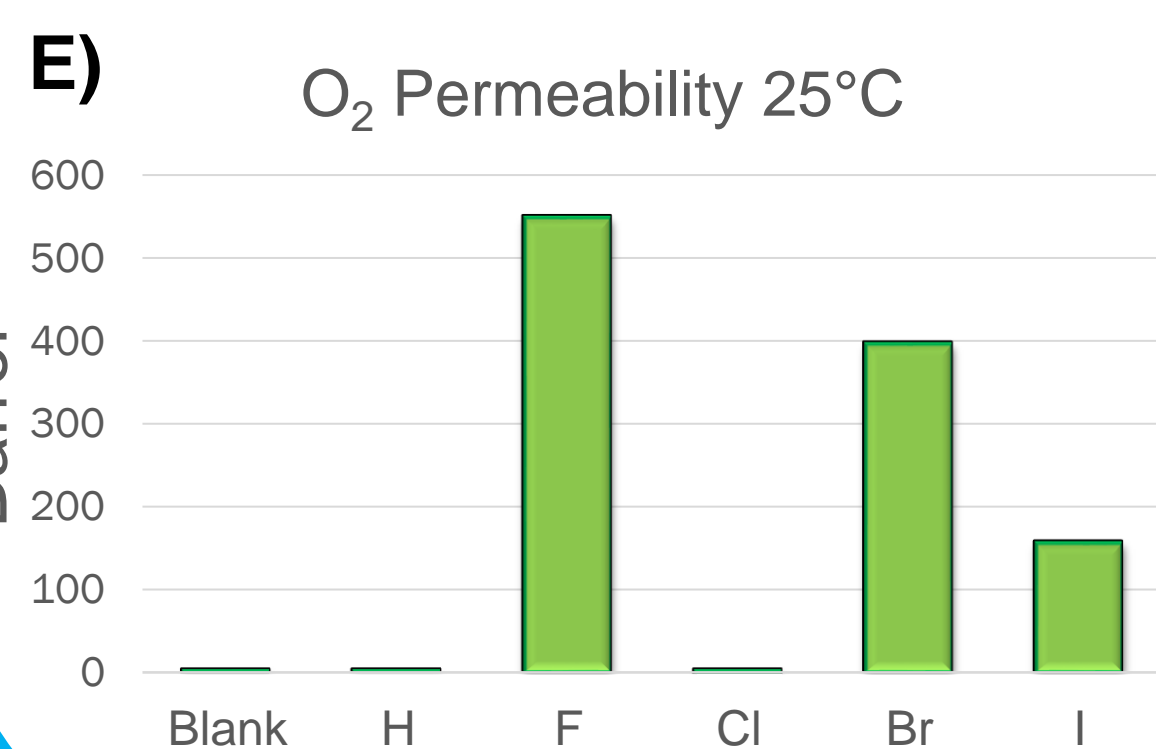

## Conclusion

The different transmission (Tr) rates registered for the introduced polymer are, most likely, related to the presence of the azo groups. They can increase the transmission rate of an almost totally gas impermeable polymeric membrane.

According to the steric hindrance of the ortho functional groups, different Tr values were obtained. The only functionalized samples that seem to not follow this trend are the ones with H and Cl as *ortho* groups. These samples are actually under investigation.

Under green laser irradiation (532 nm) a rapid and reversible increase in permeability of CO<sub>2</sub> was observed. The same behavior can't be registered for other gases.

A possible application of these membranes is under investigation, to realize 3DP devices with different tunable gas selectivity.

[1] Z.X. Khoo, J.E.M. Teoh, Y. Liu, C.K. Chua, S. Yang, J. An, K.F. Leong and W.Y. Yeong Virtual and Physical Prototyping, 2015, 10, 103

[2] Gillono, M.; Roppolo, I.; Frascella, F.; Scaltrito, L.; Pirri, C. F.; Chiappone, A., Applied Materials Today, 2020, 18, 100470

[3] Accardo, J. V.; Kalow, J. A. Chem. Sci. 2018, 9, 5987–5993



POR FESR/FSE 2014/2020

The research leading to these results has received funding from the European Union and the Regione Piemonte, Piattaforma Tecnologica "Fabbrica Intelligente" - SMART 3D Project.