

## **DEVELOPMENT AND ASSESSMENT TO ENVIRONMENTALLY FRIENDLY NATURAL FIBER COMPOSITES**

J. P. Nunes<sup>1(\*)</sup>, B. F. Castro<sup>2</sup>, A. C. Duro<sup>3</sup>, J. F. Silva<sup>2</sup>, L. Oliveira<sup>4</sup>

<sup>1</sup> Institute of Polymers and Composites/I3N, Minho University, 4800-058 Guimaraes, Portugal

<sup>2</sup> Department of Mechanical Engineering ISEP, 4200-072 Porto, Portugal

<sup>3</sup> Department of Polymer Engineering, Minho University, 4800-058 Guimaraes, Portugal

<sup>4</sup> PIEP - Pole for Innovation in Polymer Engineering, Minho University, 4800-058 Guimaraes, Portugal

(\*)Email: [jpn@dep.uminho.pt](mailto:jpn@dep.uminho.pt)

### **ABSTRACT**

Two different types of natural fibers (jute and sisal) were studied and characterized, using optical microscopy, pycnometry density, single filament and linear density tests. Jute fibers were processed into composite parts from woven fabrics raw-material and sisal fibers were also processed into final composite components but in the form of chopped mat. Those fibers were used to reinforce polyester and epoxy matrices and therefore produce composite plates by resin infusion molding. Finally, the final obtained composite plates were submitted to mechanical testing, in order to assess their relevant mechanical properties.

### **INTRODUCTION**

During the past few decades, polymer matrix composites replaced, advantageously, many conventional materials, in various applications. This was possible because these materials have low density, excellent mechanical behavior and can be easily processed. The large majority of composite structures still use thermosetting matrices, like polyester or epoxy systems, even if, more recently, thermoplastic matrices are starting to be studied. (Mazumbar, 2012, Nunes, 2003).

Recently, because of their interesting properties, natural fibers are being studied as reinforcement material in composite components. Usually they are low-costly, combine very low density with high specific properties, are biodegradable and nonabrasive, unlike other reinforcing fibers and also readily available (Saheb, 1999).

### **RAW MATERIALS AND COMPOSITE PROCESSING**


Jute and sisal fibers, chosen to be studied in this work, are between the most successfully used natural fibers as reinforcements in composite structures. The different natural fibers were impregnated and consolidated with two different thermoplastic resins: one orthophthalic polyester resin and one epoxy.

Fibers were impregnated, at room temperature, by hand lay-up, with polyester and epoxy resins. Then, vacuum molding was employed to allow establishing a controlled consolidation pressure.

### **RESULTS**

Microscopy obtained images are depicted in figure 2.

Fiber characterization results are summarized in tables 1 and 2.

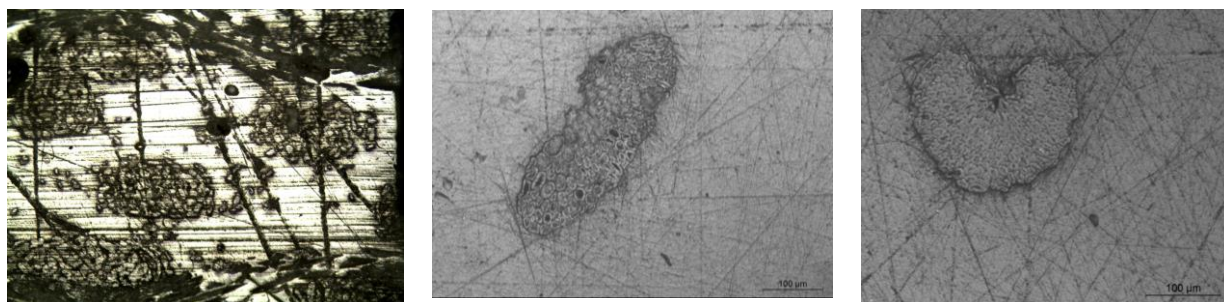

a) Jute fiber (50×)                      b) Sisal fiber (100×)                      c) Sisal fiber (100×)  
 Fig. 2. Typical jute and sisal fiber geometries. Sisal fibers have two typical shapes, shown in pictures b) and c)

Table 1 Sisal single filament test results

Gage length	Deformation at break	Tensile strength	Tensile modulus
(mm)	(%)	(MPa)	(GPa)
20,00	3,22±0,28	760±114	28,1±0,97
25,00	2,81±0,70	763±9,2	19,4±0,66
30,00	2,64±0,42	461±185	14,7±0,13

Table 2 Jute plain woven fabric specifications

Mass (g/m <sup>2</sup> )	204.0±7.0
Warp	
Linear density of the yarn (Tex)	140.5±9.5
Density (yarns/cm)	7.0±0.1
Crimp (%)	5.04±0.89
Weft	
Linear density of the yarn (Tex)	142.6±19.1
Density (yarns/cm)	6.6±0.5
Crimp (%)	2.44±1.24

Mechanical test results, for polyester matrix composites are summarized in table 3.

Table 3 Mechanical test results of jute and sisal polyester matrix composites

	Fiber type	Strength (MPa)	Elasticity modulus (GPa)	Deformation at break (%)
Tensile	Jute	57,0±7,2	7,0±0,5	1,9±0,2
	Sisal	24,8±3,9	5,4±0,3	1,5±0,3
Flexural	Jute	91,5±3,8	5,9±0,2	2,8±0,1
	Sisal	54,8±1,9	3,9±0,2	2,4±0,1

## Acknowledgements

The authors wish to thank the Engineering School of the University of Minho, PIEP – Pole for Innovation in Polymer Engineering and the School of Engineering of the Polytechnic of Porto, for the support given to this work. They also acknowledge the Portuguese Foundation for Science and Technology for the financial support of IPC through project PEST-C/CTM/LA0025/2013 (Strategic Project - LA 25 - 2013-2014).

## REFERENCES

1. Nunes, J. P., Silva, J. F., van Hattum, F.W. J., Bernardo, C. A., Marques, A. T., Brito, A. M. and Pouzada, A. S., "Production of thermoplastic towpregs and towpreg-based composites" in Polymer Composites – From Nano- to Macro-Scale, Eds K. Friedrich, S. Fakirov and Z. Zhang, Eds Kluwer Academic Publishers, 2005.
2. Sanjay Mazumdar "Growth opportunities: materials innovation will drive composites usage to new heights". High Performance Composites, May 2012.
3. D. Nabi Saheb and J. P. Jog "Natural fiber polymer composites: A review" Advances in Polymer Technology, Vol. 18, No. 4, pp. 351–363 1999.