

# IPTV Deployment: Trigger for Advanced Network Services!

The increasing popularity of multimedia broadband applications, beyond basic triple-play, introduces new challenges in content distribution networks. These next-generation services are not only very bandwidth-intensive and sensitive to the high delays and poor loss properties of today's Internet, they also have to support interactivity from the end user. The current trend is therefore to introduce IP-aware network elements in the aggregation networks to meet the increasing QoS requirements, offering a smooth transition from legacy ATM-based platforms towards more scalable, efficient and intelligent access networks. One of the promising services triggering this evolution is IPTV. This paper presents a large-scale IPTV service deployment in an IP-aware multi-service access network, supporting Broadcast TV, Time-Shifted TV and Pay-per-View services. Transparent proxy caches collaborate providing distributed network storage and user interactivity, while offering an adequate end-to-end Quality of Experience. As a use case, a Time-Shifted TV solution is introduced in more detail. We discuss a distributed caching model that makes use of a sliding window concept and calculates the optimal trade-off between bandwidth usage efficiency and storage cost. A prototype implementation of a diskless proxy cache is evaluated through performance measurements. *Keywords: service awareness, access network, IPTV*

## Authors

T. Wauters, W. Van de Meerssche,  
 K. Vlaeminck, S. Van den Berghe,  
 F. De Turck, B. Dhoedt, P. Demeester  
 Ghent University (INTEC) – IBBT – IMEC  
 Gaston Crommenlaan 8, bus 20, B-9050 Gent  
 E. Six, T. Van Caenegem  
 Alcatel Research & Innovation  
 F. Wellesplein 1, B-2018 Antwerpen

access and voice-over-ip (VoIP) services, IPTV services are becoming the highest-priority residential telecom services, creating very promising market opportunities. These bandwidth-intensive IPTV services have a significant impact on the underlying transport network and require more intelligent access network elements to meet the higher QoS requirements. IPTV is therefore considered as an important driver for other advanced network services.

reduction of VLANs could alleviate these shortcomings, it can be questioned whether this approach is sufficiently scalable for larger access network deployments. Therefore an IP-aware network model [3] is often considered a valuable alternative.

## Introduction

Although telecom operators continue to build out their broadband access networks to improve high-speed Internet

As a consequence, the architectural model of access networks has evolved towards multi-service and multi-provider networks during the last few years. Ethernet as well as full IP alternatives have been investigated as viable connectionless successors for the legacy ATM-based platforms. While the introduction of Ethernet up to the edge solves some of the existing access networks, new ones are created. Per subscriber traffic segregation and the lack of QoS support are the main issues of standard Ethernet. While the intro-

Depending on the popularity of the content, different IPTV services can be distinguished (Figure 1). While traditional live TV is broadcasted from a central server deeper in the network, video-on-demand (VoD) servers are typically located at the edge of the core network. In order to support interactivity from the end-user for live TV or to serve requests for other very popular content, servers in the access network can become beneficial. This approach however has important implications for future access network architectures, as discussed further on in this paper.


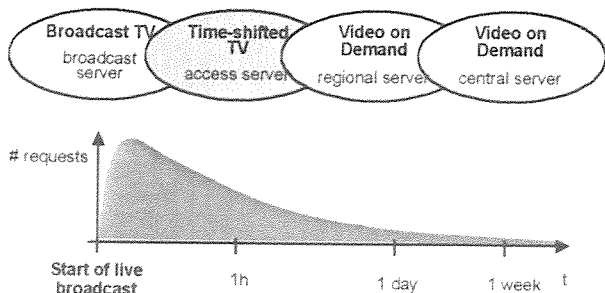


Figure 1 Delivery mechanisms for IPTV

## Next-generation broadband services

Next to IPTV services, a wide variety of other value added (interactive) services, such as managed home networking,

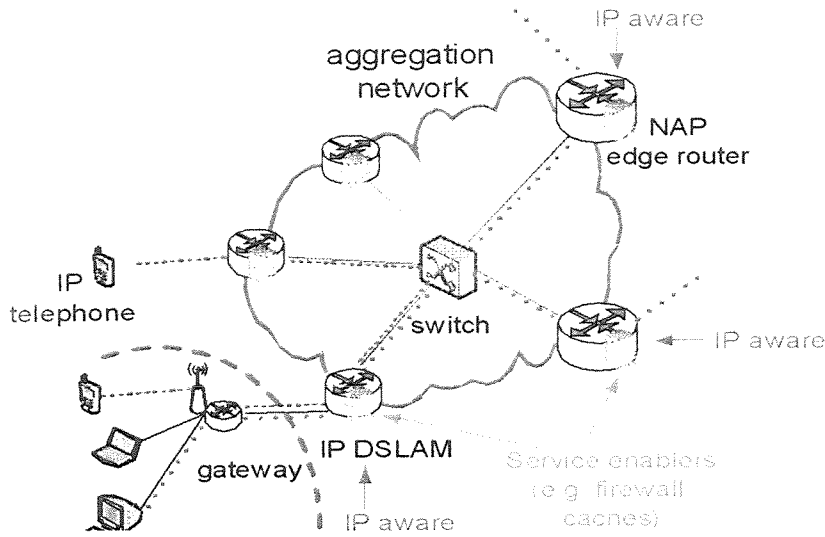

**Figure 2** Evolution towards a converged, IP aware, full service access network.

home automation and security management, multimedia multi-party conferencing and online gaming, can be offered by service providers, each setting its own requirements for the underlying network. Different services have highly fluctuating bandwidth requirements. Delay and jitter requirements also differ from service to service.

For interactive services a low delay over the network is a critical success factor. When several parties exchange information in an interactive way, the quality of the user experience (QoE) decreases with increasing delay. For instance, a telephone conversation will become very difficult if the network delay exceeds a few 100 milliseconds. Multimedia services are very sensitive to jitter – variation in the delay will drastically degrade audio and video quality – but in case they are non-interactive (e.g. Video on Demand), some delay can be tolerated.

Some services, such as firewalls and intrusion detection systems for managed home networking, interact directly with the network layer and could be deployed on a large scale inside the access network. Other services mainly focus on the application layer, but even these services could benefit greatly from enabling technologies in the access network: e.g. a caching system in the access multiplexer supporting multimedia content delivery.

However, several shortcomings of operational DSL access networks prevent further generalization of the Internet and the introduction of such new services.

### A. Network transformation


The connection-oriented approach of current DSL (Digital Subscriber Line) access networks (cf. Figure 3 on current access network deployment) has been identified as a limiting factor, both in terms of access network scalability – all PPP (Point to Point Protocol) links are terminated in a single device, the broadband access server (BAS), PPP obstructs multicast support in the access network – and subscriber terminal autoconfiguration – PPP links cannot be autoconfigured as the link specification is location dependent. Also, since PPP access networks are tailored to the connection of a single device per subscriber, Network Address

Translation (NAT) is required on subscriber lines where multiple IP devices are connected, breaking end-to-end IP connectivity. Furthermore, introducing new services, all imposing their own QoS (Quality of Service) requirements, is impossible over a single best-effort access link as it exists today.

To overcome all these issues, a converged IP access network architecture, as depicted Figure 2, was introduced in [1], showing how an IP(v6) data-plane can be used as the cornerstone of a future service-oriented access network:

IP awareness close to the end user is required for the deployment of new advanced services in the access network.

A converged access network reduces the capital and operational expenses (CAPEX and OPEX) of maintaining per service separated networks. Furthermore, interaction between dif-

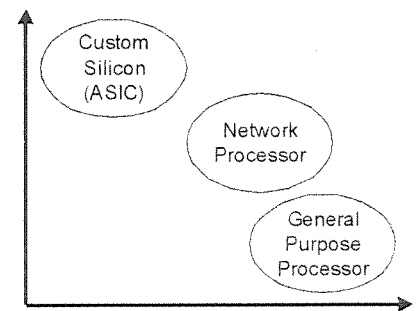


**Figure 4** Taxonomy

ferent services is more flexible.

Due to its connectionless nature, an IP access network allows for multiple edges, greatly improving scalability and robustness in case of edge node failure.

In light of the growing peer-to-peer traffic volume, the ability to process

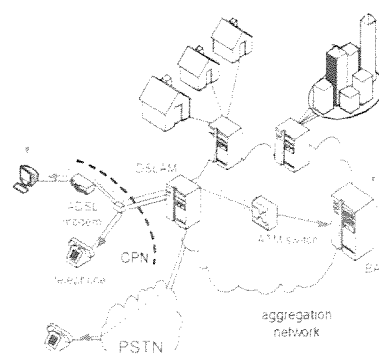

**Figure 3** Current Access Networks

For telephony, a switched path is set up over the PSTN network (Public Switched Telephone Network) between the end-devices of the caller and the called party. For DSL (Digital Subscriber Line), broadband Internet access, end-users set up PPP (Point-to-Point Protocol) connections inside ATM VCs (Asynchronous Transfer Mode Virtual Circuits) from their customer premises network (CPN) to a central aggregation node, the Broadband Access Server (BAS). Only the tunnel endpoints are IP aware. When an end-user wants to connect multiple IP devices to the Internet, a NAT (Network Address Translation) router is used to terminate the PPP connection. Although geographically similar, PSTN and DSL networks are physically separate, except for the first mile. Broadcast TV is distributed over yet another access network (e.g. cable, satellite).

**Table 1 : Network transformation process for triple play**

Current ATM-based broadband aggregation	Next-generation Ethernet/IP-based broadband aggregation
ATM DSLAMs	IP DSLAMs
<ul style="list-style-type: none"> <li>• Unintelligent Layer 1 aggregation</li> <li>• Low-speed ATM uplinks</li> <li>• Mostly Central Office - based</li> </ul>	<ul style="list-style-type: none"> <li>• Intelligent aggregation with multicast support</li> <li>• Gigabit Ethernet Uplinks</li> <li>• Increasingly RT-based</li> </ul>
Complex, fixed connections	Simple, flexible connections
<ul style="list-style-type: none"> <li>• PPP-based</li> <li>• Bound to DSL CPE in the home</li> <li>• Provisioning cost high</li> </ul>	<ul style="list-style-type: none"> <li>• DHCP-based</li> <li>• Independent of device</li> <li>• User-based</li> <li>• Provisioning cost low</li> </ul>
Centralized B-RAS	Distributed routers
<ul style="list-style-type: none"> <li>• Optimized for best-effort internet</li> <li>• Lack of scalable routing and QoS</li> <li>• Typical OC-12 handoff to IP core</li> </ul>	<ul style="list-style-type: none"> <li>• Optimized for QoS-sensitive services</li> <li>• Highly scalable</li> <li>• 10 GbE handoff to IP/MPLS core</li> </ul>
Lack of network resiliency	Highly available network
<ul style="list-style-type: none"> <li>• Outages tolerated</li> <li>• Minimal financial repercussions</li> </ul>	<ul style="list-style-type: none"> <li>• Little to no tolerance of service interruptions</li> <li>• Risk of churn if reliability metrics aren't met</li> </ul>

Source: Yankee Group "Inside the trends and Numbers of the Broadband Aggregation Market", June 2005

local traffic without edge involvement further increases the scalability of an IP access network.

An overview of the most important elements in the network transformation process is given in Table 2 [7].

### B. Network processing power

Because each service has its own requirements for the characteristics of the underlying network, advanced QoS support will be a critical success factor for such a converged access network, requiring additional processing power to be present in IP access nodes. Furthermore, the deployment of service enablers or even full services in the access network puts additional strain on the access nodes' processing units.

Traditionally, telecom equipment vendors have used fixed-function application specific integrated circuits (ASIC) to cope with the huge performance requirements of today's network systems. However, the ever-changing requirements of a service oriented access network ask for flexible solutions with assured time to market, while custom silicon provides little or no flexibility to introduce new protocols or services on existing hardware.

As opposed to ASICs, general-purpose processors certainly meet the flexibility requirements for implementing modern network services. However, they often lack performance or consume too much power (generate too much heat) for integration in large telecom systems.

important technology for increasing application awareness of IP access nodes.

## IPTV service deployment

### A. Time-shifted TV


Due to the growing popularity of IPTV, a central server architecture has become insufficient to support these services. Recent deployments therefore introduce distributed servers at the edge of the core network, storing the more popular programs. The time-shifted TV concept however, as explained in more detail in the next section, even goes one step further and introduces the storage of small sliding intervals of streaming content in the access network. This way smaller, diskless streamers can be deployed close to the end users, at the proxies. This is most beneficial, in terms of network bandwidth, for very popular content, such as live TV shows on popular channels. Support of interactive commands (pause, fast forward or rewind) on live TV then becomes possible at the proxies, at least within the time window of the stored interval.

### B. Distributed storage

End users have an increasing amount

of multimedia data (digital photo albums, digital home videos, a digital music and movie collection, etc). A major opportunity of multi service access networks, is allowing users to transparently store, access and share their digital media library from anywhere. While harddisks are failure prone and recordable optical media only have limited archival lifespan [4], having a high speed network storage service, enabling users to virtually take their data with them wherever they go and relieving them of the burden of meticulously backing up all data, would make life a lot easier.

Guaranteeing fast access requires distributed servers and a pervasive replication mechanism, as introduced in [5], caching data wherever and whenever it is accessed. Since multimedia content is typically read-mostly data, no strong consistency is required between replicas.

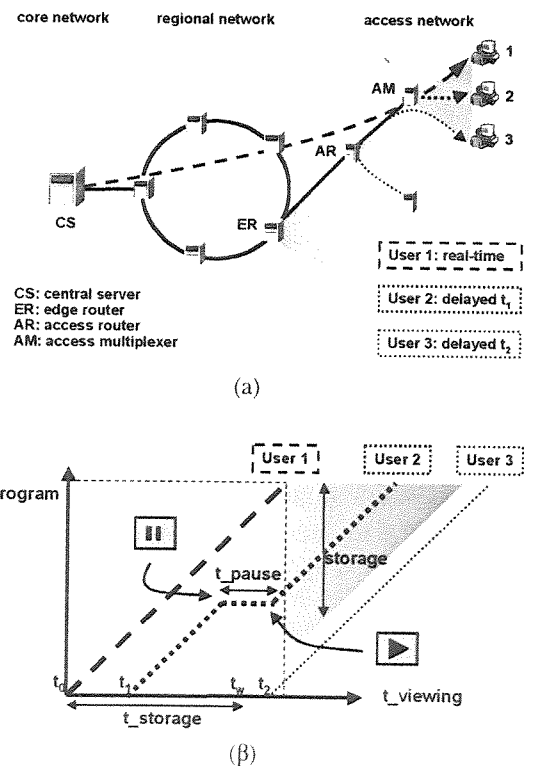

**Figure 5** Time-shifted television: (a) typical access network topology and (b) tsTV streaming diagram

Occasional updates can be propagated periodically, at the same time deciding whether a replica should be retained or deleted (e.g. based on last access time, access frequency, etc). A minimum set of replicas should be maintained at all times in order to ensure reliability. A further speed-up of data access and sharing could be achieved by deploying small caches

close to the end-user, operating in an analogous manner as the tsTV proxies.

## Use case: time-shifted television

### A. Concept

Time-shifted TV enables the end-user to watch a broadcasted TV program with a time shift, i.e. the end-user can start watching the TV program from the beginning although the broadcasting of that program has already started or is even already finished.

As shown in Figure 1, the popularity of a television program typically reaches its peak within several minutes after the initial broadcast of the program and exponentially decreases afterwards. This means that caching a segment with a sliding window of several minutes for each current program can serve a considerable part of all user requests for that program, from start to finish, hence the benefit of using distributed streamers with limited storage capacity. In Figure 5a and Figure 5b for example, user 1 is the first to

### B. Caching algorithm

Our caching algorithm for tsTV services is presented in this section. Since we assume that in general only segments of programs will be stored, cache sizes can be limited to a few gigabyte in stand-alone mode or even less in case of co-operative caching. This way smaller streaming servers can be deployed closer to the users, without increasing the installation cost excessively.

We virtually split the cache into two parts: a small part S and a main part L. Part S will be used to cache the first few (e.g. 5) minutes of every newly requested (or broadcasted) program, mainly to learn about its initial popularity. Its size is generally smaller than 1 GB (typically 1 hour of streaming content).

Part L will be used to actually store the appropriate segments (with growing or sliding windows). These segments and their window size are chosen based on local popularity (especially useful in case of stand-alone caching), distance from the end user (important in case of co-operative caching) or a combination of both metrics. Figure 6 shows the basic principle of the tsTV caching algorithm.

We assume that all caches know which segments are stored on the other caches, through a Cache State Exchange (CSE) protocol.

#### Deployment options

To demonstrate both deployment options, stand-alone or co-operative caching, simulations were performed on the typical access network topology shown in Figure 5a. The server offers 5 popular channels through the tsTV service, each with 6 programs of 45 minutes per evening. The popularity of each program reaches a peak during the first

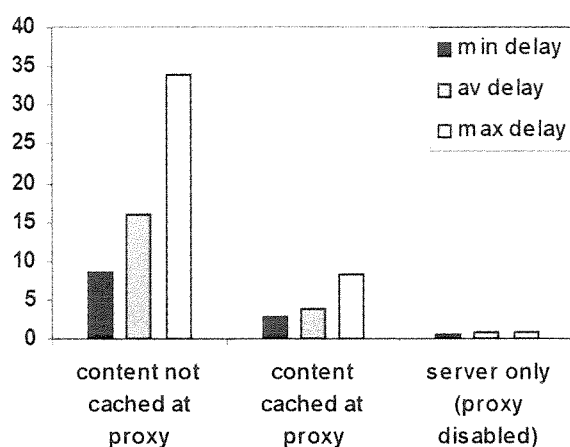


Figure 8 Delay between a client request and the actual start of the RTP stream on a client PC

interval (= 5 minutes) after the start and is halved after each interval (similar to Figure 1), so that all requests for each program are made before the program has ended.

Figure 7 shows the load on the different links between the edge server ER, the access routers AR and the access multiplexers AM from Figure 5a. In stand-alone mode, requests that cannot be served by the cache at an AM are forwarded to its AR cache and, if necessary, forwarded to the ER (hierarchical). In co-operative mode, caches are present at the AMs only (no hierarchical caching), forwarding requests amongst each other effectively, using RTSP (Real-Time Streaming Protocol) messages [6].

In co-operative mode, the server load decreases n times faster than in stand-alone mode without hierarchical caching, where n is the number of AM caches (6 in

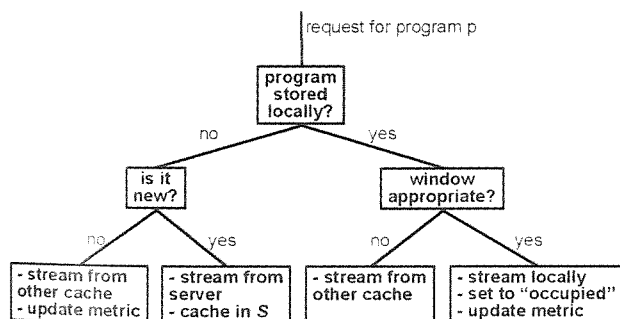


Figure 6 Basic principle of the tsTV caching algorithm at each proxy

request a certain television program and gets served from the central server. Afterwards, other requesting users (e.g. user 2) can be served by the proxy, as long as the window of the requested program is still growing. After several minutes, the window stops growing and begins sliding, so that user 3 cannot be served anymore and will be redirected to the (central or regional) server or, in case of co-operative caching, to a neighbor proxy with the appropriate segment, if present. Pausing (parallel to the horizontal axis, Figure 5b) can also be supported within the segment window, as well as fast forward or rewind (parallel to the vertical axis).

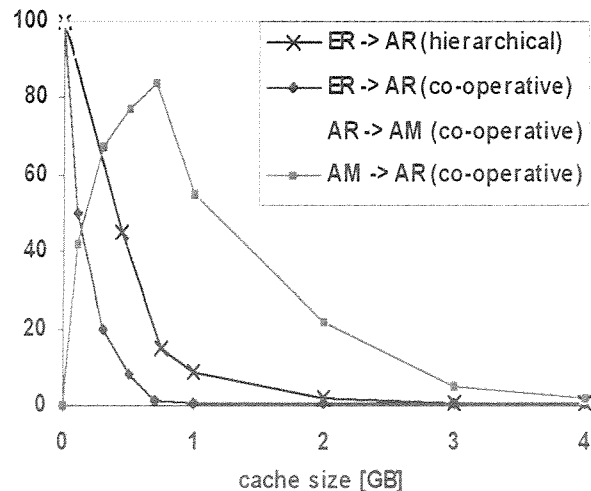


Figure 7 Relative load on the links between ER, AR and AM (upstream and downstream) for hierarchical and co-operative caching

Figure 7). At low cache sizes (<1GB), the access network traffic due to the cache operation is relatively high. When using larger caches, this load is reduced as well, since most requests can be served locally.

### C. RTSP proxy

A transparent RTSP proxy for time-shifted TV has been implemented for evaluation purposes. An overview of the performance measurements on an AMD Athlon™ 64 processor 3000+ (512MB RAM) is presented in [6]. Figure 8 shows the delay between a PLAY request sent by a PC client and the arrival of the first RTP packet at the PC client, for different con-

figurations (server-proxy-client).

Even when the proxy has to fetch the content from the server, the delay is never higher than 35 ms (1000 measurements per configuration). When the proxy acts as a mere router, the delay caused by the server is less than 1 ms. The delay on the network links between server, proxy and client is negligible.

## Conclusions

---


In this paper, the necessary transformations in access network architectures for next-generation broadband services

have been described. Improved scalability, flexibility and availability can be achieved through the introduction of IP-aware network elements.

Due to their significant bandwidth requirements and steadily rising popularity, IPTV services have been identified as the main trigger for this evolution, offering opportunities for service providers to introduce other value added (interactive) services. One of the most promising IPTV services is time-shifted TV, which can be deployed using diskless distributed caches, effectively offloading the server and transport network.

# Contents

	Comite de Patronage	2
	Comite d' Honneur	3
	Comite de Direction	4
	<b>Welcome Messages</b>	
	Georgios Argyropoulos, President FITCE	8
	Constantinos Sidiropoulos, President FITCE HELLAS	9
	Panagis Vourloumis, Chairman of the Board of Directors and CEO, OTE	10
Session 1.1 "The Battlefield"	<b>Deployed Modular Multi-Beam Active Arrays for Space Communications</b> Lockheed Martin Corporation/Commercial Space Systems (Sponsor)	11
	<b>Internet Safety and Trust</b> Carles Martin - Badell (IQUA/ Spain)	15
	<b>Return of the profits: if – when – how</b> Jos Gerrese (GANESHA consult / The Netherlands)	18
Session 2.1 "Profitable Services"	<b>Service Delivery Framework: A vehicle to reduce risk for carriers and suppliers</b> Klaus Zauner (Siemens AG/Germany)	21
	<b>DRM applied to Digital TV area: DVB-H, MHP and IPTV</b> Jose Ignacio Alonso Montes (Universidad Polit�cnica de Madrid/Spain)	25
	<b>An event-driven LBS for public transport: design and feasibility study of GSM-based positioning</b> Nico Deblauwe (Vrije Universiteit Brussel/Belgium)	29
	<b>IPTV Deployment: Trigger for Advanced Network Services!</b> Tim Wauters (Ghent University/Belgium)	36
	<b>New Flavors in IPTV service provisioning</b> Costas Boukouvalas (Sponsor - OTE/Greece)	41
Session 3.1 "How to Converge?"	<b>Fixed Mobile Convergence: Why, when, how and what then/ Mobile WiMAX</b> Angeliki Philippopoulou / Spyros Skiadopoulos (Sponsor - ZTE)	46 50
	<b>An analysis of technologies and strategies to facilitate convergence towards a unique data network platform</b> Luis Enrique Garcia - Fernander (Polytechnic University of Madrid)	52
	<b>What's So Important About Convergence?</b> A R Valdar (University College London)	58
Session 3.2 "Opportunities in Telecomms"	<b>Trends in Modern CDNs</b> John Vlontzos (Sponsor - Intracom Telecom)	62
	<b>Comparative Study and Techno-Economic Analysis of Broadband Access Technologies: GEPON and GESON</b> Ioannis Tomkos (Sponsor - AIT)	67
Session 4.1 "Business Roles and How to Model Them"	<b>Broadband Investments as Growth Options Under Competition Threat</b> Georgios N. Angelou (University of Macedonia / Greece)	73
	<b>Adding cost-drivers to the pricing process by using a bottom-up cost-allocation approach</b> Raf Meersman - Jan Van Ooteghem (Ghent University / Belgium)	79
	<b>Business Model Evolution from MVNO to Multiple PlayOperator based on WiMAX: the Spanish Scenario</b> Manuel Espias (ISDEFE / Spain)	84
	<b>Operational impact of IMS on Business Roles</b> A.R. Feunekes (Capgemini / The Netherlands)	88
Session 4.2 "Service Assurance and Security"	<b>Improving service provision of modern telecommunication networks by increasing the network immunity to unreliable power and thus increasing the income of the operator</b> Andreas Koulaxouzidis (Sponsor - Raycap)	93

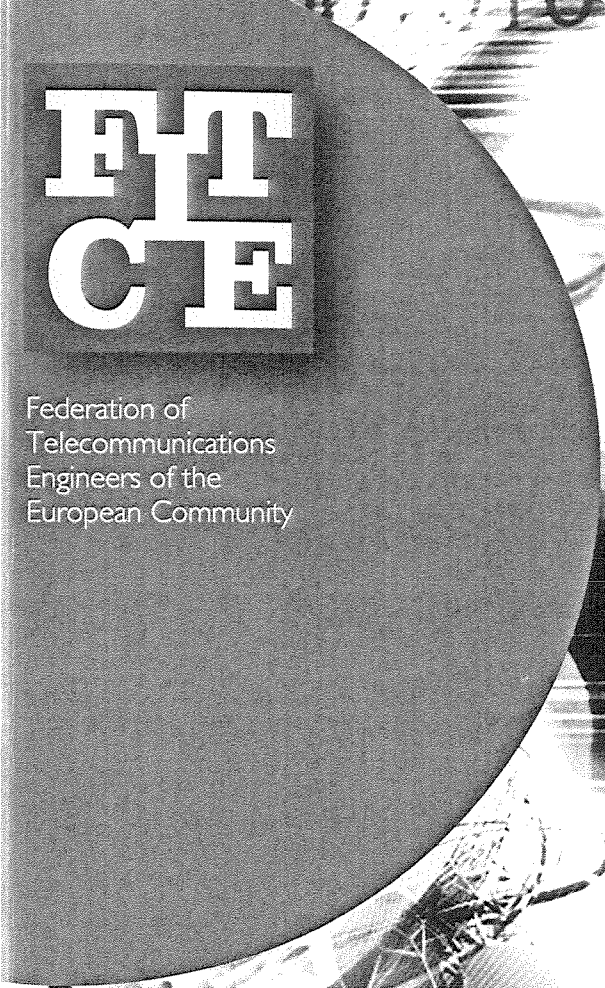

**FIT  
CE**

Federation of  
Telecommunications  
Engineers of the  
European Community

**FITCE FORUM  
FITCE JOURNAL**

August 2006

**Telecom Wars:  
The Return of the Profit**

**Proceedings  
45th Fitce Congress**

Athens, 30th August - 2nd September 2006



**45th  
Congress  
2006  
Athens**

30 AUG - 2 SEPT [www.fitce.org](http://www.fitce.org)



Sponsors:



Platinum



Gold



SIEMENS



Silver




ZTE中兴

CISCO SYSTEMS



Bronze



Communication Sponsors:



FITCE HELLAS

O.T.E. Building  
Office: FITCE

99, Kifissias Avenue,  
151 24 Marousi, Greece  
fitcehel@ote.gr

FITCE Forum

E-mail: forum@fitce.org  
© 2006: The Federation of  
Telecommunications  
Engineers of the European Community,  
an Association of Belgium

Editor:  
INFOTE Information for All S.A.  
Tel.: +30 210 9204223  
E-mail: customerservice@infote.gr

The opinions expressed in this  
publication are those of the authors  
and are not the responsibility  
of FITCE.

ISSN 1106-2975

Congress Organizer:



MOEL Conferences