



LJMU Research Online

Thanh, PN, Le Van, T, Minh, TT, Ngoc, TH, Lohpaisankrit, W, Pham, QB, Gagnon, A, Deb, P, Pham, NT, Anh, DT and Dinh, VN

Adapting to climate-change-induced drought stress for improving water management in Southeast Vietnam

<http://researchonline.ljmu.ac.uk/id/eprint/19605/>

Article

Citation (please note it is advisable to refer to the publisher's version if you intend to cite from this work)

Thanh, PN, Le Van, T, Minh, TT, Ngoc, TH, Lohpaisankrit, W, Pham, QB, Gagnon, A, Deb, P, Pham, NT, Anh, DT and Dinh, VN Adapting to climate-change-induced drought stress for improving water management in Southeast Vietnam. Sustainability. ISSN 2071-1050 (Accepted)

LJMU has developed [LJMU Research Online](#) for users to access the research output of the University more effectively. Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Users may download and/or print one copy of any article(s) in LJMU Research Online to facilitate their private study or for non-commercial research. You may not engage in further distribution of the material or use it for any profit-making activities or any commercial gain.

The version presented here may differ from the published version or from the version of the record. Please see the repository URL above for details on accessing the published version and note that access may require a subscription.

For more information please contact researchonline@ljmu.ac.uk

<http://researchonline.ljmu.ac.uk/>

Adapting to climate-change-induced drought stress for improving water management in Southeast Vietnam

Phong Nguyen Thanh ^{1,2}, Thinh Le Van ³, Tuan Tran Minh ³, Tuyen Huynh Ngoc ³, Worapong Lohpaisankrit ⁴, Quoc Bao Pham ⁵, Alexandre S. Gagnon ⁶, Proloy Deb ⁷, Nhat Truong Pham ⁸, Duong Tran Anh ^{1,2}, Vuong Nguyen Dinh ^{3*}

¹ Laboratory of Environmental Sciences and Climate Change, Institute for Computational Science and Artificial Intelligence, Van Lang University, Ho Chi Minh City, Vietnam; phong.nguyenthanh@vlu.edu.vn; duong.trananh@vlu.edu.vn

² Faculty of Environment, School of Technology, Van Lang University, Ho Chi Minh City, Vietnam; phong.nguyenthanh@vlu.edu.vn; duong.trananh@vlu.edu.vn

³ Southern Institute of Water Resources Research, Ho Chi Minh City, Vietnam; dinhvuongkhtlmn@gmail.com; lethinh912@gmail.com; tranminhtuan04@gmail.com; Ngoctuyen42n@gmail.com

⁴ Department of Civil Engineering, Faculty of Engineering, Khon Kaen University, Thailand; woralo@kku.ac.th

⁵ Faculty of Natural Sciences, Institute of Earth Sciences, University of Silesia in Katowice, Będzińska street 60, 41-200, Sosnowiec, Poland; quoc_bao.pham@us.edu.pl

⁶ School of Biological and Environmental Science, Liverpool John Moores University, Liverpool L3 3AF, United Kingdom; A.Gagnon@ljmu.ac.uk

⁷ International Rice Research Institute (IRRI), NASC Complex, Dev Prakash Shastri Marg, Pusa, New Delhi, 110012, India; debproloy@gmail.com

⁸ Computational Biology and Bioinformatics Laboratory, Department of Integrative Biotechnology, College of Biotechnology and Bioengineering, Sungkyunkwan University, Suwon 16419, Gyeonggi-do, Republic of Korea; truongpham96@skku.edu

* Correspondence: dinhvuongkhtlmn@gmail.com

Abstract: In Southeast Vietnam, droughts have become more frequent, causing significant damage and impacting the region's socio-economic development. Water shortages frequently affect the industrial and agricultural sectors in the area. This study aims to calculate the water balance and the resilience of existing water resource allocations in the La Nga-Luy River basin based on two scenarios: 1) business-as-usual and 2) following a sustainable development approach. The MIKE NAM and MIKE HYDRO BASIN models were used for Rainfall-Runoff (R-R) and water balance modeling, respectively, and the Keetch-Byram Drought Index (KBDI) was used to estimate the magnitude of droughts. The results identified areas within the Nga-Luy River basin where abnormally dry and moderate drought conditions are common and subbasins, i.e., in the Southeast and Northeast, where severe and extreme droughts often prevail. It is also shown that the water demand for the irrigation of the Winter-Spring and Summer-Autumn crop life cycles could be fully met under abnormally dry conditions. This decreases to 85-100% during moderate droughts, however. In contrast, 65% and 45-50% of the water demand for irrigation is met for the Winter-Spring and Summer-Autumn crop life cycles, respectively, during severe and extreme droughts. Furthermore, this study demonstrates that the water demand for irrigation could still be met 100% and 75-80% of the time during moderate, extreme, and severe droughts, respectively, through increased water use efficiency. This study could help managers rationally regulate water to meet the agricultural sector's needs in the region and reduce the damage and costs caused by droughts.

Keywords: Water allocation; Water use; Droughts; Climate change; Southeast Vietnam

Citation: To be added by editorial staff during production.

Academic Editor: Firstname Last-name

Received: date

Revised: date

Accepted: date

Published: date



Copyright: © 2023 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

A water balance represents how much water is available in a hydrological system. The input into the system, precipitation, is equal to the output, which is the water leaving the system, such as evapotranspiration and runoff [1]. The latter primarily depends on the catchment's Land Use Land Cover (LULC) [2]. LULC changes can increase the water demand, notably through an increase in agricultural production and industrialization [3], potentially leading to competition amongst water users when the demand exceeds the available supplies [4,5]. Moreover, trends in hydroclimatic variables, including precipitation and temperature, through their impact on evapotranspiration [6], can affect the availability of water resources and agricultural water needs [7,8]. These trends can also increase the occurrence and intensity of droughts, often leading to competition among water users [9–11].

The land in the Southeast region of Vietnam is fertile and is covered with commercial crops such as rubber, cashew, coffee, pepper, and fruit trees. The region experiences a tropical monsoon climate with a distinct wet and dry season. Although the area receives between 1500 and 3000 mm of precipitation annually, it is highly variable, spatially and temporally [12]. For instance, the 2014–2016 El Niño exposed many localities to droughts, thereby increasing the number of wells drilled to abstract water for irrigation. The El Niño-induced drought affected Binh Thuan province the most, with irrigation providing water to less than 16% of the cultivated land when it occurred. Agricultural production was consequently greatly affected, with 11,304 hectares of cropland damaged [13,14]. Therefore, allocating water resources adequately is very important. This is particularly the case when there are many competing water users within a catchment. For instance, using water for industrial crops in upland areas often results in rivers and streams running dry yearly and lowering the water table, leading to dry wells or salinization of the water supply, thereby affecting water users downstream [15].

There has been rapid development in hydrological and hydraulic modeling in recent years [16], leading to improvements in the simulation of river flow and water balance modeling [17]. The choice of a numerical model depends on data availability [4,18], with commonly used models including SWAT [19–22], MIKE *Système Hydrologique Européen* (SHE) [23–25], MIKE Nedbor-Afstromings Model (NAM) [26,27], and MIKE HYDRO BASIN [28–32]. Santos et al. [21] used SWAT and MIKE HYDRO BASIN to model water allocation in the Sabor River in Portugal, while Yu et al. [32] used the latter model to develop sustainable agricultural water management practices in the Tarim River in northwestern China.

During the 2015–2016 Winter-Spring crop life cycle and the dry season of 2018–2019, many households in Binh Thuan province lacked water for domestic use because the water supply from irrigation construction only met the water demand in Phan Thiet, Binh Hiep, Ma Lam, Tuy Phong. Similarly, in 2018–2019, thousands of households lacked water for domestic use in Ham Thuan Nam and Tanh Linh districts, and 1,846 hectares of cropland were damaged due to a lack of irrigation water. Moreover, crops could not be grown on 13,215 hectares of arable land in Duc Linh and Tanh Linh districts during the Summer-Autumn crop of 2019 due to a lack of water.

This study investigates changes in water availability for irrigation in South-Eastern Vietnam under different drought scenarios. It first calculates the water balance and, thus, the water resources potential of the La Nga and Luy river basins. Secondly, it simulates the effects of various drought categories on water resource availability and assesses the possibility of water infrastructure development to mitigate these effects. The study also proposes a water use plan to enhance efficiency in response to drought in Binh Thuan province.

2. Methodology

2.1. Study area

This study focuses on Binh Thuan province's La Nga and the Luy rivers. The source of the La Nga River is located near Di Linh-Bao Loc at an altitude of 1,300-1,600 m. The river flows along the western edge of Binh Thuan province and meets the mainstream, covering 4,100 km² of the watershed. The Luy River originates in a mountainous region bordering the Da Queyon basin of Lam Dong province at 1,623 m and flows through the Bac Binh district, and its outlets are at Phan Ri (Figure 1). The river is 87 km long and has a basin area of 2,004 km². The Luy River is vital to the region since its topography favors the construction of dams and reservoirs. The Luy River system also receives water from the Dong Nai River basin. However, these two basins often suffer from drought and severe water shortages during the dry season. Water resources in the study area are unevenly distributed in space and time. Total annual rainfall is an average of 1,950 mm, equal to 61.4 billion m³/year, with nearly 92% falling during the rainy season.

The water supply depends heavily on the outflow from the Ham Thuan and Da Mi hydroelectric reservoirs (La Nga River basin) and Dai Ninh (Luy River basin). In the first eight months of 2015, according to data from Phan Thiet, only 550 mm of rain fell over Binh Thuan province, which was lower than the average rainfall for the same period (721 mm). The volume of water only fulfills approximately 21.7% of the total capacity of the reservoirs. Some reservoirs were below the dead water level. In addition, the storage capacity of the Ham Thuan – Da Mi and Dai Ninh hydropower reservoirs had dropped to about 2.3 m³/s, much lower than the average of many years, leading to water shortages.

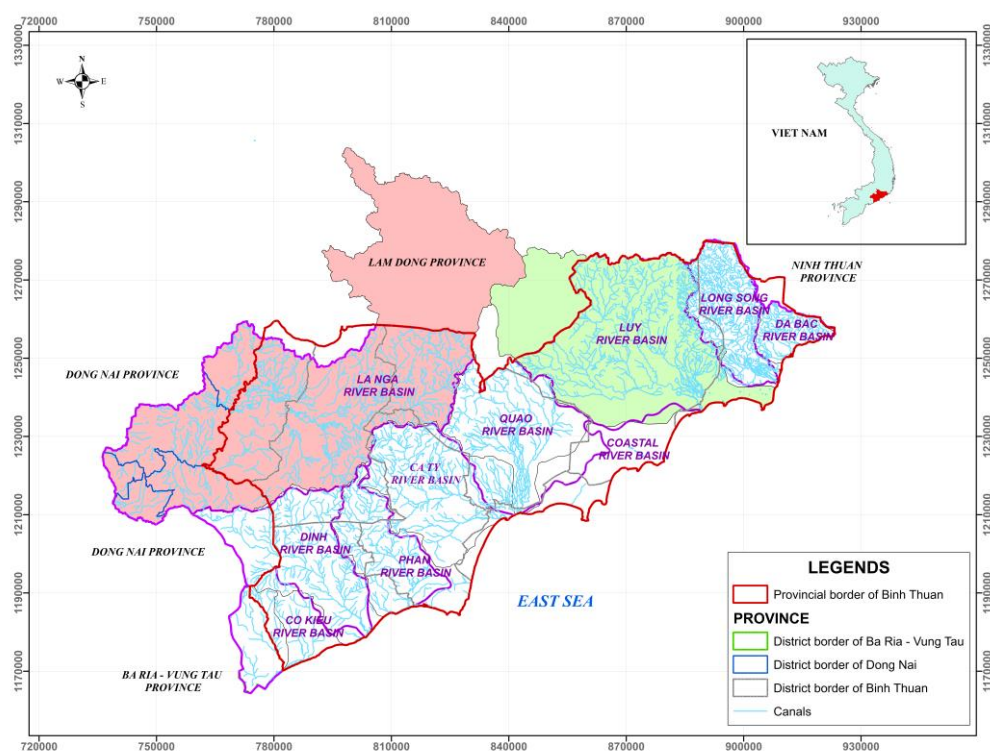


Figure 1. The La Nga and Luy River basins.

2.2. Methodological approach

This study used the MIKE NAM Rainfall-Runoff (R-R) and the MIKE HYDRO BASIN water balance model. The R-R model was calibrated and validated using discharge data from Ta Pao and Luy from 1988-1999. For the R-R model, the input data includes hydrological data (rainfall, evaporation), geographical data (river network, Digital Elevation Model (DEM), land cover map, soil map), and for the MIKE HYDRO BASIN model, the input data includes infrastructure (Reservoir operation, hydraulic structure), water data (water demand, irrigation area and method, and streamflow time series).

We selected the two commonly used greenhouse gas (GHG) emission scenarios in our investigation of the impacts of climate change on water resources, thus allowing for a consideration of the uncertainties in such emissions. The two scenarios were a business-as-usual scenario based on current trends and conditions (KB1) and another one following a sustainable development strategy (KB2), i.e., Representative Concentration Pathway (RCP) 4.5 and 8.5, respectively, from the Intergovernmental Panel on Climate Change (IPCC) (Figure 2). The output of the study is the calculation results of water balance, water supply capacity, drought map, water flow distribution, and available water potential.

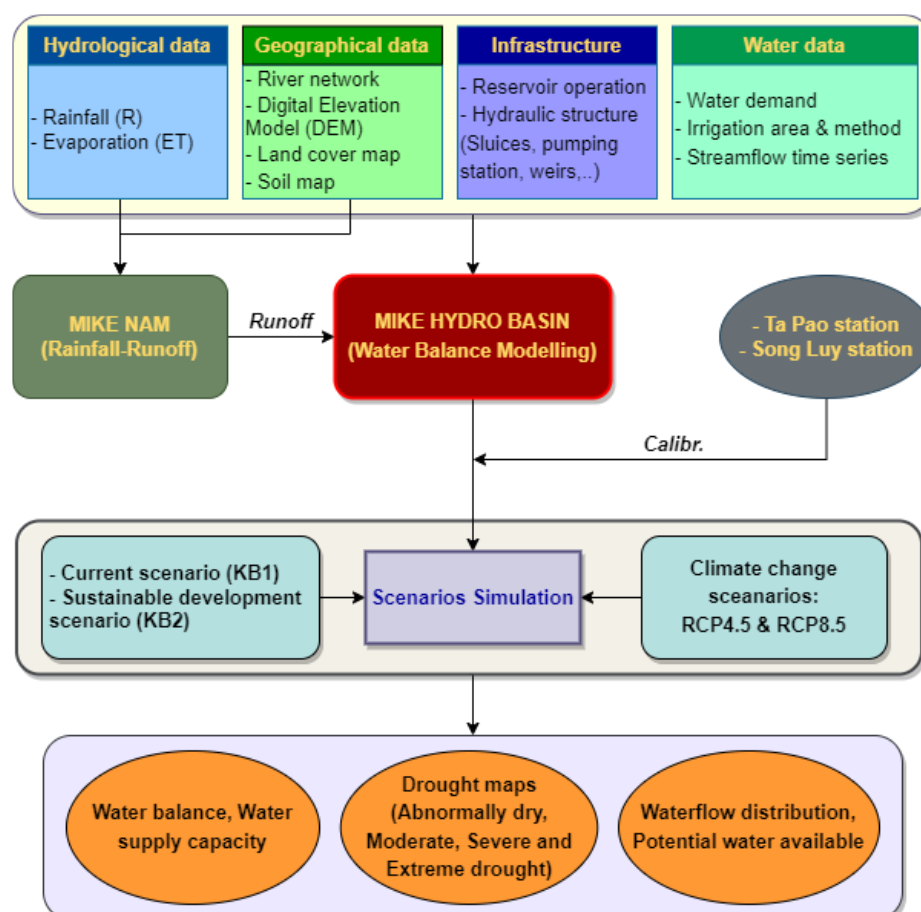


Figure 2. The methodological approach used in this study.

2.3. MIKE HYDRO BASIN

MIKE HYDRO BASIN was developed by the Danish Hydraulic Institute [33]. It has been used as a decision-support tool in water resources management and planning, including water allocation [34]. MIKE HYDRO BASIN is also used for rainfall-runoff modeling [35]. The MIKE HYDRO BASIN model incorporates information on the catchment characteristics, river network, water use, reservoir operation, and hydropower elements [33]. The model allows for simulating single or multipurpose reservoirs using specified operating policies, sharing rights, or no-operation policies [34]. Figure 3 shows the river network and hydraulic works used in the MIKE HYDRO BASIN.

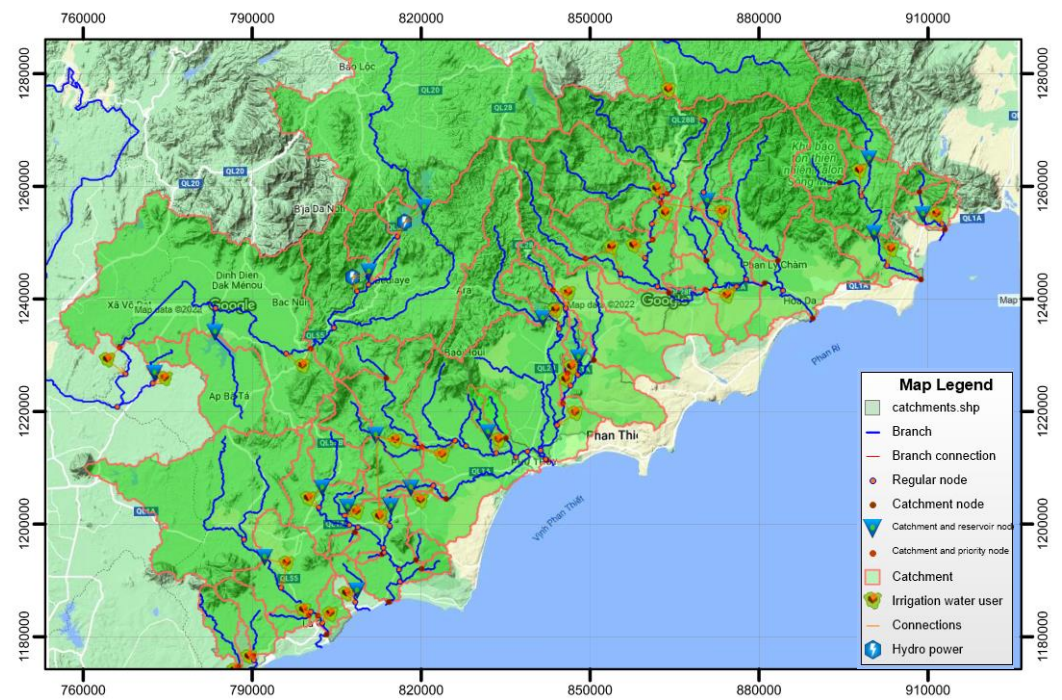


Figure 3. River network and hydraulic works used in the water balance modeling.

2.4. Input data for MIKE Models

The allocation of water to different users and assessing potential shortage and surplus were investigated using the MIKE HYDRO BASIN model. The model used time series of precipitation, evaporation, and irrigation works to determine water availability and refine allocation and usage priorities. The rainfall time series at eight stations in the study area and average monthly potential evaporation data were used as input into the MIKE HYDRO Basin model to determine the basin's water balance.

The allocation of water to different users and assessing potential shortage and surplus were investigated using the MIKE HYDRO BASIN model. The model used time series of precipitation, evaporation, and irrigation to determine water availability. Daily rainfall time series from 1980 to 2017 at eight stations in the study area, i.e., Di Linh, Ta Pao, Dong Giang, La Gi, Lien Huong, Song Luy, Phan Thiet, and Song Mao, and average monthly potential evaporation data were input into the MIKE HYDRO Basin model to determine the basin's water balance. Monthly evaporation was calculated at Phan Thiet and Ham Tan using the Penman formula based on the Piche evaporimeter at Phan Thiet.

The Penman equation combines radiative and radiation-aerodynamic factors to estimate evapotranspiration (ET_o). This study used the FAO version of the equation from 1992, as described in [36,37]. Penman's original equation [38] and its subsequent modifications have been extensively employed for estimating evapotranspiration [39]. It is calculated using the following equation:

$$ET_o = \frac{0.75\Delta(R_n - G) + 1.84\gamma \frac{900}{273 + t} U_2 (e_a - e_d)}{\Delta + \gamma(1 + 0.34U_2)}, \text{mm/month} \quad (1)$$

where t – Mean monthly temperature (°C), Δ - The inclination of the temperature relationship curve with the saturated vapour, pressure at temperature t (Kpa/°C), which is determined using the following:

$$\Delta = \frac{4098e_a}{(t + 237)^2} \quad (2)$$

e_a – saturated vapour pressure (kPa):

$$e_a = 0.611 \exp\left(\frac{17.27t}{t + 237}\right) \quad (3)$$

R_n – Deviant between increased radiation and decreased radiation of short and long waves (mm/month): 174
175

$$R_n = R_{ns} - R_{nL} \quad (4)$$

R_{ns} – Retained solar radiation after reflection to the crop ground (mm/month): 176

$$R_{ns} = 0.77 \left(0.19 + 0.38 \frac{n}{N}\right) R_a \quad (5)$$

R_a – Irradiance at the boundary layer of the atmosphere (mm/month) 177

$R_a = 37,6dr (\omega_s \sin \psi \sin \delta + \cos \omega_s \cos \psi \cos \delta)$ 178

$\omega_s = \arccos(-\tan \psi \tan \delta)$, (rad) 179

ψ – geographical latitude angle 180

δ – deviation angle by day (rad): 181

$\delta = 0,409 \sin(0,0172J - 1,39)$ 182

dr – relative distance by month 183

$dr = 1 + 0,033 \cos(0,0172J)$ 184

J – ordinal number by date of calculation 185

$$R_{nL} = \frac{118(t + 273)^4 10^{-9} (0.34 - 0.044 \sqrt{e_a} (0.1 + 0.9 \frac{n}{N}))}{59.7 - 0.055t} \quad (6)$$

N – maximum number of hours of sunshine 186

$N = 7,64W_s$ (h) 187

G – heat flux of the soil (MJ/m² month) 188

If we calculate G in days, then: $G = 0,38(t_i - t_{i-1})$ 189

t_i, t_{i-1} – air temperature on day i and $i-1$, (°C) 190

If G is calculated according to the average temperature of the month 191

In 2018, Binh Thuan province had 78 irrigation systems, comprising 21 reservoirs, 35 weirs, 18 pumping stations, and four canals, with a total storage capacity of 303.7 million m³ available to irrigate 70,360 hectares (Figure A1 - Appendix). There are 73 existing systems of irrigation constructions from the focal point to the in-field canal system, with a total design irrigation capacity of 49,047 hectares; five systems of hydraulic works have been invested since 2010, with a total design capacity of 21,313 ha (Figure 3). Out of 73 constructions, 33 systems have promoted irrigation efficiency beyond design capacity, 16 promote irrigation efficiency from 70-100% of design capacity, and the remaining 24 effective irrigation systems reach less than 70% of design capacity. 192
193
194
195
196
197
198
199
200

2.5. Model performance evaluation 201

The simulated data was evaluated by comparing it with the measured data, using various statistical measures such as Relative bias [40], Percentage of bias (BIAS(%)), the Correlation coefficient (R), Nash-Sutcliffe efficiency (NSE) [16], Root Mean Square Error (RMSE) and Mean Absolute Error (MAE) [41]. 202
203
204
205

The formula used to calculate the indicators is as follows:s 206

$$\text{Relative Bias} = \frac{\sum_{i=1}^n (O_i - P_i)}{\sum_{i=1}^n O_i} \quad (7)$$

$$\text{BIAS}(\%) = \frac{\sum_{i=1}^n (O_i - P_i) * 100}{\sum_{i=1}^n O_i} \quad (8)$$

$$R = \frac{\sum_{i=1}^n (O_i - \bar{O})(P_i - \bar{P})}{\sqrt{\sum_{i=1}^n (O_i - \bar{O})^2} \sqrt{\sum_{i=1}^n (P_i - \bar{P})^2}} \quad (9)$$

$$NSE = 1 - \frac{\sum_{i=1}^n (O_i - P_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (10)$$

$$RMSE = \sqrt{\frac{1}{n} \sum_{i=1}^n (O_i - P_i)^2} \quad (11)$$

$$MAE = \frac{1}{n} \sum_{i=1}^n |O_i - P_i| \quad (12)$$

where O_i - The observed data at the time i , P_i - The simulated data at the time i , \bar{O} - The mean value of the observed data and \bar{P} - The mean value of the simulated data. 207
208

2.6. Scenarios simulations 209

The two scenarios that were simulated are described in Table 1. At the same time, the KB2 represents projected water use by 2030 based on socio-economic development and future water use by the different sectors, as approved by the government. The seasonal rainfall frequency scenarios are shown in Table A1 - Appendix with two cases of Water excess and Less water. Rainfall frequency is the probability of a rainfall event of defined characteristics occurring in any given year at a given location. For the case of Water excess, rainfall frequency is less than 50%, corresponding to the scenario of Water Excess. For the case of Less water with a rainfall frequency of 50–75%, 75–85%, 85–95%, and over 95%, respectively, the scenarios are abnormally dry, moderate drought, severe drought, and extreme drought. Future precipitation changes were based on climate change scenarios (RCP 4.5 and RCP 8.5 greenhouse gas emissions) to 2025 and 2035 (Table A3 - Appendix; Figure 4). Irrigation and hydropower infrastructure will be upgraded, repaired, and built according to the planning until 2025 and 2030. 210
211
212
213
214
215
216
217
218
219
220
221
222

Table 1. Characteristics of the two scenarios. 223

No	Factors	Simulation scenarios	
		Business-as-usual (KB1)	Sustainable development (KB2)
1	Inflow scenarios	Scenario 1a: Magnitude 50% Scenario 1b: Magnitude 75% Scenario 1c: Magnitude 90%	RCP 4.5 and RCP 8.5 GHG emission scenario to 2035
2	Industrial water demand	Water demand in 2018	Water demand in 2030
3	Hydraulic works	Reservoirs, hydropower plants, and dams connected to the network in 2018	Planned hydraulic works, including Reservoirs, hydropower plants, and weirs, in 2030

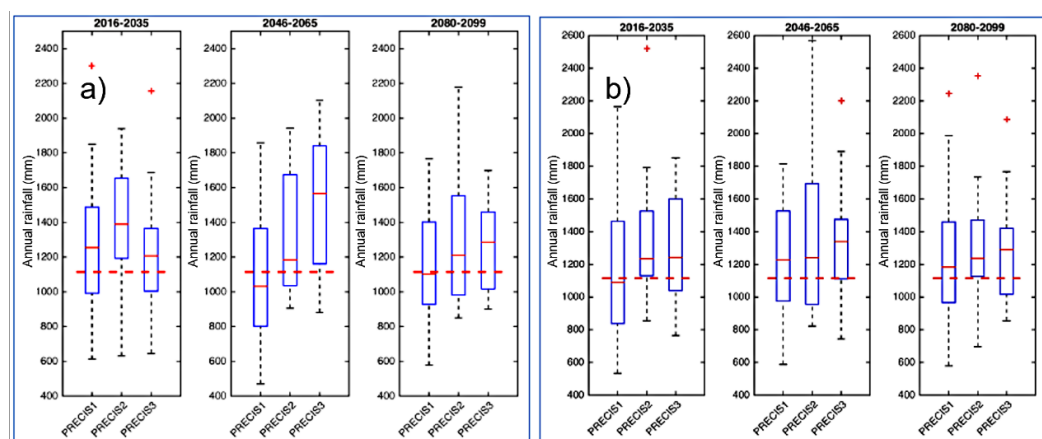


Figure 4. Total annual rainfall for three future 20-year at Phan Thiet according to three versions of the PRECIS Regional Climate Model forced with the (a) RCP 4.5 and (b) RCP 8.5 scenarios developed by the Ministry of Natural Resources and Environment.

2.7. Quantifying the magnitude of the droughts

The magnitude of the droughts was assessed using the Keetch-Byram Drought Index (KBDI). John Keetch and George Byram developed the KBDI in 1965 based on soil moisture for monitoring the risk of forest fires [42,43]. Values of the KBDI can range from zero, representing no-drought conditions, to a maximum of 800, the most severe drought category (Table 2). The KBDI index is calculated as follows:

$$KBDI_t = (KBDI_{t-1} - 100r) + dF \quad (13)$$

$$KBDI_t = (KBDI_{t-1} - 100r) + dF \quad (14)$$

where $KBDI_t$ - Current day KBDI index, $KBDI_{t-1}$ - The previous day's KBDI index, dF - Drought factor (0,01 inch), T - The daily maximum temperature ($^{\circ}F$), R - The mean annual rainfall (inch), dt - Time increment (1 day).

Table 2. Categorization of droughts according to the KBDI index.

Values	Drought level
0 – 200	No drought
201– 400	Possibility of a drought
401– 600	Occurrence of a drought
601– 800	Severe drought

3. Result and Discussion

3.1. Model calibration

The model parameters were calibrated using data from the Luy River at Luy and the La Nga River at Ta Pao (Table 3). The calibration was done manually, and the model parameters were modified to obtain the smallest error between the simulated and measured data.

Table 3. Calibration of the MIKE HYDRO BASIN model over the study catchments.

Statistical indicators	Ta Pao	Luy
Relative Bias	2530	-2390
BIAS%	6%	8%
R	0.85	0.87

NSE	0.997	0.997
RMSE	349.5	84.8
MAE	0.025	0.023

Model parameters of the Luy River station in the coastal basin were used to simulate 245
flow for construction routes in Long Song, Da Bac, Quao Rivers, Ca Ty Rivers, Co Kieu 246
Streams, Phan, and Dinh Rivers. Figure 5a and Figure 5b illustrate the calibrated flow at 247
the Luy and Ta Pao and the associated rainfall over the catchment from 1988 to 1999. The 248
observed and simulated discharge similarity is demonstrated by a bias of no more than 8% 249
at both locations and a correlation coefficient of 0.85 and 0.87 at Luy and Tao Pao, respec- 250
tively (Table 3). Similarly, the correlation coefficient between the simulated and measured 251
accumulative water volume at Luy and Tao Pao are both 0.999 (Figure 5c and Figure 5d). 252

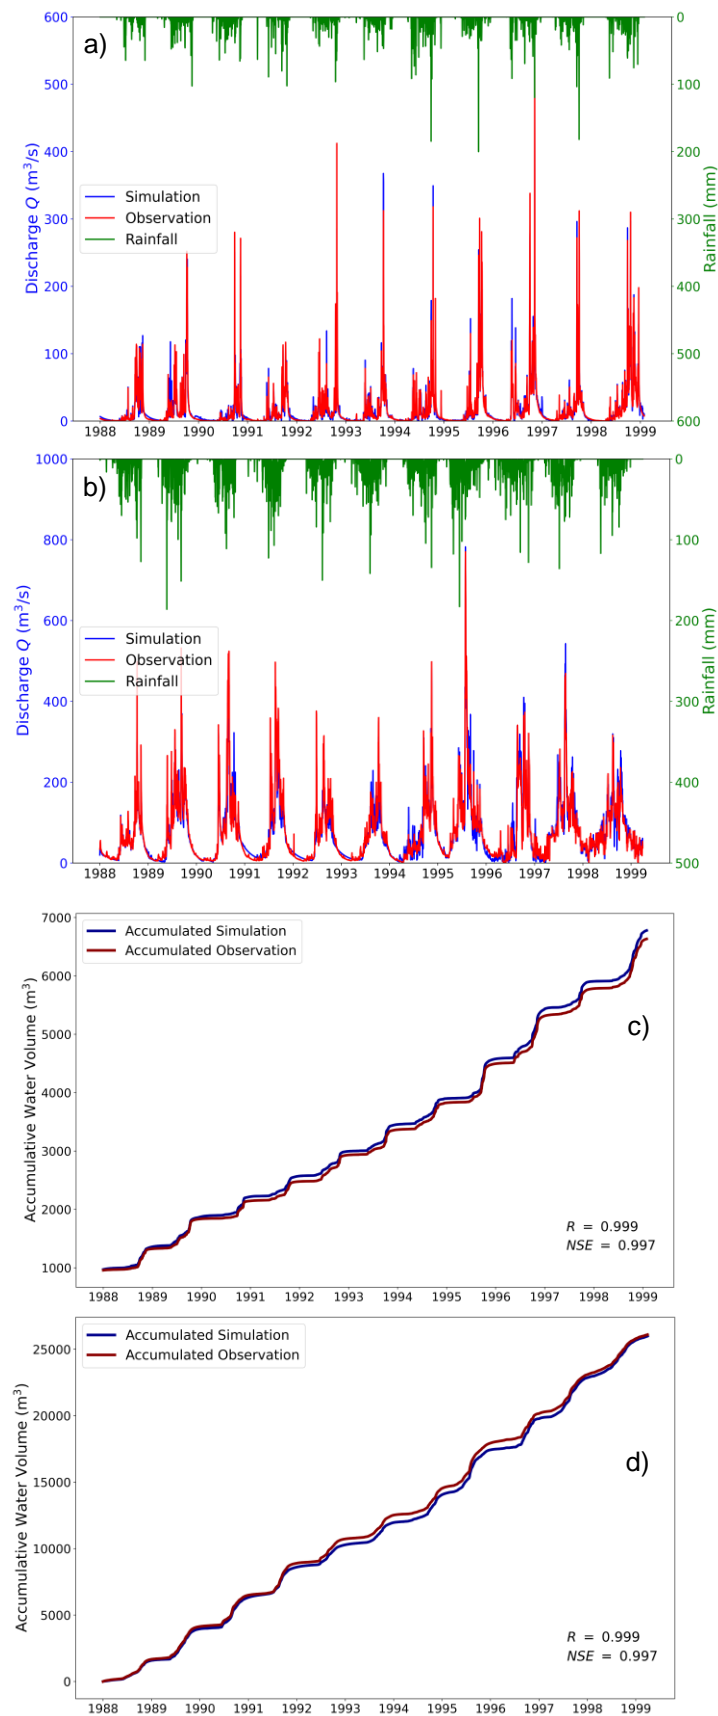


Figure 5. Calibrated daily discharge (a) at Luy station and (b) at Tao Pao station associated with rainfall intensity; Accumulative water volume (c) at Luy station and (d) at Tao Pao station.

3.2. Water availability and allocation under climate change

The total of the calculated potential water is 8.092 billion m³, 6.447 billion m³, and 5.609 billion m³ for P=50%, 75%, and 90%, respectively (Table 4), of which the potential water volume in the North Binh Thuan region accounts for 24–26% of the total water volume of the province. The Luy River basin accounts for 71–75% of the water volume in the North Binh Thuan region. The potential water volume in the South Binh Thuan region accounts for 73–75% of the total water volume of the province. At the same time, the La Nga River basin accounts for 75–80% of the water in the South Binh Thuan region. The flood season starts from June to November, and the flow accounts for 75–80% of the total annual flow. The dry season is usually from December to May. Most of the streams in the North of the province are almost dry. The transition time from the flood to the dry season is usually one month in both river basins.

The province has only two regular flow monitoring stations to standardize the model parameters. The coastal plain is the Luy River station, and the mountainous area is the Ta Pao station. In the condition of existing observed data, we suggest using the Ta Pao model parameter set of the mountainous basin to simulate the flow of the sub-basins: La Nga, Tra Tan, and Bien Lac. In addition, the water in the river can suddenly decrease due to steep slopes and the high permeability of the basins. Especially in recent years, when the vegetation growth rates are declining, the ability of the land to hold and regulate water also decreases.

The rivers and streams in the La Nga river basin have a significant average annual rainfall, and this area is also the place with the most extensive flow module of about $M=0.040 \text{ m}^3/\text{s.km}^2$ in the province. The area with the second largest flow is the Phan River and Dinh River, which fluctuates around $0.026 \text{ m}^3/\text{s.km}^2$. The site with the smaller flow, even from the Ca Ty River, is only $0.008\text{--}0.014 \text{ m}^3/\text{s.km}^2$.

Table 4. Potential water resources of the river basins of Binh Thuan province with a rainfall frequency of P=50%, 75%, 95%.

River basin	Area (km ²)	Total volume (10 ⁶ m ³)		
		50%	75%	90%
Da Bac	85.9	14.640	7.230	4.72
Long Song	471.7	93.140	82.330	28.18
Luy (including discharge from the Dai Ninh hydropower plant)	1,952.7	1,404.18	1,204.33	1,057.1
Quao	1,068.3	440.66	390	289.76
Ca Ty	840	565.150	175.82	85.85
Luy	533.5	214.500	131.77	73.67
Dinh	834.5	904.93	524.34	330.5
Co Kieu	74	58.390	8.730	5.63
Tram	63.7	53.66	55.14	50.98
La Nga (including discharge of Ham Thuan – Da Mi Hydropower)	3,181	4,343.69	3,867.88	3,683.41
Total		8,092.4	6,447.6	5,609.8

We calculated the water resources potential of the two river basins according to climate change scenarios in 2030. The results show that the total annual flow to 2030 will increase by 2.4%. The total flow in flood season increases by 3.6%. The dry season flow assessment shows an average decrease of about 2.3%. Coastal basins decrease more than

mountainous areas, such as the Long Song and Luy River basins, with the highest reduction rates of 6.7% and 8.8%, respectively (Table 5). La Nga and Dinh River basins slightly decrease from 0.2-0.3%. It can be seen that climate change alters the flow pattern in the canal systems with the tendency to increase the extremes, in which the flood season is expected to be more severe, and the dry season is expected to be more and more water-deficient. Therefore, the basins can have a greater risk of water shortage.

The results of assessing water demand for economic sectors to 2030 in Binh Thuan province. Compared with the potential of surface water, we can see that the province's water resources are met for water use needs. However, water resources are unevenly distributed among river basins and over time. Water resources in the South Binh Thuan and North Binh Thuan regions are mainly concentrated in the La Nga and Luy river basins.

Table 5. Predicted water resources available in two river basins.

River basin	Mean annual flow		Dry season		Flooding season		Change (%) (In comparison to the current scenario)		
	Q ₀	W ₀	Q _k	W _k	Q _l	W _l	Annual Average	Dry Season	Flooding season
	(m ³ /s)	(10 ⁶ m ³)	(m ³ /s)	(10 ⁶ m ³)	(m ³ /s)	(10 ⁶ m ³)			
Da Bac	0.69	21.76	0.14	4.42	1.21	38.16	+1.5	0.0	+2.4
Long Song	5.82	183.54	2.98	93.98	8.6	271.21	+0.5	-8.8	+3.4
Luy	54.56	1,720.6	31	977.62	77.22	2,435.21	+0.8	-6.7	+3.6
Quao	25.08	790.92	6.5	204.98	42.27	1,333.03	+2.8	-1.4	+3.4
Ca Ty	16.83	530.75	3.71	117	29.22	921.48	+2.2	-1.1	+2.5
Phan	14.37	453.17	2.92	92.09	24.94	786.51	+3.1	0.3	+3.4
Dinh	21.59	680.86	3.57	112.58	38.28	1,207.2	+3.1	-0.6	+3.4
La Nga	119.85	3,779.59	49.33	1,555.67	179.71	5,667.33	+4.4	-0.2	+5.7
Total	258.78	8,161.2	97.7	3,091.07	419.86	13,240.7	+2.4	-2.3	+3.6

3.3. Water balance of the La Nga and Luy River basins

Based on the ability of water sources in river basins and the water demand for socio-economic development. The water balance calculation must consider each river basin's water supply capacity to propose solutions for providing sufficient water for different economic sectors.

The outcomes of the water balance analysis are shown in Table 6 for each river basin. They represent water supply capacity for (i) Water balance of river basins scenario 1a - current - P=50%; (ii) Water balance of river basins scenario 1 - current - P=75%; (iii) Water balance of river basins scenario 1c - current - P=90%; (iv) Water balance in river basins scenario 2 (Plan 2030 + climate change).

Table 6. The water supply capacity of the two river basins.

317

No	River basin	Current Water demand (m ³ /s)	Inflow with P = 50%		Inflow with P = 75%		Inflow with P = 90%		Water demand in 2030 (m ³ /s)	Climate change + plan 2030	
			Deficit dis-charge (m ³ /s)	% Supply capacity	Deficit dis-charge (m ³ /s)	% Supply capacity	Deficit dis-charge (m ³ /s)	% Supply capacity		Deficit dis-charge (m ³ /s)	% Supply capacity
I			Luy River basin								
1	Da Bac	2.138	0.564	73.62	0.726	66.04	1.025	52.03	2.523	0.697	72.38
2	Long Song	27.415	4.874	82.22	6.812	75.15	10.143	63.00	47.768	9.296	80.54
3	Luy	139.787	0.505	99.64	0.824	99.41	4.901	96.49	160.056	0	100
4	Quao	81.829	1.679	97.95	3.601	95.60	21.179	74.12	131.206	25.491	80.57
II			La Nga River basin								
1	Ca Ty	17.620	0.538	96.95	0.911	94.83	0.918	94.79	38.937	11.357	70.83
2	Phan	9.495	0	100	0.058	99.39	1.004	89.43	19.678	2.570	86.94
3	Dinh	18.375	0.585	96.82	0.671	96.35	0.811	95.59	63.547	10.240	83.89
4	Co Kieu	0.415	0.043	89.65	0.043	89.65	0.073	82.43	0.527	0.224	57.53
5	Tram	1.127	0.117	89.61	0.369	67.25	0.454	59.70	1.126	0.632	43.84
6	La Nga	184.837	0	100	17.703	90.42	25.049	86.45	236.929	0	100
Total (Million.m³)			24.089		85.072		176.240			157.610	

The results of scenario 1a show that the total water shortage of the whole province is 24.089 million m³, of which the Luy River basin and surrounding (Northern Binh Thuan region) account for about 68% of the water shortage in the province. The lack of water is mainly in the Long Song, Quao, and Luy river basins (mainly in the irrigation area on the side of the Ca Tot dam). La Nga River basin and surrounding (South Binh Thuan region) account for 32% of the province's total water shortage. The water shortage is mainly concentrated in the irrigation areas of the Ca Ty and Co Kieu river basins and the Tram River dam. In scenario 1b, the province's total water shortage is 85.072 million m³, of which the Luy River basin and surrounding account for about 39.6% of the province's total water shortage. The Long Song, Quao, and Luy River basins (on the Ca Tot dam side) meet 75%, 95%, and 99% of the demand, respectively.

From December to April, the available water can only meet 35-60% of the demand. La Nga River basin and surrounding water shortage are 51.39 million m³, accounting for 60.4% of the province's total water shortage. The water shortage is mainly concentrated in the irrigation areas of the Ca Ty and Co Kieu river basins and the Tram River dam. In Weir's system, the La Nga River basin pumping station in the dry season months from

318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333

December to April, the response rate is only 45-55% of the demand. For scenario 1c, the province's total water shortage is 176.240 million m³. The Luy River basin accounts for 57.1% of the water shortage in the region. Long Song, Quao, and Luy River basins meet 63%, 74%, and 96.5% of demand, respectively. The water was available during the dry season from January to May, and December can only meet 30-46% of the demand.


La Nga River basin and surrounding areas account for 42.9% of the province's water shortage. The amount of water shortage is mainly concentrated in the irrigation areas of the river basin: Ca Ty, Co Kieu, Tram River Dam, Ta Pao Dam, and La Nga River Basin pumping station. In the dry season months from December to April next year, the response rate is only 40-55% of the demand. For scenario 2, the province's total water shortage is 157.610 million m³, in which the Luy River basin and surrounding account for about 58.8% of the province's water shortage. The Long Song, Quao, and Luy River basins meet 63%, 80.5%, and 100% of the water demand, respectively. The water shortage is in the middle of the dry season from January to May, and in December, it can only meet 30-40% of the water demand. La Nga River basin and surrounding areas account for 41.23% of the province's water shortage. The amount of water shortage is mainly concentrated in the irrigation areas of the river basin: Ca Ty, Co and Tram River Dam, Ta Pao Dam, and La Nga River basin pumping station. During the dry season from December to April, the response rate is only 35-45% of the demand.

3.4. Drought assessment and prediction

This section presents the results of the future drought forecast with different scenarios such as abnormally dry conditions, moderate drought, severe drought, and extreme drought during the period 2030 for two scenarios for the current situation and the sustainable development scenario. We classify drought according to the American classification [44–46].

3.4.1. Abnormally dry conditions

Figure 6 and Figure 7 show the areas projected to experience abnormally dry conditions during the Winter-Spring crop. The Winter-Spring crop in the years with the reservoirs (18 reservoirs) at the beginning of the crop life cycle is more significant than 240 million m³, and the total rainfall in the Winter-Spring crop is 40 mm, more critical than in non-drought years. The water source is enough to meet the water demand. However, there are a few months when the water in the reservoir can only meet 30-40% of the irrigation demand (Figure 6). At the beginning of the Summer-Autumn crop life cycle, there is less than 104 million m³ of water available in the reservoir, and the total rainfall in the Summer-Autumn crop is 40 mm, which is more significant than in non-drought years. Drought and water shortages may occur locally in some reservoirs at the beginning of the production season (Figure 7). It is necessary to grasp the situation and results of water resource forecasting to recommend that forecasting water availability can help people to adjust the cultivation area and develop a plan to change the crop structures.

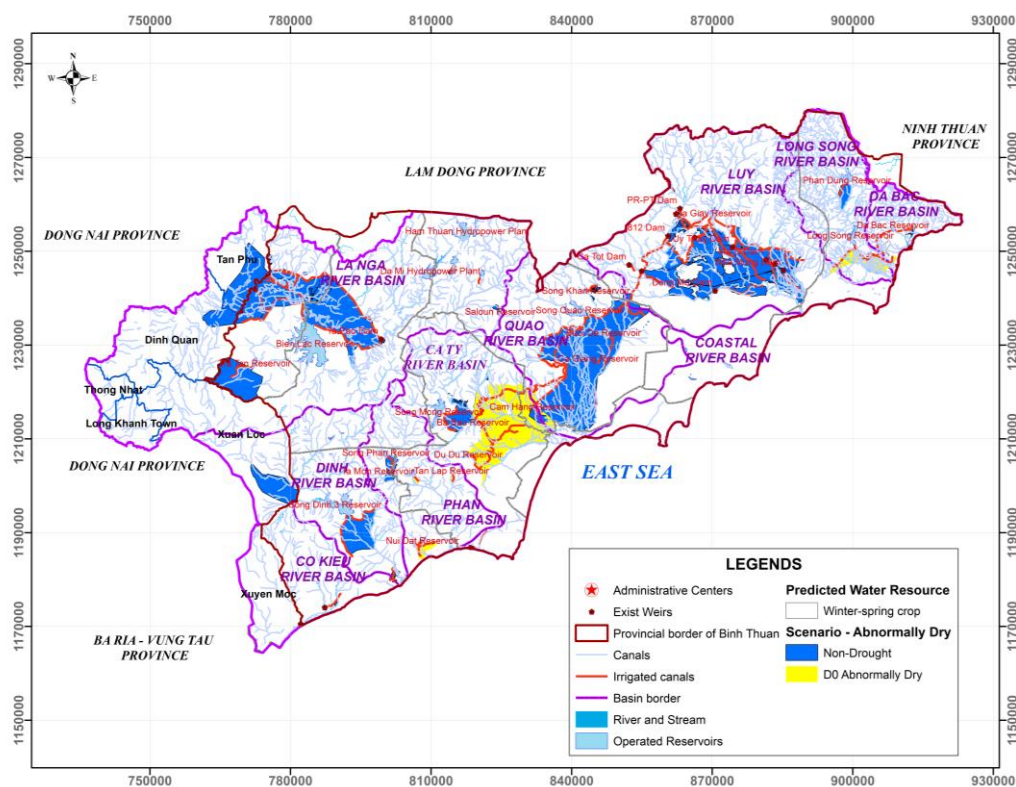


373

Figure 6. Areas projected to experience abnormally dry conditions during the Winter-Spring crop.

374

375

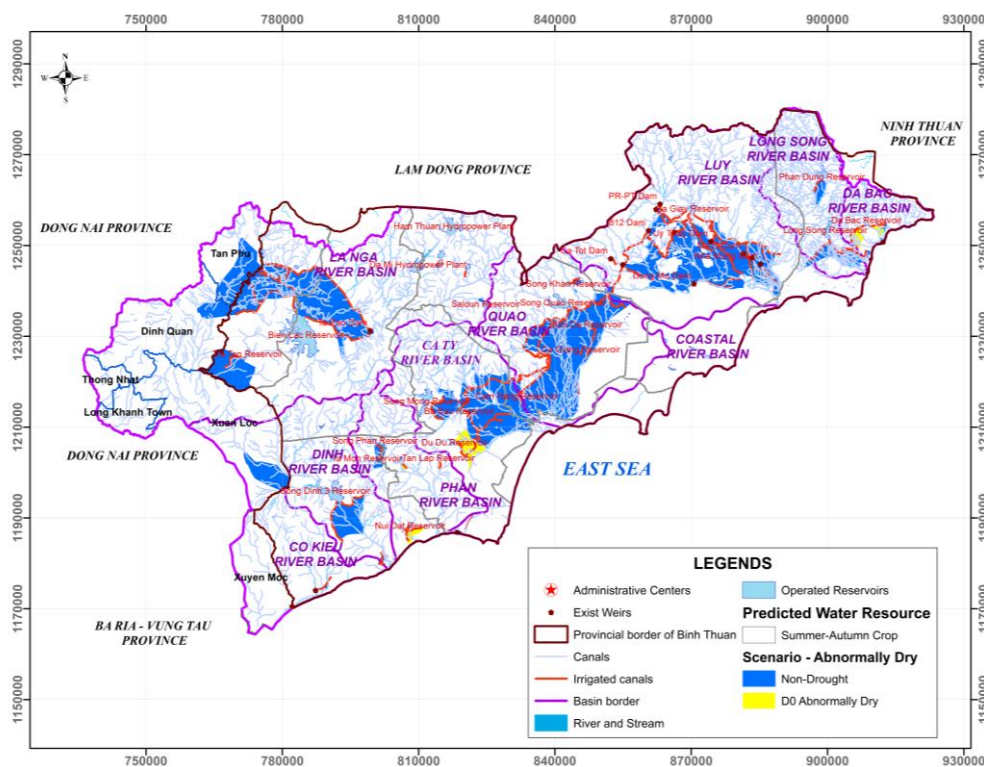

376

Figure 7. Areas projected to experience abnormally dry conditions during the Summer-Autumn crop under two scenarios.

377

378

3.4.2. Moderate drought scenario

379

At the beginning of the Winter-Spring crop life cycle, less than 204 million m³ of water is available in the reservoirs. The total rainfall is less than 35 mm in abnormally dry and moderate drought years. This implies that water source meets 85% of the agricultural water demand. However, the water availability in some reservoirs at the beginning of the crop life cycle can only meet 25-35% of the irrigation needs (Figure 8). Reservoirs with additional water sources during the season can still ensure sufficient water supply (Ca Giay reservoir). The water availability in the reservoir at the beginning of the Summer-Autumn crop life cycle is less than 60 million m³, and the total rainfall is less than 450 mm in moderate drought years (Figure 9). **This may lead to local drought and water shortage in some reservoirs.** However, reservoirs with supplementary water sources can remain productive during the season. As can be seen, the heavy reliance on reservoirs as the primary water source for irrigation raises questions regarding the sustainability of this practice in the face of increasing water demand for agricultural, industrial, and domestic use.

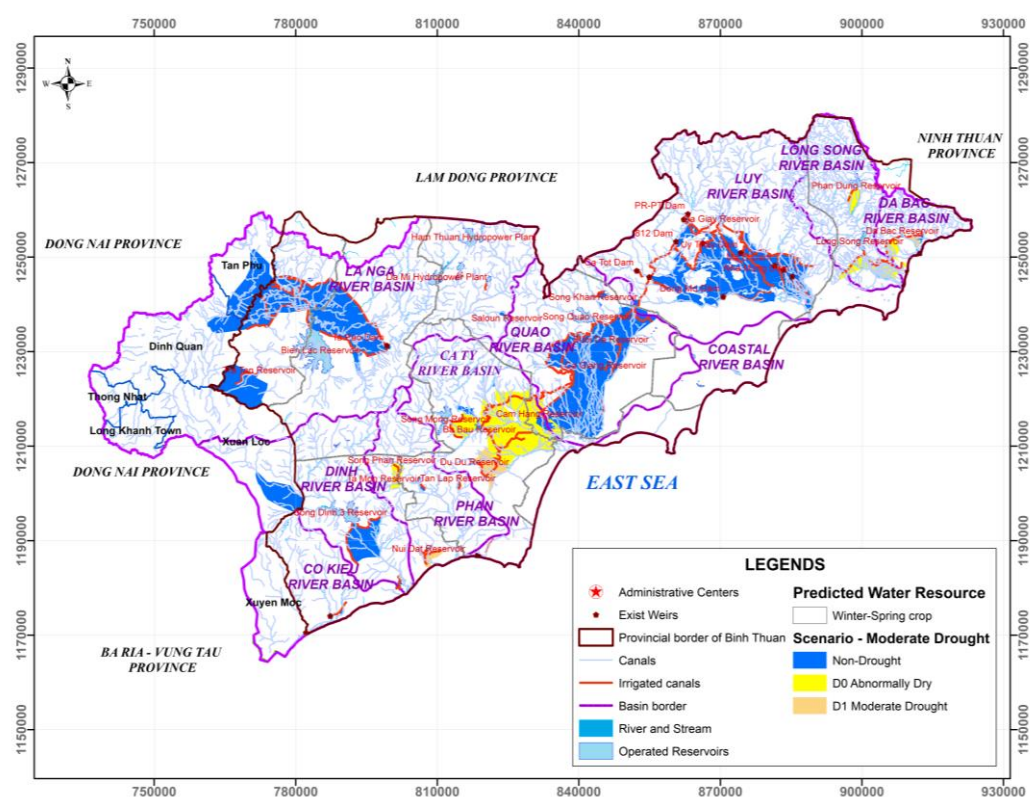


Figure 8. Areas projected to experience moderate droughts during the Winter-Spring crop under two scenarios.

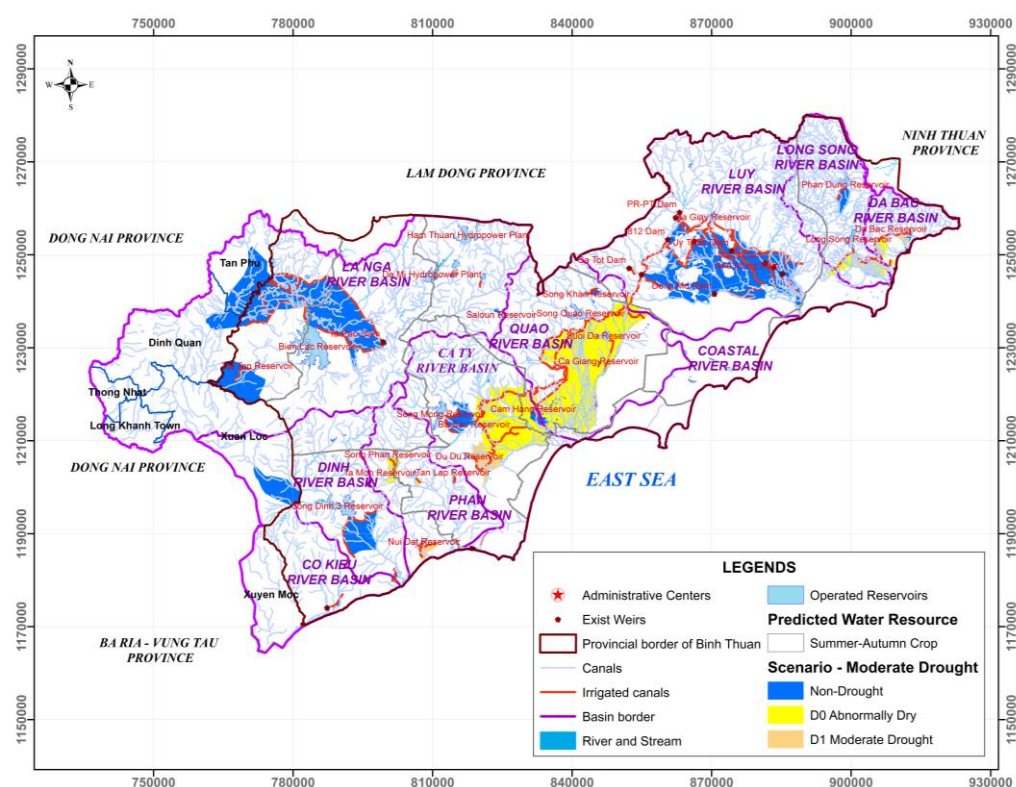


Figure 9. Areas projected to experience moderate droughts during the Summer-Autumn crop under two scenarios.

3.4.3. Severe drought scenario

In the Summer-Autumn crop, the water source to the reservoirs at the beginning of the crop life cycle is less than 45 million m³, and the total rainfall is less than 400 mm in severe drought years—drought and lack of water in most reservoirs. During severe drought, the water source to the reservoirs at the beginning of the crop life cycle is less than 180 million m³ for the Winter-Spring crop. The total rainfall in the Summer-Autumn crop is less than 10 mm during years of experiencing moderate to severe drought. The water source meets 65% of the water demand. In some reservoirs, water availability at the beginning of the crop life cycle meets less than 25% of the irrigation water requirements (Figure 10). Based on the forecast results of the drought occurrence and the forecasted water source, local authorities in the affected areas should adjust the farming season or not allow crops.

Furthermore, the incoming water only meets 65% of the demand (Figure 11). At the beginning of the crop, it is necessary to plan production efficiently, adjust the season, and reduce the arable land area for reservoirs that can only meet 25–30% (Da Bac reservoir, and Phan, Du Du, Nui Dat River). Preparing a backup pump system could reduce damage when a water shortage occurs.

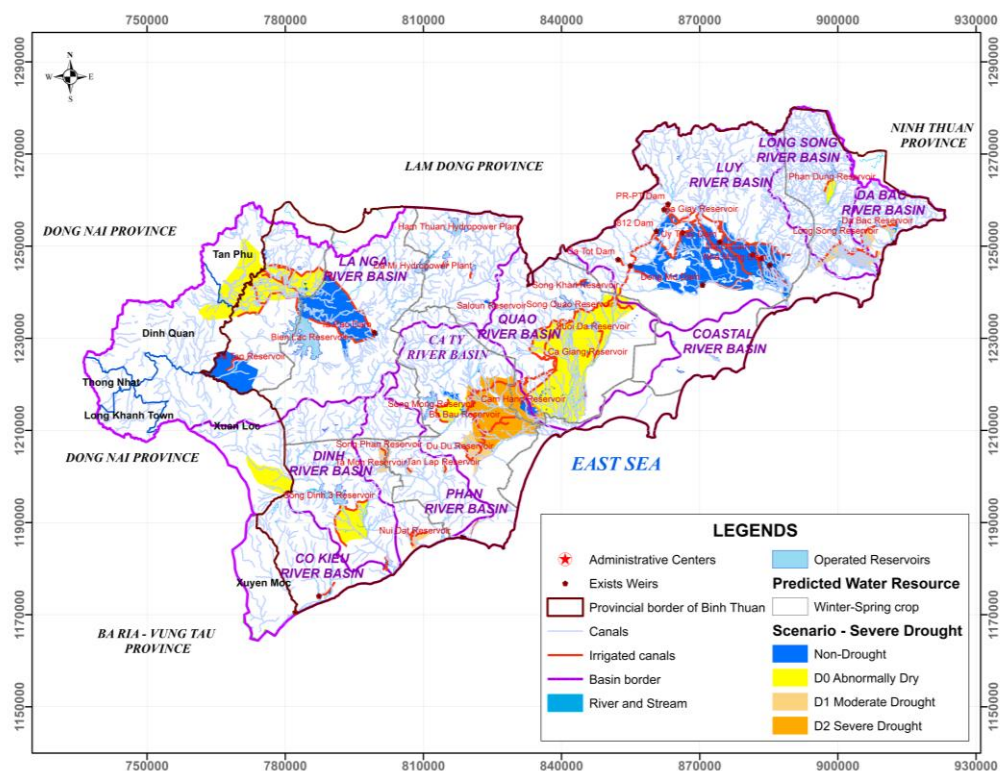


Figure 10. Areas projected to experience abnormally dry and moderate and severe drought conditions during the Winter-Spring crop.

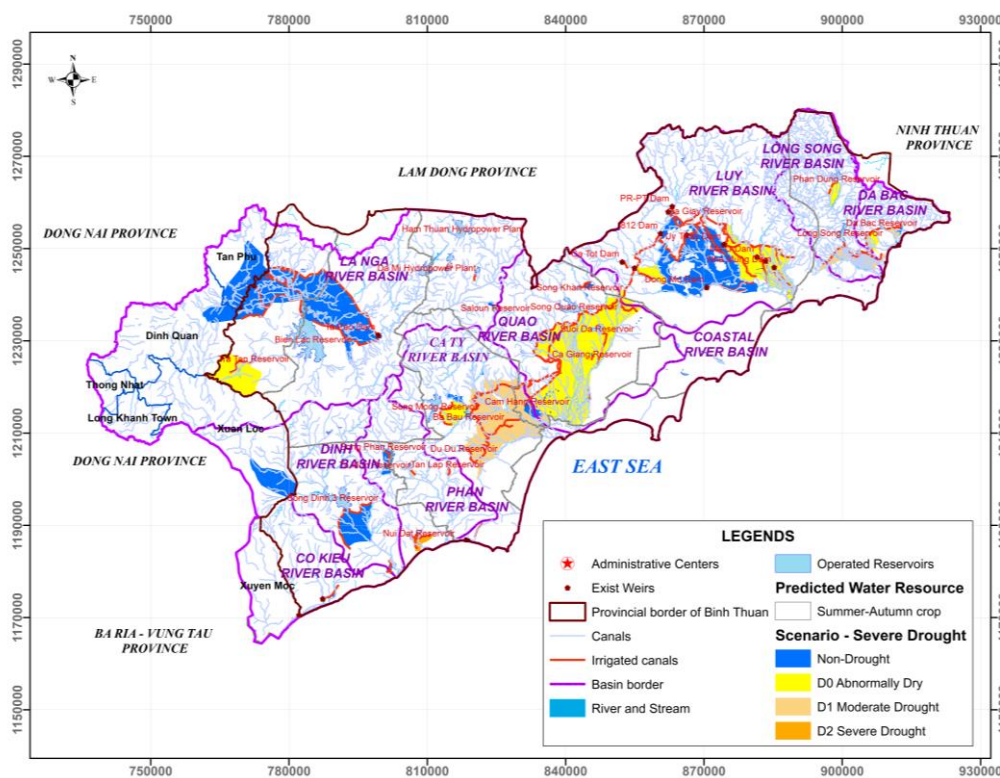


Figure 11. Areas projected to experience abnormally dry and drought conditions during the Summer-Autumn crop.

3.4.4. Extreme drought scenario

During an extreme drought (Figure 12 and Figure 13), less than 160 million m³ is available at the beginning of the Winter-Spring crop life cycle (Figure 12), and the total rainfall is less than 1 mm in severe and extreme drought years. Based on the forecast results of the drought occurrence and the forecasted water resource, it is necessary to have an efficient water use plan. Water source meets 50% of water demand. The cropping area to be reduced compared to the program is 13,228 hectares. Water availability of some reservoirs at the beginning of the season can only meet less than 20% of the water demand for irrigation. Some reservoirs, such as Mong, Quao, Phan, Da Bac, and Phan Dung, can supply water for domestic plants. This provides water for daily life and services of the people, then to livestock rearing, agricultural production, and other economic sectors. Preliminary calculations suggest that if an extreme drought occurs, the area affected by drought and water shortages will be about 9,344 hectares. For the Summer-Autumn crop (Figure 13), the water source to the reservoirs at the beginning of the crop life cycle is less than 25 million m³, and the total rainfall is less than 300 mm in extreme drought years. With the drought, water shortage in most reservoirs, and the amount of incoming water only meeting 45% of the demand, the area must be reduced by nearly 17,000 hectares compared to the plan. Right from the beginning of the crop, it is necessary to plan production, adjust the season, and reduce the arable land area for reservoirs that can only meet 15-20%.

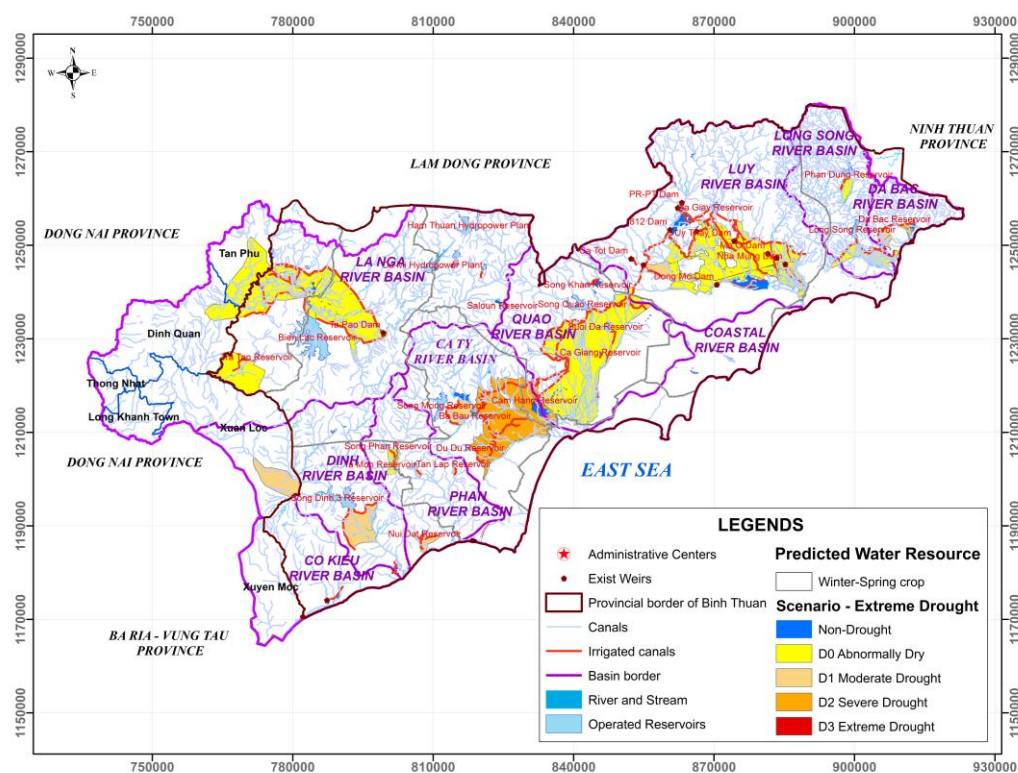


Figure 12. Areas projected to experience abnormally dry and drought conditions during the Winter-Spring crop.

423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441

442
443
444

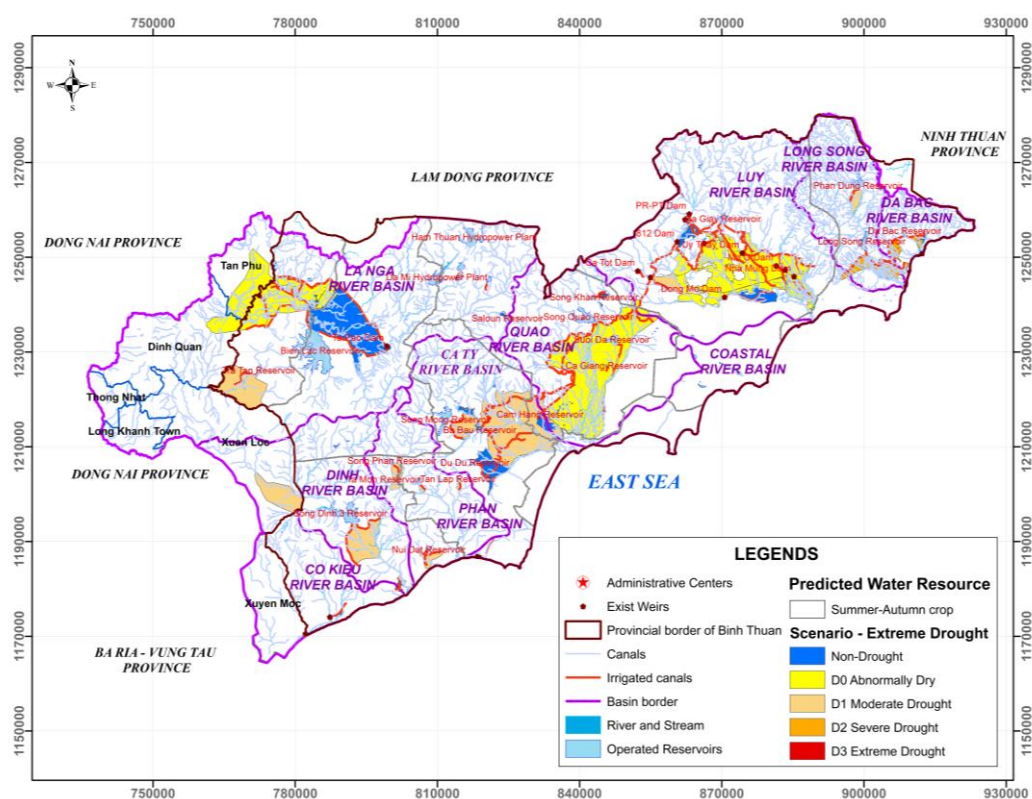


Figure 13. Areas projected to experience abnormally dry and drought conditions during the Summer-Autumn crop.

The KBDI shows that droughts occur almost annually in the Southeast provinces located in the South-Central region (Binh Thuan, Dong Nai– Ba Ria - Vung Tau provinces). The KBDI index at Dong Nai station from 2010 to 2018 shows that drought usually occurs from the end of January to the middle of May; severe droughts typically happen in March and April. 2010-2018, four relatively severe droughts (KBDI Index > 700, occurred for two consecutive months), namely 2014, 2015, 2017, and 2018 dry seasons. Besides, in the dry season KBDI drought index in 2019 shows that drought occurs unevenly in space and time regions. The drought started in January and ended in May 2019, and the most significant drought occurred in March and April. In the northern and western areas, drought appeared earlier. It ended earlier than the southern and eastern areas of the study area, with severe drought in Binh Thuan, Dong Nai, and Ba Ria - Vung Tau provinces.

3.5. Assessing the response of the irrigation system to different drought scenarios

Under the abnormally dry scenario (P=50%), water is available for irrigation through the entire crop life cycle. However, drought occurs in some small reservoirs, where the water source for winter-spring crops is guaranteed. Some areas of the Cam Hang and Du Du reservoirs experience abnormal and moderate droughts. For the Summer-Autumn cropping period, the incoming water source ensures the water use demand. Water shortage only occurs at the beginning of the Long Song reservoir season (June with a 75% response rate). The irrigation system of Phan Ri – Phan Thiet and Ta Pao dam ensures 100% of the irrigation area in each season (no drought). In the moderate drought scenario

(P=75%), some reservoirs in the Winter-Spring crop are in abnormally drought conditions, such as the Da Bac reservoir, which lacks water at the beginning of the crop. For the Cam Hang reservoir, the amount of water at the beginning of the crop is only 26% compared to the requirement.

It is also observed that abnormally dry and moderate droughts have occurred between February and April for many years. The Du Du reservoir reached 32% compared to the requirement for moderate water shortage from January to March. Moreover, abnormal drought is observed in the Nui Dat reservoir during March and April. The Ba Bau reservoir has only 28% of water at the beginning of the season, but the amount of water meets the irrigation demand. In the Summer-Autumn cropping season, some reservoirs have only 40-50% of water at the beginning of the season, but the amount of water can meet the demands because of rainfall. The Phan River reservoir has a mild water shortage at the beginning of the crop, with a supply rate of 56%. The Phan Ri - Phan Thiet irrigation system and the Ta Pao dam will meet 100% of the irrigation demand in the moderate drought scenario. In the severe drought scenario (P=85%), 188.05 million m³ of water is available in the reservoirs at the beginning of the winter-spring crop life cycle. However, this decreases to 124.90 million m³ by the end of January.

The water availability of the Cam Hang reservoir at the beginning of the cropping period is only 24% compared to the requirement. The amount of water is only enough for December and January. From February to April, there is a moderate to severe drought. The Du Du and Nui Dat reservoirs have an abnormally dry to moderate drought from January to April. The Quao reservoir would require more water for domestic purposes to provide to the Phan Thiet water supply plant. The Ba Bau reservoir has a moderate drought from December to January and a severe drought from February to April. The response rate is less than 40% of the requirement. The Phan Ri - Phan Thiet irrigation system can ensure 80% of the water demand for the crop, and the Ta Pao dam can provide more than 90% of the water demand for the crop in the abnormally dry scenario. In the Summer-Autumn crop, the Cam Hang, Du Du, and Nui Dat reservoirs need to be improved their capacity to meet the crop water demand. The Song Phan reservoir has a slight water shortage at the beginning of the Summer-Autumn cropping season with a supply rate of 50%. The Nui Dat reservoir had a moderate and severe drought in May, June, and July.

The Phan Ri - Phan Thiet irrigation system can meet all the required water demand for cropping during abnormally dry conditions, while this decreases to 76% for the Ta Pao reservoir. For the extreme drought scenario (P=95%), the total capacity of irrigation reservoirs at the beginning of the winter-spring crop will reach 164.21 million m³. By the end of January, only 75.90 million m³ can be supplied. At the beginning of the cropping, there would be a water shortage in Da Bac, Ca Giay, and Ba Bau reservoirs. The reservoirs' water supply can meet the demand during the beginning of the cropping between December and January in the following year. From February to April, there is moderate to severe drought. In the extreme drought scenario, there is no rain in the case. The amount of water at the end of the crop life cycle in March is about 51.41 million m³. The Ba Bau, Du Du,

and Ca Giay reservoirs can meet about 15%, 22%, and 31% of water demand. The Song Mong and Song Quao reservoirs can ensure water demand for irrigation and domestic use. Moreover, the Song Quao reservoir can provide sufficient water for the domestic demand for the Phan Thiet water plants. Most small reservoirs have severe drought between January and April.

In the Summer-Autumn cropping season, the Cam Hang, Du Du, and Nui Dat reservoirs must improve their capacity to meet cropping water demand. The Phan River reservoir needs more water at the beginning of the Summer-Autumn cropping season with a response rate of less than 50%. The Nui Dat reservoir would have a moderate and severe drought in May, June, and July. In this scenario, in two seasons, the irrigation system of Phan Ri - Phan Thiet is 75% guaranteed, and abnormally dry conditions occur at Ta Pao dam, 80% and 76%, respectively (Table 7). However, a moderate drought can occur in the Summer-Autumn cropping season.

Table 7. Production plan

No	Construction or construction group	Scenario responsiveness							
		Winter-Spring				Summer-Autumn			
		Abnormally Dry	Moderate Drought	Severe Drought	Extreme Drought	Abnormally Dry	Moderate Drought	Severe Drought	Extreme Drought
I		Reservoir system							
1	Long Song	88%	100%	75%	65%	100%	100%	40%	12%
2	Da Bac	85%	65%	56%	40%	80%	65%	20%	11%
3	Phan Dung	100%	100%	100%	100%	100%	100%	100%	100%
4	Ca Giay	100%	75%	41%	32%	100%	64%	41%	15%
5	Song Quao	100%	100%	78%	73%	100%	79%	79%	75%
6	Suoi Da	100%	86%	86%	80%	100%	86%	84%	81%
7	Khan	100%	100%	100%	100%	100%	100%	100%	100%
8	Ca Giang	100%	100%	74%	71%	100%	100%	100%	77%
9	Mong	100%	100%	100%	100%	100%	100%	100%	100%
10	Cam Hang	40%	28%	24%	23%	60%	28%	35%	22%
11	Ba Bau	100%	85%	25%	15%	100%	100%	45%	35%
12	Du Du	42%	32%	31%	22%	51%	32%	30%	29%
13	Phan	100%	100%	86%	76%	100%	100%	25%	22%
14	Tan Lap	100%	76%	71%	69%	100%	76%	65%	65%
15	Ta Mon	100%	95%	81%	73%	100%	85%	77%	55%
16	Nui Dat	100%	65%	65%	63%	100%	65%	24%	20%
17	Dinh 3	100%	100%	100%	100%	100%	100%	100%	100%
18	Tra Tan	100%	100%	100%	100%	100%	100%	72%	65%

II		Weir system							
1	Phan Ri - Phan Thiet	100%	100%	80%	75%	100%	100%	100%	75%
2	Ta Pao	100%	100%	90%	80%	100%	100%	76%	76%

The average annual flow across the region is 0.025 m³/s, with surface water resources in the study area of 25.3 billion m³. This water source is relatively abundant but needs to be more evenly distributed. In the dry season, the water can dry up. In the rainy season, floods can occur and cause loss of human life, destruction of crops, and loss of livestock. In some places, a severe water shortage causes drought and a lack of water for production and daily life.

The amount of water supply for the domestic, agricultural, and industrial sectors in 2017 was 9.0 billion m³, accounting for 21.7% of the total annual flow. Agricultural production, domestic use, and industry accounted for 77.3% (cultivation 65.6%; fishery 11.6%), 8.4%, and 14.0% of the water supply, respectively. Considering climate changes, the results of the expected water demand by 2030 show that the total water demand is about 13.42 billion m³, which increases by about 4.35 billion m³ compared to the water demand of the year 2017. The agricultural sector accounts for much water use in the basin. Compared with the water available in the basin, the water demand for agriculture by 2030 accounts for about 29.75% of the water use. The water balance results of the current situation in 2017 show that in the dry season, most river basins have water shortages. The amount of water shortage in the region is about 1.35 billion m³. The water shortage is mainly concentrated in the Tay Ninh sub-basins, Saigon River sub-basins, and coastal sub-basins. The results of water balance by 2030 under climate change show that the planned constructions, namely Dong Nai River, La Nga 3 reservoir works, and Ta Pao, Vo Duc irrigation systems, can help to improve the water supply systems in some sub-basins, especially upstream sub-basins. Although large reservoirs were built, water is insufficient to meet the high demand. As a result, water shortage can occur in some drought years, especially for the sub-basins of the Saigon River and the coastal river basin because this area has limited storage facilities, unlike upstream regions.

The study demonstrates the feasibility and high applicability of using the MIKE HYDRO BASIN model and KDBI drought index to assess water resource management in Binh Thuan province. The successful calculation of the KDBI's potential application in monitoring drought and predicting crop yield has previously been demonstrated in the Greater Mekong sub-region, the central highland regions of Vietnam, and neighboring countries, including Indonesia [47–51]. The findings of this study can potentially improve the identification and monitoring of drought conditions in Binh Thuan province and provide an example for other studies in other regions affected by droughts and water availability constraints. With the latter, decision-makers and stakeholders, including farmers and water resource managers, can better plan and arrange for cultivating different crops when droughts are forecast and establish a rational irrigation plan. Moreover, the research

could assist the irrigation department in determining the water supply capacity and the percentage of water deficit required to enhance their irrigation system, reservoirs, pumping stations, and canals, raising awareness for future investments in water infrastructure.

Despite the model's excellent performance, it is essential to acknowledge that limitations and uncertainties remain. Specifically, this study only accounts for surface water calculations and does not include groundwater. Also, the study focused on one drought index to assess drought extent. Other drought indices representing meteorological, hydrological, and agricultural droughts, such as the Standardized Precipitation Index (SPI), Standardized Precipitation Evapotranspiration Index (SPEI), Standardized Runoff Index (SRI), and the Standardized Soil Water Index (SSWI), could be examined as an extension to this study, as well as assessing drought frequency and probability using Artificial Intelligence (AI) models.

As for all numerical models, there are uncertainties associated with the use of the MIKE MYDRO BASIN model, notably in the model structure, the assumptions that the model makes, and the values of model parameters even after calibration [52–54], the accuracy of the input data [52]. Furthermore, there are uncertainties in using the regional climate model and climate change scenarios [54]; modeling not only uncertainties can meet the need for irrigation water by 100% and 75-80% during moderate to extreme drought. Nonetheless, the results indicate that water shortages will occur in some drought years, but uncertainties are associated with future GHG emissions and the climate system's response to the latter [55]. However, the problem was previously solved using two greenhouse gas emissions scenarios, including the lower and upper boundaries of projected future emissions.

4. Conclusion

Water shortages and the allocation of water resources are major issues in the Southeast region of Vietnam, especially in the Luy-Nga River basin, where water resources are not evenly distributed in space and time and where droughts are a recurrent problem during the dry season. This study shows the continued recurrence of abnormally dry and drought conditions in the basin until 2030 and the resilience of existing allocations of water resources based on two climate change scenarios. Under unusually dry conditions, 100% of the water needs during both annual crop cycles can be met. However, this rate decreases to 85-100% during a moderate drought. Severe and extreme droughts, common in the East and Northeast of the basin, reduces the percentage of the water demand for irrigation that can be met to 65% and 45-50%, respectively, albeit with some reservoirs meeting only 15-40% of the demand. Water availability will increase when the La Nga 3 reservoir and Ta Pao Vo Dac irrigation systems are completed.

This study demonstrates that improving water resources managementThis study will be the basis for developing and expanding approaches for water resources management in other rivers in the Southeast region, helping to stabilize agricultural production, changing the structure of crops suitable for water resources in harsh weather conditions, and reducing costs and damage caused by droughts.

Author Contributions: Conceptualization, Vuong, N.D.; methodology, Thinh, L.V., Vuong, N.D., Duong, T.A. and Phong, N.T.; software, Thinh, L.V., Vuong, N.D., Tuyen, H.N., Truong, P.N.; validation, Vuong, N.D., Duong, T.A. and Alexandre, S.G.; formal analysis and data curation, Vuong, N.D., Tuan, T. M., Tuyen, H.N., Truong, P.N. and Phong, N.T.; investigation and resources, Vuong, N.D., Thinh, L.V.; Tuan, T. M. and Tuyen, H.N.; writing—original draft preparation, Vuong, N.D., Phong, N.T., Duong, T.A., Proloy.D., Alexandre, S.G., Quoc, B.P. and Lohpaisankrit.W.; writing—review and editing, Quoc, B.P., Duong, T.A., Lohpaisankrit.W., Proloy.D. and Alexandre, S.G.; visualization, Truong, P.N., Phong, N.T., Lohpaisankrit.W. and Quoc, B.P.; supervision and project administration, Vuong, N.D. and Duong, T.A.; funding acquisition, Vuong, N.D. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the Ministry of Agriculture and Rural Development of Vietnam under the project titled “Research and propose integrated solutions to improve the efficiency of water use for agricultural production and people’s livelihood to cope with drought in river basins in the Southeast region”, the Decision No. 3324/QĐ-BNN-KHCN dated August 12, 2016, research by the Southern Institute of Water Resources Research (SIWRR).

Institutional Review Board Statement: Not applicable

Informed Consent Statement: Not applicable

Data Availability Statement: The datasets generated during and analyzed in this study are available from the corresponding author upon reasonable request.

Acknowledgments: This work is based on a ministerial project titled: “Research and propose integrated solutions to improve the efficiency of water use for agricultural production and people’s livelihood to cope with drought in river basins in the Southeast region,” funded by Vietnam’s Ministry of Agriculture and Rural Development (MADR). We thank the Southern Institute of Water Resources Research for providing the data, model license, and information required to conduct the study.

Conflicts of Interest: The authors declare no conflict of interest.

Appendix A

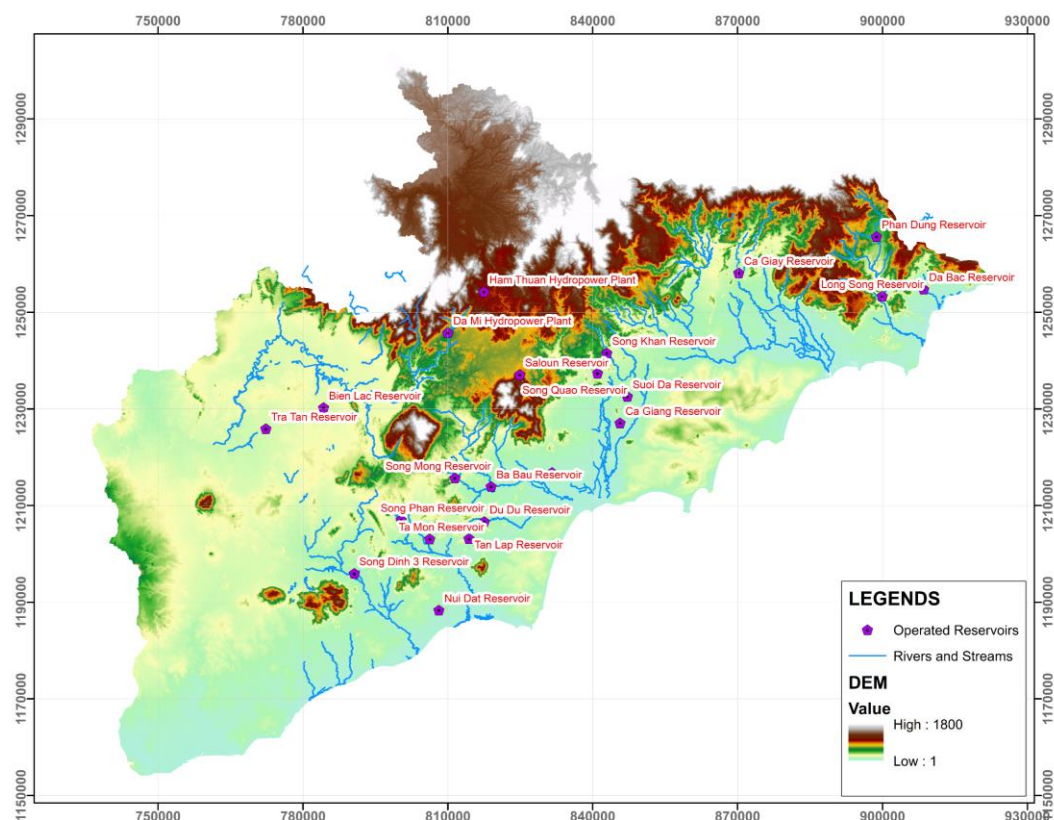


Figure A1. Digital Elevation Model (DEM) and Location of critical reservoirs in the La Nga and Luy river basin of Binh Thuan Province.

Table A1. Drought scenario corresponding to rainfall frequency.

Case	Rainfall frequency	Drought scenario
Water shortage	<50%	No drought
Less water	From 50% to less than 75%	Abnormally dry
	From 75% to less than 85%	Moderate drought
	From 85% to less than 95%	Severe drought
	Over 95%	Extreme drought

Table A2. Water use rates by different sectors in a sustainable development scenario (1,000 m³).

Year	Water demand (Million m ³)	Ratio to current	Cash crop	Aquaculture	Domestic	Industry
2017	9,068.698	100%	5,952.89	1,056.16	762.83	1,296.81
		100%	65.6%	11.6%	8.4%	14.0%
2030	13,418.875	148%	8,845.23	969.34	1,327.89	2,276.39
		100%	65.9%	7.2%	9.9%	17.0%

Table A3. Projected changes in mean annual temperature and total annual precipitation for different 20-year periods compared to the 1986-2005 period for RCP4.5 and RCP8.5.

Variable	RCP4.5	RCP8.5
----------	--------	--------

	2016-2035	2046-2065	2080-2099	2016-2035	2046-2065	2080-2099
Temperature	0.7°C (0.4-1.3)	1.3 (0.9-2.1)	1.7 (1.1-2.6)	0.8 (0.5-1.2)	1.8 (1.3-2.6)	3.2 (2.7-4.1)
Rainfall	18.4% (8.3-28.0)	21.5 % (13.5- 30.1)	23.2 % (13.4- 33.2)	16.0 % (6.6- 25.8)	17.8 % (6.2- 28.9)	21.5 % (11.8-31.2)

References

- Costa, M.H.; Foley, J.A. Trends in the Hydrologic Cycle of the Amazon Basin. *J. Geophys. Res. Atmospheres* **1999**, *104*, 14189–14198, doi:10.1029/1998JD200126.
- Anand, J.; Gosain, A.K.; Khosa, R. Prediction of Land Use Changes Based on Land Change Modeler and Attribution of Changes in the Water Balance of Ganga Basin to Land Use Change Using the SWAT Model. *Sci. Total Environ.* **2018**, *644*, 503–519.
- Pereira, L.S. Water, Agriculture and Food: Challenges and Issues. *Water Resour. Manag.* **2017**, *31*, 2985–2999.
- Pham, H.; Olivier, P.A. Water Balance Changes in the Upper Part of Dong Nai River Basin. *J. Vietnam. Environ.* **2019**, *11*, 74–82.
- Walraevens, K.; Gebreyohannes Tewolde, T.; Amare, K.; Hussein, A.; Berhane, G.; Baert, R.; Ronsse, S.; Kebede, S.; Van Hulle, L.; Deckers, J. Water Balance Components for Sustainability Assessment of Groundwater-Dependent Agriculture: Example of the Mendae Plain (Tigray, Ethiopia). *Land Degrad. Dev.* **2015**, *26*, 725–736.
- Bao, Z.; Zhang, J.; Wang, G.; Chen, Q.; Guan, T.; Yan, X.; Liu, C.; Liu, J.; Wang, J. The Impact of Climate Variability and Land Use/Cover Change on the Water Balance in the Middle Yellow River Basin, China. *J. Hydrol.* **2019**, *577*, 123942.
- Deb, P.; Abbaszadeh, P.; Moradkhani, H. An Ensemble Data Assimilation Approach to Improve Farm-Scale Actual Evapotranspiration Estimation. *Agric. For. Meteorol.* **2022**, *321*, 108982.
- Sacon, P. Water for Agriculture, Irrigation Management. *Appl. Soil Ecol.* **2018**, *123*, 793–796.
- Batchelor, C.H.; Rama Mohan Rao, M.S.; Manohar Rao, S. Watershed Development: A Solution to Water Shortages in Semi-Arid India or Part of the Problem? *Land Use Water Resour. Res.* **2003**, *3*.
- Deb, P.; Moradkhani, H.; Han, X.; Abbaszadeh, P.; Xu, L. Assessing Irrigation Mitigating Drought Impacts on Crop Yields with an Integrated Modeling Framework. *J. Hydrol.* **2022**, *609*, 127760.
- Yoshida, K.; Azechi, I.; Hariya, R.; Tanaka, K.; Noda, K.; Oki, K.; Hongo, C.; Honma, K.; Maki, M.; Shirakawa, H. Future Water Availability in the Asian Monsoon Region: A Case Study in Indonesia. *J. Dev. Sustain. Agric.* **2013**, *8*, 25–31.
- Programme, U.N.E. *Vietnam Assessment Report on Climate Change*; UNEP, 2009.
- Van Hong, N.; Nguyen, V.T. The Impact of Climate Change on the Transportation in Binh Thuan Province. *Meteorol. Hydrol. J.* **2021** (in Viet Nam).
- Vinh, P.Q.; Huong, P.T.T. Assessing Agricultural Drought for Binh Thuan Province under Climate Change Scenario. *Sci. Earth* **2012**, *34*, 513–523.
- Bastiaanssen, W.G.; Chandrapala, L. Water Balance Variability across Sri Lanka for Assessing Agricultural and Environmental Water Use. *Agric. Water Manag.* **2003**, *58*, 171–192.
- Golmohammadi, G.; Prasher, S.; Madani, A.; Rudra, R. Evaluating Three Hydrological Distributed Watershed Models: MIKE-SHE, APEX, SWAT. *Hydrology* **2014**, *1*, 20–39.

17. Shi, P.; Chen, C.; Srinivasan, R.; Zhang, X.; Cai, T.; Fang, X.; Qu, S.; Chen, X.; Li, Q. Evaluating the SWAT Model for Hydrological Modeling in the Xixian Watershed and a Comparison with the XAJ Model. *Water Resour. Manag.* **2011**, *25*, 2595–2612. 688–690
18. Suryatmojo, H.; Fujimoto, M.; Yamakawa, Y.; Kosugi, K.; Mizuyama, T. Water Balance Changes in the Tropical Rainforest with Intensive Forest Management System. *Int. J. Sustain. Future Hum. Secur. J-Sustain* **2013**, *1*, 56–62. 691–692
19. Himanshu, S.K.; Pandey, A.; Shrestha, P. Application of SWAT in an Indian River Basin for Modeling Runoff, Sediment and Water Balance. *Environ. Earth Sci.* **2017**, *76*, 1–18. 693–694
20. Marhaento, H.; Booij, M.J.; Rientjes, T.H.M.; Hoekstra, A.Y. Attribution of Changes in the Water Balance of a Tropical Catchment to Land Use Change Using the SWAT Model. *Hydrol. Process.* **2017**, *31*, 2029–2040. 695–696
21. SANTOS, R.; FERNANDES, L.S.; CORTES, R.; PACHECO, F. Analysis of Hydrology and Water Allocation with Swat and Mike Hydro Basin in the Sabor River Basin, Portugal. *WIT Trans. Ecol. Environ.* **2018**, *215*, 347–355. 697–698
22. Uniyal, B.; Jha, M.K.; Verma, A.K. Assessing Climate Change Impact on Water Balance Components of a River Basin Using SWAT Model. *Water Resour. Manag.* **2015**, *29*, 4767–4785. 699–700
23. Loliyana, V.D.; Patel, P.L. A Physics Based Distributed Integrated Hydrological Model in Prediction of Water Balance of a Semi-Arid Catchment in India. *Environ. Model. Softw.* **2020**, *127*, 104677. 701–702
24. Singh, R.; Subramanian, K.; Refsgaard, J.C. Hydrological Modelling of a Small Watershed Using MIKE SHE for Irrigation Planning. *Agric. Water Manag.* **1999**, *41*, 149–166. 703–704
25. Usmanov, S.; Mitani, Y.; Kusuda, T. An Integrated Hydrological Model for Water Balance Estimation in the Chirchik River Basin, Northern Uzbekistan. *Comput. Water Energy Environ. Eng.* **2016**, *5*, 87. 705–706
26. Makungo, R.; Odiyo, J.O.; Ndiritu, J.G.; Mwaka, B. Rainfall–Runoff Modelling Approach for Ungauged Catchments: A Case Study of Nzhelele River Sub-Quaternary Catchment. *Phys. Chem. Earth Parts A B C* **2010**, *35*, 596–607. 707–708
27. Singh, A.; Singh, S.; Nema, A.K.; Singh, G.; Gangwar, A. Rainfall-Runoff Modeling Using MIKE 11 NAM Model for Vinayakpur Intercepted Catchment, Chhattisgarh. *Indian J. Dryland Agric. Res. Dev.* **2014**, *29*, 1. 709–710
28. Hongsawong, P.; Sittichok, K. Runoff Estimation Using SWAT and MIKE HYDRO BASIN Models in the Pasak River Basin. PhD Thesis, Kasetsart University, 2021. 711–712
29. Husain, M.R.; Ishak, A.M.; Redzuan, N.; van Kalken, T.M.; Brown, K. Malaysian National Water Balance System (Nawabs) for Improved River Basin Management: Case Study in the Muda River Basin. In Proceedings of the E-proceedings of the 37th IAHR World Congress; 2017; pp. 13–18. 713–715
30. Jha, M.K.; Gupta, A.D. Application of Mike Basin for Water Management Strategies in a Watershed. *Water Int.* **2003**, *28*, 27–35. 716–717
31. Kolokytha, E.; Malamataris, D. Integrated Water Management Approach for Adaptation to Climate Change in Highly Water Stressed Basins. *Water Resour. Manag.* **2020**, *34*, 1173–1197. 718–719
32. Yu, Y.; Disse, M.; Yu, R.; Yu, G.; Sun, L.; Huttner, P.; Rumbaur, C. Large-Scale Hydrological Modeling and Decision-Making for Agricultural Water Consumption and Allocation in the Main Stem Tarim River, China. *Water* **2015**, *7*, 2821–2839. 720–722
33. DHI MIKE HYDRO Basin User Guide 2017. 723
34. Bessa Santos, R.M.; Sanches Fernandes, L.F.; Vitor Cortes, R.M.; Leal Pacheco, F.A. Development of a Hydrologic and Water Allocation Model to Assess Water Availability in the Sabor River Basin (Portugal). *Int. J. Environ. Res. Public Health* **2019**, *16*, 2419. 724–726
35. Jaiswal, R.K.; Lohani, A.K.; Galkate, R.V. Decision Support for Scenario Analysis in a Complex Water Resource Project. *J. Appl. Water Eng. Res.* **2021**, *9*, 52–68. 727–728
36. Allen, R.G. An Update for the Calculation of Reference Evapotranspiration. *IcID Bull* **1994**, *43*, 35–92. 729

37. Allen, R.G.; Smith, M.; Perrier, A.; Pereira, L.S. An Update for the Definition of Reference Evapotranspiration. *ICID Bull.* **1994**, *43*, 1–34. 730
731
38. Penman, H.L. Natural Evaporation from Open Water, Bare Soil and Grass. *Proc. R. Soc. Lond. Ser. Math. Phys. Sci.* **1948**, *193*, 120–145. 732
733
39. Allen, R.G.; Pereira, L.S.; Raes, D.; Smith, M. Crop Evapotranspiration-Guidelines for Computing Crop Water Requirements-FAO Irrigation and Drainage Paper 56. *Fao Rome* **1998**, *300*, D05109. 734
735
40. Jabbari, A.; Bae, D.-H. Application of Artificial Neural Networks for Accuracy Enhancements of Real-Time Flood Forecasting in the Imjin Basin. *Water* **2018**, *10*, 1626, doi:10.3390/w10111626. 736
737
41. Chicco, D.; Warrens, M.J.; Jurman, G. The Coefficient of Determination R-Squared Is More Informative than SMAPE, MAE, MAPE, MSE and RMSE in Regression Analysis Evaluation. *PeerJ Comput. Sci.* **2021**, *7*, e623, doi:10.7717/peerj-cs.623. 738
739
740
42. Deb, P.; Moradkhani, H.; Abbaszadeh, P.; Kiem, A.S.; Engström, J.; Keellings, D.; Sharma, A. Causes of the Widespread 2019–2020 Australian Bushfire Season. *Earths Future* **2020**, *8*, e2020EF001671. 741
742
43. Keetch, J.J.; Byram, G.M. *A Drought Index for Forest Fire Control*; US Department of Agriculture, Forest Service, Southeastern Forest Experiment ..., 1968; Vol. 38. 743
744
44. Mallya, G.; Zhao, L.; Song, X.C.; Niyogi, D.; Govindaraju, R.S. 2012 Midwest Drought in the United States. *J. Hydrol. Eng.* **2013**, *18*, 737–745. 745
746
45. Svoboda, M.; LeComte, D.; Hayes, M.; Heim, R.; Gleason, K.; Angel, J.; Rippey, B.; Tinker, R.; Palecki, M.; Stooksbury, D. The Drought Monitor. *Bull. Am. Meteorol. Soc.* **2002**, *83*, 1181–1190. 747
748
46. Zink, M.; Samaniego, L.; Kumar, R.; Thober, S.; Mai, J.; Schäfer, D.; Marx, A. The German Drought Monitor. *Environ. Res. Lett.* **2016**, *11*, 074002. 749
750
47. Hosoya, Y.; Takeuchi, W. Performance of Drought Monitoring Methods towards Rice Yield Estimation in Greater Mekong Sub-Region (GMS). In Proceedings of the Proceedings of 33rd Asian Conference on Remote Sensing (ACRS), Patthaya, Thailand; 2012; Vol. 28. 751
752
753
48. Shofiyati, R.; Takeuchi, W.; Sofan, P.; Darmawan, S.; Supriatna, W. Indonesian Drought Monitoring from Space. A Report of SAFE Activity: Assessment of Drought Impact on Rice Production in Indonesia by Satellite Remote Sensing and Dissemination with Web-GIS. In Proceedings of the IOP Conference Series: Earth and Environmental Science; IOP Publishing, 2014; Vol. 20, p. 012048. 754
755
756
757
49. Thang, N.V.; M.V., K.; W., T.; V. N., A. Research and Propose a Real-Time Drought Monitoring System in Vietnam. *Meteorol. Hydrol. J.* **2014** (in Viet Nam). 758
759
50. Thuc, T.; Thang, N.V.; Cuong, H.D.; Khiem, M.V.; Mau, N.D.; Thang, V.V.; Takeuchi, W.; An, V.N. The Applicability of the Keetch-Byram Drought Index (KBDI) in Drought Monitoring in Vietnam.; Tay Nguyen, Vietnam, 2013; p. 177 (in Viet Nam). 760
761
762
51. Quyen, T.N.N.; Liem, D.N.; Nguong, D.N.; Thoang, N.; Long, T.B.; Loi, K.N. Drought Zoning Based on Drought Index and Hydrological Simulation in Srepok Basin in the Central Highlands. *VNU Journal of Science: Earth and Environmental Sciences* **2017** (in Viet Nam). 763
764
765
52. Moges, E.; Demissie, Y.; Larsen, L.; Yassin, F. Sources of Hydrological Model Uncertainties and Advances in Their Analysis. *Water* **2021**, *13*, 28. 766
767
53. Renard, B.; Kavetski, D.; Kuczera, G.; Thyer, M.; Franks, S.W. Understanding Predictive Uncertainty in Hydrologic Modeling: The Challenge of Identifying Input and Structural Errors. *Water Resour. Res.* **2010**, *46*. 768
769

-
54. Brigode, P.; Oudin, L.; Perrin, C. Hydrological Model Parameter Instability: A Source of Additional Uncertainty in Estimating the Hydrological Impacts of Climate Change? *J. Hydrol.* **2013**, *476*, 410–425, doi:10.1016/j.jhydrol.2012.11.012. 770
771
772
55. Deser, C.; Knutti, R.; Solomon, S.; Phillips, A.S. Communication of the Role of Natural Variability in Future North American Climate. *Nat. Clim. Change* **2012**, *2*, 775–779, doi:10.1038/nclimate1562. 773
774
775