

**ELECTRICAL RESISTIVITY STUDIES IN
THE KANSAS RIVER VALLEY**

By

Daniel F. Merriam

State Geological Survey of Kansas, Bulletin 109, Part 7

UNIVERSITY OF KANSAS PUBLICATION

LAWRENCE, KANSAS

1954

STATE OF KANSAS

EDWARD F. ARN, *Governor*

STATE BOARD OF REGENTS

WALTER FEES, *Chairman*

MRS. LEO HAUGHEY
A. W. HERSHBERGER
WILLIS N. KELLY
DREW McLAUGHLIN

LESTER McCOY
GROVER POOLE
LA VERNE B. SPAKE
OSCAR STAUFFER

MINERAL INDUSTRIES COUNCIL

B. O. WEAVER ('57), *Chairman*
M. L. BREIDENTHAL ('54)
HOWARD CAREY ('54)
JOHN L. GARLOUGH ('54)
O. W. BILHARZ ('55)
GEORGE K. MACKIE JR. ('55)

BRIAN O'BRIAN ('55), *Vice-Chairman*
CHARLES COOK, ('56)
DANE HANSEN ('56)
JOE E. DENHAM ('56)
K. A. SPENCER ('57)
W. L. STRYKER ('57)

STATE GEOLOGICAL SURVEY OF KANSAS

FRANKLIN D. MURPHY, M.D., Chancellor of the University of Kansas,
and ex officio Director of the Survey

FRANK C. FOLEY, Ph.D., State Geologist and Director
RAYMOND C. MOORE, Ph.D., Sc.D., Principal Geologist

BASIC GEOLOGY

STRATIGRAPHY, AREAL GEOLOGY, AND
PALEONTOLOGY

John M. Jewett, Ph.D., Geologist
A. B. Leonard, Ph.D., Paleontologist*
M. L. Thompson, Ph.D., Paleontologist
Henry V. Beck, M.S., Geologist*
Sue Shine, Stenographer

PETROGRAPHY

Ada Swineford, Ph.D., Petrographer

PUBLICATIONS AND RECORDS

Betty J. Hagerman, Secretary & Editor
Grace Muilenburg, B.S., Journalist
Vera Witherspoon, B.F.A., Draftsman
Jeanne Esch, B.F.A., Draftsman
Juanita E. Lewis, B.F.A., Draftsman
Haraidean Murray, B.F.A., Draftsman
Phyllis J. Harris, Clerk-Typist
Shirley Baker, Clerk-Steno
Lila M. Watkins, Clerk-Typist

MINERAL RESOURCES

W. H. Schoewe, Ph.D., Coal Geologist
R. O. Kulstad, M.S., Econ. Geologist
Kenneth E. Rose, M.S., Met. Engineer*
H. E. Risser, E.M., Mining Engineer*
F. W. Bowdish, S.M., Mining Engineer*

SOUTHEASTERN KANSAS FIELD OFFICE

Allison Hornbaker, M.S., Geologist
Maxine Shaver, Stenographer

COOPERATIVE DEPARTMENTS WITH UNITED STATES GEOLOGICAL SURVEY

GROUND-WATER RESOURCES

V. C. Fishel, B.S., Engineer in Charge
Howard G. O'Connor, B.S., Geologist
Kenneth Walters, B.S., Geologist
Charles K. Bayne, A.B., Geologist
Gilbert J. Stramel, B.S., Hydraulic Engr.
Warren G. Hodson, B.S., Geologist
Delmar W. Berry, A.B., Geologist
E. L. Reavis, Core Driller
Betty Henderson, A.B., Stenographer

SPECIAL CONSULTANTS: Eugene A. Stephenson, Ph.D., Petroleum Engineering; Robert
W. Wilson, Ph.D., Vertebrate Paleontology.

COOPERATING STATE AGENCIES: *State Board of Agriculture, Division of Water Resources*
Robert Smrha, Chief Engineer; *State Board of Health, Division of Sanitation,*
Dwight Metzler, Chief Engineer and Director, and William O. Hilton, Geologist.

*Intermittent employment only.

MINERAL RESOURCES

OIL AND GAS

Edwin D. Goebel, M.S., Geologist
Walter A. Ver Wiebe, Ph.D., Geologist*
Wells W. Rood, Scout
Ruby Marcellus, Well Sample Curator
Judy Perry, Clerk-Typist
Maxine Gantz, Clerk-Typist
Carrie B. Thurber, Laboratory Asst.
Anna Flory, Laboratory Assistant
WICHITA WELL SAMPLE LIBRARY
Ethelyn McDonald, M.A., Curator
Della B. Cummings, Clerk

SUBSURFACE GEOLOGY

Wallace Lee, E.M., Geologist
Daniel F. Merriam, M.S., Geologist

PETROLEUM ENGINEERING

C. F. Weinaug, Ph.D., Petro. Engineer*
J. P. Everett, M.S., Petro. Engineer*
Ivan Nemecek, M.S., Mech. Engineer*

CERAMICS

Norman Plummer, A.B., Ceramist
William B. Hladik, Ceramist
J. Sheldon Carey, A.M., Ceramist*
Clarence Edmonds, Laboratory Asst.

GEOCHEMISTRY

Russell T. Runnels, M.S., Chemist
John Schleicher, B.S., Chemist
William Ives, Jr., M.S., Geologist
Richard Lloyd, B.S., Chemist
Walter E. Hill, Jr., A.B., Chemist
Loretta Vorse, A.B., Chemist

MINERAL FUELS RESOURCES

Holly C. Wagner, M.A., Geologist
Charlene Anderson, Clerk

TOPOGRAPHIC SURVEYS

D. L. Kennedy, Division Engineer
Max J. Gleissner, Section Chief
J. P. Rydeen, Topographer

ELECTRICAL RESISTIVITY STUDIES IN THE KANSAS RIVER VALLEY

By
DANIEL F. MERRIAM

CONTENTS

ABSTRACT	99
INTRODUCTION	99
Previous work	100
Acknowledgments	100
METHODS AND PROCEDURE	101
Field procedure	102
Computations	102
INTERPRETATIONS	103
Depth to water table	104
Depth to bedrock	104
Lithology and type of water	104
Comparison of resistivity curves	105
Accuracy of interpretations	107
APPLICATION	107
SUMMARY AND CONCLUSIONS	109
REFERENCES	112

ILLUSTRATIONS

PLATE

1. Electrical resistivity studies in the Kansas River Valley (*In pocket*)
2. A, Set-up of resistivity equipment in field operation. B, Electrical resistivity instrument and the logging device 98

FIGURE

1. Schematic diagram showing the Wenner electrode configuration 101
2. Comparison of an electric log with a resistivity depth profile 103
3. Representative resistivity profiles in the Lawrence-Eudora area ... 109
4. Configuration on top of the water table in the Lawrence-Eudora area 110
5. Configuration of the bedrock in the Lawrence-Eudora area 111

TABLES

TABLE

1. Resume of chemical analyses of ground water from the Kansas River Valley alluvium 100
2. Water-table measurements compared with resistivity findings 107
3. Bedrock as determined by drilling compared with bedrock as determined by resistivity methods 108



PLATE 2. **A**, Set-up of resistivity equipment in field operation. **B**, Electrical resistivity instrument and the logging device. (Photo by Ada Swineford)

ABSTRACT

In order to investigate the application of resistivity methods to ground-water studies in eastern Kansas, electrical resistivity depth profiles were run in the Kansas River Valley at localities where geologic conditions were known. The results of this survey show that the depth to water table and bedrock can be determined in the Kansas River Valley. To a less certain degree interpretations can also be made concerning lithology and type of water contained in the alluvial sediments.

INTRODUCTION

A series of preliminary electrical resistivity studies was made in the Kansas River Valley in eastern Kansas during 1953 (Pl. 1) in order to evaluate the possibilities of this geophysical prospecting method in the location of usable ground-water supplies. The Kansas River Valley was chosen for this preliminary study because of the abundance of available subsurface information. Test holes have been drilled by the State Geological Survey and by the U. S. Corps of Engineers to obtain information concerning ground water and bedrock. There are also numerous municipal, industrial, and domestic wells in this area from which information has been obtained. Furthermore, detailed geologic investigations of the ground-water resources recently have been completed by Davis and Carlson (1952) and Dufford (1953) and additional studies are under way by Henry V. Beck. As is true in the application of any geophysical method, the more geological data available, the better the interpretation of the results. In this area the resistivity profiles could be compared with known conditions of lithology, depth to water table, and depth to bedrock. These correlations then can be used to facilitate interpretation of profiles in areas which are geologically similar but lack well data.

Depth profiles were run at 33 places in the Kansas River Valley from Eudora to Belvue, Kansas, where test hole information was available.

The bedrock, Pennsylvanian in age, is overlain by Quaternary river alluvium. The alluvial fill attains a maximum thickness of 90 feet (Davis and Carlson, 1952, p. 229), but averages about 55 feet. The alluvial fill grades upward from a coarse cobble conglomerate in the deepest portions to fine sand or silt at the surface. The bedrock consists mainly of shale with some interbedded limestone and

sandstone. The strata dip gently to the west from one-fourth to one-half a degree.

The saturated zone of water-bearing material ranges in thickness from about 20 to 65 feet (Davis and Carlson, 1952, p. 238). The depth to the water table ranges from about 5 to 30 feet from the surface. The quality of the ground water in the Kansas River Valley alluvium is good. Table 1 is a resume of chemical analyses as given by Davis and Carlson (1952, p. 245).

Previous work.—To my knowledge, no other work has been done on the uses of electrical-resistivity studies for the location of ground-water supplies in Kansas. Similar studies, however, have been conducted in other states, notably Illinois (Buhle, 1953).

Acknowledgments.—Thanks are extended to Robert M. Dreyer, who suggested the problem and acquainted me with the field procedure and technique. Ralph E. O'Connor assisted with most of the field work and added many helpful suggestions. Many students at the University of Kansas and members of the State Geological Survey helped during various parts of the field work; these include Henry V. Beck, Donald O. Asquith, John C. Mann, and Robert O. Kulstad. John C. Frye made available unpublished manuscripts and other articles from his personal library and V. C. Fishel furnished unpublished ground-water information. R. M. Dreyer, M. B. Buhle, J. E. Hackett, and W. W. Hambleton read this report critically.

TABLE 1.—*Resume of chemical analyses of ground water from the Kansas River Valley alluvium. Dissolved constituents given in parts per million**
(Davis and Carlson, 1952, p. 245)

Constituents	Minimum	Maximum
Dissolved solids	346	828
Silica	2.4	38
Iron	Trace	13
Calcium	90	156
Magnesium	7.6	28
Sodium and potassium	16	174
Sulfate	4.5	106
Chloride	7	285
Fluoride	0.1	0.6
Nitrate	1.1	29
Bicarbonate	266	587

*One part per million is equivalent to one pound of substance per million pounds of water or 8.33 pounds per million gallons of water.

The resistivity equipment used is owned by the Department of Geology at the University of Kansas.

METHODS AND PROCEDURE

The instrument used was based on the Gish-Rooney circuit (Gish and Rooney, 1925), having a commutated direct current supplied from an external battery source. Four steel electrodes spaced equally distant in a straight line are placed in the ground from 6 to 12 inches deep (Pl. 2A). A measurable current is passed through the ground by way of the two outer electrodes and the potential drop is measured between the two inner electrodes. The two energizing electrodes are placed on the outside of the potential electrodes. This symmetrical arrangement with an equal spacing of the electrodes is known as the Wenner (Wenner, 1916) electrode configuration (Fig. 1).

The effective depth to which the specific resistance to flow of an electric current is measured is dependent upon the spacing of the electrodes and the resistivity of the materials through which the current passes. When the electrodes are placed in the ground at equal spacings in a straight line, the effective depth penetration in homogeneous material is theoretically one-third the total spread or equal to the distance of the spacing of the two inner or potential electrodes. However, since the materials measured generally are not homogeneous, the depth of penetration will change from place to place and must be determined empirically for each new area.

Two types of resistivity measurements may be made: (1) vertical and (2) lateral. The vertical profiles are constructed by progressively increasing the distance between the electrodes as they are moved out from a common center. Lateral investigations are made by taking a single reading at each of several stations along a traverse line, maintaining a constant electrode spread and moving the entire configuration. The purpose of lateral investigation is to




FIG. 1.—Schematic diagram showing the Wenner electrode configuration. C_1 and C_2 are the current electrodes; P_1 and P_2 are the potential electrodes; a is the distance between them. As a increases the depth of penetration also increases.

detect horizontal changes. Both methods are applicable to ground-water studies depending upon the results desired; however, only vertical investigations were used in this study.

FIELD PROCEDURE

Relatively flat ground was selected for each survey to eliminate the necessity of topographic corrections. No more than a 2-foot difference in elevation occurred at any one station. Extreme care was taken to avoid power lines, steel fences, buried pipe lines, cased wells, and culverts which might act as shunts or otherwise disturb the electrical system. For this reason no profiles were run inside any town. Open ditches, such as irrigation ditches, also were avoided. Most of the profiles were run in a north-south direction which is roughly normal to the trend of the valley. However, when profiles were run in an east-west direction because it was impossible to spread the electrodes north-south, no appreciable differences were found. The depth profiles were run as near as possible to the wells for which records were available. From one to five men were used. An ideal crew for extensive work would contain six—one man to move each electrode, an instrument man, and a computer.

Usually readings were started at a depth of 5 feet and taken every 2 or 3 feet until the water table was reached and then at 5-foot intervals into bedrock. Each reading was then computed and plotted for interpretation.

COMPUTATIONS

The computations are based on the principle of Ohm's law: $R = V/I$ (where R = resistance, V = voltage, and I = current). By using a known current and measuring the voltage, it is possible to compute the average rock resistivity within the zone of measurement. When the Wenner configuration is used, the formula, which is a derivation of Ohm's law, for computing the apparent resistivity is:

$$p = 2\pi a V/I$$

(where p = resistivity in ohm-feet, a = the distance between the electrodes in feet, V = the voltage in volts, and I = the current in amperes).

INTERPRETATIONS

There are several methods by which resistivity data can be interpreted. In this report interpretations are based on a visual comparison of resistivity data with geologic data from well logs. To help with the interpretations, an electric log was run on test hole R-7 for comparison with the depth profile obtained at the same location (Fig. 2). An electric log was run immediately after the well was drilled, with a logging device which is attachable to the resistivity instruments (Pl. 2B). This log shows that the resistivity decreases until the water table is reached, increases sharply until bedrock is reached, and then decreases again. It will be noted that the interpretation of the water table, as shown on the well log, corresponds to a lithologic change from silt and clay to sand. In general, the apparent resistivity of a lithologic unit in an electric well log is a function of the ionic content of water in the given strata. If the water has become mineralized in a particular strata the resistance of that bed will be low. The resistivity curve then may show the contrast between the contained waters of two beds of unlike lithology. The resistivity depth profiles may be interpreted in the same manner as interpretations made from the electric log.

There are four items which might be determined from these resistivity profiles in the Kansas River Valley: (1) depth to water

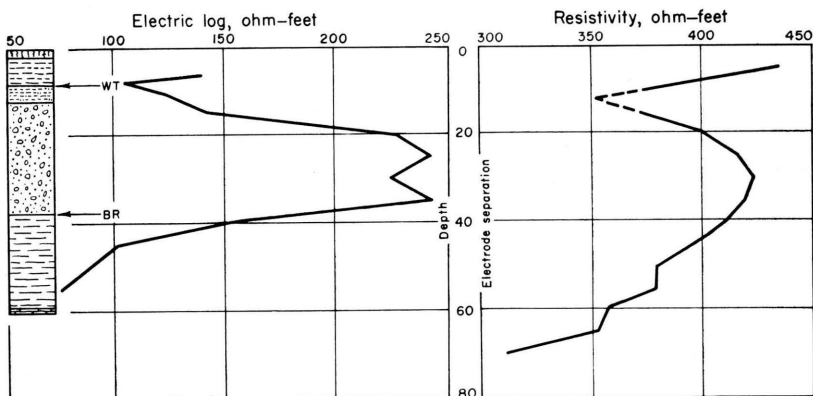


FIG. 2.—Comparison of an electric log with a resistivity depth profile. Shows by visual comparison the relationships between the electric log and a depth profile and the lithologic log at the test hole R-7. WT is the measured depth to the water table and BR is the measured depth to bedrock.

table, (2) depth to bedrock, (3) type of lithology, and (4) type of water. The last two are more difficult to interpret than the first two.

DEPTH TO WATER TABLE

As most of the wells had been drilled several years before the resistivity surveys were run, the present depth to the water table could not be obtained. However, a few of the holes were still open and the depth to the water table could be measured.

Generally the resistivity of the material decreases until the water table is reached and then it increases. However, in some of the profiles the opposite was found. This latter situation is interpreted to mean that the water is mineralized with a high ion content. Some of the profiles do not show a change of resistivity at the water table. Most curves were run very close to Kansas River on low ground in wet weather and it is probable that the water table was very near the surface. Water-table determinations could not be made on other profiles which were logged as dry holes.

DEPTH TO BEDROCK

The bedrock contact is relatively easy to determine because the resistivity of the bedrock is usually less than that of the water-filled alluvium. However, some of the profiles are straight and featureless, showing little contrast in resistivity of the alluvium and the bedrock. This is especially true where either dry alluvium or alluvial silt and clay were found to overlie bedrock of weathered shale. In some profiles the resistivity of the water-filled alluvium was so high that it almost completely masked the bedrock contact.

LITHOLOGY AND TYPE OF WATER

Lithology can be interpreted to a limited extent from an examination of the configuration of the curves. As alluvium, in general, has a higher resistivity than the bedrock the curves show more irregularities due to local lithologic variations. In general, sand and gravel have a higher resistivity than silt and clay. Profiles that show relatively high resistivity probably indicate fresh water, whereas the profiles showing relatively low resistivity probably indicate mineralized water. According to Heiland (1937, p. 574), water with a resistivity of less than 440 ohm-feet (1350 ohm-cm)

should be avoided for human use, and down to about 165 ohm-feet (500 ohm-cm) is tolerable for stock use. Salinity interpretations, however, are uncertain other than for the two extremes—fresh or brackish. Since no brackish water occurs in this area, salinity determinations were not possible.

COMPARISON OF RESISTIVITY CURVES

The comparison of the depth profiles and the well logs is shown on Plate 1. The water table as interpreted from the resistivity profiles is marked by a "WT" and the bedrock contact by a "BR."

Moore's (1945, p. 197) cumulative method of interpretation was applied to the profiles and found to be a satisfactory method of determining bedrock. Although the validity of the method is questioned by some, it seems to give excellent results in aiding interpretations of profiles in the Kansas River Valley. Only a few of the profiles could not be analyzed by this method.

Profile E.—Profiles E-1 and E-2 show an increase in resistivity until the water table is reached and then a decrease. This decrease in resistivity possibly is due to a lens of mineralized water between 25 and 50 feet. The bedrock contact in these two profiles does not show a sharp decrease in the electrical resistivity, but rather a gentle break in the curve caused by slightly increased resistivity. Profile E-3 shows little form with an over-all low resistivity. The water table in this profile occurs in a clay bed in contrast to E-1 and E-2 where the water table occurs approximately at the top of the sand.

Profile L.—Profiles L-1, L-2, and L-3 show similar characteristics. The resistivity decreases to the water table and then increases until bedrock is reached. The bedrock in all three profiles is sandstone. The irregularity of the resistivity curves in bedrock below the alluvium possibly can be attributed to a sequence of alternating sandstone and shale beds.

Profile LV.—Profile LV-1 was logged as a dry hole and thus shows no water-table break on the curve. The straightness, lack of feature, and gradual increase in resistivity with depth seem to be characteristic of alluvial material which lacks water saturation. Profile LV-2 shows a high resistivity between 20 and 40 feet which probably indicates fresh water in that interval. The drillers logs at LV-3 and LV-4 found bedrock at 51 and 52 feet respectively,

whereas the resistivity profiles could be interpreted as showing bedrock at 80 and 75 feet respectively. This discrepancy can be explained in two ways: (1) the limestone and shale, logged as bedrock by the driller, are boulders in the alluvial fill and thus not bedrock or (2) the interpretation of the resistivity profiles is in error because of some anomalous electrical property of the material in this area. It has been found, in certain areas, that a silt bed, such as the one here, will completely mask the electrical properties of the lower beds (Buhle, personal communication). The profile LV-5 is unusual because it shows a gradual decrease of resistivity with depth into bedrock. On the electrical resistivity profile, bedrock is placed tentatively where the rate of decrease in resistivity becomes less.

Profile P.—Profile P-1 is unusual because of the sharp breaks of the curve. P-2 shows a high resistivity between 15 and 30 feet which is probably fresh water. The bedrock contact, as logged in the test well, does not compare favorably with the resistivity curve in profile P-3. Possibly some near-surface anomaly is masking the electrical properties of the lower beds. Profile P-4 shows a more characteristic type of curve with the drillers log and resistivity curve in close agreement.

Profile T.—All three of the resistivity curves show a good break at the water table. Bedrock could not be interpreted from profile T-1. Profiles T-2 and T-3 show more characteristic curves. The increased resistivity between 20 and 40 feet on profile T-3 could be interpreted as a lens of fresh water in that interval.

Profile K.—Profiles K-1, K-2, and K-3 show good breaks at the water table. The discrepancy in the interpretation of bedrock in profiles K-1 and K-2 possibly is due to the fact that the shale logged as bedrock is actually part of the alluvium.

Profile SL.—Profiles SL-3, SL-4, and SL-5 show a high resistivity for the sand and gravel beds of the alluvium which tend to indicate that they probably contain fresh water. Bedrock in the profiles is marked by a decrease in resistivity. These curves are good illustrations of a fresh water-bearing alluvium overlying a bedrock shale sequence. The profiles SL-5 and SL-6 show good water-table breaks.

Profile R.—Profile R-5 does not show an interpretable break either at the water table or at bedrock. The lack of features on this curve may be due to the masking effect of the overlying near-sur-

face clay bed. Profile R-6 shows an overall decrease in resistivity with depth. Profiles R-6, R-7, R-8, and R-9 show good water-table breaks. Profile R-9 might be termed an ideally shaped curve.

Profile B.—The profiles at B-1 and B-2 are similar in shape and configuration. The two curves show an over-all increase in resistivity into bedrock. However, a slight break in rate of increase of resistivity is interpreted as bedrock on both profiles. The high resistivity shown on profile B-3 is probably due to fresh water in the alluvial sand.

ACCURACY OF INTERPRETATIONS

The average error in picking the water table is about 15 percent, whereas the error in interpretation of bedrock is only 9 percent. With a refinement of technique this percentage of error probably could be reduced. Table 2 is a resume of the water-table measurements and those obtained by resistivity methods. Generally, the water table can be determined within 2 feet when using a 2-foot interval spread in taking the depth measurements. The best results in locating the water table seem to be obtained when it is 15 feet or more below the surface. Table 3 is a resume of bedrock as determined by drilling and by resistivity methods. Using a 5-foot interval in taking depth measurements, the bedrock usually can be determined within 5 feet.

APPLICATION

The information obtained from the resistivity profiles at the location of the test holes was utilized in a small area in the Kansas

TABLE 2.—*Water-table measurements compared with resistivity findings*

Profile number	Water table by direct measurement, feet	Water table by resistivity, feet
E-1	20½	20
E-2	20	15
P-1	3	5 or less
B-1	17	12
B-2	21	15
R-7	6	8
R-8	17	16
R-9	17	15
SL-4	7½	5 or less
SL-5	17	15
SL-6	14	12

TABLE 3.—*Bedrock as determined by drilling compared with bedrock as determined by resistivity methods*

Profile number	Bedrock as determined by drilling, feet	Bedrock as determined by resistivity, feet
E-1	55	50
E-2	65	55
E-3	76	80
L-1	79	70
L-2	60	55
L-3	42	40
P-1	48	50
P-2	41	40
P-3	47	60
P-4	75	80
T-2	79	90
T-3	49	50
K-1	65	70
K-2	72	65
K-3	75	75
B-2	78	75
B-3	50	50
R-6	41	45
R-7	38	50
R-8	65	65
R-9	50	55
SL-3	74	65
SL-4	65	70
SL-5	74½	75
SL-6	49	60
LV-1	53	60
LV-2	68	55

River Valley between Lawrence and Eudora for the construction of contours showing the configuration of the water table and the bedrock surface. Interpretations of water table and bedrock from profiles in this area were determined by visual comparison of curves obtained at the location of test holes in the vicinity. Some of the representative resistivity profiles are presented in Figure 3. The depths to water table and bedrock were computed to sea level, plotted, and then contoured. Figure 4 shows the configuration of the top of the water table. Information from both the resistivity surveys and direct measurements were used. This map shows a remarkable similarity to a water-table map prepared by Dufford (1953, pl. 3) on information obtained only from test holes and water

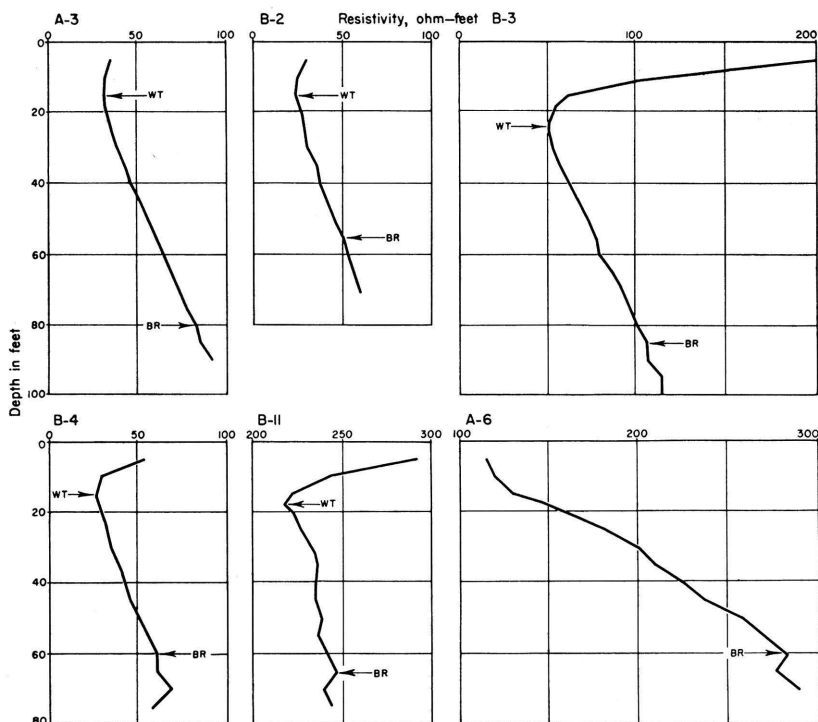


FIG. 3.—Representative resistivity profiles in the Lawrence-Euroda area. WT marks the water table as interpreted from the resistivity profile and BR marks the bedrock contact as interpreted from the resistivity profile.

wells. With the stations spaced even closer together, a more detailed map could be obtained. The configuration of the bedrock as determined from the resistivity profiles is shown in Figure 5. The most significant feature on this map is an old bedrock river channel below the alluvium.

SUMMARY AND CONCLUSIONS

Electrical resistivity methods have been shown to be an effective way of prospecting for ground water and for mapping alluvium-bedrock contacts in the Kansas River Valley. Within limits, the depth to the water table and to bedrock can be determined. Some information also can be obtained concerning the lithology of the materials and type of ground water they contain. The full utili-

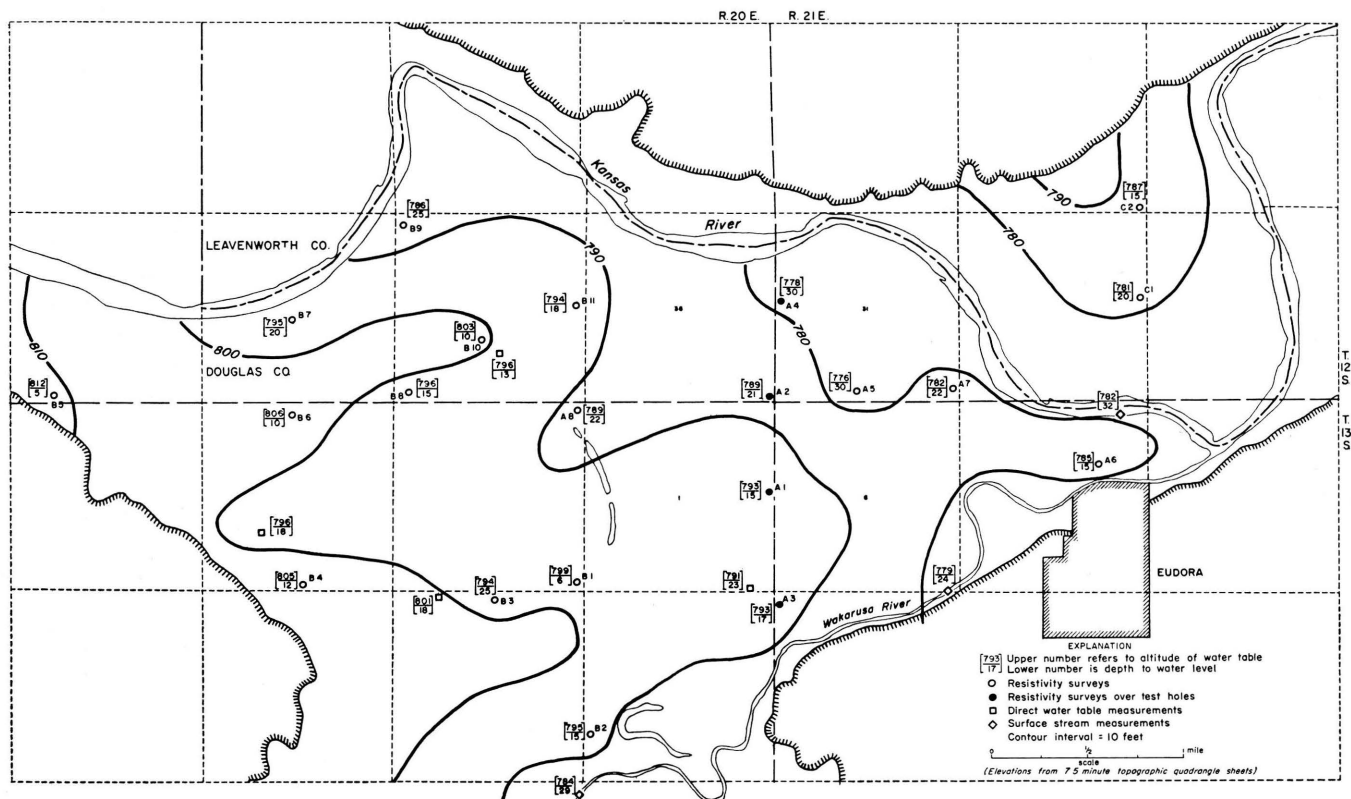


FIG. 4.—Configuration on top of the water table in the Lawrence-Eudora area. Information from resistivity surveys and actual measurements shows the mounding effect of the water table between Kansas River and Wakarusa River.

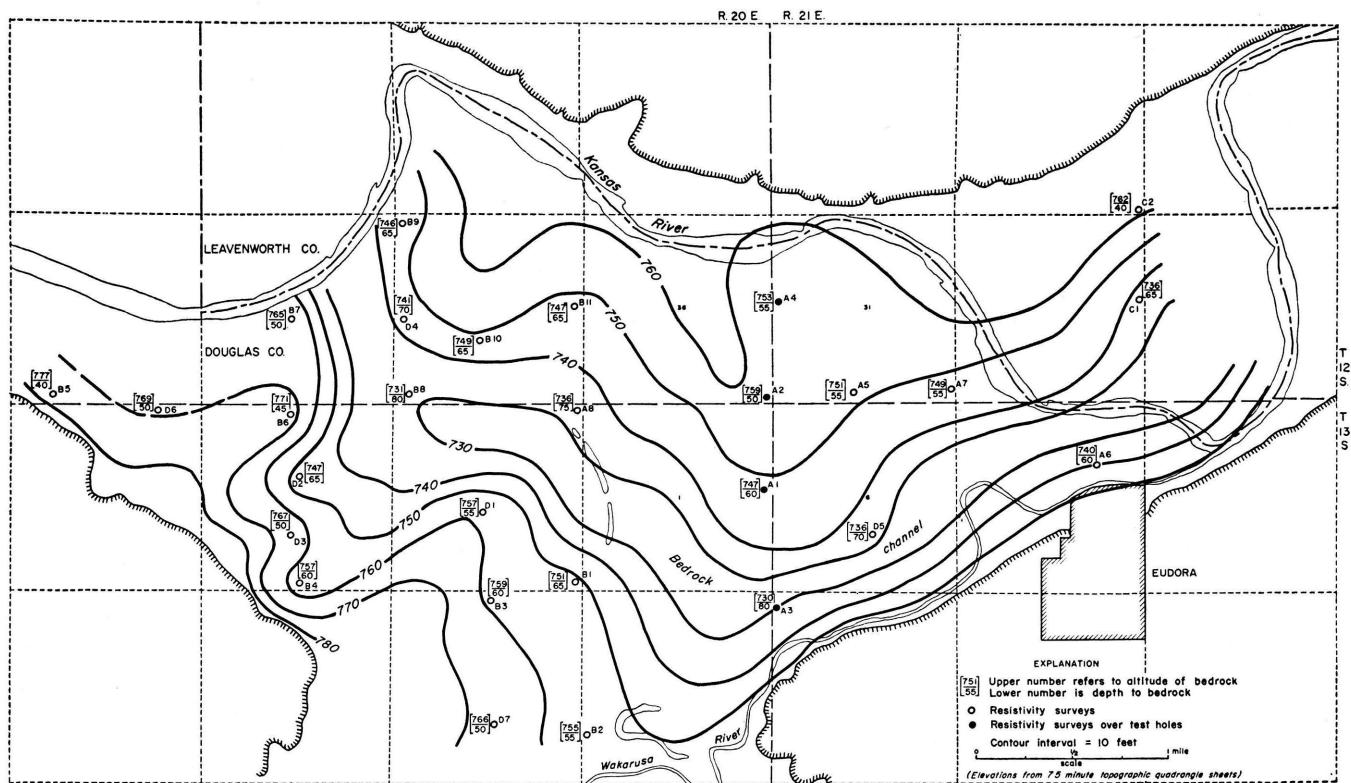


FIG. 5.—Configuration of the bedrock in the Lawrence-Eudora area. Information from resistivity surveys and actual measurements shows the configuration on top of the bedrock. A bedrock channel (along with several minor tributaries to the main channel) is outlined below the river alluvium.

zation of this method has not yet been recognized and should be tried at other pertinent localities in Kansas.

REFERENCES

- BUHLE, M. B. (1953) Earth resistivity in groundwater studies in Illinois: Am. Inst. Mining and Met. Engineers Trans., Tech. Paper 3496L, Mining Engineering, April, pp. 395-399.
- DAVIS, S. N., AND CARLSON, W. A. (1952) Geology and ground-water resources of the Kansas River Valley between Lawrence and Topeka, Kansas: Kansas Geol. Survey, Bull. 96, pt. 5, pp. 201-276.
- DUFFORD, A. E. (1953) Quaternary geology and ground-water resources of Kansas River Valley between Bonner Springs and Lawrence, Kansas: unpublished master's thesis, University of Kansas Library.
- GISH, O. E., AND ROONEY, W. J. (1925) Measurement of resistivity of large masses of undisturbed earth: *Terrestrial Magnetism*, vol. 30, pp. 161-188.
- HEILAND, C. A. (1937) Prospecting for water with geophysical methods: Am. Geophys. Union Trans., pt. 2, pp. 574-588.
- LOHMAN, S. W. (1941) Ground-water conditions in the vicinity of Lawrence, Kansas: Kansas Geol. Survey, Bull. 38, pt. 2, pp. 17-64.
- MOORE, R. W. (1945) An empirical method of interpretation of earth-resistivity measurements: Am. Inst. Mining and Met. Engineers Trans., vol. 164 (Geophysics), pp. 197-214.
- WENNER, FRANK (1916) A method of measuring resistivity in the earth: U. S. Bur. Standards, Bull. 12, pp. 469-478.
- WYMAN, THEODORE (1935) Report on Kansas River, Kansas, Colorado, and Nebraska: 73d Congress, 2d Sess., House Doc. 195, pp. 1-331.

STATE GEOLOGICAL SURVEY OF KANSAS

Recent Publications

- BULLETIN 89.** The Kansas Rock Column, by Raymond C. Moore, John C. Frye, J. M. Jewett, Wallace Lee, and Howard G. O'Connor, 132 pages, 1951. Mailing charge, 25 cents.
- BULLETIN 90.** 1951 Reports of Studies (Eight parts issued separately). Mailing charge, 10 cents each part.
- BULLETIN 91.** The Manufacture of Lightweight Concrete Aggregate from Kansas Clays and Shales, by Norman Plummer and William B. Hiadik, 100 pages, 1951. Mailing charge, 25 cents.
- BULLETIN 92.** Oil and Gas Developments in Kansas During 1950, by W. A. Ver Wiebe, J. M. Jewett, E. K. Nixon, R. K. Smith, and A. L. Hornbaker, 187 pages, 1951. Mailing charge, 25 cents.
- BULLETIN 93.** Geology and Ground-Water Resources of Lane County, Kansas, by Glenn C. Prescott, Jr., 126 pages, 1951. Mailing charge, 25 cents.
- BULLETIN 94.** Ground-Water Resources of Pawnee Valley, Kansas, by V. C. Fishel. 144 pages, 1952. Mailing charge, 25 cents.
- BULLETIN 95.** Geology and Ground-Water Resources of Lincoln County, Kansas, by Delmar W. Berry, 96 pages, 1952. Mailing charge, 25 cents.
- BULLETIN 96.** 1952 Reports of Studies (Nine parts issued separately). Mailing charge, 10 cents each part.
- BULLETIN 97.** Oil and Gas Developments in Kansas During 1951, by W. A. Ver Wiebe, J. M. Jewett, E. D. Goebel, and A. L. Hornbaker, 188 pages, 1952. Mailing charge, 25 cents.
- BULLETIN 98.** Geology and Ground-Water Resources of the North Fork Solomon River in Mitchell, Osborne, Smith, and Phillips Counties, Kansas, by Alvin R. Leonard, 150 pages, 1952. Mailing charge, 25 cents.
- BULLETIN 99.** Pleistocene Geology of Kansas by John C. Frye and A. Byron Leonard, 230 pages. Mailing charge, 25 cents.
- BULLETIN 100.** Geology and Ground-Water Resources of Cheyenne County, Kansas, by Glenn C. Prescott, Jr., 106 pages, 1953. Mailing Charge, 25 cents.
- BULLETIN 101.** Geology and Ground-Water Resources of Jackson County, Kansas, by Kenneth L. Walters, 91 pages, 1953. Mailing charge, 25 cents.
- BULLETIN 103.** Oil and Gas Developments in Kansas During 1952, by W. A. Ver Wiebe, E. D. Goebel, J. M. Jewett, and A. L. Hornbaker, 201 pages, 1953. Mailing charge, 25 cents.
- BULLETIN 104.** Oil and Gas in Eastern Kansas, by John Mark Jewett, 397 pages, 1954. Mailing charge, 25 cents.
- BULLETIN 105.** Geology and Ground-Water Resources of Sherman County, Kansas, by Glenn C. Prescott, Jr., 130 pages, 1953. Mailing charge, 25 cents.
- BULLETIN 106.** Geology and Ground-Water Resources of Marshall County, Kansas, by Kenneth L. Walters, 116 pages, 1954. Mailing charge, 25 cents.
- BULLETIN 107.** Oil and Gas Developments in Kansas During 1953, by W. A. Ver Wiebe, E. D. Goebel, A. L. Hornbaker, and J. M. Jewett, 208 pages, 1954. Mailing charge, 25 cents.
- BULLETIN 108.** Geology and Ground-Water Resources of Wichita and Greeley Counties, Kansas, by Glenn C. Prescott, Jr., John R. Branch, and Woodrow W. Wilson, 134 pages, 1954. Mailing charge, 25 cents.
- VOLUME 11.** Geology, Mineral Resources, and Ground-Water Resources of Chace County, Kansas, by Raymond C. Moore, John Mark Jewett, Howard G. O'Connor, and R. Kenneth Smith, 49 pages, 1951. Mailing charge, 40 cents.
- VOLUME 12.** Geology, Mineral Resources and Ground-Water Resources of Lyon County, Kansas, by Howard G. O'Connor, Edwin D. Goebel, and Norman Plummer, 59 pages, 1953. Mailing charge, 40 cents.
- OIL AND GAS INVESTIGATIONS, No. 9.** Cross Section, Subsurface Geologic Cross Section from Meade County to Smith County, Kansas, by Wallace Lee, 1953. Mailing charge, 25 cents.
- OIL AND GAS INVESTIGATIONS, No. 10.** Map. The Petroleum Industry in Kansas, by Edwin D. Goebel, 1953. Map 28½ x 45 inches, 4 colors. Mailing charge, 25 cents folded in cover, 50 cents rolled (in a tube).
- OIL AND GAS INVESTIGATIONS, No. 11.** Maps and Cross Sections. Preliminary Study of the Structure of Western Kansas, by Wallace Lee and Daniel F. Merriam, 1954. Mailing charge, 40 cents.
- OIL AND GAS INVESTIGATIONS, No. 12.** Cross Sections. Cross Sections in Eastern Kansas, by Wallace Lee and Daniel F. Merriam, 1954. Mailing charge, 25 cents.
- GRAPHIC COLUMN OF KANSAS ROCKS,** chart 22x33 inches, 1952. Mailing charge, 10 cents if folded, 20 cents if rolled in a tube.
- KANSAS ROCKS AND MINERALS,** by Laura Lu Tolsted and Ada Swineford, 56 pages, 1952. Mailing charge, 5 cents.
- THE KANSAS SCENE,** by Grace Mullenburg, 48 pages, 1953. Free of charge.

STATE GEOLOGICAL SURVEY OF KANSAS

BULLETIN 102











1953 REPORTS OF STUDIES

- PART 1. PETROGRAPHIC STUDY OF SOUTHEASTERN KANSAS COALS, by William W. Hambleton. pp. 1-76, figs. 1-5, pls. 1-12, May 15, 1953.
- PART 2. A SPINY APTYCHUS FROM THE CRETACEOUS OF KANSAS, by Alfred G. Fischer and Robert O. Fay, pp. 77-92, fig. 1, pls. 1-2, June 15, 1953.
- PART 3. COMPOSITION OF SOME URANIUM-BEARING PHOSPHATE NODULES FROM KANSAS SHALES, by Russell T. Runnels, John A. Schleicher, and H. S. Van Nortwick. pp. 93-104, figs. 1-3, October 1, 1953.
- PART 4. EXPERIMENTAL SEPARATION OF IRON-BEARING MINERALS FROM CERTAIN KANSAS CLAYS, by Frank W. Bowdish, pp. 105-116, October 15, 1953.
- PART 5. ELECTRON MICROSCOPY OF FIRED GLAZE SURFACES, by Ada Swineford and Norman Plummer, pp. 117-124, pls. 1-4, October 15, 1953.
- PART 6. EXPERIMENTS IN THE RAPID DRYING OF PLASTIC CLAY BRICK, by Norman Plummer and William B. Hladik, pp. 125-144, figs. 1-10, October 30, 1953.
- PART 7. IMPROVEMENTS OF SOME KANSAS CLAYS THROUGH THE CONTROL OF pH AND OF SOLUBLE SULFATES, by Norman Plummer and William B. Hladik, pp. 145-173, figs. 1-8, October 30, 1953.

BULLETIN 109

1954 REPORTS OF STUDIES

- PART 1. SOME PRELIMINARY STUDIES ON COMPOSITIONS OF LIGHTWEIGHT STRUCTURAL SHAPES BY FOAM METHODS, by Ronald G. Hardy, pp. 1-12, fig. 1, March 1, 1954.
- PART 2. APPLICATION OF THE TRI-AXIAL TYPE DIAGRAM TO THE STUDY OF CONCRETE MASONRY BATCH MIXES IN PLANT PRACTICE, by Ronald G. Hardy, pp. 13-28, figs. 1-4, March 10, 1954.
- PART 3. SIGNIFICANT NEW EXPOSURES OF PLEISTOCENE DEPOSITS AT KIRWIN, PHILLIPS COUNTY, KANSAS, by John C. Frye and A. Byron Leonard, pp. 29-48, figs. 1-3, pls. 1-3, April 1, 1954.
- PART 4. ADDITIONAL STUDIES OF THE CENOZOIC OF WESTERN KANSAS, by Daniel F. Merriam and John C. Frye, pp. 49-64, pls. 1-2, May 15, 1954.
- PART 5. THICKNESS MAPS AS CRITERIA OF REGIONAL STRUCTURAL MOVEMENT, by Wallace Lee, pp. 65-80, figs. 1-10, May 31, 1954.
- PART 6. GRADED SLOPES IN WESTERN KANSAS, by John C. Frye, pp. 81-96, fig. 1, pls. 1-2, June 15, 1954.
- PART 7. ELECTRICAL RESISTIVITY STUDIES IN THE KANSAS RIVER VALLEY, by Daniel F. Merriam, pp. 97-112, figs. 1-5, pls. 1-2, October 15, 1954.

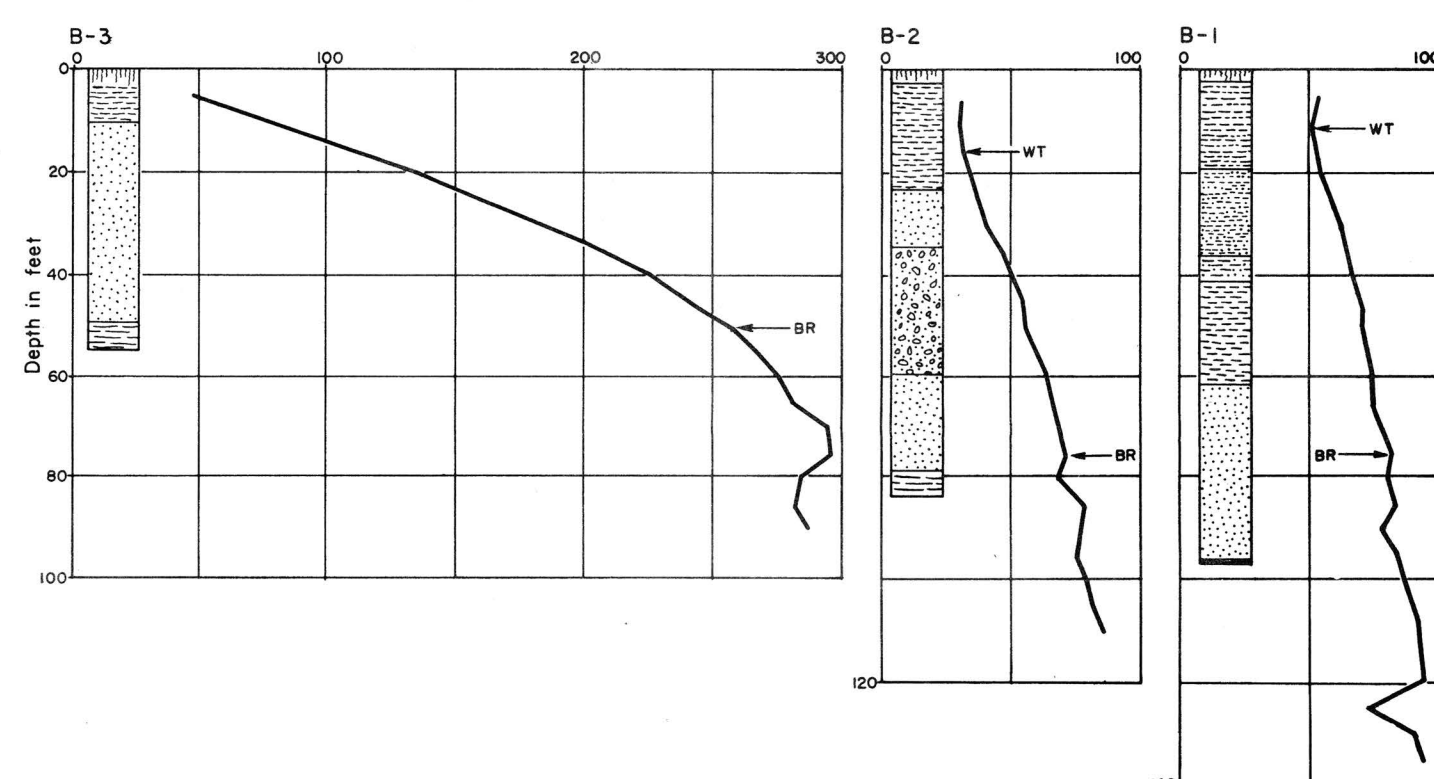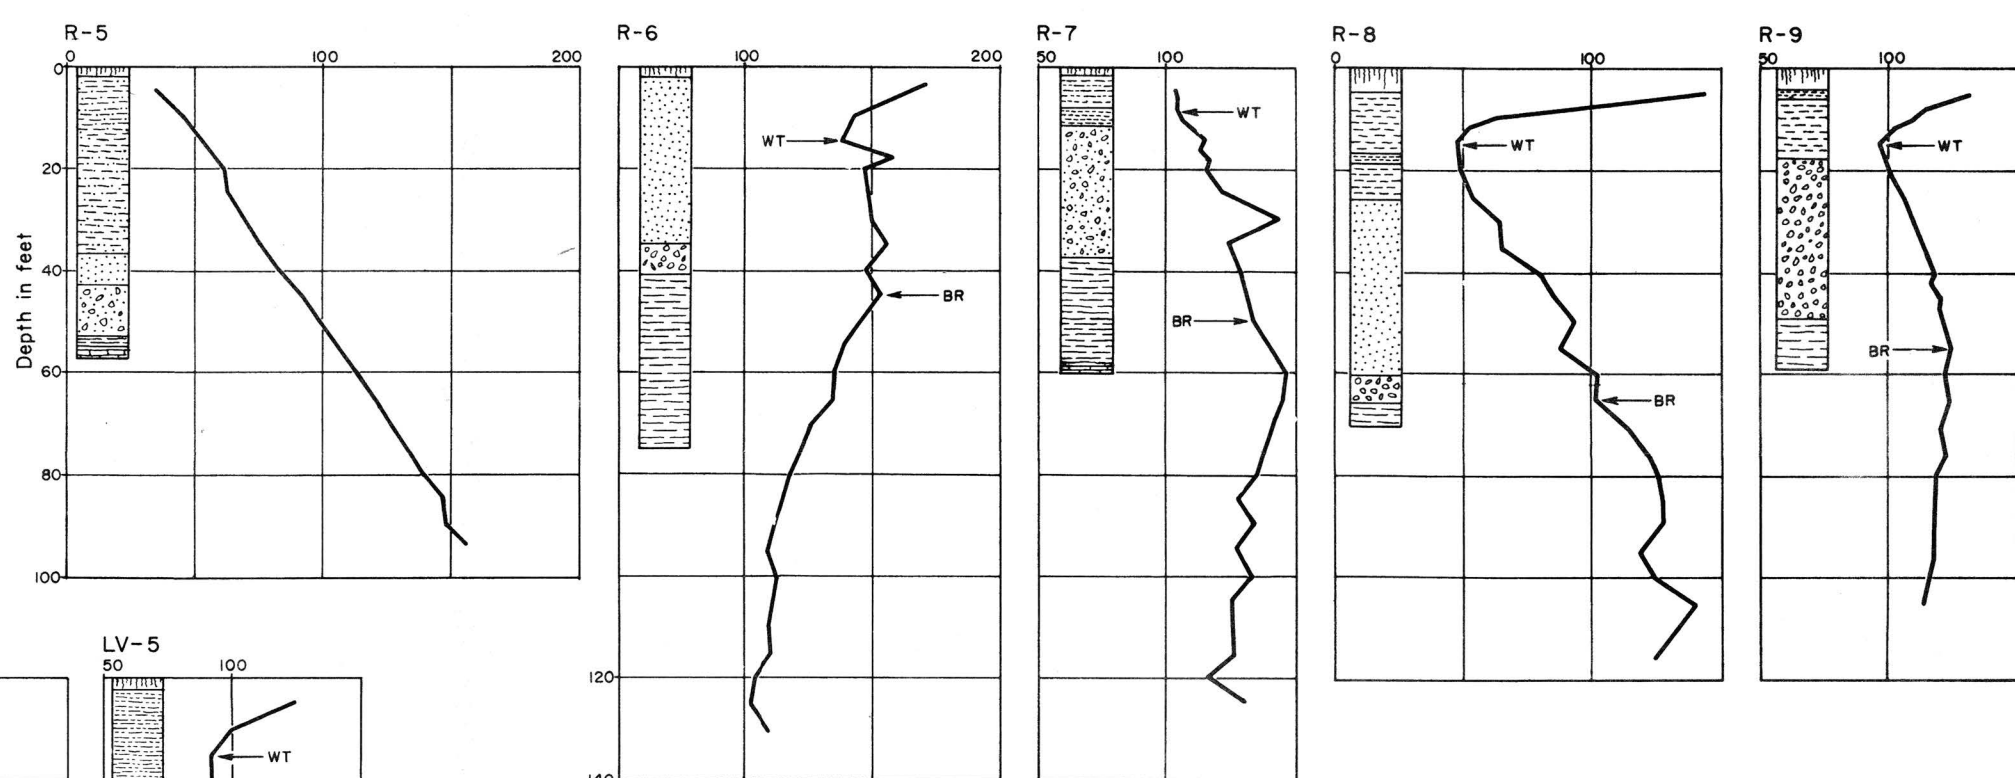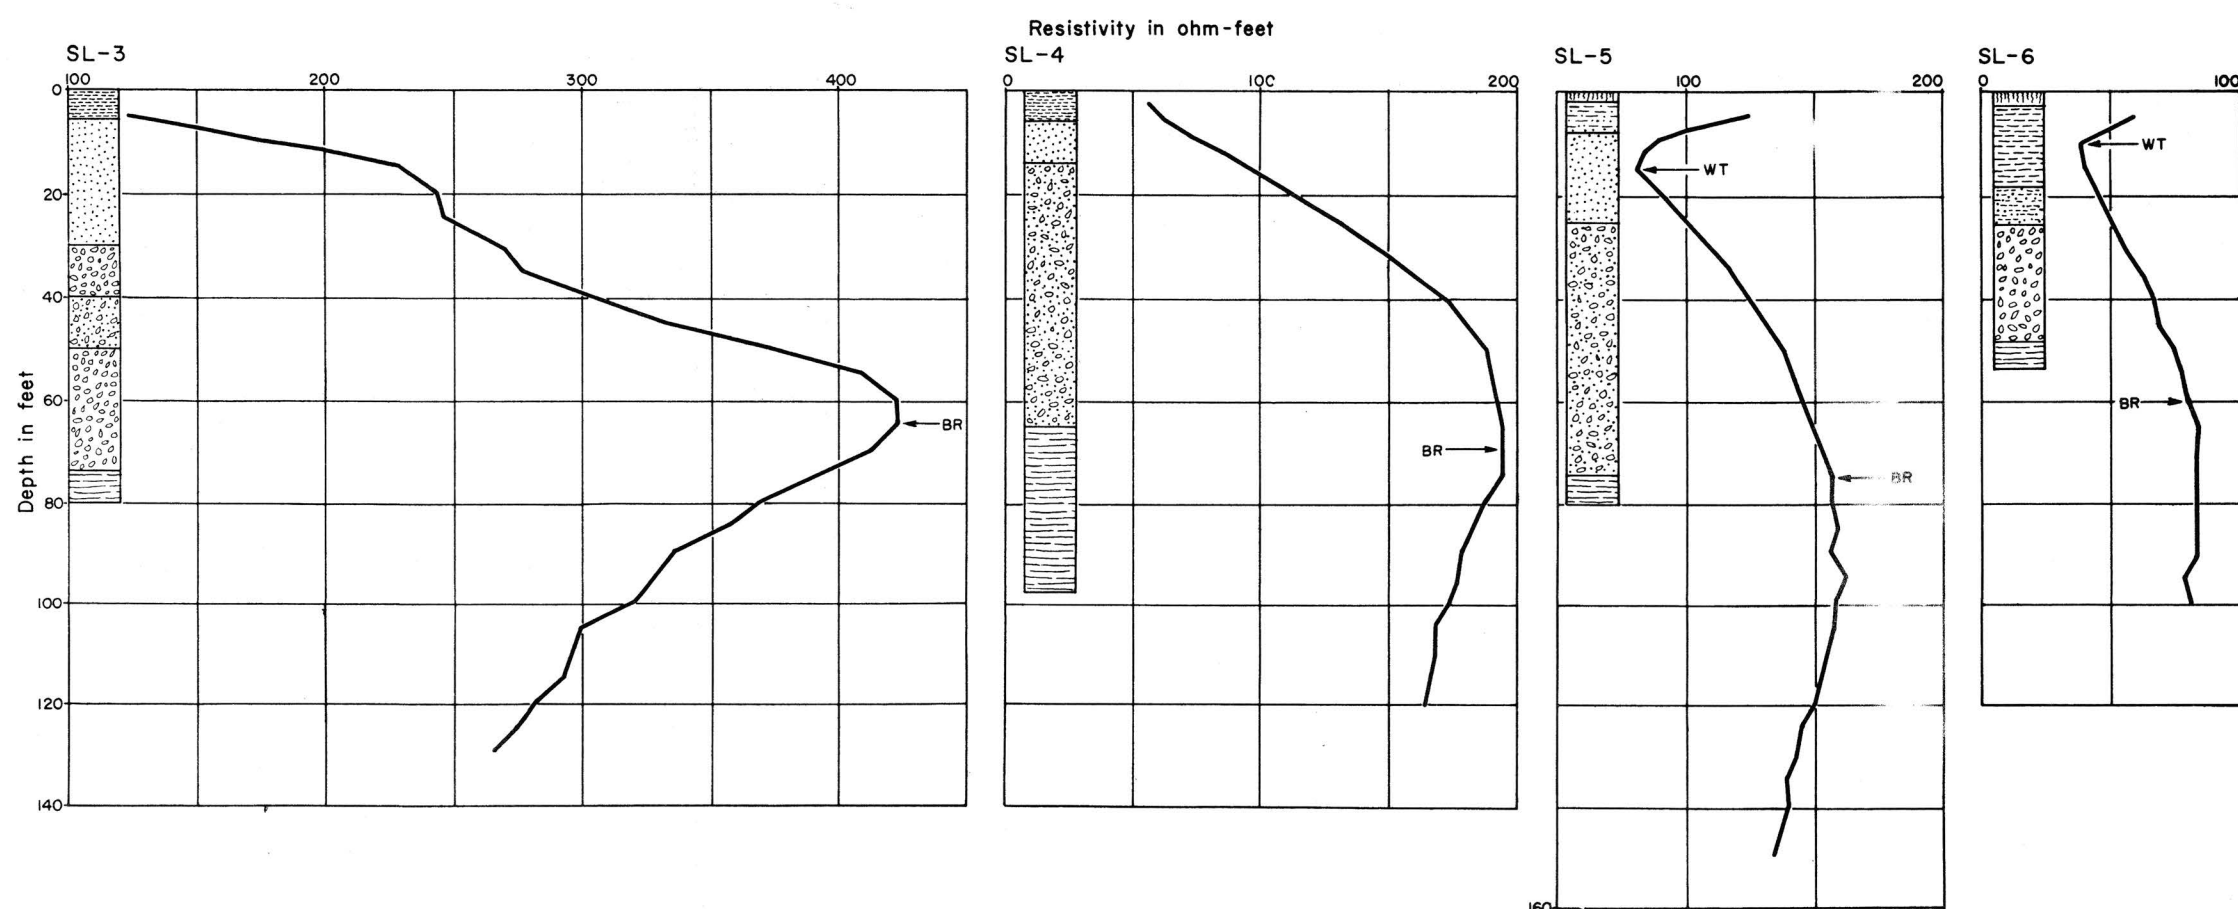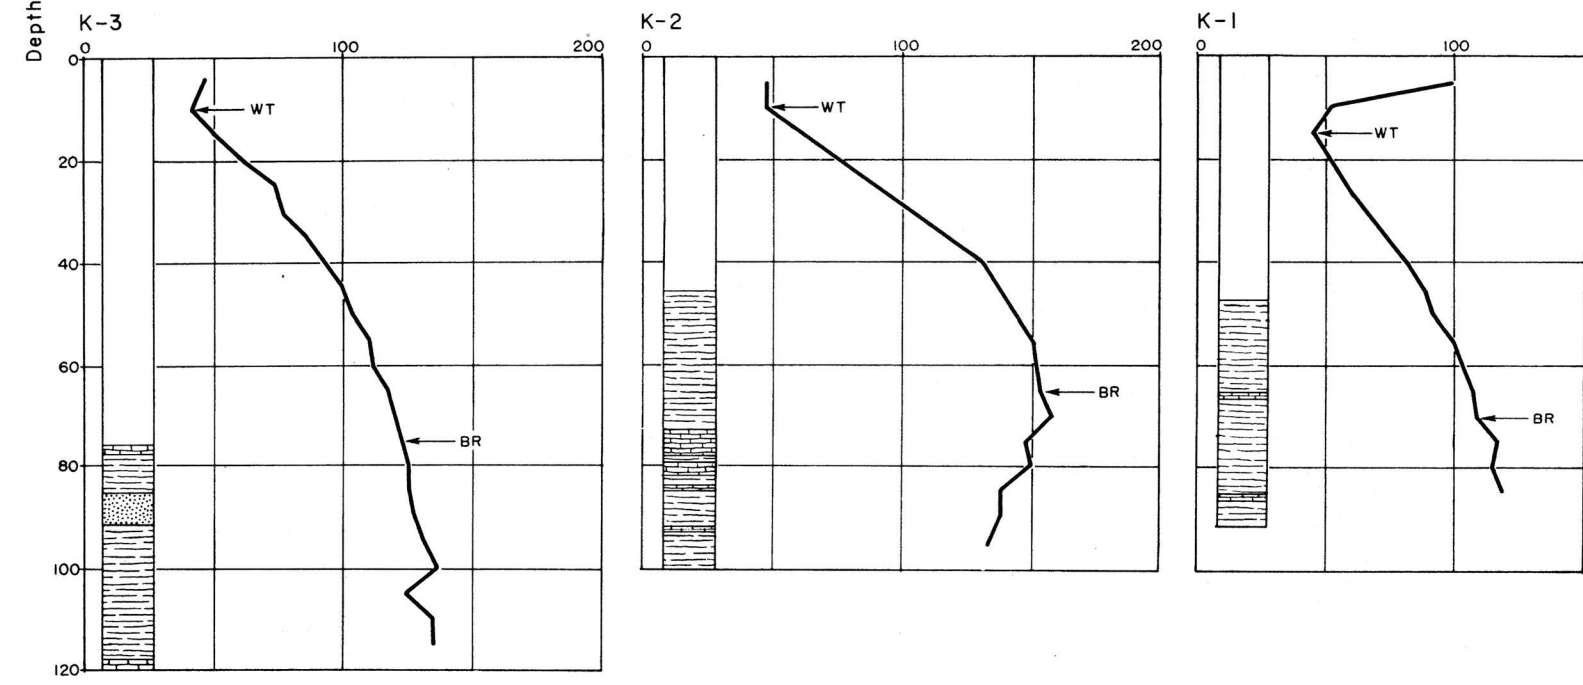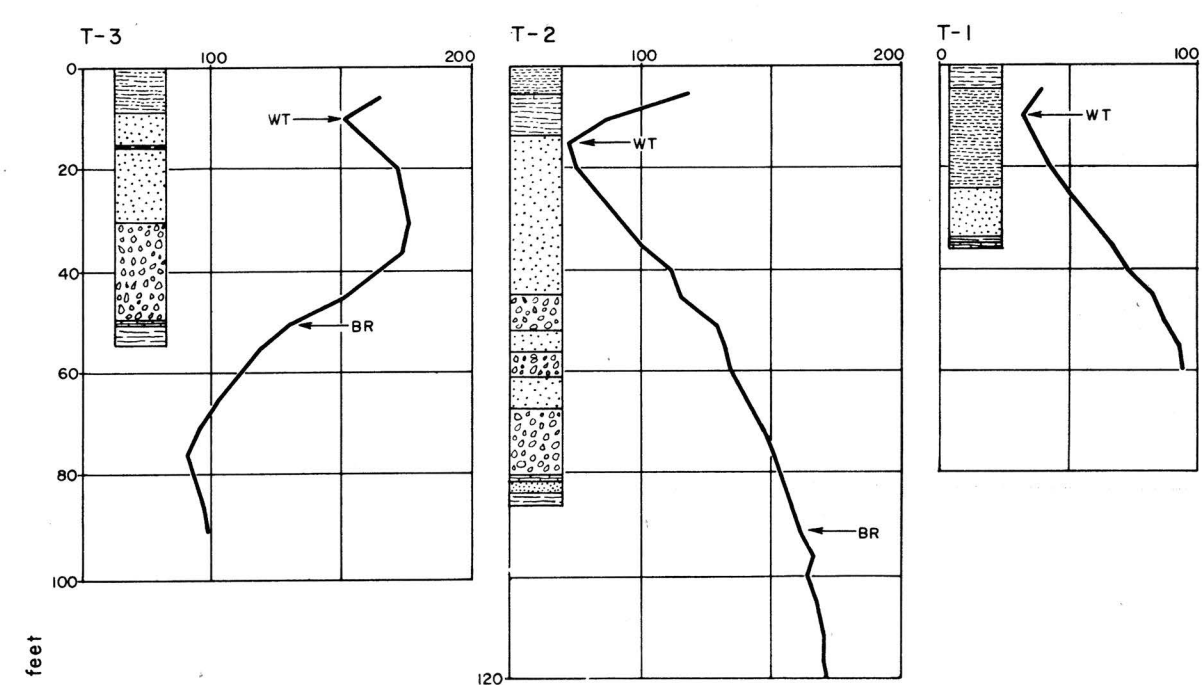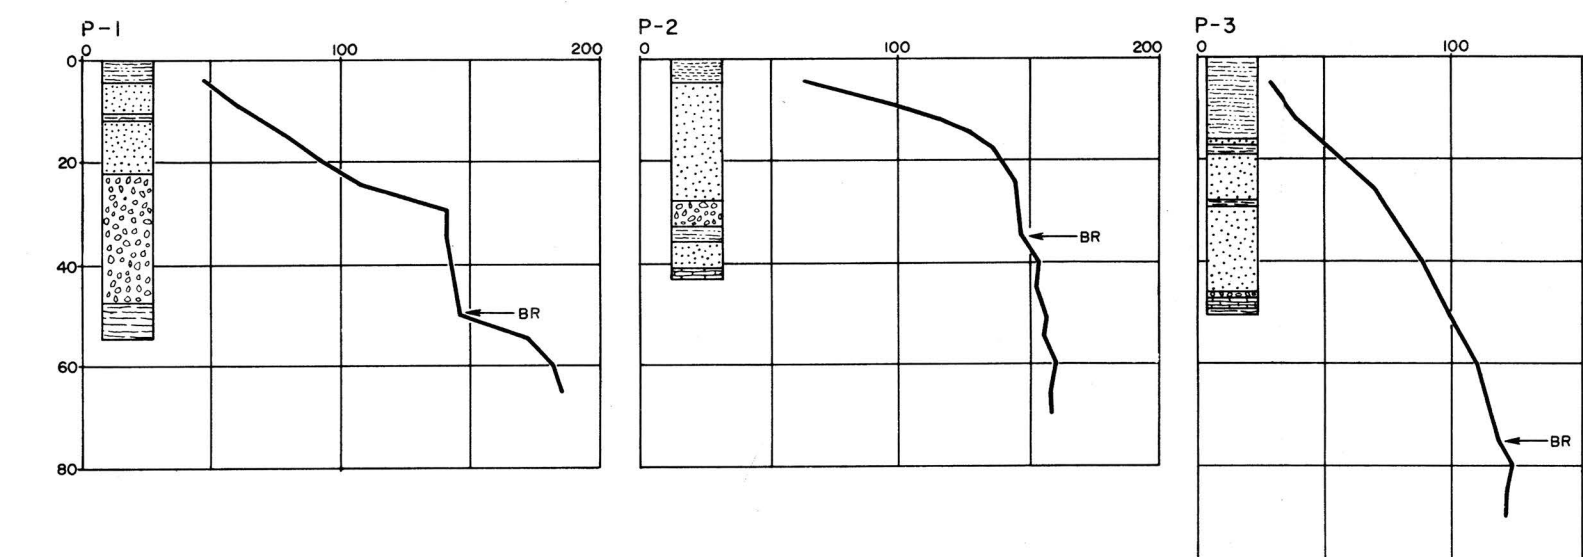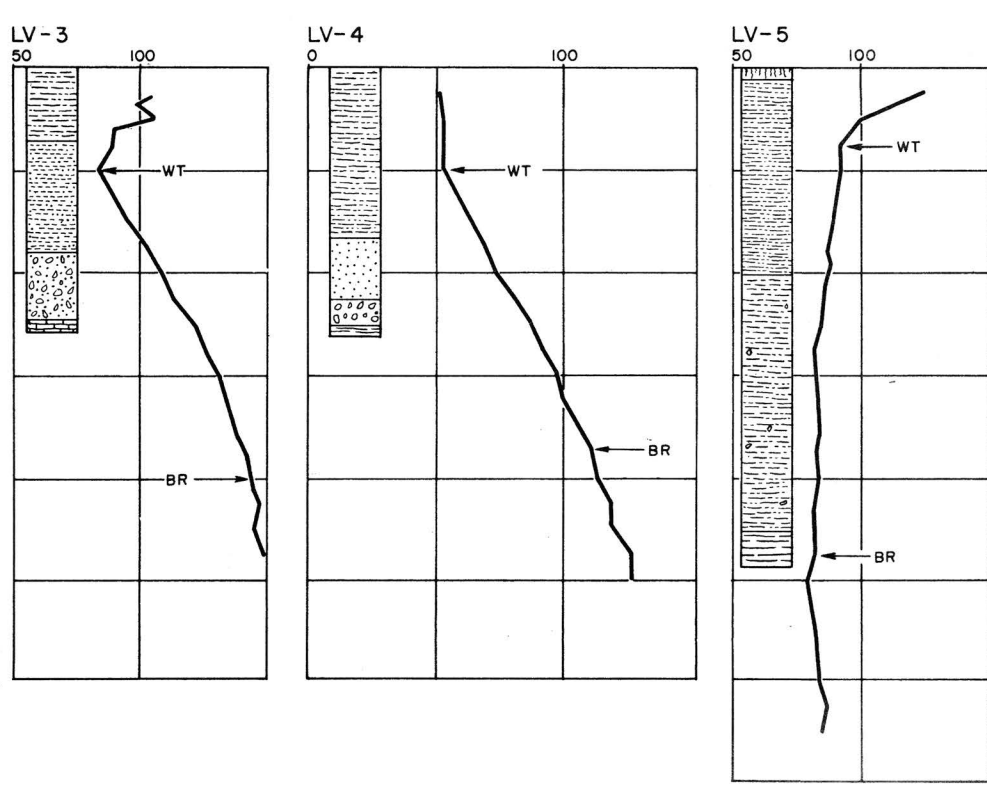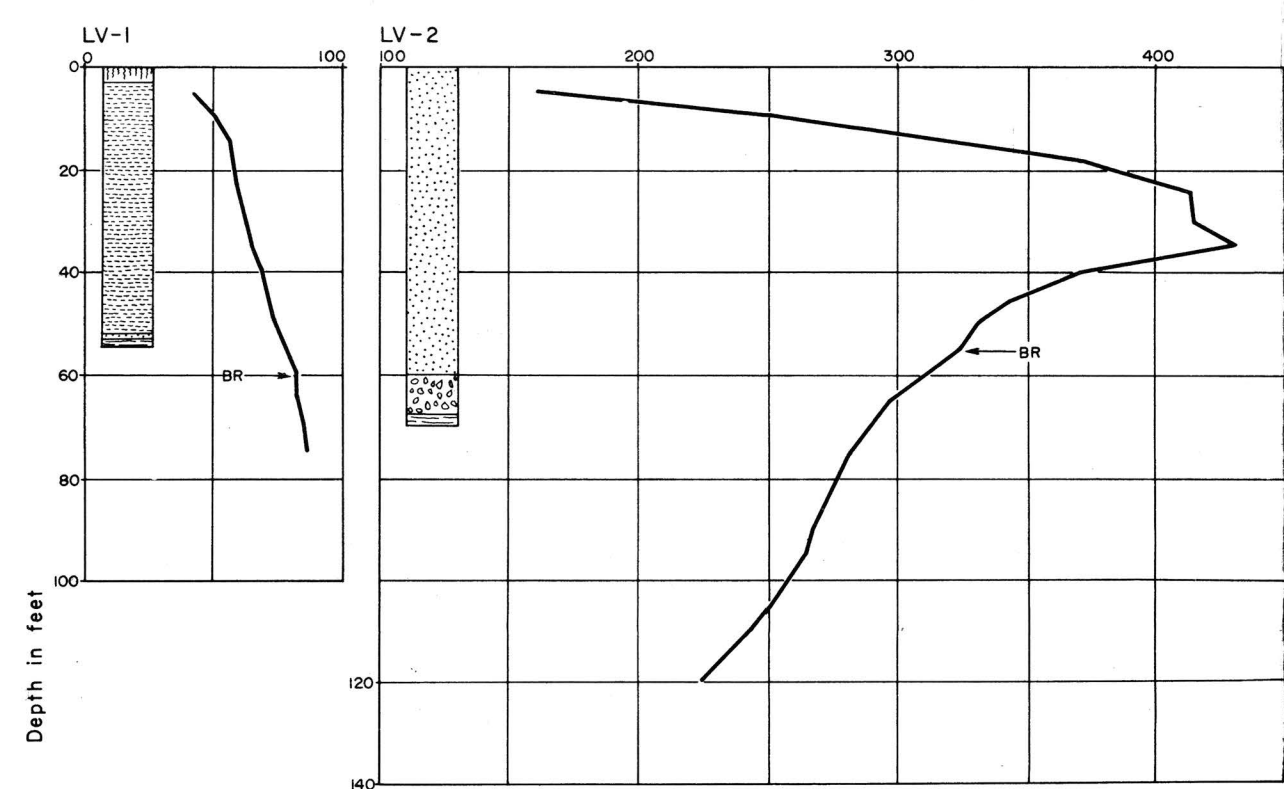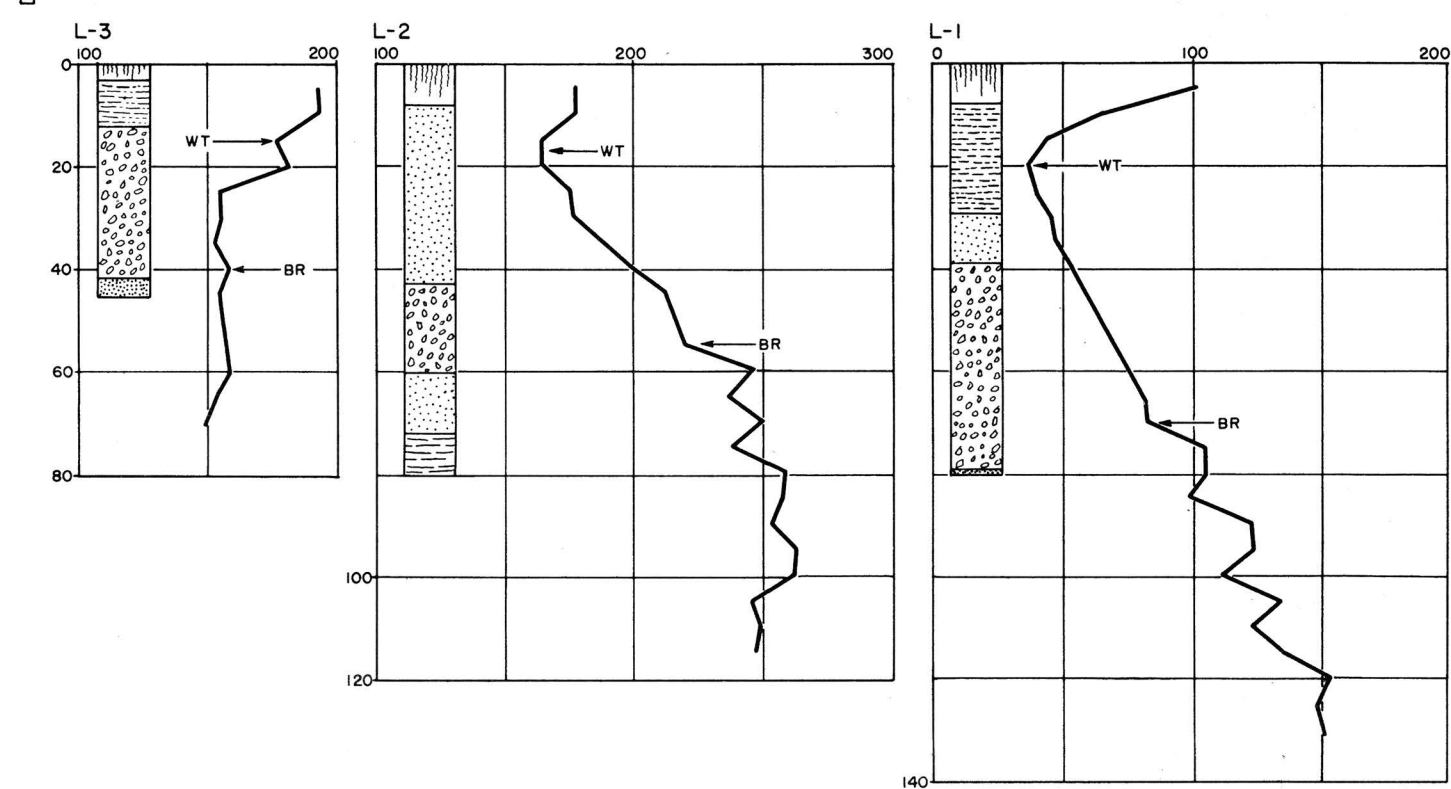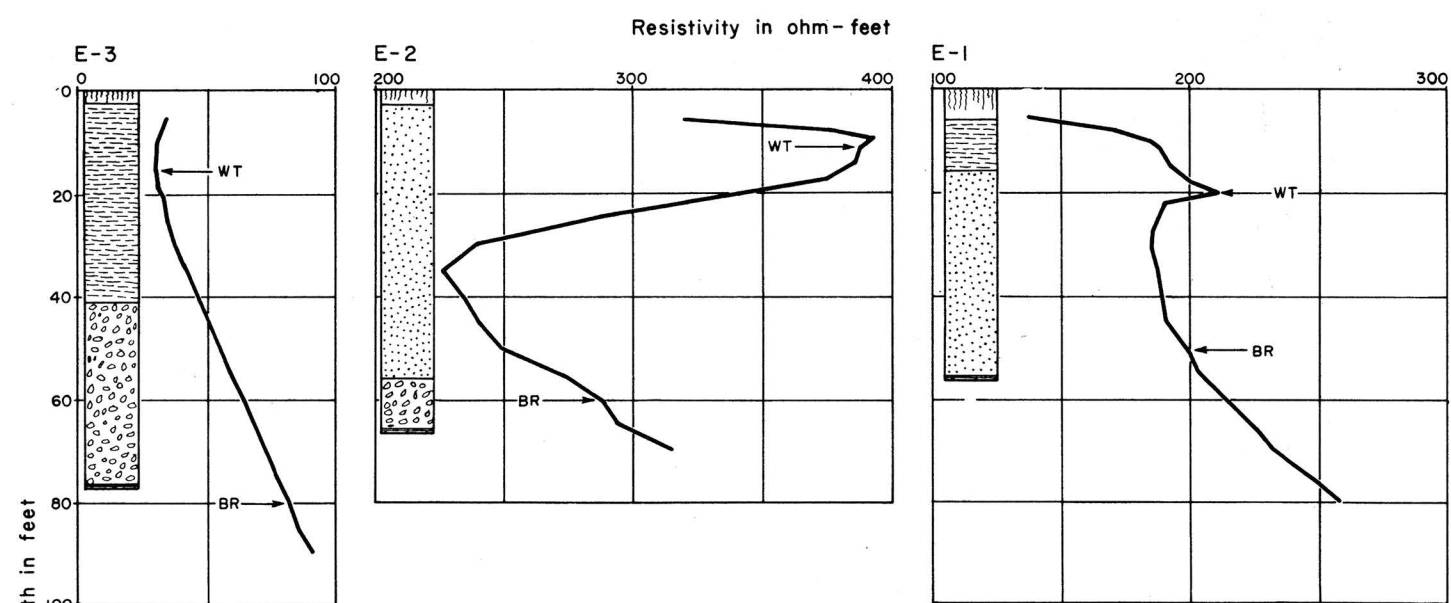

Electrical Resistivity Studies in the Kansas River Valley

Daniel F. Merriam
1954

State Geological Survey of Kansas

Bulletin 109, Part 7, Plate I

EXPLANATION

- Soil
- Silt
- Clay
- Sand
- Gravel
- Limestone
- Sandstone
- Shale
- WT - Water table
- BR - Bedrock

