

# Accelerated Protons with Energies up to 70MeV based on Optimized SG-II Peta-Watt Laser Facility

H.H. An<sup>1,4</sup>, W. Wang<sup>1,4</sup>, J. Xiong<sup>1,4</sup>, C. Wang<sup>1,4\*</sup>, X. Pan<sup>2,4</sup>, X.P. Ouyang<sup>2,4</sup>, S. Jiang<sup>3</sup>, Z.Y. Xie<sup>1,4</sup>,  
P.P. Wang<sup>1,4</sup>, Y.L. Yao<sup>3</sup>, N. Hua<sup>2,4</sup>, Y. Wang<sup>2,4</sup>, Z.C. Jiang<sup>2,4</sup>, Q. Xiao<sup>2,4</sup>, F.C. Ding<sup>2,4</sup>, Y.T.  
Wan<sup>1,4</sup>, X. Liu<sup>1,4</sup>, R.R. Wang<sup>1,4</sup>, Z.H. Fang<sup>1,4</sup>, P.Q. Yang<sup>2,4</sup>, Y.E. Jiang<sup>2,4</sup>, P.Z. Zhang<sup>2,4</sup>, B.Q.  
Zhu<sup>2,4</sup>, J.R. Sun<sup>1,4</sup>, B. Qiao<sup>3\*</sup>, A.L. Lei<sup>1,4\*</sup>, and J.Q. Zhu<sup>2,4\*</sup>

*1 Shanghai Institute of Laser Plasma, China Academy of Engineering Physics, Shanghai 201800, China*

*2 Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences, Shanghai 201800, China*

*3Center for Applied Physics and Technology, Peking University, Beijing 100871, China*

*4National Laboratory on High Power Laser and Physics, Shanghai 201800, China*

\* Correspondence to: C. Wang, Shanghai Institute of Laser Plasma, China Academy of Engineering Physics, Shanghai 201800, China; B. Qiao, Center for Applied Physics and Technology, Peking University, Beijing 100871, China; A.L. Lei, Shanghai Institute of Laser Plasma, China Academy of Engineering Physics, Shanghai 201800, China; J.Q. Zhu, Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences, Shanghai 201800, China. Email: wangch@mail.shcnc.ac.cn (C. Wang); bqiao@pku.edu.cn (B. Qiao); lal@siom.ac.cn (A.L. Lei); jqzhu@siom.ac.cn (J.Q. Zhu).

## Abstract

The target backsheath field acceleration mechanism is one of the main mechanisms of laser-driven proton acceleration (LDPA) and strongly depends on the comprehensive performance of ultrashort ultra-intense lasers used as the driving sources. The successful use of the SG-II peta-watt (SG-II PW) laser facility for LDPA and its applications in radiographic diagnoses have been manifested by the good performance of the SG-II PW

This peer-reviewed article has been accepted for publication but not yet copyedited or typeset, and so may be subject to change during the production process. The article is considered published and may be cited using its DOI.

This is an Open Access article, distributed under the terms of the Creative Commons Attribution licence (<https://creativecommons.org/licenses/by/4.0/>), which permits unrestricted re-use, distribution, and reproduction in any medium, provided the original work is properly cited.

10.1017/hpl.2023.54

facility. Recently, the SG-II PW laser facility has undergone extensive maintenance and a comprehensive technical upgrade in terms of the seed source, laser contrast, and terminal focus. LDPA experiments were performed using the maintained SG-II PW laser beam, and the highest cutoff energy of the proton beam was obviously increased. Accordingly, a double-film target structure was used, and the maximum cutoff energy of the proton beam was up to 70MeV. These results demonstrate that the comprehensive performance of the SG-II PW laser facility was significantly improved.

*Key words: Laser-driven proton acceleration, Target normal sheath acceleration, SG-II peta-watt laser.*

## 1. Introduction

New phenomena emerged when the laser intensity increased. Ultrashort ultra-intense lasers have been rapidly developed based on the chirped pulse amplification (CPA) <sup>[1]</sup> technique and the subsequent development of the optical parametric chirped pulse amplification (OPCPA) <sup>[2]</sup> technique. The peak power density of ultrashort ultra-intense lasers is increasing and has exceeded  $10^{21}$  W/cm<sup>2</sup> <sup>[3]</sup>, which is higher than the traditionally considered relativistic intensity ( $10^{18}$  W/cm<sup>2</sup>) by three orders of magnitude. The laser intensity will be increased further with the advancement of the next-generation peta-watt (PW) class laser project <sup>[4-8]</sup>, which will provide an entirely new arena and direction for related research and open up new research directions. At present, there are several sets of PW-class ultrashort ultra-intense laser facilities, such as Vulcan <sup>[9]</sup>, PHELIX <sup>[10]</sup>, Omega-EP <sup>[11]</sup>, NIF-ARC <sup>[12]</sup>, PETAL <sup>[13]</sup>, LFEX <sup>[14]</sup>, SG-II PW <sup>[15]</sup>, and others, that have provided the opportunity to conduct research on various topics, such as particles

acceleration sources [16-19], X/ $\gamma$  radiation sources [20,21], plasma diagnostics [16, 22-24], fast ignition [25,26], cancer therapy [27], warm dense matter [28], and other experimental studies.

The SG-II PW laser facility was constructed in 2016 with the output capability of a kJ single-pulse picosecond laser, which can form a combined ps and ns-driven laser-integrated experimental platform together with the SG-II upgrade facility. This satisfies the demand for relevant physical experiments in high-power laser conditions in multiple fields. Thousands of physical experiments have been performed with satisfactory performance [15]. Recently, the SG-II PW facility has undergone extensive maintenance and comprehensive technical upgrades in terms of the seed source, contrast, and focal focus. A systematic test analysis showed that the quality of the ps laser improved significantly after maintenance; however, the overall performance was not clear.

When the laser intensity reaches relativistic levels ( $I \geq 10^{18}$  W/cm<sup>2</sup>), it can produce an ultra-strong accelerating gradient electric field up to  $10^6$  times as the conventional pedals, which can be used for proton acceleration to accelerate proton energy to levels higher than MeV. In 2000, Snavely et al. demonstrated a laser-driven proton acceleration (LDPA) experiment to produce protons on the order of tens of MeV with an ultrashort, ultra-intense laser that irradiated a solid target [29]. Since then, research on LDPA has gained extensive attention, and different acceleration mechanisms, such as the target normal sheath acceleration (TNSA) [30], Radiation pressure acceleration (RPA) [31], collisionless shock wave acceleration (CSA) [32,33], Coulomb explosion acceleration (CE) [34], breakout afterburner acceleration (BOA) [35], and magnetic vortex acceleration (MVA) [36] have been gradually developed. Among these acceleration mechanisms, the TNSA mechanism was proposed first and is currently the most extensively used. The physical image of the TNSA mechanism is relatively clear and concise: the ultrashort

ultra-intense incident laser is absorbed on the front surface of a solid film target, and the electrons are heated and propagate to the posterior part of the target to establish an ultra-intense sheath electric field. The electric field directly ionized the hydrogen in the water vapor adsorbed on the posterior surface of the target and accelerated the hydrogen ions. Hydrogen ions (i.e., protons) are accelerated and emitted in a direction normal to the posterior of the target. Numerous theoretical simulations and experiments have confirmed the correlation between the proton cutoff energy and laser parameters in the TNSA mechanism <sup>[17,37-39]</sup>; for example, the maximum proton cutoff energy that can be achieved in the TNSA mechanism is usually proportional to the 1/2 power of the driving laser intensity <sup>[37]</sup>. The conditions of ultrashort, ultra-intense laser facilities directly determine the proton beam characteristics of the TNSA generation. This also makes the LDPA experiment based on the TNSA mechanism a reference indicator for testing the comprehensive driving capability of ultrashort, ultra-intense laser facilities <sup>[40]</sup>. Higher cutoff energies and more stable proton outputs signify better conditions for the laser facility.

Therefore, in this study, experiments on LDPA based on the TNSA mechanism were conducted at the maintained SG-II PW laser facility. The results showed that the generated high-energy proton beams had substantially higher cutoff energies. Furthermore, a high-energy proton beam with a maximum cutoff energy of more than 70 MeV was obtained using the double-membrane target structure, which is substantially close to the results reported in the current literature for obtaining the highest cutoff energy based on the TNSA mechanism. These results demonstrate that the comprehensive driving capability of the maintained SG-II PW facility has improved significantly and reached a first-class level worldwide. The SG-II PW facility will provide higher-quality laser conditions for additional physical experiments in the future.

## 2. Performance enhancements of the SG-II PW

### 2.1 Introduction to SG-II PW

The SG-II PW facility was constructed by the National Laboratory of High Power Laser and Physics and adopted the OPCPA+CPA technology route; its optical path is shown in Figure 1. The front end of the facility adopted a cascaded OPCPA scheme and injected chirped pulses from the parametric amplification of the pulse generation system into the amplification chain of the SG-II ps peta-watt laser system. The amplifier consists of a rod amplifier and a slab amplifier in the main oscillator-power amplifier (MOPA) scheme. The compressor included four large-aperture 1740 l/mm gratings. The dimension of the gratings is 1025 mm × 350 mm. The near-field diameter of the beam is ~310mm. The facility achieved single pulse output 1 kJ/1.7 ps at  $1\omega$  ( $\lambda=1.053\mu\text{m}$ ) after compression in 2016. The facility can provide experiments at near-PW standards with power densities of up to  $10^{20}$  W/cm<sup>2</sup> (or higher) <sup>[15]</sup>, but most experiments are usually conducted at slightly lower conditions, typically at 300 J/1 ps or 500 J/10 ps at  $1\omega$ , by taking into account the component lifetime and other factors <sup>[41]</sup>.

The SG-II PW facility has been in operation for several years. With the increase in the operating time in recent years, optical components have gradually developed aging, bad spots, and contamination, which have imposed device maintenance requirements, while new technologies have gradually been developed to improve the performance of laser facilities. Therefore, the SG-II PW facility has recently undergone comprehensive maintenance and optimization. Optimization consists of two main aspects. One is the signal-to-noise ratio of the front-end pulse generation system and the other is the terminal focusing capability.

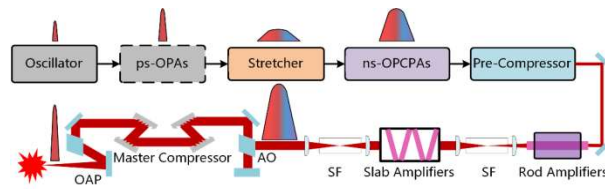


Figure 1. Schematic of the optical path of the SG-II peta-watt (SG-II PW) laser facility.

## 2.2 Significant improvement in the front-end signal-to-noise ratio

The optimization of the laser signal-to-noise ratio is divided into two main parts: one for the suppression of parametric fluorescence and the other for the elimination of prepulses.

The suppression of parametric fluorescence is achieved by increasing the energy of the seed source from nanojoules to millijoules by increasing the picosecond OPA, which achieves high-gain amplification in the picosecond time-domain window, effectively suppressing the parametric fluorescence in the ns time-domain window and ultimately increasing the front-end signal-to-noise ratio from  $10^7$  to values  $>10^{11}$  [42].

The prepulse is mainly from the (secondary) reflected light from the rear surface of the reflective or transmissive element. This light spectrally modulates the main pulse. The compression causes the backpulse to be transferred to the prepulse owing to the nonlinear B-integral effect [43]. The elimination of pre-pulses was mainly achieved by optimizing the key optical components in the ns-OPCPA assembly.

Figure 2 shows the waveform of the optimized OPCPA front-end at output energy of 50mJ and a compressed pulse width of 400fs. All prepulses were eliminated, and the signal-to-noise ratio was significantly improved compared with previous methods.

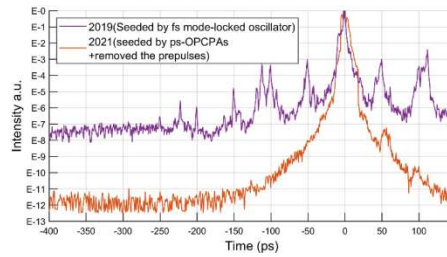


Figure 2. Comparison of the signal-to-noise ratio of the front-end optical parametric chirped pulse amplification (OPCPA) output of the picosecond pulse before and after optimization.

### ***2.3 Optimization of terminal focusing capability***

The terminal focusing capability is directly related to the power density on the target surface and is a key factor in the use of ultrashort ultra-intense lasers for physics experiments. The measurement accuracy of the focal spot was improved by optimizing the key parameters of the deformation mirror, thus establishing a focal spot and wavefront measurement system at the center of the target chamber, and performing full-field measurement and control. The terminal focusing capability of the system was improved by using adaptive optics to measure and correct the aberrations of the full optical path system combined with precise control of the off-axis parabolic mirror attitude. The optical focal spot, which includes 50% of the laser energy, was enhanced from four to two times the diffraction limit, and its size was significantly reduced.

Figure 3 shows the X-ray images from a laser-irradiated metal film target measured with a grazing incidence pinhole camera designed for ultrastrong laser-plasma experiments in the working band of 0.5–2.5 keV <sup>[44]</sup>. Compared with conventional pinhole cameras <sup>[45]</sup>, grazing incidence can effectively suppress the noise of hard X-rays produced by laser-irradiated targets in ultrahigh power density conditions, thus obtaining a relatively realistic X-ray image at the focal spot location. Figure 3 shows that the size of the X-ray image is significantly reduced after the terminal focusing optimization with the full-width-at-half-width value dropping from

approximately 50 $\mu\text{m}$  to approximately 25 $\mu\text{m}$ . This indicates a reduction in the actual laser focal spot. This value is already very close to the size of the adjustment optical focal spot of  $\Phi 20\ \mu\text{m}$  [41, 46].

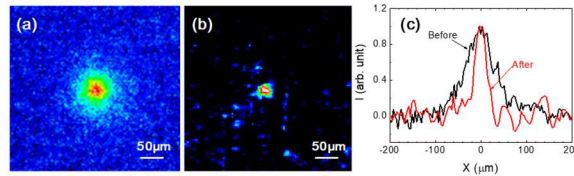


Figure 3. X-ray images and scanned intensity curve of laser irradiating metal planar target. (a) image before optimization; (b) image after optimization; (c) scanned intensity curve along the x-direction.

### 3. Studies of LDPA based on TNSA

#### 3.1 LDPA scheme with SG-II PW

Based on the maintained SG-II PW facility, an LDPA experiment with a ps laser based on the TNSA mechanism was conducted, and the scheme is shown in Figure 4(a). Figure 4(b) shows an actual photograph of the target chamber. A single beam of a picosecond laser (wavelength 1053nm, pulse duration 1–10 ps, energy 100–500 J) output from the SG-II PW laser facility was focused on the target surface with P-polarization and an incidence angle of  $21^\circ$  through an off-axis parabolic mirror with a focal length of 800 mm. The F# value of the optical path was  $\sim 2.5$ . The target was a Cu or an Au planar thin-film with a thickness of approximately 20 $\mu\text{m}$ , which is sufficiently thick for LDPA with a picosecond laser as the driving source, thus ensuring that the accelerated generated proton source is mainly derived from the TNSA mechanism.

The main diagnostic method used to measure proton signals is a multilayer stack of radiochromic films (RCFs) [47], which are placed in the normal direction to the target back, and



the front surface is approximately 40 mm from the target back surface. RCFs are an internationally common measurement method for LDPA that has been used for many years and performed well in previous LDPA experiments. The RCF model used in the experiments was HD-V2 manufactured by GAFCHROMIC, USA <sup>[48]</sup>, with a dose-response range of 10–1000Gy and a thickness of 105  $\mu\text{m}$ , including a plastic substrate thickness of 97  $\mu\text{m}$  and a sensitive layer thickness of 8  $\mu\text{m}$ . The layer is very sensitive to proton signals and less sensitive to X-rays and electron signals <sup>[49]</sup>; therefore, it can be used for high-energy proton-beam measurements. Al films of appropriate thickness were placed between each RCF layer. These Al films can attenuate the energies of high-energy protons, thus allowing the recording of higher-energy proton signals with fewer RCFs. Subsequently, the minimum proton energy required to reach each RCF layer can be calculated using Monte Carlo codes to determine the proton energy deposition in the material. The maximum cut-off energy of the proton beam can be determined according to the position of the last RCF where the proton signal is recorded.

In addition, a grazing incidence pinhole camera designed for ultrahigh intensity laser-plasma experiments was placed in a direction of  $10^\circ$  normal to the target surface in front of the target to monitor the focal spot condition of the incident laser irradiated target where the pinhole size is  $\sim\Phi 10\ \mu\text{m}$ , the distance from the pinhole to the target is 85 mm, and the magnification is  $\sim 7.7$ . Two sets of electron magnetic spectrometers (EMS) were placed in the direction of  $30^\circ$  normal to the target surface in front of the target and  $50^\circ$  normal to the target surface at the back of the target to measure the energy spectrum of the outgoing hot electrons. The parameters of the two EMS sets were identical. The induction intensity was 0.3 T, the incident collimation hole diameter was 1 mm, the distance from the target surface was 500 mm, and the measured spectrum range was 0.2–260 MeV <sup>[50,51]</sup>.

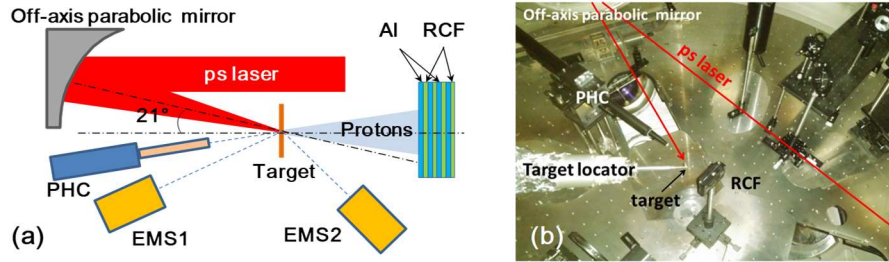


Figure 4. Light path and diagnostic arrangement of laser-driven proton acceleration (LDPA) experiment based on the target normal sheath acceleration (TNSA) mechanism. (a) Schematic of arrangement. (b) Photograph of the target chamber.

### 3.2 Experimental results

Typical results of the LDPA experiments with the picosecond laser at the maintained SG-II PW facility are shown in Figure 5. The pulse duration of the driving laser was  $\sim 1$  ps, the energy of the target was  $\sim 280$  J, and the focal spot size was  $\sim \Phi 25$   $\mu\text{m}$ . So the power density on target surface was  $\sim 5 \times 10^{19}$   $\text{W}/\text{cm}^2$ . The target was a planar thin film of Au with a thickness of  $\sim 20$   $\mu\text{m}$ .

The scanned images of the six RCF sheets are shown in Figure 5, and the sheet numbers 5<sup>th</sup>, 13<sup>th</sup>, 20<sup>th</sup>, 25<sup>th</sup>, 26<sup>th</sup>, and 27<sup>th</sup> are the numbers in the upper right corner of each sheet. As the number of RCF sheets increases, protons must be transported through the additional layers of RCF sheets and Al films to reach the RCF at the corresponding positions. The proton energy corresponding to each RCF layer in the experiment was calculated using the Monte Carlo code SRIM-2013-Pro<sup>[52, 53]</sup>, depending on the thickness of the RCF sheets (The material is plastic and the thickness is the thickness of each layer multiplied by the number of layers penetrated) and the thickness of the Al films (accumulated according to the thickness of the passing Al films). This energy was also the minimum proton energy that can cause the darkening of the RCF layer. The six RCF sheets in Figure 5 correspond to the minimum proton energies of 12.9, 38.3, 49.8, 57.9,

59.6, and 61.4 MeV, respectively. It is clear from Figure 5 that the last RCF sheet in which the proton signal can be clearly distinguished is the 26<sup>th</sup> layer, whereas the proton signal in the 27<sup>th</sup> layer is indistinguishable. This indicates that the initial energy of the generated protons exceeds 59.6MeV, which can darken the 26<sup>th</sup> layer RCF but does not reach 61.4MeV, i.e., it cannot darken the 27<sup>th</sup> layer RCF.

The direction normal to the posterior part of the target (0°, labeled in white +), and the direction of the laser propagation (21°, marked in blue +), are also shown in Figure 5. The proton signal propagates along the target back normal direction and the signal intensity distribution gradually decreases as the number of RCF layers or the proton energy increases; these are typical findings related to the TNSA mechanism, thus indicating that the measured LDPA signal is derived from the TNSA mechanism [54,55]. It is noteworthy that a weaker darkening spot can still be observed in the middle part of the 27<sup>th</sup> RCF sheet, but also in the 26<sup>th</sup> and further layers thereafter. Its intensity and size did not change significantly; thus, this corresponds to the background noise caused by high-energy electrons in the target back normal direction [56].

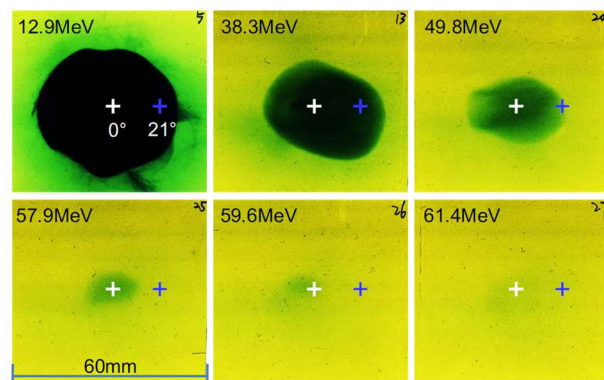


Figure 5. Several images of different layers of radiochromic film (RCF) sheets showing the proton signals with different proton energies.

### 3.3 Higher cutoff energy proton using double-film target

In the experiments described above, the cutoff energy of the proton beam was close to 60 MeV, which is much better than the results of the LDPA experiments conducted in the SG-II PW facility before maintenance, fully demonstrating the effect of recent maintenance and technology upgrades. Therefore, an attempt was made to obtain a proton beam output with a higher cutoff energy using a double-film target.

The double-film target included two thin films; however, its structure and principles were completely different from those of the double-layer target of the transmission plasma mirror [57, 58], as shown in Figure 6. Figure 6(a) shows the structure of a double-layer target based on a plasma mirror, and Figure 6(b) shows the double-film target. In Figure 6(a), the laser is focused on the surface of the T2 target, and the T1 target acts as a plasma mirror to absorb the prepulse and improve the contrast of the laser focused on the T2 target, which in turn enhances the quality of the accelerated proton beam. In Figure 6(b), the laser is focused on the surface of the T1 target and forms a target-back electric field  $E$ . The T2 target is located at a certain position, and is induced by the action of the target-back electric field  $E$  to generate an additional electric field  $E'$ , which in turn may induce a re-acceleration effect. This configuration was first proposed by Huang et al [59]. Based on the relativistic transparency mechanism and theoretically illustrated the possibility of a double-film structure to enhance the quality of proton beams.

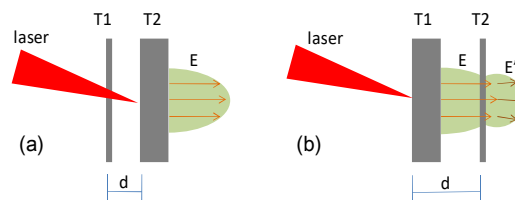


Figure 6. Two different double target structures. (a) Double-layer target for plasma mirror. (b) Double-film target for modulating sheath field modulation.

A preliminary numerical simulation of the double-film target was performed using the PIC codenamed EPOCH. The simulated conditions are as follows: laser wavelength = 1053 nm, pulse duration = 0.4 ps, power density =  $1 \times 10^{19}$  W/cm<sup>2</sup>, focal spot size =  $\Phi 14.3$   $\mu$ m, incidence angle = 21°, T1 target thickness = 20  $\mu$ m, T2 target thickness = 0.3  $\mu$ m, material: Au, and double-film spacing  $d=250$   $\mu$ m. Figure 7 shows the two-dimensional (2-D) numerical simulation results for the spatial distribution of the electric field for the two target types at two moments (500T0 and 700T0). Figures 7(a) and 7(b) show the results for a single target, that is, there is only the T1 target, whereas Figures 7(c) and 7(d) show the results for the double-film target. Conversely, Figures 7(a) and 7(c) are the results at 500T0, and Figures 7(b) and 7(d) depict the results at 700T0. It is obvious that an induced electric field is generated at the position of the T2 target back at the moment 700T0 owing to the addition of the very thin target T2. This new electric field potentially re-accelerates the protons, thus causing a boost in proton beam energy.

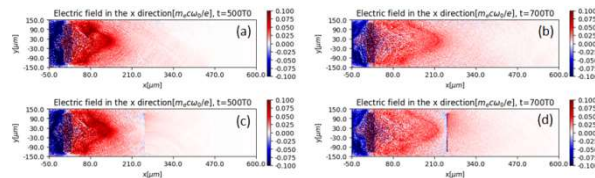


Figure 7. Two-dimensional spatial distribution of electric field intensity for ps laser-driven single and double-film targets. (a, b) Single target, (c, d) double-film target, (a, c) at 500T0, and (b, d) at 700T0.

The same scheme and laser conditions as those in Figure 5 were used for the experiments, except that the target was changed to a double-film target. The pulse duration of the driving laser was  $\sim 1$  ps, the energy of the target was  $\sim 300$  J, and the focal spot size was  $\sim \Phi 25$   $\mu$ m. The target

was a planar thin film of Au with a thickness of  $\sim 20 \mu\text{m}$ . T1 in the double-film target is the same as that in the single target, that is, the thickness of the Au planar film is  $\sim 20 \mu\text{m}$ , the T2 target has a Au planar film thickness of  $0.3 \mu\text{m}$ , and the double-film spacing  $d$ , which is related to the driving laser conditions and to other factors, maybe a key parameter. The results for  $d=830 \mu\text{m}$  are shown in Figure 8. Similar to Figure 5, six images of RCF sheets are given for the 5<sup>th</sup>, 13<sup>th</sup>, 20<sup>th</sup>, 31<sup>st</sup>, 32<sup>nd</sup>, and 33<sup>rd</sup> layers, and the minimum proton energies corresponding to each RCF layer were 12.9, 38.3, 49.8, 68.2, 70.0 and 71.4 MeV, respectively.

It is clear from Figure 8 that the last RCF sheet in which the proton signal can be clearly distinguished is the 32<sup>nd</sup> layer, whereas the proton signal in the 33<sup>rd</sup> layer is already indistinguishable. This indicates that the initial energy of the generated protons exceeds 70.0 MeV, but does not reach 71.4 MeV. This is the first time that a proton beam with a cutoff energy higher than 70 MeV has been obtained at the SG-II PW laser facility.

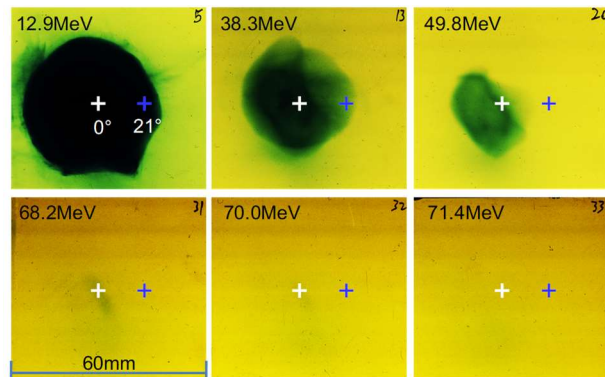


Figure 8. Several images of different layers of RCF sheets showing the proton beam output with higher cut-off energy using a double-film target.

## 4. Discussion

### 4.1 Performance improvement of SG-II PW facility

The SG-II PW facility experiments on LDPA using the SG-II PW facility have been conducted for many years, and a variety of experiments for proton applications have also been conducted; however, the highest cutoff energies of proton sources are generally not high. Figure 9 shows the proton cutoff energy data obtained from the LDPA experiments using the driving laser with a 1ps pulse duration over the years corresponding to the actual drive laser energy range of 115–374 J. It can be observed that the proton cutoff energy does not change significantly with increases in the drive laser energy by 2–3 times, thus remaining in the range of 20–30 MeV. Figure 9 shows the recent results after the maintenance of the SG-II PW laser facility. The driving laser energy corresponds to approximately 280 J, but the cutoff energy of the proton beam yields significant increases, reaching 50–60 MeV; this changes is equivalent to an improvement which is almost equal to two times. In other words, increasing the energy of the driving laser alone is not sufficient to produce a proton beam with a higher cutoff energy; thus, improving the comprehensive performance of the driving laser is the key factor. The results demonstrate that the capability of the SG-II PW laser facility was significantly improved.

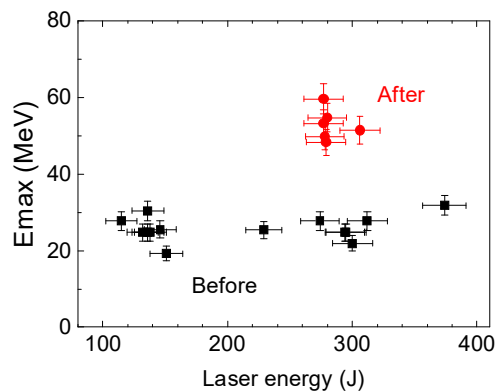


Figure 9. Maximum proton cutoff energy at different laser energies before and after maintenance.

#### ***4.2 Double-film target for higher cutoff energy***

The original intention of the double-film target design was to modify the target backsheath electric field by adding a layer of film at an appropriate location after the main target. As shown in Figure 7, the additional film layer excited a new electric field  $E'$  subject to the action of the electric field  $E$  behind the main target, which in turn caused a change in the overall sheath electric field. However, it is difficult to understand whether this change causes an increase in the cutoff energy of the accelerated protons. From the perspective of energy conservation, the new electric field was excited by the original electric field. Thus, the original electric field was inevitably attenuated; this resulted in a weakened total electric field. This was completely different from conventional cascade LDPA<sup>[60]</sup>, where the second electric field was generated with a second laser-driven film target, so the total effect of the two electric fields is increased. This was also confirmed by Chen who used a double-film target for LDPA experiments, which affected the quality of the proton beam but with lower cutoff energy<sup>[61]</sup>.

Some of these traces are shown in Figure 7. Figures 7(b) and 7(d) show the electric field intensity distributions of the single- and double-film target at the moment of  $700T_0$ , respectively. However, as shown in Figure 7(d), a new electric field is generated at distances  $> 250 \mu\text{m}$ , and the electric field of the main target is reduced. This is clearly demonstrated in Figure 10, which shows the electric-field intensity profile obtained from the scan at position  $y=0$  in Figures 7(b) and 7(d). In the case of the double-film target, the electric field intensity decreased substantially before  $250 \mu\text{m}$  despite the formation of a new electric field at  $250 \mu\text{m}$ . However, a proton beam



output with a higher cutoff energy was clearly obtained in the experiment using the double-film target, and the increase was more than 15%, thus indicating that there are unclear physical mechanisms that need to be investigated further.

In addition to the aforementioned conditions of a double-film spacing of  $830\mu\text{m}$ , experiments with other double-film spacing were also conducted. Consequently, in most of the laser shots, the proton cutoff energy does not increase compared with that of a single target and even decreases in certain conditions, which is consistent with the phenomenon in the literature [58]. When the spacing is small, the T2 target may destroy the effective accelerating electric field on the posterior part of the main target T1; when the spacing is larger, the effects on the T2 target by the electric field of T1 are minor. Therefore, the proton cutoff energy was comparable to or reduced by a single thin-film target. It is only possible to obtain protons with a higher cutoff energy when the spacing is suitable and certain special conditions are met. However, it is not currently clear which specific conditions are required.

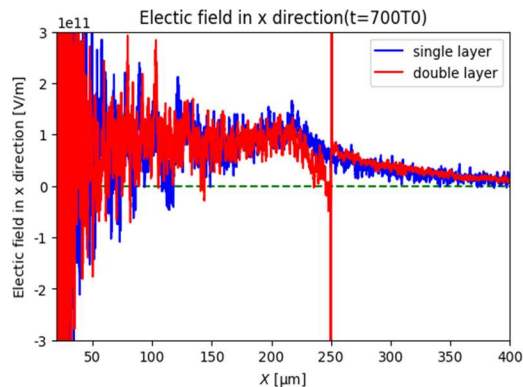


Figure 10. Electric field intensity distribution versus position for ps laser-driven single target and double-film target conditions. The data are from Figures 7(b) and 7(d). The blue line is for a single target and the red line is for a double-film target.

## 5. Conclusion

The SG-II PW laser facility has undergone extensive maintenance and technology upgrades, and its overall performance has improved. A LDPA experiment based on the TNSA mechanism was conducted to evaluate the driving performance of the ps laser in the maintained SG-II PW facility. The experimental results showed that the cut-off energy of the accelerated high-energy proton beam significantly improved to approximately 60 MeV, which is approximately twice that of previously obtained results. Accordingly, a double-film target structure whose physical mechanism is not yet well understood was used to obtain a high-energy proton beam output with a maximum cutoff energy up to 70 MeV. These results demonstrate that the comprehensive performance of the ps laser beam of the SG-II PW laser facility was significantly improved, thus providing a better experimental platform for future research.

## Acknowledgement

The authors acknowledge the staff of the SG-II PW laser facility for their assistance with the execution of this work. This work was funded by the National Natural Science Foundation of China (Grant No. 12075227), the National Natural Science Foundation of China - NSAF (Grant No. U2130121), the National Key Research and Development Program of China (Grant No. 2016YFA0401102) and the Science Challenge Project (Grant No. TZ2018005).

## References

1. Strickland, D., and Mourou, G., “Compression of amplified chirped optical pulses”, *Opt. Commun.* 55, 447 (1985).
2. Dubietis, A., Jonušauskas, G., and Piskarskas, A., “Powerful femtosecond pulse generation by chirped and stretched pulse parametric amplification in BBO crystal”, *Opt. Commun.* 88, 437 (1992).
3. Li, A. X., Qin, C. Y., Zhang, H., Li, S., Fan, L. L., Wang, Q. S., Xu, T. J., Wang, N. W., Yu, L. H., Xu, Y., Liu, Y. Q., Wang, C., Wang, X. L., Zhang, Z. X., Liu, X. Y., Bai, P. L., Gan, Z. B., Zhang, X. B., Wang, X. B., Fan, C., Sun, Y. J., Tang, Y. H., Yao, B., Liang, X. Y., Leng, Y. X., Shen, B. F., Ji, L. L., Li, R. X., and Xu, Z. Z., “Acceleration of 60 MeV proton beams in the commissioning experiment of the SULF-10 PW laser”, *High Power Laser Sci. Eng.* 10, e26 (2022).
4. Lureau, F., Laux, S., Casagrande, O., Chalus, O., Pellegrina, A., Matras, G., Radier, C., Rey, G., Ricaud, S., Herriot, S., Jouglu, P., Charbonneau, M., Duvochelle, P.A., and Simon-Boisson, C., “Latest results of 10 petawatt laser beamline for ELI Nuclear Physics infrastructure”, *Proc. SPIE* 9726, 972613 (2016).
5. Hernandez-Gomez, C., Blake, S. P., Chekhlov, O., Clarke, R. J., Dunne, A. M., Galimberti, M., Hancock, S., Heathcote, R., Holligan, P., Lyachev, A., Matousek, P., Musgrave, I. O., Neely, D., Norreys, P. A., Ross, I., Tang, Y., Winstone, T. B., Wyborn, B. E., and Collier, J., “The Vulcan 10 PW project”, *J. Phys. Conf. Ser.* 244, 032006 (2010).
6. Hein, J., Le Garrec, B., Papadopoulos, D. N., Le Blanc, C., Zou, J. P., Chériaux, G., Georges, P., Druon, F., Martin, L., Fréneaux, L., Beluze, A., Lebas, N., Mathieu, F., and Audebert, P., “Design update and recent results of the Apollon 10 PW facility”, *Proc.*

- SPIE 10238, 102380Q (2017).
7. Li, W. Q., Gan, Z. B., Yu, L. H., Wang, C., Liu, Y. Q., Guo, Z., Xu, L., Xu, M., Hang, Y., Xu, Y., Wang, J. Y., Huang, P., Cao, H., Yao, B., Zhang, X. B., Chen, L. R., Tang, Y. H., Li, S., Liu, X. Y., Li, S. M., He, M. Z., Yin, D. J., Liang, X. Y., Leng, Y. X., Li, R. X., and Xu, Z. Z., “339 J high-energy Ti: sapphire chirped-pulse amplifier for 10 PW laser facility”, *Opt. Lett.* 43, 5681 (2018).
  8. Bashinov, A. V., Gonoskov, A. A., Kim, A. V., Mourou, G., and Sergeev, A. M., “New horizons for extreme light physics with mega-science project XCELS”, *Eur. Phys. J. Special Topics* 223, 1105 (2014).
  9. Danson, C. N., Brummitt, P. A., Clarke, R. J., Collier, J. L., Fell, B., Frackiewicz, A. J., Hancock, S., Hawkes, S., Hernandez-Gomez, C., Holligan, P., Hutchinson, M. H. R., Kidd, A., Lester, W. J., Musgrave, I. O., Neely, D., Neville, D.R., Norreys, P. A., Pepler, D. A., Reason, C. J., Shaikh, W., Winstone, T. B., Wyatt, R. W. W., and Wyborn, B. E., “Vulcan Petawatt—an ultra-high-intensity interaction facility”, *Nucl. Fusion* 44, S239 (2004).
  10. Bagnoud, V., Aurand, B., Blazevic, A., Borneis, S., Bruske, C., Ecker, B., Eisenbarth, U., Fils, J., Frank, A., Gaul, E., Goette, S., Haefner, C., Hahn, T., Harres, K., Heuck, H. -M., Hochhaus, D., Hoffmann, D. H. H., Javorková, D., Kluge, H. -J., Kuehl, T., Kunzer, S., Kreutz, M., Merz-Mantwill, T., Neumayer, P., Onkels, E., Reemts, D., Rosmej, O., Roth, M., Stoehlker, T., Tauschwitz, A., Zielbauer, B., Zimmer, D., and Witte, K., “Commissioning and early experiments of the PHELIX facility”, *Appl. Phys. B* 100, 137 (2010).
  11. Zuegel, J. D., Bahk, S., Bromage, J., Dorrer, C., Earley, R., Kessler, T. J., Kruschwitz, B.

- J., Morse, S. F. B., Maywar, D. N., Oliver, J. B., Qiao, J., Right, A. L., Schmid, A. W., Shoup III, M. J., Waxer, L. J., and Kelly, J. H., “Novel laser and diagnostic technologies for the OMEGA EP high energy petawatt laser”, *Rev. Laser Eng.* 37, 437 (2009).
12. Di Nicola, J. M., Yang, S. T., Boley, C. D., Crane, J. K., Heebner, J. E., Spinka, T. M., Arnold, P., Barty, C. P. J., Bowers, M. W., Budge, T. S., Christensen, K., Dawson, J. W., Erbert, G., Feigenbaum, E., Guss, G., Haefner, C., Hermann, M. R., Homoelle, D., Jarboe, J. A., Lawson, J. K., Lowe-Webb, R., McCandless, K., McHale, B., Pelz, L. J., Pham, P. P., Prantil, M. A., Rehak, M. L., Rever, M. A., Rushford, M. C., Sacks, R. A., Shaw, M., Smauley, D., Smith, L. K., Speck, R., Tietbohl, G., Wegner, P. J., and Widmayer, C., “The commissioning of the advance dradiographic capability laser system experimental and modeling results at the main laser output”, *Proc. SPIE* 9345, 934501 (2015).
13. Raffestin, D., Lecherbourg, L., Lantuéjoul, I., Vauzour, B., Masson-Laborde, P. E., Davoine, X., Blanchot, N., Dubois, J. L., Vaisseau, X., d'Humières, E., Gremillet, L., Duval, A., Reverdin, Ch., Rosse, B., Boutoux, G., Ducret, J. E., Rousseaux, Ch., Tikhonchuk, V., and Batani, D., “Enhanced ion acceleration using the high-energy petawatt PETAL laser”, *Matter Radiat. Extremes* 6, 056901 (2021).
14. Shiraga, H., Fujioka, S., Nakai, M., Watari, T., Nakamura, H., Arikawa, Y., Hosoda, H., Nagai, T., Koga, M., and Kikuchi, H., “Fast ignition integrated experiments with Gekko and LFEX lasers”, *Plasma Phys. Contr. F.* 53, 124029 (2011).
15. Zhu, J. Q., Zhu, J., Li, X. C., Zhu, B. Q., Ma, W. X., Lu, X. Q., Fan, W., Liu, Z. G., Zhou, S. L., Xu, G., Zhang, G. W., Xie, X. L., Yang, L., Wang, J. F., Ouyang, X. P., Wang, L., Li, D. W., Yang, P. Q., Fan, Q. T., Sun, M. Y., Liu, C., Liu, D. A., Zhang, Y.

- L., Tao, H., Sun, M. Z., Zhu, P., Wang, B. Y., Jiao, Z. Y., Ren, L., Liu, D. Z., Jiao, X., Huang, H. B., and Lin, Z. Q., “Status and development of high-power laser facilities at the NLHPLP”, *High Power Laser Sci. Eng.* 6, e55 (2018).
16. Daido, H., Nishiuchi, M., and Pirozhkov, A. S., “Review of laser-driven ion sources and their applications”, *Rep. Prog. Phys.* 75, 056401(2012).
17. Petrov, G. M., McGuffey, C., Thomas, A. G. R., Krushelnick, K., and Beg, F. N., “Proton acceleration from high-contrast short pulse lasers interacting with sub-micron thin foils”, *J. Appl. Phys.* 119, 053302 (2016).
18. Geddes, C. G. R., Toth, Cs., van Tilborg, J., Esarey, E., Schroeder, C. B., Bruhwiler, D., Nieter, C., Cary, J., and Leemans, W. P., “High-quality electron beams from a laser wakefield accelerator using plasma-channel guiding”, *Nature* 431, 538 (2004).
19. Pomerantz, I., McCary, E., Meadows, A. R., Arefiev, A., Bernstein, A. C., Chester, C., Cortez, J., Donovan, M. E., Dyer, G., Gaul, E. W., Hamilton, D., Kuk, D., Lestrade, A. C., Wang, C., Ditmire, T., and Hegelich, B. M., “Ultrashort pulsed neutron source”, *Phys. Rev. Lett.* 113, 184801 (2014).
20. Powers, N. D., Ghebregziabher, I., Golovin, G., Liu, C., Chen, S., Banerjee, S., Zhang, J., and Umstadter, D. P., “Quasi-monoenergetic and tunable X-rays from a laser-driven Compton light source”, *Nat. Photonics* 8, 28 (2013).
21. Liang, E., “Gamma-ray and pair creation using ultra-intense lasers and astrophysical applications”, *High Energ. Dens. Phys.* 9, 425 (2013).
22. Lancia, L., Albertazzi, B., Boniface, C., Grisollet, A., Riquier, R., Chaland, F., Le Thanh, K. -C., Mellor, Ph., Antici, P., Buffechoux, S., Chen, S. N., Doria, D., Nakatsutsumi, M., Peth, C., Swantusch, M., Stardubtsev, M., Palumbo, L., Borghesi, M., Willi, O., Pépin, H.,

- and Fuchs, J., “Topology of megagauss magnetic fields and of heat-carrying electrons produced in a high-power laser-solid interaction”, *Phys. Rev. Lett.* 113, 235001 (2014).
23. Schumaker, W., Nakanii, N., McGuffey, C., Zulick, C., Chyvkov, V., Dollar, F., Habara, H., Kalintchenko, G., Maksimchuk, A., Tanaka, K. A., Thomas, A. G. R., Yanovsky, V., and Krushelnick, K., “Ultrafast electron radiography of magnetic fields in high-intensity laser-solid interactions”, *Phys. Rev. Lett.* 110, 015003 (2013).
24. Zhao, Z. H., An, H. H., Xie, Y., Lei, Z., Yao, W. P., Yuan, W. Q., Xiong, J., Wang, C., Ye, J., J., Xie, Z. Y., Fang, Z. H., Lei, A. L., Pei, W. B., He, X. T., Zhou, W. M., Wang, W., Zhu, S. P., and Qiao, B., “Laboratory observation of plasmoid-dominated magnetic reconnection in hybrid collisional-collisionless regime”, *Commun. Phys.* 5, 247 (2022).
25. Roth, M., Cowan, T. E., Key, M. H., Hatchett, S. P., Brown, C., Fountain, W., Johnson, J., Pennington, D. M., Snavely, R. A., Wilks, S. C., Yasuike, K., Ruhl, H., Pegoraro, F., Bulanov, S.V., Campbell, E. M., Perry, M. D., and Powell, H., “Fast ignition by intense laser-accelerated proton beams”, *Phys. Rev. Lett.* 86, 436(2001).
26. Kodama, R., Norreys, P. A., Mima, K., Dangor, A. E., Evans, R. G., Fujita, H., Kitagawa, Y., Krushelnick, K., Miyakoshi, T., Miyanaga, N., Norimatsu, T., Rose, S. J., Shozaki, T., Shigemori, K., Sunahara, A., Tampo, M., Tanaka, K. A., Toyama, Y., Yamanaka, T., and Zepf, M., “Fast heating of ultrahigh-density plasma as a step towards laser fusion ignition”, *Nature* 412, 798 (2001).
27. Bulanov, S. V., and Khoroshkov, V. S., “Feasibility of using laser ion accelerators in proton therapy”, *Plasma Phys. Rep.* 28, 453 (2002).
28. Morea, R., Yonedab, H., and Morikami, H., “Short-pulse lasers and electron dynamics in warm dense matter”, *J. Quant. Spectrosc. Ra.* 99, 409(2006).

29. Snavely, R. A., Key, M. H., Hatchett, S. P., Cowan, T. E., Roth, M., Phillips, T. W., Stoyer, M. A., Henry, E. A., Sangster, T. C., Singh, M. S., Wilks, S. C., MacKinnon, A., Offenberger, A., Pennington, D. M., Yasuike, K., Langdon, A. B., Lasinski, B. F., Johnson, J., Perry, M. D., and Campbell, E. M., “Intense high-energy proton beams from petawatt-laser irradiation of solids”, *Phys. Rev. Lett.* 85, 2945(2000).
30. Wilks, S. C., Langdon, A. B., Cowan, T.E., Roth, M., Singh, M., Hatchett, S., Key, M. H., Pennington, D., MacKinnon, A., and Snavely, R. A., “Energetic proton generation in ultra-intense laser–solid interactions”, *Phys. Plasmas* 8, 542 (2001).
31. Henig, A., Steinke, S., Schnürer, M., Sokollik, T., Hörlein, R., Kiefer, D., Jung, D., Schreiber, J., Hegelich, B. M., Yan, X. Q., Meyer-ter-Vehn, J., Tajima, T., Nickles, P. V., Sandner, W., and Habs, D., “Radiation-pressure acceleration of ion beams driven by circularly polarized laser pulses”, *Phys. Rev. Lett.* 103, 245003 (2009).
32. Silva, L. O., Marti, M., Davies, J. R., Fonseca, R. A., Ren, C., Tsung, F. S., and Moria, W. B., “Proton shock acceleration in laser-plasma interactions”, *Phys. Rev. Lett.* 92, 015002 (2004).
33. Haberberger, D., Tochitsky, S., Fiuza, F., Gong, C., Fonseca, R. A., Silva, L. O., Moria, W. B., and Joshi, C., “Collisionless shocks in laser-produced plasma generate monoenergetic high-energy proton beams”, *Nat. Phys.* 8, 95 (2012).
34. Ditmire, T., Tisch, J. W. G., Springate, E., Mason, M. B., Hay, N., Smith, R. A., Marangos, J., and Hutchinson, M. H. R., “High-energy ions produced in explosions of superheated atomic clusters”, *Nature* 386, 54 (1997).
35. Yin, L., Albright, B. J., Hegelich, B. M., and Fernández, J. C., “GeV laser ion acceleration from ultrathin targets: The laser break-out afterburner”, *Laser Part. Beams* 24, 291



- (2006).
36. Nakamura, T., Bulanov, S. V., Esirkepov, T. Zh., and Kando, M., “High-energy ions from near-critical density plasmas via magnetic vortex acceleration”, *Phys. Rev. Lett.* 105, 135002 (2010).
  37. Krushelnick, K., Clark, E. L., Beg, F. N., Dangor, A. E., Najmudin, Z., Norreys, P. A., Wei, M., and Zepf, M., “High intensity laser-plasma sources of ions—physics and future applications”, *Plasma Phys. Contr. F.* 47, B451(2005).
  38. Lindau, F., Lundh, O., Persson, A., McKenna, P., Osvay, K., Batani, D., and Wahlström, C. -G., “Laser-accelerated protons with energy-dependent beam direction”, *Phys. Rev. Lett.* 95, 175002 (2005).
  39. Kaluza, M., Schreiber, J., Santala, M. I. K., Tsakiris, G. D., Eidmann, K., Meyer-ter-Vehn, J., and Witte, K. J., “Influence of the laser prepulse on proton acceleration in thin-foil experiments”, *Phys. Rev. Lett.* 93, 045003 (2004).
  40. Burdonov, K., Fazzini, A., Lelasseux, V., Albrecht, J., Antici, P., Ayoul, Y., Beluze, A., Cavanna, D., Ceccotti, T., Chabanis, M., Chaleil, A., Chen, S. N., Chen, Z., Consoli, F., Cuciuc, M., Davoine, X., Delaneau, J. P., d’Humières, E., Dubois, J. L., Evrard, C., Filippov, E., Freneaux, A., Forestier-Colleoni, P., Gremillet, L., Horny, V., Lancia, L., Lecherbourg, L., Lebas, N., Leblanc, A., Ma, W., Martin, L., Negoita, F., Paillard, J. L., Papadopoulos, D., Perez, F., Pikuz, S., Qi, G., Quéré, F., Ranc, L., Söderström, P. A., Scisciò, M., Sun, S., Vallières, S., Wang, P., Yao, W., Mathieu, F., Audebert, P., and Fuchs, J., “Characterization and performance of the Apollon Short-Focal-Area facility following its commissioning at 1 PW level”, *Matter Radiat. Extremes* 6, 064402 (2021).
  41. Ding, F. C., Ouyang, X. P., Zhang, X. J., Jiang, Y. E., Hou, K., Jiang, X. Q., Tao, H.,

- Zhu, B. Q., Liu, D. A., Zhu, J., and Zhu, J. Q., “Universal nanosecond range pulse contrast measurement for a kJ-class petawatt laser”, *Appl. Optics* 60, 10016 (2021).
42. Xiao, Q., Pan, X., Jiang, Y. E., Wang, J. F., Du, L. F., Guo, J. T., Huang, D. J., Lu, X. H., Cui, Z. J., Yang, S. S., Wei, H., Wang, X. C., Xiao, Z. L., Li, G. Y., Wang, X. Q., Ouyang, X. P., Fan, W., Li, X. C., and Zhu, J. Q., “High-contrast OPCPA front end in high-power petawatt laser facility based on the ps-OPCPA seed system”, *Opt. Express* 29, 15980 (2021).
43. Bromage, J., Dorrer, C., and Jungquist, R. K., “Temporal contrast degradation at the focus of ultrafast pulses from high-frequency spectral phase modulation”, *J. Opt. Soc. Am. B*, 29, 1125 (2012).
44. Wang, C., An, H. H., Xiong, J., Fang, Z. H., Wang, Y. W., Zhang, Z., Hua, N., Sun, J. R., and Wang, W., “A pinhole camera for ultrahigh-intensity laser plasma experiments”, *Rev. Sci. Instrum.* 88, 113501 (2017).
45. Theobald, W., Sorce, C., Donaldson, W. R., Epstein, R., Keck, R. L., Kellogg, C., Kessler, T. J., Kwiatkowski, J., Marshall, F. J., Sampat, S., Seka, W., Shah, R. C., Shvydky, A., Stoeckl, C., Waxer, L. J., and Regan, S. P., “Inferred UV fluence focal-spot profiles from soft x-ray pinhole-camera measurements on OMEGA”, *Rev. Sci. Instrum.* 91, 023505 (2020).
46. Ouyang, X. P., Cui, Y., Zhu, J., Zhu, B. Q., and Zhu, J. Q., “Temporal characterization of petawatt class laser at ShenGuang II facility”, *Appl. Optics* 55, 7538 (2016).
47. Borghesi, M., Schiavi, A., Campbell, D. H., Haines, M. G., Willi, O., MacKinnon, A. J., Gizzi, L. A., Galimberti, M., Clarke, R. J., and Ruhl, H., “Proton imaging: a diagnostic for inertial confinement fusion/fast ignitor studies”, *Plasma Phys. Control. Fusion* 43,

A267(2001).

48. Chen, S. N., Gauthier, M., Bazalova-Carter, M., Bolanos, S., Glenzer, S., Riquier, R., Revet, G., Antici, P., Morabito, A., Propp, A., Starodubstev, M., and Fuchs, J., “Absolute dosimetric characterization of Gafchromic EBT3 and HDv2 films using commercial flat-bed scanners and evaluation of the scanner response function variability”, *Rev. Sci. Instrum.* 87, 073301 (2016).
49. Hey, D. S., Key, M. H., Mackinnon, A. J., MacPhee, A. G., Patel, P. K., Freeman, R. R., Van Woerkom, L. D., and Castaneda, C. M., “Use of GafChromic film to diagnose laser generated proton beams”, *Rev. Sci. Instrum.* 79, 053501(2008).
50. Xiong, J., An, H. H., Wang, C., Zhang, Z. C., Jiao, J. L., Lei, A. L., Wang, R. R., Hu, G. Y., Wang, W., and Sun, J. R., “Gamma-ray generation optimized by long and short pulses jointly driving double-layer target”, *Acta Phys. Sin.* 71, 215201 (2022).
51. Li, M. T., An, H. H., Hu, G. Y., Xiong, J., Lei, A. L., Xie, Z. Y., Wang, C., Wang, W., Zhang, Z. C., and Huang, L. G., “Experimental investigations of hard x-ray source produced by picosecond laser-irradiated solid target”, *Phys. Plasmas* 29, 013107 (2022).
52. Ziegler, J. F., Ziegler, M. D., and Biersack, J. P., “SRIM – The stopping and range of ions in matter (2010)”, *Nucl. Instrum. Meth. B.*268, 1818 (2010).
53. See <http://www.srim.org> for SRIM-2013-Pro.
54. Simpson, R. A., Scott, G. G., Mariscal, D., Rusby, D., King, P. M., Grace, E., Aghedo, A., Pagano, I., Sinclair, M., Armstrong, C., J-E Manuel, M., Haid, A., Flippo, K., Winslow, L., Gatu-Johnson, M., Frenje, J. A., Neely, D., Kerr, S., Williams, G. J., Andrews, S., Cauble, R., Charron, K., Costa, R., Fischer, B., Maricle, S., Stuart, B., Albert, F., Lemos, N., Mackinnon, A., MacPhee, A., Pak, A., and Ma, T., “Scaling of laser-driven electron

- and proton acceleration as a function of laser pulse duration, energy, and intensity in the multi-picosecond regime”, *Phys. Plasmas* 28, 013108 (2021).
55. Margarone, D., Kim, I. J., Psikal, J., Kaufman, J., Mocek, T., Choi, I. W., Stolcova, L., Proska, J., Choukourov, A., Melnichuk, I., Klimo, O., Limpouch, J., Sung, J. H., Lee, S. K., Korn, G., and Jeong, T. M., “Laser-driven high-energy proton beam with homogeneous spatial profile from a nanosphere target”, *Phys. Rev. ST Accel. Beams* 18, 071304 (2015).
56. Wagner, F., Deppert, O., Brabetz, C., Fiala, P., Kleinschmidt, A., Poth, P., Schanz, V. A., Tebartz, A., Zielbauer, B., Roth, M., Stöhlker, T., and Bagnoud, V., “Maximum Proton Energy above 85 MeV from the Relativistic Interaction of Laser Pulses with Micrometer Thick CH<sub>2</sub> Targets”, *Phys. Rev. Lett.* 116, 205002 (2016).
57. Wei, W. Q., Yuan, X. H., Fang, Y., Ge, Z. Y., Ge, X. L., Yang, S., Li, Y. F., Liao, G. Q., Zhang, Z., Liu, F., Chen, M., Zhao, L., Zhuo, H. B., Li, Y. T., Sheng, Z. M., and Zhang, J., “Plasma optical shutter in ultraintense laser-foil interaction”, *Phys. Plasmas* 24, 113111 (2017).
58. Huang, C. K., Albright, B. J., Yin, L., Wu, H.C., Bowers, K. J., Hegelich, B. M., and Fernández, J. C., “A double-foil target for improving beam quality in laser ion acceleration with thin foils”, *Phys. Plasmas* 18, 056707 (2011).
59. Braenzel, J., Andreev A. A., Abicht F., Ehrentraut L., Platonov K., and Schnürer M., “Amplification of Relativistic Electron Bunches by Acceleration in Laser Fields”, *Phys. Rev. Lett.* **118**, 014801 (2017).
60. Andreev A. A., Nickles P. V., and Yu Platonov K., “Effective post-acceleration of ion bunches in foils irradiated by ultra-intense laser pulses”, *Phys. Plasmas* 21, 083110

(2014).

61. Chen, S. N., Robinson, A. P. L., Antici, P., Brambrink, E., d'Humières, E., Gaillard, S., Grismayer, T., Mancic, A., Mora, P., Romagnani, L., Audebert, P., Pépin, H., and Fuchs, J., “Passive tailoring of laser-accelerated ion beam cut-off energy by using double foil assembly”, *Phys. Plasmas* 21, 023119 (2014).