



Application of soft computing in predicting the compressive strength of self-compacted concrete containing recyclable aggregate

Asad S. Albostami^{1,5} · Rwayda Kh. S. Al-Hamd² · Saif Alzabeebee³ · Andrew Minto² · Suraparb Keawsawasvong⁴

Received: 5 June 2023 / Accepted: 10 June 2023
© The Author(s) 2023

Abstract

Self-compacting concrete (SCC) is a type of concrete known for its environmental benefits and improved workability. In this study, data-driven approaches were used to anticipate the compressive strength (CS) of self-compacting concrete (SCC) containing recycled plastic aggregates (RPA). A database of 400 experimental data sets was used to assess the capabilities of multi-objective genetic algorithm evolutionary polynomial regression (MOGA-EPR) and gene expression programming (GEP). The analysis results indicated that the proposed equations provided more accurate CS predictions than traditional approaches such as the linear regression model (LRM). The proposed equations achieved lower mean absolute error (MAE) and root mean square error (RMSE) values, a mean close to the optimum value (1.0), and a higher coefficient of determination (R^2) than the LRM. As such, the proposed approaches can be utilized to obtain more reliable design calculations and better predictions of CS in SCC incorporating RPA.

Keywords Self-compacting concrete · Recycled plastic aggregates · Multi-objective genetic algorithm evolutionary polynomial regression · Gene expression programming · Soft computing

Introduction

Self-compacting concrete (SCC) is a type of concrete that can flow and compact under its weight, without the need for external vibration. It is highly fluid concrete that can fill complex forms and confined spaces, making it ideal for use in precast, prestressed, and reinforced concrete structures (Aslani et al., 2018). SCC has become increasingly popular worldwide due to its many benefits in the construction industry. Its fast-paced construction, enhanced workability,

reduced labor requirements, and superior finish makes it an attractive option for builders (Singh et al., 2020).

With 65–80% of the concrete's volume made up of aggregate, the concrete structural component heavily relies on it. In addition to durability, it gives concrete strength, permeability, volume stability, and workability (Faraj et al., 2019). Large volumes of coarse and fine aggregates are essential to supply the extensive global demand for concrete (Spies et al., 2016). To reduce waste and environmental impact, recycled materials can be used to prepare new concrete

✉ Rwayda Kh. S. Al-Hamd
r.al-hamd@abertay.ac.uk

Asad S. Albostami
asad.albostami@oryx.edu.qa

Saif Alzabeebee
Saif.Alzabeebee@gmail.com; Saif.Alzabeebee@qu.edu.iq

Andrew Minto
a.minto@abertay.ac.uk

Suraparb Keawsawasvong
ksurapar@enr.tu.ac.th

² School of Applied Sciences, Abertay University, Dundee, UK

³ Department of Roads and Transport Engineering, College of Engineering, University of Al-Qadisiyah, Al Diwaniyah, Al-Qadisiyah, Iraq

⁴ Department of Civil Engineering, Thammasat School of Engineering, Thammasat University, Pathumthani 12120, Thailand

⁵ School of Engineering & Construction, Oryx Universal College in Partnership with Liverpool John Moores, Doha, Qatar

¹ School of Engineering & Construction, Oryx Universal College in Partnership with Liverpool John Moores, Doha, Qatar

(Saikia & de Brito, 2013). Reusing recycled materials instead of mining new aggregates also alleviates aggregate shortages on construction sites. Every year, humans produce a variety of plastics to meet their needs. Unfortunately, most of these plastics are created for single-use and have very low biodegradability, making them difficult to recycle. As a result, this plastic waste contributes to increasing environmental pollution. Accordingly, Recycled Plastic Aggregate (RPA) in SCC has been an area of increasing interest in recent years. RPA is made from waste plastic material, such as plastic bottles, bags, and packaging. It is a sustainable and environmentally friendly alternative to traditional aggregates, such as gravel and crushed stone (Gu & Ozbakkaloglu, 2016). Research has shown that using RPA in SCC can improve the mechanical properties of the concrete, such as compressive strength, tensile strength, and flexural strength. RPA is also non-porous, which can help improve the durability and water resistance of the concrete (Gu & Ozbakkaloglu, 2016). Additionally, using RPA in SCC can also reduce the carbon footprint of the concrete, as it reduces the need for virgin materials and the amount of waste plastic sent to landfills (Singh et al., 2020). Overall, the use of RPA in SCC is a promising area of research, with many benefits in terms of sustainability, durability, and strength. However, more research is needed to fully understand the potential challenges and limitations of using RPA in SCC and to optimize the use of RPA in SCC for different applications.

SCC's compressive strength (CS) is a critical aspect of engineering structures. Shariati et al. (2022) noted that multiple cubic and cylindrical samples are made and tested at varying curing ages to determine the CS of SCC. The testing procedure is therefore time-consuming and expensive, and work on a construction site should also not begin until the results of the CS test are achieved at a specified age, such as 28 days. In contrast, because of the significant influence of mix proportions and components on its characteristics, determining the CS of SCC without doing experimental experiments has long been a hurdle in concrete technology (Shariati et al., 2022). This is particularly evident with the use of pozzolanic materials such as ground granulated blast furnace slag (GGBFS), limestone powder (LP), fly ash, and silica fume to partially replace cement, and recycled aggregates (RAs) to replace natural aggregates. To reduce the need for laboratory testing, improved approaches are needed to provide engineers with simpler methods and mathematical formulas for predicting experimental results.

Soft computing approaches such as genetic algorithms, fuzzy logic systems, and support vector machines have also been used to predict the mechanical properties of concrete. Additionally, a hybrid model using fuzzy logic and particle swarm optimization (PSO) is used to predict the compressive strength of high-performance concrete (HPCC) (Gao et al., 2019). In conclusion, soft computing techniques are a

suitable solution for predicting the compressive strength of different types of concrete as it provides a powerful tool for analyzing and predicting the mechanical characteristics of cement-based materials (Kumar et al., 2023).

Artificial neural networks (ANNs), such as backpropagation networks (BP) (Kaveh & Khalegi, 2000; Rumelhart et al., 1986), radial basis function networks (RBF) (Moody & Darken, 1989), and others, are considered crucial components of computational intelligence. Over the years, the effectiveness of ANNs has improved by leveraging a blend of diverse networks and algorithms. Nevertheless, it is important to note that the utilization of various network types varies depending on the specific scenario or application at hand (Kaveh & Khalegi, 1998, 2000; Kaveh & Khavaninzadeh, 2023; Kaveh & Lranmanesh, 1998; Kaveh et al., 2001, 2008, 2021; Rofooei et al., 2011).

On the other hand, other methods based on improving the regression analysis using AI function are used in the literature. One of the methods is the multi-objective genetic algorithm evolutionary polynomial regression (MOGA-EPR) method is indeed a popular and effective method for predicting various models within the field of civil engineering. MOGA-EPR is a multi-objective optimization method that uses genetic algorithms to find optimal solutions for complex problems. This method has been applied to various engineering problems, including the prediction of structural behavior, soil-structure interaction, water-structure interaction, and other related areas (Al Hamd et al., 2022; Alzabeebee et al., 2022a, 2022b, 2022c, 2023; Zuhaira et al., 2021).

Additionally, gene expression programming (GEP) (Ferreira, 2006), a relatively new modeling method, has demonstrated superior performance compared to regression methods when it comes to acquiring mathematical relationships in some experimental studies (Abd Elhakam et al., 2012). Numerous studies have highlighted the multiple benefits of GEP over traditional regression methods. Unlike classic regression methods, which analyze predefined functions retrospectively, GEP does not rely on predefined functions. As a result, GEP is considered more robust than other regression methods and even neural networks in terms of modeling and deriving mathematical relationships for experimental studies involving multivariate problems (Bhargava et al., 2011; Ganguly et al., 2009; Shahmansouri et al., 2020).

This research aims to investigate the influence of changing mixture proportions on the compressive strength (CS) of self-compacting concrete (SCC) from 7 to 400 days of curing. To this end, data has been obtained from 400 previous tests (Faraj et al., 2022), were examined. Many model approaches were used to predict the CS of SCC with various RP aggregates, including the multi-objective genetic algorithm evolutionary polynomial regression (MOGA-EPR) model and two models employing gene expression programming (GEP). RP aggregate content, binder (limestone

powder, GGBFS, fly ash, silica fume, or their combination), natural fine and coarse aggregate, water-to-binder ratio (w/b) ratio, and superplasticizer dose (SP) content were among the factors taken into account.

This paper utilizes MOGA-EPR and GEP techniques due to their explicit mathematical models which can be interpreted for further exploration (Alzabeebe et al., 2022a, 2022b, 2022c). The use of MOGA-EPR and GEP techniques in this paper is novel because these techniques have explicit mathematical models that can be easily interpreted, making them useful for further exploration and analysis. By using these techniques, the paper's authors aim to provide a more detailed and interpretable understanding of predicting the compressive strength of SSC concrete containing recycled plastic. This will impact future research and provide a means for practitioners to easily access quick calculations.

Methodology

In this study, the predictability of the compressive strength (CS) of green self-compacting concrete (SCC), including recycled plastic aggregates (RPA) is investigated using the MOGA-EPR and GEP models. An experimental database compiled from the current literature serves as the foundation for the data utilised to train and evaluate the CS. The results of the MOGA-EPR and two GEP models will then be compared to the linear regression (LR) model established in the literature by Faraj et al. (2022).

Figure 1 summarizes the methodology and procedure used in this investigation in terms of a flowchart. This flowchart starts with data collection, statistical analysis, data grouping, developing models, calculating statistical indicators, analysis of the results, assessment and analyzing sensitivity studies.

Data collection and statistical analysis

Table 1 summarizes the statistical measures for experimental data from the reference Faraj et al. (2022) with a total of 400 observations. It includes the minimum, maximum, average, and standard deviation of the SCC mix proportions, the RP aggregate contents, and the measured CS values.

In Table 1, the input data set, which includes, binder content (BC), water to binder ratio (w/b), superplasticizer dosage (SP), recycled plastic aggregate (RPA), natural fine aggregate content (FA), natural coarse aggregate content (CA), curing time (CT), and the output measured Compressive Strength (CS). In this table, the statistical measures are shown, which are the dataset's minimum, maximum, average, and standard deviation (STDEV).

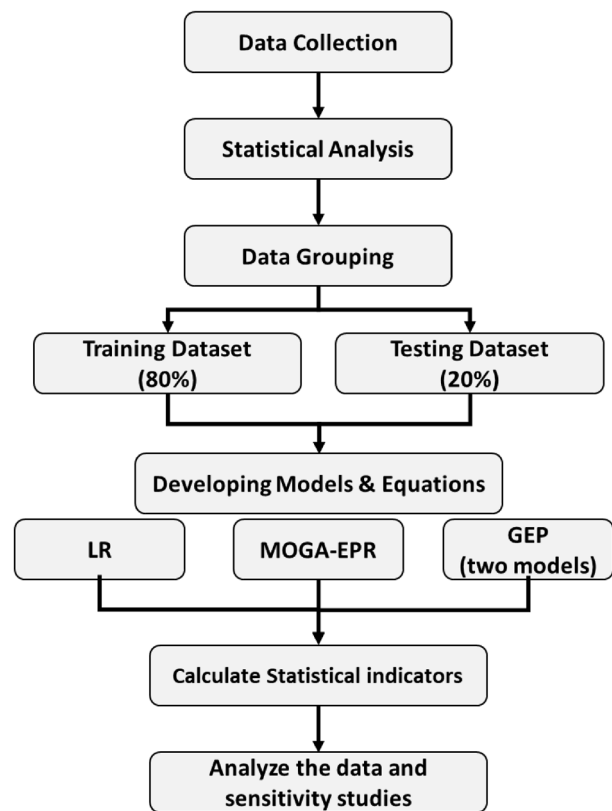


Fig. 1 Flowchart process for this paper methodology

Data grouping

In this paper, the performance of two alternative approaches to predict the compressive strength (CS) of self-compacting concrete (SCC) with varying recycled aggregates (RP) was compared to the linear regression model (LRM) developed by Faraj et al. (2022). The first approach is MOGA-EPR, and the second is GEP. The data collected was split into two sets: 80% was used to train the models, while the remaining 20% was used to test their performance. The results were then compared to the LRM approach as shown in Tables 2 and 3.

For the MOGA-EPR and GEP models, Tables 2 and 3 show the statistical measures of the training and testing datasets. The statistical measures include the minimum, maximum, average, and standard deviation of the input and output (CS) datasets.

Developing the models

In this paper, two methods, the MOGA-EPR and GEP, were used to estimate the Compressive Strength (CS) of Self-Compacting Concrete (SCC) with various amounts of Recycled Aggregates (RP). The development of the models is explained below:

Table 1 Statistical measures of the collected data

Statistical measure	BC (kg/m ³)	w/b (%)	CT (Days)	SP (kg/m ³)	RPA (kg/m ³)	FA (kg/m ³)	CA (kg/m ³)	CS (MPa)
Min	400	0.25	7	3	0	517	300	10
Max	615	0.45	400	23	138	976	935	106
Average	498	0.37	68	7	17	792	765	53
STDEV	46	0.05	88	4	32	99	128	23

Table 2 Statistical measures of the training dataset

Statistical measure	BC (kg/m ³)	w/b (%)	CT (Days)	SP (kg/m ³)	RPA (kg/m ³)	FA (kg/m ³)	CA (kg/m ³)	CS (MPa)
Min	400	0.25	7	3	0	517	300	10
Max	615	0.45	400	23	138	976	935	106
Average	497	0.37	66	7	17	792	767	53
STDEV	46	0.05	86	4	32	98	131	23

Table 3 Statistical measures of the testing dataset

Statistical measure	BC (kg/m ³)	w/b (%)	CT (Days)	SP (kg/m ³)	RPA (kg/m ³)	FA (kg/m ³)	CA (kg/m ³)	CS (MPa)
Min	400	0.25	7	3	0	517	387	18
Max	585	0.45	400	23	138	976	927	96
Average	502	0.36	78	7	18	793	753	52
STDEV	49	0.06	96	4	31	106	116	23

Table 4 MOGA-EPR model equation

Predicted CS equation	Coefficients	Equation #
$CS = a_1 \times \sqrt{w/b} \times CT^2 \times FA \times CA + a_2 \times w/b^2 \times \sqrt{RPA} \times \sqrt{FA} \times CA^2 + a_3 \times BC^2 \times CA + a_4 \times BC^2 \times \sqrt{SP} \times FA^2 \times CA + a_5 \times BC^2 \times w/b \times \sqrt{CT} \times \sqrt{SP} \times FA^2 \times CA$	$a_1 = -7.2805 \times 10^{-10}$ $a_2 = -9.2476 \times 10^{-7}$ $a_3 = 2.3381 \times 10^{-7}$ $a_4 = -1.862 \times 10^{-14}$ $a_5 = 2.7419 \times 10^{-14}$	Equation (1)

Multi-objective evolutionary polynomial regression (MOGA-EPR)

The Multi-objective evolutionary polynomial regression analysis (MOGA-EPR) is a computational technique that uses input data to solve practical problems (Table 4). It uses a genetic algorithm (GA) to create a mathematical correlation that depicts the relation between the physical input variables and is based on regression analysis. Multiple targets are added to the EPR-GA, MOGA's increasing the correlation's accuracy and fitness while reducing its complexity. The benefits of this regression method over classical regression include: finding the best correlation

automatically through a search algorithm and overcoming the overfitting problem commonly seen in other regression methods. To use the EPR-MOGA, the user must determine the correlation's structure, the range of exponents, and the number of terms. A more in-depth explanation of the EPR-MOGA can be found in (Alani et al., 2014; Alzabeebe et al., 2022a, 2022b, 2022c; Assaad et al., 2021; Giustolisi & Savic, 2006; Zuhaira et al., 2021).

The devolved models are based on eight input variables which are CS, BC, w/b, CT, SP, RPA, FA and CA. Table 4 displays the MOGA-EPR model equation (Equation (1)), which is used to predict the CS of SCC with various amounts of RP. The compressive strength (CS) of the material is measured in MPa and is dependent on the binder content (BC) in kg/m³, the water-to-binder ratio (w/b), the curing

Table 5 The main setting parameters and adjustments of GEP models

GEP parameter	Setting of parameters	
	Model (1)	Model (2)
Number of chromosomes	30	30
Head size	10	10
Number of genes	6	6
Function set	+, -, ×, / and $\sqrt{\quad}$	+, -, ×, and /
Fitness function	RMSE	RMSE
Mutation rate	0.00138	0.00138
Inversion rate	0.00346	0.00346
Gene transposition rate	0.00277	0.00277
Random chromosomes	0.0026	0.0026
Gene recombination rate	0.00277	0.00277

time (CT) in days, the superplasticizer dosage (SP) in kg/m^3 , the recycled plastic aggregate (RPA) in kg/m^3 , the fine aggregate (FA) in kg/m^3 , and the coarse aggregate (CA) in kg/m^3 .

Gene expression programming (GEP)

The GEP algorithm is an expanded version of genetic programming (GP) (Ferreira, 2001), and has been demonstrated to be effective in modelling complex and nonlinear processes (Aytek & Kişi, 2008; Faradonbeh et al., 2016). This paper uses GEP to predict the compressive strength (CS) of self-compacting concrete (SCC) with various recycled aggregate (RA) components. GEP encodes individuals in the form of linear chromosomes of fixed lengths, which can then be expressed as tree structures (Ferreira, 2001). Genetic operators, such as mutation and recombination, can be employed on the linear structure of chromosomes, thereby creating valid and correct structures for solutions.

In this paper, GEP analysis was conducted using the GeneXproTools software (Gandomi et al., 2015). The initial population of solutions was generated by incorporating a selection of functions, such as basic arithmetic functions, trigonometric, logarithmic, and polynomial functions, and terminals, which are constant values and independent problem variables. The chromosomes were then presented as tree expressions. The fitness of each member of the population was evaluated with the fitting function (Koza, 1992).

The GEP model follows an iterative process to generate a desirable solution for a given problem (Ferreira, 2001). It starts by randomly producing chromosomes from the initial population, which are expressed as tree expressions. Then, the degree of desirability and compatibility of each chromosome is evaluated. The program is terminated if the desired

conditions are met, and the present population displays the answer. The most outstanding individuals from the current population are retained, while the rest are chosen based on their performance. Subsequently, corrections and enhancements are made to the selected population, creating offspring with new traits. These new progenies are then subjected to the same developmental cycle, and the process is repeated for a set number of generations to acquire a satisfactory solution.

Similar to the MOGA-EPR model, the devolved models by the GEP use the same eight input variables. The primary setting parameters and adjustments of the GEP model are presented in Table 5.

Equations 2 and 3 for the two models of the GEP are provided in Table 6. The compressive strength (CS) of the material is measured in MPa and is dependent on the binder content (BC) in kg/m^3 , the water-to-binder ratio (w/b), the curing time (CT) in days, the superplasticizer dosage (SP) in kg/m^3 , the recycled plastic aggregate (RPA) in kg/m^3 , the fine aggregate (FA) in kg/m^3 , and the coarse aggregate (CA) in kg/m^3 .

It has been demonstrated by Eqs. 1–3 that the impact of the main variables presented by Faraj et al. (2022) has been factored into the predicted CS.

In the following section, the statistical metrics for the various models will be calculated and discussed, and the findings from the models will be contrasted.

Statistical indicators and measurements

An assessment of the new and existing analytical methods was performed using statistical indicators, such as mean absolute error (MAE), root mean squared error (RMSE),

Table 6 GEP models equations

Model #	Predicted CS equation	Coefficients	Equation #
Model (1)	$C_S = \left(\frac{b_1}{w/b^2}\right) + \left(\frac{b_2}{SP}\right) +$ $CT + SP + \left(\frac{FA}{w/b - SP + BC + (b_3 \times CT) + SP^2 - (RPA \times BC)}\right) + \left(\frac{(RPA \times CA) + FA}{(b_4 \times (BC - CT)) + \frac{CA}{SP}}\right)$ $+ \left(\sqrt{\frac{\sqrt{CA}}{(FA^3 \times RPA) + SP + b_5}}\right) + \left(\frac{(FA + (b_6 \times CT) + SP) \times (w/b - SP)}{BC + CT}\right) -$ $CT + \left(\sqrt{\left(\frac{(2BC + CA + FA) \times CA}{FA - RPA}\right)} - CT\right)$	$b_1 = 2.04752164326306$ $b_2 = -83.66222380874190$ $b_3 = -4.56731433711308$ $b_4 = -6.09275161630692$ $b_5 = -2.68057863833849$ $b_6 = -10.2250110299772$	Equation (2)
Model (2)	$C_S = \frac{((c_1 - CT) \times w/b) \times CA}{((c_2 \times RPA) - c_3) \times (CT + BC)} + \left(\frac{c_4 \times CA}{2c_5}\right) - (FA - c_6) - ((c_4 - (c_7 \times RPA)) + c_8 -$ $((RPA + c_8) \times w/b) + \frac{c_9 \times ((c_{10} \times RPA) + 2FA + SP + CT)}{CA} + FA + \left(\frac{BC - c_{11}}{w/b + c_{12}}\right) + \left(\frac{SP}{c_{13} \times c_{14}}\right) - 2c_{14}$ $) + \left(\frac{w/b}{(CT \times SP) + (c_{15} - CT)}\right) \times (((c_{16} \times CT) - BC) - CA)$	$c_1 = -18.2064588194262$ $c_2 = 11.620285986222$ $c_3 = 3.42765361474484$ $c_4 = 12.1922067234333$ $c_5 = 346.522214148519$ $c_6 = 3.10875385621427$ $c_7 = 0.0894705512548135$ $c_8 = 9.05935992915163$ $c_9 = -10.4224902614892$ $c_{10} = -6.90705435346538$ $c_{11} = -2.28260016889247$ $c_{12} = 7.06013962452122$ $c_{13} = 0.748150368882835$ $c_{14} = 2.22375164446721$ $c_{15} = 8.40446223029267$ $c_{16} = -12.872347535881$	Equation (3)

mean, and coefficient of determination (R^2) (Eqs. 4–7). This same accuracy evaluation method has been used in many past studies (e.g., Alkroosh et al., 2015; Huang et al., 2019; Kordnaeij et al., 2015; Tinoco et al., 2020; Zhang et al., 2020) The MAE and RMSE values describe the ideal fit as the lower means. The mean value should ideally be 1.0; values higher than this indicate an overall overprediction of the compressive strength (CS) and lower values indicate an overall underprediction.

$$MAE = \frac{1}{n} \sum_1^n |CS_p - CS_m| \tag{4}$$


$$RMSE = \sqrt{\frac{1}{n} \sum_1^n (CS_p - CS_m)^2} \tag{5}$$

$$Mean = \frac{1}{n} \sum_1^n \left(\frac{CS_p}{CS_m}\right) \tag{6}$$


$$R^2 = \left(\frac{\sum_{i=1}^n (CS_p - CS_{p\text{average}})(CS_m - CS_{m\text{average}})}{\sqrt{\sum_{i=1}^n (CS_p - CS_{p\text{average}})^2 \sum_{i=1}^n (CS_m - CS_{m\text{average}})^2}}\right)^2 \tag{7}$$

Table 7 Statistical accuracy analysis of the developed models for both datasets


Statistical indicators	Training data			Testing data		
	MOGA-EPR Model	GEP Model (1)	GEP Model (2)	MOGA-EPR Model	GEP Model (1)	GEP Model (2)
MAE (MPa)	7.1	7.7	7.3	7.8	8.6	8.3
RMSE (MPa)	8.8	9.7	9.5	10.0	10.8	10.2
Mean	1.04	1.06	1.03	1.06	1.05	1.04
R^2	0.85	0.82	0.83	0.80	0.78	0.80

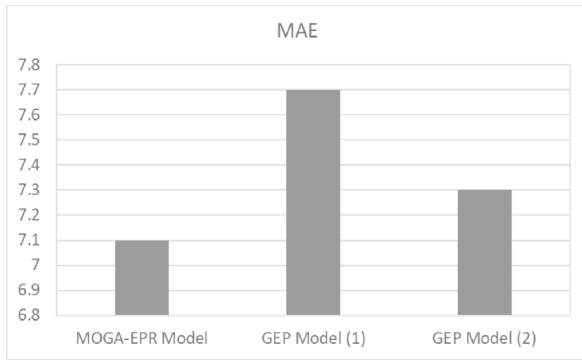


(a): MAE for Training dataset

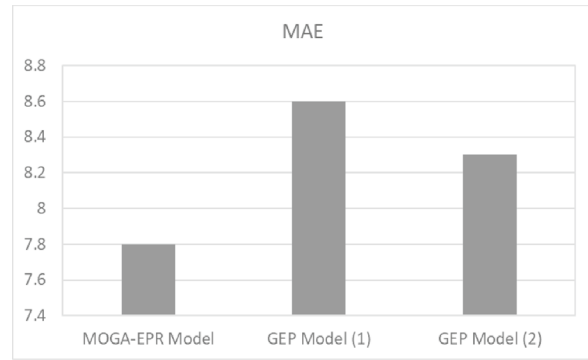


(e): MAE for Testing dataset

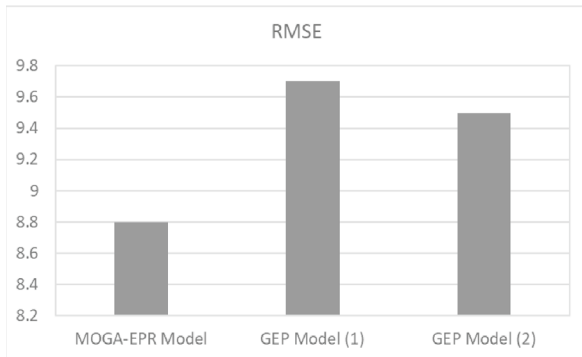


(b): RMSE for Training dataset

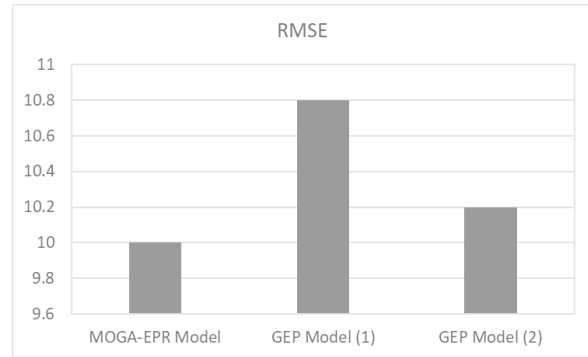


(f): RMSE for Testing dataset

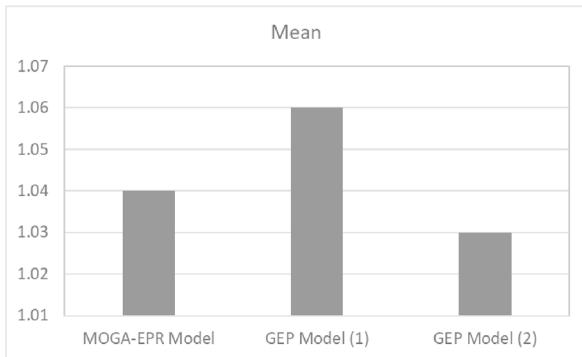


(c): Mean for Training dataset

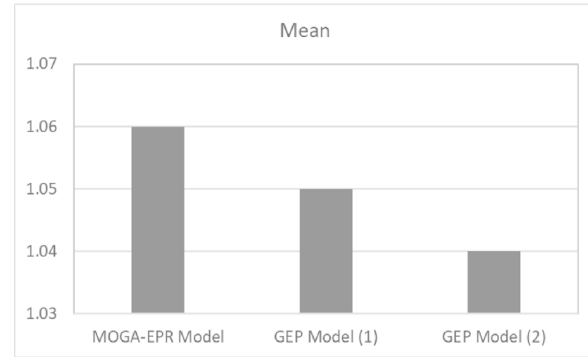

(g): Mean for Testing dataset

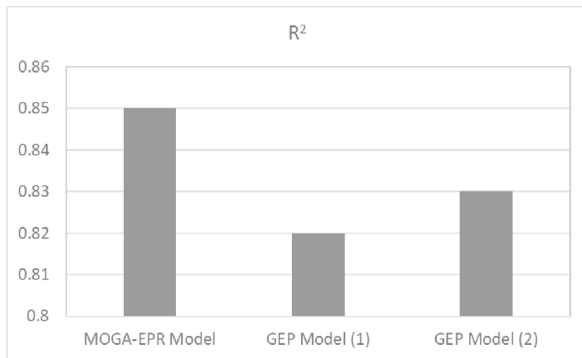


(d): R² for Training dataset

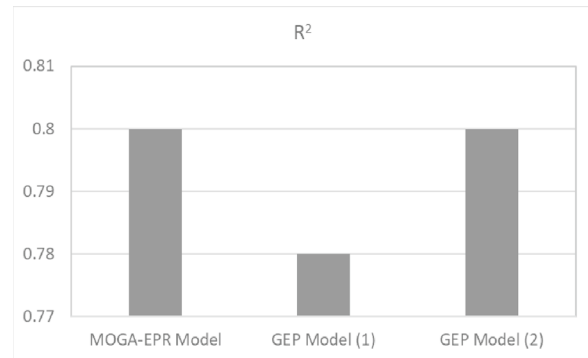


(h): R² for Testing dataset


Fig. 2 Statistical accuracy analysis of the developed models for both datasets a–d for the training dataset and e–h for the testing dataset

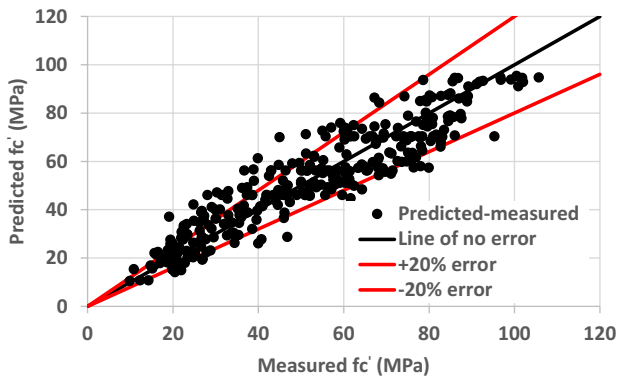


(a)

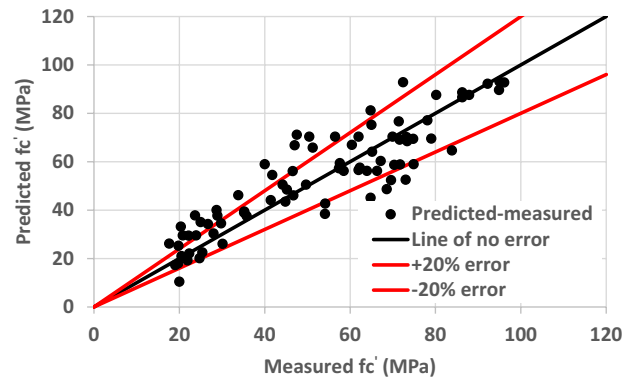


(a)

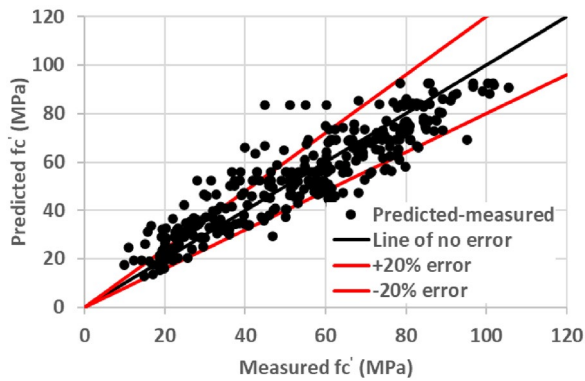


(b)

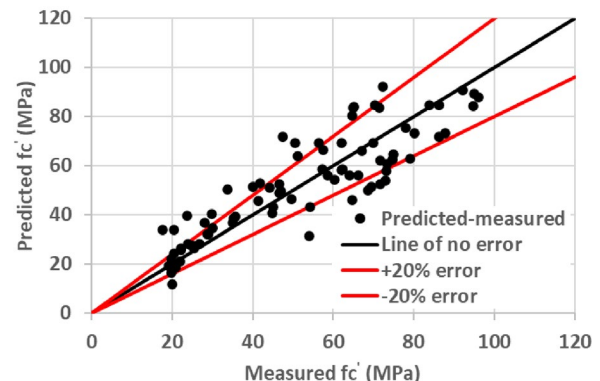

(b)

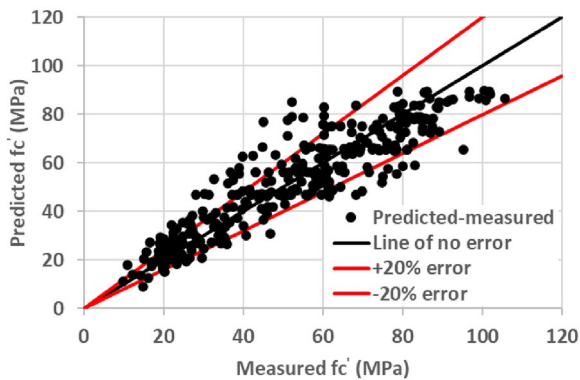

(c)

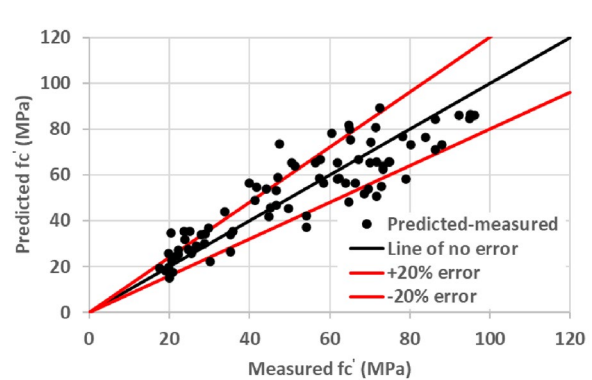

(c)

Fig. 3 Relationship between measured and predicted CS using the developed models for the training dataset: **a** MOGA- EPR, **b** GEP model (1) and **c** GEP model (2)

In Eqs. 4–7, n is the number of data points used in the assessment, CS_p is the predicted compressive strength, and CS_m is the measured compressive strength.

Fig. 4 Relationship between measured and predicted CS using the developed models for the testing dataset: **a** MOGA- EPR, **b** GEP model (1) and **c** GEP model (2)

Results

The statistical indicators and measurements in the previous section have been used to calculate the mean absolute error (MAE), root mean squared error (RMSE), mean, and coefficient of determination (R^2) for the prediction CS values compared to the measured CS for the training and testing datasets for each model of the MOGA-EPR and GEP approaches, as shown in Table 7 and Fig. 2.

Table 8 Statistical accuracy comparison of the developed model with LRM using all of the data

Model	MAE (MPa)	RMSE (MPa)	Mean	R^2
MOGA-EPR model	7.3	9.0	1.04	0.84
GEP model (1)	7.9	9.9	1.06	0.81
GEP model (2)	7.5	9.7	1.03	0.82
LRM by Faraj et al. (2022)	9.4	11.5	1.07	0.75

Results from Table 7 and Fig. 2 indicate that the MAE for the developed approaches lies between 7.1 and 7.7 for the training datasets, and 7.8 and 8.6 for the testing datasets. In terms of RMSE, the training datasets yield scores between 8.8 and 9.7, while the testing datasets have scores between 10.0 and 10.8. The mean of the datasets ranges from 1.03 to 1.06 for the training datasets and 1.04 to 1.06 for the testing datasets. Lastly, the R^2 scores for the training datasets are between 0.82 and 0.85, and 0.78 to 0.80 for the testing datasets.

The statistical indicators calculated from the training and testing datasets presented in Table 7 and Fig. 2 are promising and fairly close to each other. The MOGA-EPR model has the highest R^2 compared to the two GEP models, with GEP model (2) having a higher R^2 than GEP model (1). Additionally, MOGA-EPR has the lowest MAE and RMSE values among the models. The mean values are all close to 1 for all models.


Figures 3 and 4 display the comparison between the predicted and measured values for the training and testing data, respectively, for the three models. These figures show that the majority of the predictions resemble the perfect fit line and that most of them are within the $\pm 20\%$ error, which suggests accurate predictions.

Comparison with the LR model suggested by Faraj et al. (2022)


In this paper, the three models from two different approaches are developed and compared with the Linear Regression model (LRM) suggested by Faraj et al. (2022).

Table 8 and Fig. 5 compare the statistical indicators between 4 models. From this table and figure, the MOGA-EPR model shows the best behavior compared to the other models by mean lower MAE, RMSE, and the mean value. On the other hand, it gives the highest R^2 .


The capability of data-driven models is specified compared to the LR model with the cumulative frequency of the error level in percentage reported in Fig. 6. It is evident from this figure that the MOGA-EPR and GEP models are close to each other and better at predicting CS

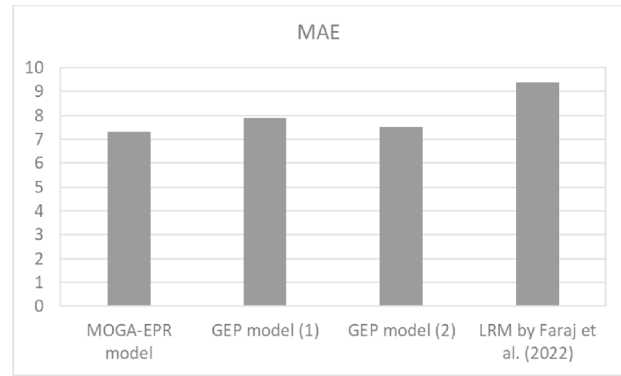


(a): MAE for all of the data

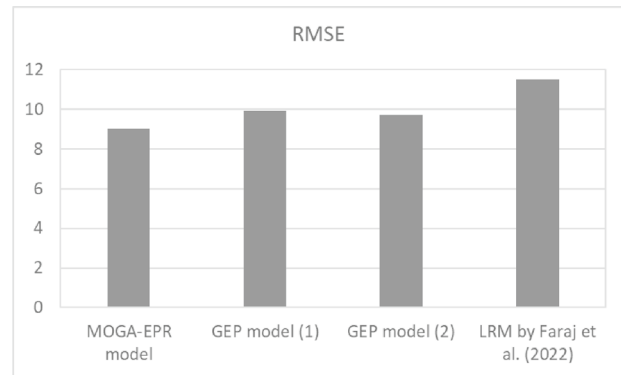

(b): RMSE for all of the data

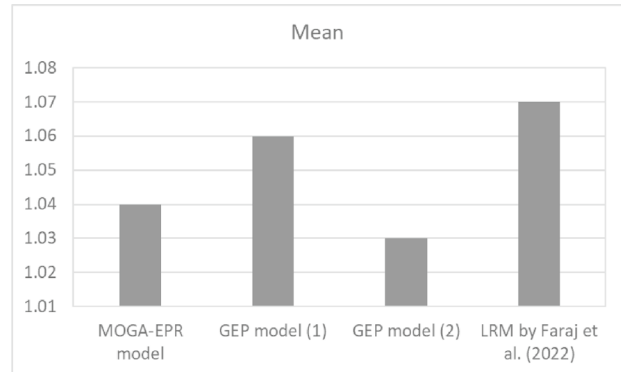

(c): Mean for all of the data

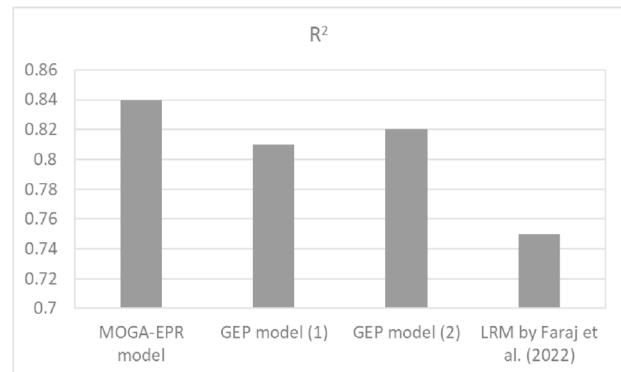

(d): R^2 for all of the data

Fig. 5 Statistical accuracy comparison of the developed model with LRM using all the data

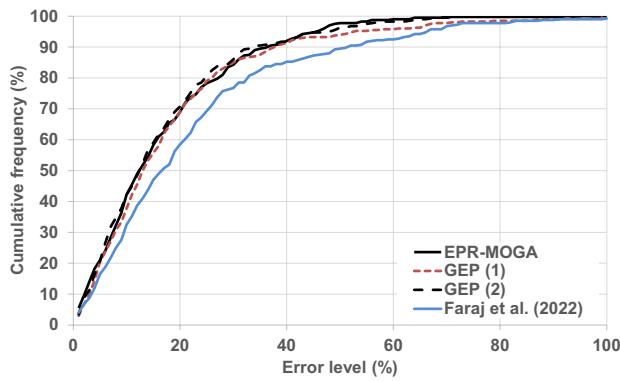


Fig. 6 Comparison of the error level for different cumulative frequencies

than the LR model. Moreover, Fig. 7 displays the residual error between each of the different models and the measured values of the CS, demonstrating the accuracy of the MOGA-EPR and GEP models in predicting the values of the CS. It is worth emphasizing that the MOGA-EPR model is much more straightforward than the other models. Therefore, it is suggested to be utilized to prevent mistakes in computations.

Sensitivity studies

After assessing the CS values from various models in the previous sections, the MOGA-EPR model was picked to conduct further sensitivity studies. The selection of the MOGA-EPR models is due to its simplicity; thus, it could be easily utilized to conduct a sensitivity analysis of the influencing parameters on the compressive strength. These studies will demonstrate how changing the values of the input variables affects the CS of SCC.

The effect of changing the recycled plastic aggregates content (RPA)

This paper aims to predict the CS of SCC with RPA. This study will investigate the effect of increasing the RPA on CS, while keeping the other factors (as indicated in Table 1) constant at the average values.

Changing the RPA in SCC can affect the compressive strength of the concrete. RPA is a type of aggregate made from recycled plastic and used as a partial substitution for other coarse aggregates in concrete. As mentioned earlier in “Introduction”, using RPA can help reduce the environmental impacts of concrete production.

Basha et al. (2020) have indicated that raising the amount of RPA in self-compacting concrete can duce its compressive strength, a consequence of the debonding between RPA and the mortar matrix. Moreover, RPA is more prone to absorbing water, which increases the porosity of the concrete (Rachedi, 2018), which can lead to a decrease in the strength of the concrete. The same can be seen in Fig. 8a, which shows the inverse correlation between RPA and CS. The two variables have an inverse relationship when looking at the graph.

The effect of changing the water-to-binder ratio (w/b)

The CS of SCC with RPA is dependent on the ratio of w/b within the mix; an increase in the water-to-binder ratio of the SCC mix can lead to a decrease in CS due to the excess water increasing porosity and reduce the strength of the concrete (Belalia Douma et al., 2017). This is demonstrated in Fig. 8b, which indicates that the CS increases as the w/b ratio increases until it reaches its peak at 0.57, after which the CS decreases, with other factors in the mix remaining at their average values indicated in Table 1.

The effect of changing the binder content (BC)

Its BC impacts the CS of SCC. As the BC increases, the CS also increases due to the addition of more cement paste, which makes the concrete denser and thus increases its

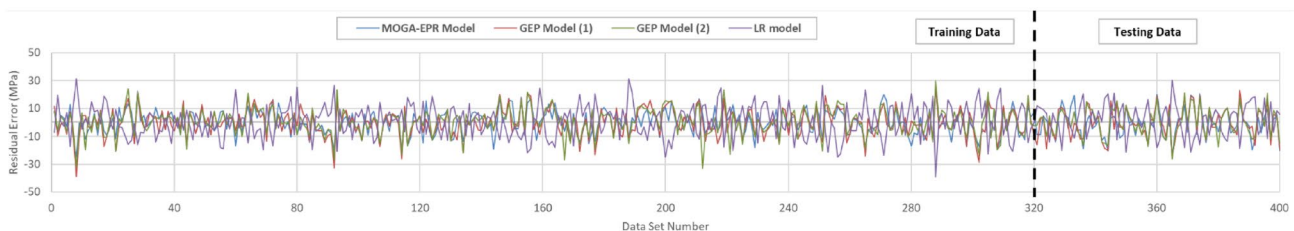


Fig. 7 Residual errors for the models using all of the data

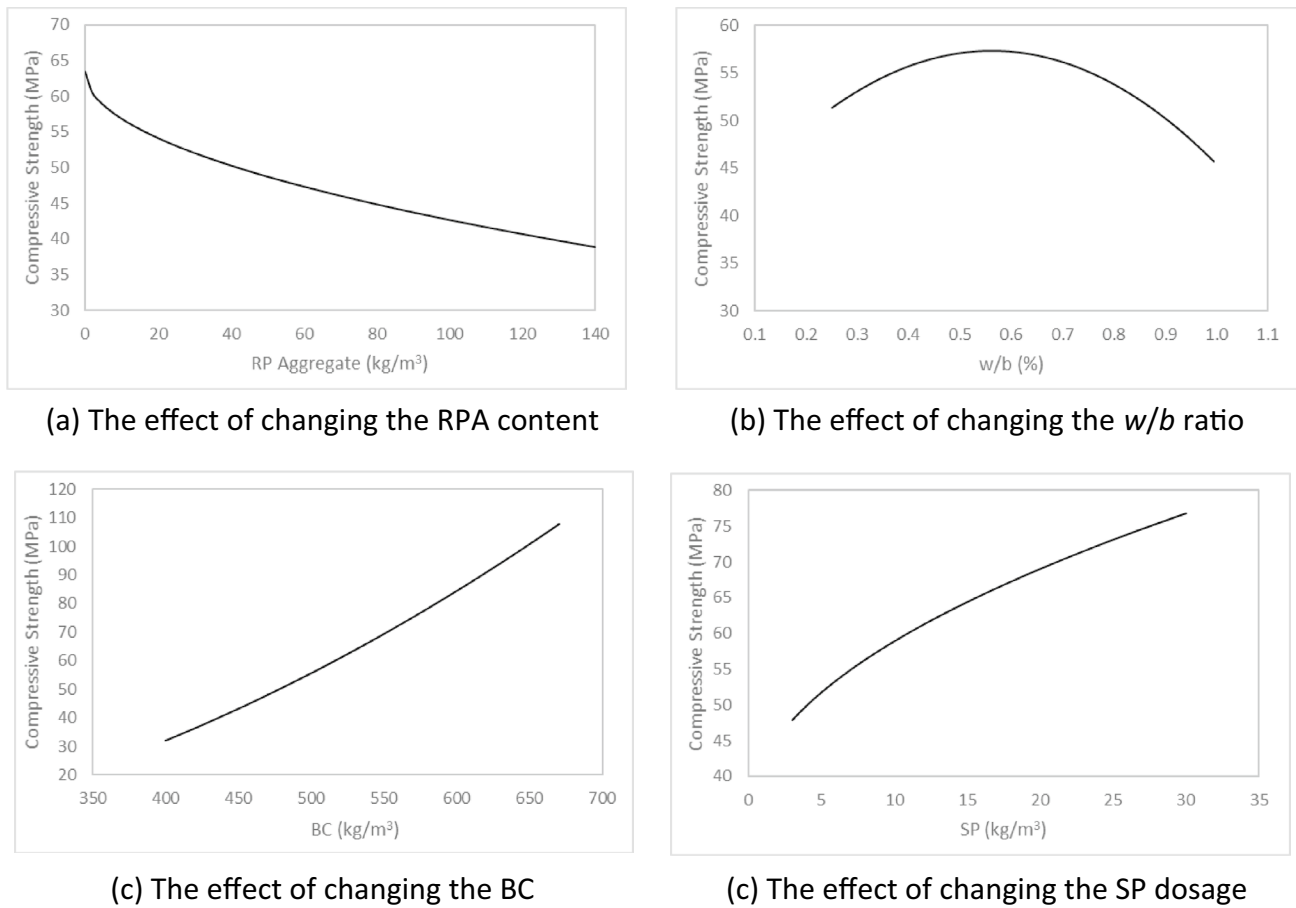


Fig. 8 Sensitivity studies

strength (Adam, 2011). This trend is seen in Fig. 8c, where the CS rises with an increase in the BC, while all other factors (listed in Table 1) remain constant.

The effect of changing the superplasticizer dosage (SP)

Adding superplasticizers to self-compacting concrete (SCC) enables the production of concrete with high workability, flowability, and water content (Ravindrarajah et al., 2003). Superplasticizers are also known to improve the compressive strength (CS) of SCC (Benaicha et al., 2019). In this study, increasing the SP will be studied on the CS, while keeping the other factors (as indicated in Table 1) constant at the average values. As illustrated by Fig. 8d, the findings reflect the outcomes of the prior studies by demonstrating a correlation between an increase in SP and an increase in CS.

Conclusions

The results of this study demonstrated that the novel MOGA-EPR and GEP techniques are highly effective for predicting Self-compacting Concrete containing Recycled Plastic Aggregates' compressive strength. Three models were developed, providing a simple and powerful tool for designers to use. The new approaches achieved significantly improved accuracy compared to the Linear Regression model (LRM).

The results of this study express the following conclusions with taking into consideration the constraints of the study:

- 1- The three proposed models have a higher accuracy than the existing LRM in the available literature, with R^2 values ranging from 0.81 to 0.84 compared to R^2 values below 0.75 for the current model.
- 2- The first proposed model, MOGA-EPR, showed the most significant accuracy with MAE of 7.1 and 7.8 for training and testing datasets, respectively, RMSE of 8.8

and 10.0, respectively, Mean of 1.04 and 1.06, and R^2 of 0.85 and 0.80 respectively.

- 3- The GEP models (1 and 2) also showed good accuracy. Where the MAE values of 7.7 and 7.3, RMSE of 9.7 and 9.5, Mean of 1.06 and 1.03, and R^2 of 0.82 and 0.83 for training and testing datasets, respectively.
- 4- The sensitivity studies revealed the effects of the recycled plastic aggregates (RPA) content, superplasticizer (SP) dosage, and binder content (BC) on the compressive strength (CS) of self-compacting concrete (SCC).

The conclusion of this study highlights the potential impact of the proposed system in the future. The system uses a well-established soft computing method, combined with an artificial intelligence algorithm, to develop three practical models. These models have the potential to be widely adopted and impact various industries, as they provide a consistent and effective solution for addressing complex problems. Implementing these models could lead to significant advancements in multiple fields and result in substantial benefits for practice engineers and researchers.

While GEP proves to be highly useful in civil engineering, researchers should consider several limitations. These limitations include complexity and parameter tuning, requiring domain expertise and careful configuration of operators, functions, and terminal sets. Overfitting is also a concern, as GEP, like other modeling methods, can become overly complex and fail to generalize well to unseen data. The interpretability of GEP's complex tree structures poses challenges in extracting meaningful insights and explaining underlying mechanisms. Additionally, GEP's performance is reliant on the quality and quantity of available data, with insufficient or noisy data hindering accurate pattern capture. GEP can be computationally intensive, particularly for large datasets or complex problems, limiting its practical application in certain scenarios. Furthermore, GEP's handling of categorical data may not be as effective, necessitating preprocessing and encoding to numeric formats. Despite these limitations, GEP remains a valuable and promising modeling approach, with ongoing research focused on overcoming these challenges and enhancing its performance and applicability across various domains.

Acknowledgements The authors gratefully acknowledge the contribution of the University of Petra, Jordan.

Author contributions A.A. and R.A. wrote the main manuscript text S.A. prepared the MOGA-EPR model A.M. and S.K. have proofed the language All authors reviewed the manuscript.

Funding The authors have not disclosed any funding.

Data availability All data, models, or codes supporting this study's findings are available from the corresponding author upon reasonable request.

Declarations

Conflict of interest None declared.

Ethical statement The authors state that the research was conducted according to ethical standards.

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

References

- Abd Elhakam, A., Mohamed, A. E., & Awad, E. (2012). Influence of self-healing, mixing method and adding silica fume on mechanical properties of recycled aggregates concrete. *Construction and Building Materials*, 35, 421–427. <https://doi.org/10.1016/j.conbuildmat.2012.04.013>
- Adam, I. (2011). Effect of binder content on properties of different self-consolidating concrete types self-compacting concrete view project nano creep of cementitious composites view project. *Engineering Research Journal*, 19–37. <https://www.researchgate.net/publication/352706898>
- al Hamd, R. K. S., Alzabeebee, S., Cunningham, L. S., & Gales, J. (2022). Bond behaviour of rebar in concrete at elevated temperatures: A soft computing approach. *Fire and Materials*. <https://doi.org/10.1002/fam.3123>
- Alani, A. M., Faramarzi, A., Mahmoodian, M., & Tee, K. F. (2014). Prediction of sulphide build-up in filled sewer pipes. *Environmental Technology (United Kingdom)*, 35(14), 1721–1728. <https://doi.org/10.1080/09593330.2014.881403>
- Alkroosh, I. S., Bahadori, M., Nikraz, H., & Bahadori, A. (2015). Regressive approach for predicting bearing capacity of bored piles from cone penetration test data. *Journal of Rock Mechanics and Geotechnical Engineering*, 7(5), 584–592. <https://doi.org/10.1016/j.jrmge.2015.06.011>
- Alzabeebee, S., Al-Hamd, R. K. S., Nassr, A., Kareem, M., & Keawsawasvong, S. (2023). Multiscale soft computing-based model of shear strength of steel fibre-reinforced concrete beams. *Innovative Infrastructure Solutions*. <https://doi.org/10.1007/s41062-022-01028-y>
- Alzabeebee, S., Dhahir, M. K., & Keawsawasvong, S. (2022a). Predictive model for the shear strength of concrete beams reinforced with longitudinal FRP bars soil structure interaction of resilient systems view project Soils' geotechnical properties: estimation and evaluation view project. *Structural Engineering and Mechanics*, 84(2), 143–154. <https://doi.org/10.12989/sem.2022.84.2.000>
- Alzabeebee, S., Jamei, M., Hasanipannah, M., Amnieh, H. B., Karbasi, M., & Keawsawasvong, S. (2022b). Development of a new explicit soft computing model to predict the blast-induced ground vibration. *Geomechanics and Engineering*, 30(6), 551–564.

- Alzabeebee, S., Mohamad, S. A., & Al-Hamd, R. K. S. (2022c). Surrogate models to predict maximum dry unit weight, optimum moisture content and California bearing ratio from grain size distribution curve. *Road Materials and Pavement Design*, 23(12), 2733–2750. <https://doi.org/10.1080/14680629.2021.1995471>
- Aslani, F., Ma, G., Yim Wan, D. L., & Muselin, G. (2018). Development of high-performance self-compacting concrete using waste recycled concrete aggregates and rubber granules. *Journal of Cleaner Production*, 182, 553–566. <https://doi.org/10.1016/j.jclepro.2018.02.074>
- Assaad, J. J., Nasr, D., Gerges, N., & Issa, C. (2021). Use of soft computing techniques to predict the bond to reinforcing bars of underwater concrete. *International Journal of Civil Engineering*, 19(6), 669–683. <https://doi.org/10.1007/s40999-020-00598-1>
- Aytek, A., & Kişi, Ö. (2008). A genetic programming approach to suspended sediment modelling. *Journal of Hydrology*, 351(3–4), 288–298. <https://doi.org/10.1016/j.jhydrol.2007.12.005>
- Basha, S. I., Ali, M. R., Al-Dulajain, S. U., & Maslehuddin, M. (2020). Mechanical and thermal properties of lightweight recycled plastic aggregate concrete. *Journal of Building Engineering*. <https://doi.org/10.1016/j.jobe.2020.101710>
- Belalia Douma, O., Boukhatem, B., Ghrici, M., & Tagnit-Hamou, A. (2017). Prediction of properties of self-compacting concrete containing fly ash using artificial neural network. *Neural Computing and Applications*, 28, 707–718. <https://doi.org/10.1007/s00521-016-2368-7>
- Benaicha, M., Hafidi Alaoui, A., Jalbaud, O., & Burtschell, Y. (2019). Dosage effect of superplasticizer on self-compacting concrete: Correlation between rheology and strength. *Journal of Materials Research and Technology*, 8(2), 2063–2069. <https://doi.org/10.1016/j.jmrt.2019.01.015>
- Bhargava, S., Dulikravich, G. S., Murty, G. S., Agarwal, A., & Colao, M. J. (2011). Stress corrosion cracking resistant aluminum alloys: Optimizing concentrations of alloying elements and tempering. *Materials and Manufacturing Processes*, 26(3), 363–374. <https://doi.org/10.1080/10426914.2010.536938>
- Faradonbeh, R., Armaghani, D., Abd Majid, M. Z., Tahir, M., Ramesh Murlidhar, B., Monjezi, M., & Wong, H. M. (2016). Prediction of ground vibration due to quarry blasting based on gene expression programming: A new model for peak particle velocity prediction. *International Journal of Environmental Science and Technology*, 13(6), 1453–1464. <https://doi.org/10.1007/s13762-016-0979-2>
- Faraj, R. H., Mohammed, A. A., Omer, K. M., & Ahmed, H. U. (2022). Soft computing techniques to predict the compressive strength of green self-compacting concrete incorporating recycled plastic aggregates and industrial waste ashes. *Clean Technologies and Environmental Policy*, 24(7), 2253–2281. <https://doi.org/10.1007/s10098-022-02318-w>
- Faraj, R. H., Sherwani, A. F. H., & Daraei, A. (2019). Mechanical, fracture and durability properties of self-compacting high strength concrete containing recycled polypropylene plastic particles. *Journal of Building Engineering*. <https://doi.org/10.1016/j.jobe.2019.100808>
- Ferreira, C. (2001). Gene expression programming: A new adaptive algorithm for solving problems. *Complex Systems*, 13(2), 87–129.
- Ferreira, C. (2006). *Gene expression programming: Mathematical modeling by an artificial intelligence* (Vol. 21). Springer.
- Gandomi, A. H., Alavi Conon, H., & Editors, R. (2015). *Handbook of genetic programming applications*.
- Ganguly, S., Datta, S., & Chakraborti, N. (2009). Genetic algorithm-based search on the role of variables in the work hardening process of multiphase steels. *Computational Materials Science*, 45(1), 158–166. <https://doi.org/10.1016/j.commatsci.2008.01.074>
- Gao, W., Karbasi, M., Derakhsh, A. M., & Jalili, A. (2019). Development of a novel soft-computing framework for the simulation aims: A case study. *Engineering with Computers*, 35(1), 315–322. <https://doi.org/10.1007/s00366-018-0601-y>
- Giustolisi, O., & Savic, D. (2006). A symbolic data-driven technique based on evolutionary polynomial regression. *Journal of Hydroinformatics*, 8(4), 235–237. <https://doi.org/10.2166/hydro.2006.020>
- Gu, L., & Ozbakkaloglu, T. (2016). Use of recycled plastics in concrete: A critical review. In *Waste Management* (Vol. 51, pp. 19–42). Elsevier Ltd. <https://doi.org/10.1016/j.wasman.2016.03.005>
- Huang, C. F., Li, Q., Wu, S. C., Liu, Y., & Li, J. Y. (2019). Assessment of empirical equations of the compression index of muddy clay: sensitivity to geographic locality. *Arabian Journal of Geosciences*. <https://doi.org/10.1007/s12517-019-4276-5>
- Kaveh, A., Dadras Eslamlou, A., Javadi, S. M., & Geran Malek, N. (2021). Machine learning regression approaches for predicting the ultimate buckling load of variable-stiffness composite cylinders. *Acta Mechanica*, 232(3), 921–931. <https://doi.org/10.1007/s00707-020-02878-2>
- Kaveh, A., Elmieh, R., & Servati, H. (2001). Prediction of moment-rotation characteristic for semi-rigid connections using BP neural networks. *Asian Journal of Civil Engineering*, 2(2), 131–142.
- Kaveh, A., Gholipour, Y., & Rahami, H. (2008). Optimal design of transmission towers using genetic algorithm and neural networks. *International Journal of Space Structures*, 23(1).
- Kaveh, A., & Khalegi, A. (1998). Prediction of strength for concrete specimens using artificial neural network. *Asian Journal of Civil Engineering*, 2(2), 1–13.
- Kaveh, A., & Khalegi, H. (2000). Prediction of strength for concrete specimens using artificial neural network. *Asian Journal of Civil Engineering*, 1(2), 1–12.
- Kaveh, A., & Khavanizadeh, N. (2023). Efficient training of two ANNs using four meta-heuristic algorithms for predicting the FRP strength. *Structures*, 52, 256–272. <https://doi.org/10.1016/j.istruc.2023.03.178>
- Kaveh, A., & Lranmanesh, A. (1998). Comparative study of backpropagation and improved counter propagation neural nets in structural analysis and optimization. *International Journal of Space Structures*, 13(4), 177–185.
- Kordnaeij, A., Kalantary, F., Kordtabar, B., & Mola-Abasi, H. (2015). Prediction of recompression index using GMDH-type neural network based on geotechnical soil properties. *Soils and Foundations*, 55(6), 1335–1345. <https://doi.org/10.1016/j.sandf.2015.10.001>
- Koza, J. R. (1992). *Genetic programming: On the programming of computers by means of natural selection* (Vol. 33). Cambridge: MIT Press.
- Kumar, R., Rai, B., & Samui, P. (2023). A comparative study of prediction of compressive strength of performance concrete using soft computing technique. *Structural Concrete*. <https://doi.org/10.1002/suco.202200850>
- Moody, J., & Darken, C. J. (1989). Fast learning in networks of locally-tuned processing units. *Neural Computation*, 1, 281–294.
- Rachedi, M. (2018). Optimal composition of plaster mortar reinforced with palm fibers. *Journal of Civil Engineering and Environmental Sciences*. <https://doi.org/10.17352/2455-488x.000027>
- Ravindrarajah, R., Farrokhzadi, F., & Lahoud, A. (2003). Properties of flowing concrete and self-compacting concrete with high-performance superplasticier. In *Third international symposium on self-compacting concrete* (p. 1028).
- Rofooei, F. R., Kaveh, A., & Farahani, F. M. (2011). Estimating the vulnerability of the concrete moment resisting frame structures using artificial neural networks. *International Journal of Optimization in Civil Engineering*, 3, 433–448.

- Rumelhart, D., Hintont, G., & Williams, R. (1986). Learning representations by backpropagating errors. *Nature*, *323*, 533–536.
- Saikia, N., & de Brito, J. (2013). Waste polyethylene terephthalate as an aggregate in concrete. *Materials Research*, *16*(2), 341–350. <https://doi.org/10.1590/S1516-14392013005000017>
- Shahmansouri, A. A., Akbarzadeh Bengar, H., & Ghanbari, S. (2020). Compressive strength prediction of eco-efficient GGBS-based geopolymer concrete using GEP method. *Journal of Building Engineering*. <https://doi.org/10.1016/j.jobe.2020.101326>
- Shariati, M., Mafipour, M. S., Ghahremani, B., Azarhomayun, F., Ahmadi, M., Trung, N. T., & Shariati, A. (2022). A novel hybrid extreme learning machine–grey wolf optimizer (ELM-GWO) model to predict compressive strength of concrete with partial replacements for cement. *Engineering with Computers*, *38*(1), 757–779. <https://doi.org/10.1007/s00366-020-01081-0>
- Singh, A., Duan, Z., Xiao, J., & Liu, Q. (2020). Incorporating recycled aggregates in self-compacting concrete: a review. In *Journal of sustainable cement-based materials* (Vol. 9, Issue 3, pp. 165–189). Taylor and Francis Ltd. <https://doi.org/10.1080/21650373.2019.1706205>
- Spiesz, P., Rouvas, S., & Brouwers, H. J. H. (2016). Utilization of waste glass in translucent and photocatalytic concrete. *Construction and Building Materials*, *128*, 436–448. <https://doi.org/10.1016/j.conbuildmat.2016.10.063>
- Tinoco, J., Alberto, A., da Venda, P., Gomes Correia, A., & Lemos, L. (2020). A novel approach based on soft computing techniques for unconfined compression strength prediction of soil cement mixtures. *Neural Computing and Applications*, *32*(13), 8985–8991. <https://doi.org/10.1007/s00521-019-04399-z>
- Zhang, W., Zhang, R., Wu, C., Goh, A. T. C., Lacasse, S., Liu, Z., & Liu, H. (2020). State-of-the-art review of soft computing applications in underground excavations. *Geoscience Frontiers*, *11*(4), 1095–1106. <https://doi.org/10.1016/j.gsf.2019.12.003>
- Zuhaira, A. A., Al-Hamd, R. K. S., Alzabeebee, S., & Cunningham, L. S. (2021). Numerical investigation of skimming flow characteristics over non-uniform gabion-stepped spillways. *Innovative Infrastructure Solutions*. <https://doi.org/10.1007/s41062-021-00579-w>

Publisher's Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.