

Chapter 25

Beyond RAMS Design: Towards an Integral Asset and Process Approach

A. Martinetti, A.J.J. Braaksma and L.A.M. van Dongen

Abstract The lifespan to which assets can be efficiently maintained, upgraded or disposed, heavily depends on the characteristics designed into the asset in the design phase. RAMS analysis is a well-established approach often used to reach this target. This approach is however not adequate for handling the complexity of changes and demands placed on nowadays assets. This can lead to reduced performance and unnecessary risk taking. There is a need for a more integral RAMS (SHEEP) perspective including Supportability, Health, Environment, Economics and Politics. Additionally there is often only focused on the asset itself and not on processes supporting the maintenance of an asset. Therefore this chapter does not only give a historic overview on RAMS evolvement, but also aims at answering how the supporting processes can be designed from an integral RAMSSHEEP perspective. We illustrate this by analysing the functional requirements for the Toilet System (TS) of the Sprinter Light Train (SLT).

25.1 Introduction

The product's Reliability, Availability, Maintainability and Safety (RAMS) are very important characteristics that have to be embedded and designed into every product or asset. This is because design decisions have a large influence on these characteristics. For example the expenditures are made during the equipment's life time, but those costs are already, for a large part, committed during the development stage of the equipment's life cycle. A re-design of components and parts during the later life cycle stages can have a strong influence on the maintenance efforts [18].

A. Martinetti (✉) · A.J.J. Braaksma · L.A.M. van Dongen
Universiteit Twente, Drienerlolaan 5, 7522 NB Enschede, The Netherlands
e-mail: a.martineeti@utwente.nl

L.A.M. van Dongen
e-mail: l.a.m.vandongen@utwente.nl

L.A.M. van Dongen
Netherlands Railways, Stationshal 15, 3511 CE Utrecht, The Netherlands

Previous research already pointed out the importance of considering maintenance in planning the product life cycle [24], RAMS is considered a strategic, tactical and operational, risk-driven maintenance concept, in which a system's or asset's Reliability, Availability, Maintainability and Safety have to be taken into account. RAMS is applied to facilitate competitive advantage for the product and to reduce the business risk associated with non-performance of products and systems [16]. The approach helps designer and analysts to get an indication of the performance of the functioning of a system.

As described also by the European Committee for Electrotechnical Standardization (CENELEC) [9], RAMS is “a qualitative and quantitative indicator of the degree that the system, or the subsystems and components comprising that system, can be relied upon to function as specified and to be both available and safe”.

But nowadays, this vision is not more enough and additional step is required to address environmental and political requests at the same time. BCG [17] states that “business is on the verge of a major ‘next wave’ of asset productivity improvement—one that will go farther and be more difficult to achieve than past initiatives”, identifying such as the exhaustion of traditional cost cutting. This challenge can be found in complex systems such as a railway system where transportation performance cannot be guaranteed just by technically perfect design concepts, but where the results are heavily affected by specific procedures, working regulations and working conditions. [21].

In the following sections we will first describe the elements of a full RAMSSHEEP methodology, then we take the method in a historic perspective, thirdly we will illustrate the application of RAMSSHEEP at our case company (NS) and finally we will present our conclusions.

25.2 RAMSSHEEP Methodology

The decision process represent a not negligible problem in terms of time and money when the product is a capital asset since the required services to provide support have to be determined for its entire life cycle [19]. Therefore, the evaluation decisions should include making decisions about not only the asset but also about the ancillary activities that it requires.

As mentioned earlier the RAMSSHEEP methodology aims to connect the well-known aspects of the RAMS approach with five essential parameters (Supportability, Health, Environment, Economics and Politics) in order to design, plan, realise, use and dispose an asset increasing the efficiency and reducing costs and environmental impacts [4]. Table 25.1 organizes and defines the nine elements of the methodology, pinpointing with the help of some sources the main characteristics of each point.

The nine described elements of the RAMSSHEEP approach can be divided in three macro-categories as represented in Fig. 25.1.: (1) RAMS (Reliability, Availability, Maintainability, Supportability) concerning the aspects related to

Table 25.1 Elements of the RAMSSHEEP methodology

Element	Definition	Contextualization
Reliability	“The probability that an asset can perform a required function under given conditions for a given time interval” [23]	The reliability of a train is for example 90%. This means that there is a certainty of 90% that the train could travel
Availability	“The ability of an asset to be in a state to perform a required function under given conditions at a given instant of time assuming that the required external resources are provided” [20]	The availability of a train is for example 85%. This means that the train should be operational circa 310 days/year
Maintainability	“The probability that following the occurrence of a failure of an asset will once again be operational within a specific time” [23].	The maintainability of a train is for example 90%. This means that there is a certainty of 90% that the train will be put in service on time after a maintenance action ¹
Supportability	“The characteristic of an asset to influence the easiness with which logistic resources can be available at the right time at the right place” [18]	The supportability of an asset can heavily affect the logistic organization causing delays (waiting for spare parts, technicians, equipment available) during the maintenance operations and influencing the Mean Time To Maintain (MTTM)
Safety	“A state in which or a place where you are safe and not in danger or at risk” [3]; “Freedom from unacceptable risks of harm” [9]	The Safety has to be included to ensure a safe asset for the final users and safe working places for the personnel involved in the production and in the maintenance operations. To note, how the absence of safety could change the cost-effectiveness of an asset
Health	“Health is a state of complete physical, mental and social well-being and not merely the absence of disease or infirmity” [27]	Health has to be included to ensure that an asset does not cause diseases for the final users and for the personnel involved in the production and in the maintenance operations
Environment	“The environment represents the earth, including rocks, soils, water, air, atmosphere and living things” [12]	The asset should reduce as much as possible, for example by using the Best Available Techniques (BAT) [10] the impact on the Environment during the entire life-cycle. Here lies the difference between environmental compatibility and environmental sustainability

(continued)

Table 25.1 (continued)

Element	Definition	Contextualization
Economics	“The economic perspective is concerned with the financial aspects of the asset and its operation.” [22]	The economic factors often drive the main direction and the investment from the design phase to the decommission phase of a product/asset
Politics	“The first definition of politics was used in the Aristotle’s book Πολιτικά, Politika, referring to the <i>affairs of the cities</i> ”	The politic decisions should affect the main direction of a capital assets investment pinpointing and underlining the needs of the community

¹To note that, in addition to the stochastic definition, the Maintainability could also represent the level of easiness to maintain an asset/product/component. In other words, how quickly maintenance activities can be performed reaching the required level of quality

maintenance management, reliability, logistic and spare parts, (2) SHE regarding all the criticalities that could cause injuries, fatalities, diseases and environmental disasters during the design, production operations, management and decommission and (3) EP including all the political and economic considerations and evaluations on the feasibility and need of the project for the society and, in general, for the market.

Adopting an automotive metaphor, the macro-categories have to work as the elements in a gearbox, providing the car requests (high torque when climbing hills and when starting at low speeds and low torque running at high speeds on level roads due the inertial momentum) at the right moment according to the situation’s conditions. In the same way, RAMS, SHE, EP gears should provide during the design phase precise and essential information over the impacts of the project on the different aspects ensuring to reach as much as possible a design-effectiveness of the production system.

25.3 R, RM, RAMS, RAMS-LCC and RAMSSHEEP: Placed in Historic Perspective¹

Looking back to the last six decades, we can identify a clear evolution of the dedicated approaches to ensure that products/assets could perform a required function under given conditions for a given time interval. The Fig. 25.2 should help to resume the observed improvements and changes, pinpointing how the demands moved from an exclusive product perspective (R, RM), to the awareness to ensure

¹R (Reliability), RM (Reliability, Maintainability), RAMS (Reliability, Availability, Maintainability and Safety), RAMS-LCC (Reliability, Availability, Maintainability Safety—Life Cycle Cost).

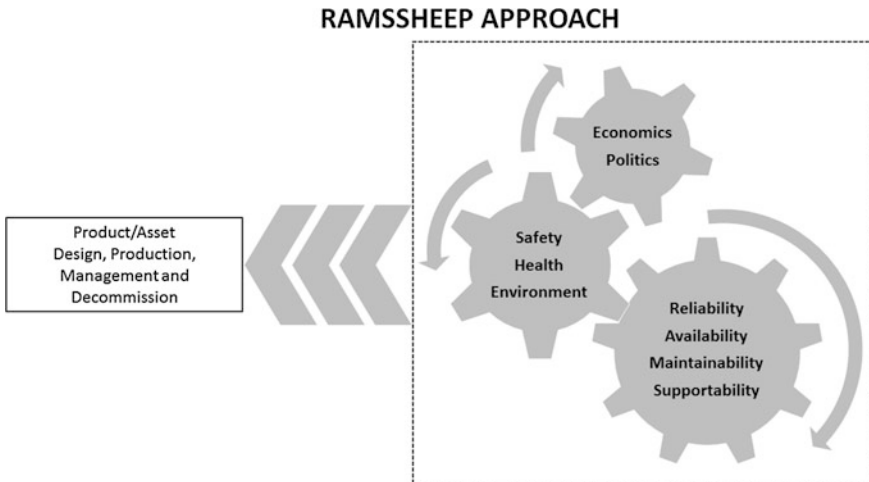


Fig. 25.1 RAMSSHEEP: RAMS, SHE and EP elements working together as parts of a gearbox

safe products for workers and users (RAMS) to cost-optimization (RAMS-LCC) products, towards the need to ensure society approval and value (RAMSSHEEP).

The first structured approach of the Modern Age to evaluate the reliability in the industrial production process was introduced after World War Two in 1954 [13] during the First National Symposium on Reliability and Quality Control in the United States of America (US). The need of reliability was mainly fuelled by two different but connected events.

During the Second World War (i), 60% of the airborne equipment and spare parts arrived damaged and unserviceable before use, causing a remarkable waste of resources, energy, money, time and man-working hours. Due to (ii) the technological evolution, the complexity of the system and the number of system components increased (and it is still increasing), directly affecting the reliability of the entire system as shown in the example of Table 25.2 with a simple example. To better describe the importance of this phenomena, even more actual nowadays, the authors want to underline the different approach in terms of number of components used to design and build the Boeing 747 and the Mariner/Mars ‘64. The aircraft was assembled using more than 4.500.000 parts [1]; but for the spacecraft, since the success of the mission was strictly dependent on the reliability of every part, only 138.000 components [8] were used during the construction in order to reduce the number of unnecessary and unreliable elements.

In the ‘80s due to the high products demand, the necessity to increase the maintainability performance reducing the downtimes related to parts replacement and repairing offered the opportunity to dedicate more efforts on the design for maintenance aspects. The manufactures invested in using materials that did not prolong maintenance activities, using standard and universal applicable components, fasteners to accelerate maintenance activities, providing sufficient space

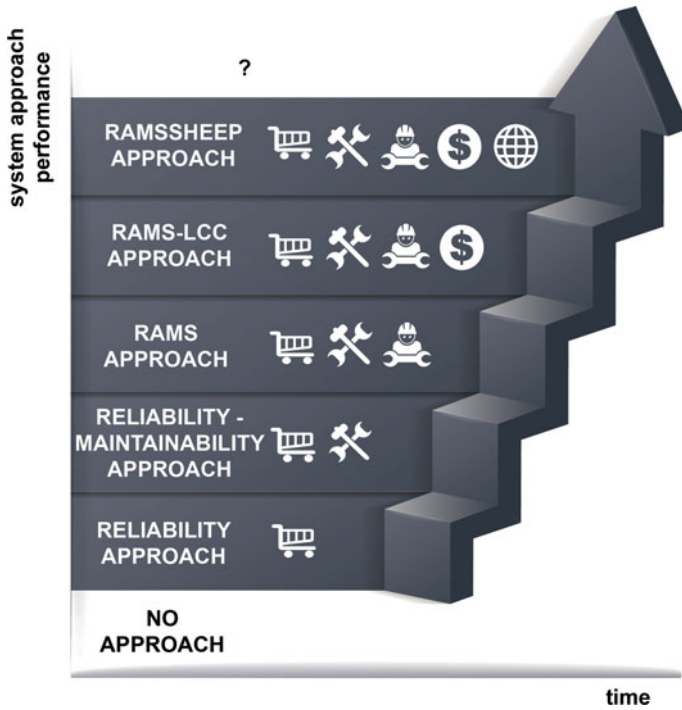


Fig. 25.2 Evolution of the approaches for product/asset production

Table 25.2 Reliability and increasing product complexity [14]

Farm tractor model year	Number of critical components	Tractor reliability per year ¹ [%]	Number of tractors failing per year/1000 tractors
1935	1.200	88.7	113
1960	2.250	79.9	201
1970	2.400	78.7	213
1980	2.600	77.1	229
1990	2.900	74.8	251

¹Assuming an average component reliability of 99.99% and critical components reliability-wise in series

around the maintenance points and designing equipment in such a way that it can only be maintained in the right way. Following the innovative vision called “Prevention through Design (PtD)” in terms of Occupational Health and Safety (OHS) proposed by the National Institute for Occupational Safety and Health (NIOSH) in the US, at the end of ’80s the European Community decided to introduce several directives [5, 6], in order to oblige the employers to carry out an exhaustive Risk Assessment and Management analysis to provide safe and reliable

machineries equipment, products and workplaces. Moreover, as a general approach, in the European Directives, the maintenance workers were identified as “workers who may be at increased risk”, so that the need to conduct a separate Risk Assessment and Management for the maintenance activities becomes more evident and necessary [15]. The aforementioned evolution helps to embrace a more general approach already explained and well-known as RAMS. Not only the products/assets and their maintenance characteristics, but also the occupational conditions of the workers have to be taken into account.

Meanwhile, in an attempt to improve the design of products and reduce design changes, cost, and time to market, concurrent engineering or Life Cycle Engineering (LCE) was emerging as an effective approach to addressing these issues in competitive global market [2]. Dowlatshahi [7] underlined that the design of the product influences between 70% and 85% of the total cost of a product remarking how the designers have the opportunity to substantially reduce the Life Cycle Cost (LCC) of the product. As happened for the Reliability approach, the first motivation and incentive were provided by the weapons’ market, stimulated by Department of Defence in order to reduce the operations and support cost that were accounted for 75% of the total expense [11].

Lastly, the development of the “Green Economy” theory defined as “low carbon, resource efficient, and socially inclusive (where) growth in income and employment should be driven by public and private investments that reduce pollution, enhance energy and resource efficiency, and prevent the loss of biodiversity and ecosystem services” [25], forced to include environmental awareness to the production system to decrease carbon emissions and ecological footprint.

25.4 Design for RAMSSHEEP: A Case Study on an Existing Capital Asset (Toilet System) in Dutch Railways

To illustrate the opportunities offered by the RAMSSHEEP methodology on a real case, a test study on a capital asset is provided. The Dutch Railways (Nederlandse Spoorwegen, NS) have to place new Toilet Systems (TS) in the Sprinter Light Trains (SLT) not designed to have them due to the very short distance to run between two stations for which they were projected. Unfortunately, after a first working period the public opinion complaints forced the owner to rethink the first decision starting an evaluation process in order to add the TS.

The goal of the application is to devise the implementation of TS into the trains using RAMSSHEEP-principles which should lead to design criteria helping to focus on alternative design solutions.

The importance of a careful, detailed and integral life-cycle design of the TS for the SLT is also enhanced by the failure data provided by the asset manager. As

stated in [26], the 13% of the failures of the rolling stock are attributed by technical problems occurred to the TS.

To provide and create a brief impression about the possible layout of the major TS sub-systems the analyses are also coupled to some design requirements (considered as pre-requirements by the asset owner and not included in the RAMSSHEEP approach):

- TS should be situated at the multifunctional vestibule;
- TS should be equipped with a vacuum toilet system which will be connected to a biological wastewater treatment system (bioreactor);
- The semi-closed wastewater treatment system should process the human waste in order to separate solids and fluids that will be biologically treated with aerobic and anaerobic processes.

25.4.1 RAMSSHEEP Principles Applied on the TS

Since NS requires a high-standard system, a long detailed list of technical specifications is analysed in order to match them with the principles of the RAMSSHEEP methodology.

The full list of the most important requirements is composed by 127 functional elements which were arbitrarily categorized by the students involved in the process. This analysis showed that besides the RAMS (57%) principles, the SHEEP (43%) principles represents an important part to be included in the design of an asset (R (20%), A (5%), M (10%), S (22%), S (16%), H (9%), E (7%), E (2%) and P (9%)).

An example of technical specifications of the SLT TS, as provided by NS, are shown according to each specific principle (Table 25.3). This approach gives the opportunity to consider in the evaluation every aspect of the problem in a “future-proof” vision.

To create a connection between the RAMSSHEEP approach and pre-requirements, the TS is divided into five subsystems (outside design, duty system, water system, sensor system, and personal care) during the design phase in order to make the design and the design choices as more efficient as possible.

Moreover, during the design process of the subsystems the users, cleaners and maintenance technicians were taken into account in order to create a TS able to be maintained and accessible from the inside regardless of the location, such as a train station or a workshop.

Table 25.3 An example of RAMSSHEEP principles applied to a few of the supplied TS requirements

Reliability	Availability	Maintainability
The toilet should not have negative influence on the reliability of existing systems and should guarantee a MTBF of at least 40.000 h. The lifespan needs to be at least 30 years	The toilet, including the waste water treatment system and the fresh water system, should have a capacity sufficient for the number of passengers	Components of the toilet should be positioned in such a way that it provides easy access for the maintenance procedures
Safety	Supportability	Health
The toilet should offer an adequate level of safety in the event of a collision or derailment during normal service	The toilet should use standard, universally applicable components, tools and parts	The toilet should be easy to clean since people would be reluctant to use them if they are dirty
Environment	Economics	Politics
Application of hazardous waste on the product should be avoided as well as contaminating chemicals which can impact the environment	The LCC of the toilet system should be within the financial boundaries	The toilet should be installed even in trains meant for short commuting

The combination of technical specifications and pre-requirements with the RAMSSHEEP approach gives the advantage to design a concept solution able to fulfil the most important aspects in order to have a Reliable, Available, Maintainable, Safe, Supportable, Healthy, Environment-friendly and Economic and Politic-feasible system as shown in Fig. 25.3.

Therefore, the minimal and simple design created with the RAMSSHEEP principles offers several advantages from a long term prospective. Most of the maintenance tasks are carried out on a human-handling level and do not involve lifting heavy parts (waste bags could be dragged over the floor, the dispensers and hand dryers could be cleaned avoiding un-ergonomic positions). The technicians should be able to solve most of the failures without docking the train at the workshop. The outside hatches should permit accessing the bio filter, chemical box and water reservoirs during extensive maintenance periods. The technicians could access the electricity and water reservoir panels from the inside in order to fix problems quickly during unexpected downtime situations.

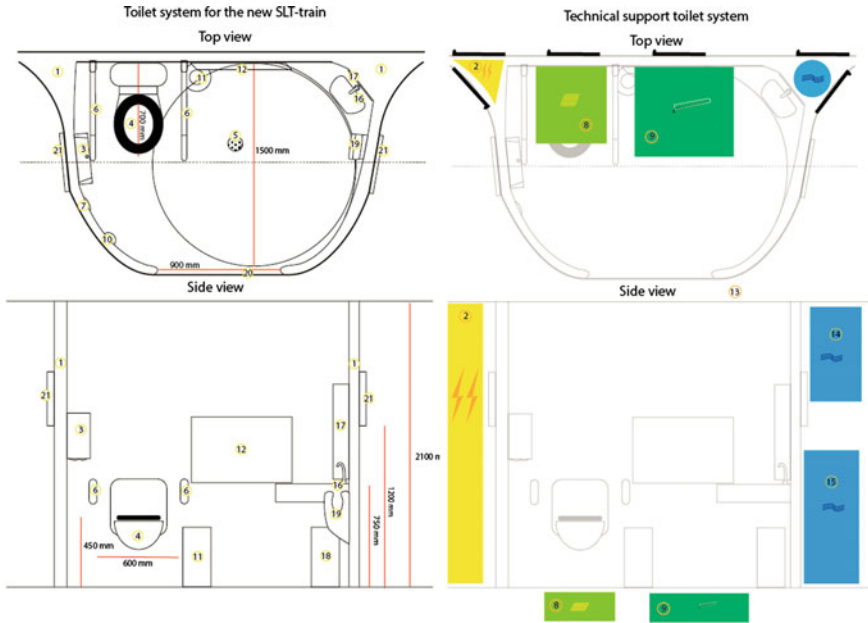


Fig. 25.3 Overview of complete design concept (1. Outer casing, 2. Electricity panel, 3. Toilet paper, 4. Toilet bowl, 5. Drain, 6. Armrests, 7. Flush button, 8. Bio-filter, 9. Chemical box, 10. Help-button, 11. Hygiene box, 12. Nursery, 13. Heating and air-conditioning, 14. Water reservoir tap, 15. Water reservoir toilet, 16. Tap, soap dispenser, 17. Mirror, 18. Bin, 19. Hand dryer, 20. Door, 21. Information screens)

25.5 Conclusions and Recommendations

Our literature review showed that the RAMS(SHEEP) Methodology has evolved from purely technically centered (Reliability and Availability) to incorporate also Maintainability and Safety concepts. Due to quicker changing environments and more critical demands (e.g. legislation and political influences) there is a need for taking additional factors into consideration. The exemplary case of the Toilet System at NS clearly illustrates that requirements nowadays should include SHEEP factors besides the well-known RAMS. The weighting of the individual elements in the design of assets is moving from a pure technical and cost perspective to a more value based evaluation. RAMSSHEEP analysis is primarily aimed at the design phase of an asset but has potential to be used during the entire life-cycle management. Further research should be performed on how to re-use and update existing analyses during the life-cycle.

Acknowledgements this research is partly funded by the Lloyd's Register Foundation (LRF) supporting engineering-related education, public engagement and the application of research. The authors thank NS for their cooperation. Authors also acknowledge the master students of the course in "Design for Maintenance Operations" a.y. 2015–2016 at the University of Twente, for inspiring them with interesting suggestions and analysis provided during the lectures.

References

1. Apple FC (1970) The 747 Ushers in a new era, the American way, American airlines magazine, March 1970, pp 25–29
2. Asiedu Y, Gu P (1998) Product life cycle cost analysis: state of the art review. *Int J Prod Res* 36(4):883–908. doi:[10.1080/002075498193444](https://doi.org/10.1080/002075498193444)
3. Cambridge International Dictionary of English (2013) ISBN-13: 978-0521484213
4. Charles A, Schuman A, Brent C (2005) Asset life cycle management: towards improving physical asset performance in the process industry. *Int J Oper & Prod Manag* 25(6):566–579. doi:[10.1108/01443570510599728](https://doi.org/10.1108/01443570510599728)
5. Council of the European Communities (1989) Council directive 89/391 EEC concerning the introduction of measures to encourage improvements in the safety and health of workers at work
6. Council of the European Communities (1989) Council directive 89/392/EEC on the approximation of the laws of the member states relating to machinery
7. Dowlatshahi S (1992) Product design in a concurrent engineering environment: an optimization approach. *J Prod Res* 30(8):1803–1818
8. Engineering Opportunities (1964) Every aspect of Mariner/Mars '64 missions involves basic state-of-art advances, October 1964, pp 14–15
9. European Committee for Electrotechnical Standardization-CENELEC (1999) Railway applications: the specification and demonstration of reliability, availability, maintainability and safety (RAMS) part 1: basic requirements and generic process. EN 50126-1. Brussel
10. European Parliament and Council of the European Union (2010) Directive 2010/75/EU on the industrial emissions (integrated pollution prevention and control)
11. Gupta Y, Chow WS (1985) Twenty-five years of life cycle costing-theory and application: a survey. *Int J Qual Reliab Manage* 2:551–576
12. Harper CL (2004) Environment and society: human perspectives on environmental issues, Taylor and Francis, USA. ISBN-13: 978-0-205-82053-5
13. Kececioglu D (1984) Reliability Educations: a historical perspective, *IEEE Transactions on Reliability*, vol R-33, No. 1, pp 21–28
14. Kececioglu D (2002) *Reliability Engineering Handbook, Volume 1*, Pennsylvania. ISBN: 1-932078-00-2
15. Luzzi R, Maida L, Martinetti A, Patrucco M (2013) Information. Formation and training for the maintenance operations: the lesson learned from fatal accidents, *chemical engineering transactions* 32:229–234. doi:[10.3303/CET1332039](https://doi.org/10.3303/CET1332039)
16. Marakeset T, Kumar U (2003) Integration of RAMS and risk analysis in product design & development: a case study. *J Qual Maint Eng*, vol 9, Issue 4. doi:[10.1108/13552510310503240](https://doi.org/10.1108/13552510310503240)
17. Mitchell JS (2002) *Physical asset management handbook*, 3rd edn. Clarion Technical Publishers, Houston, TX
18. Mulder W, Blok J, Hoekstra S, Kokkeler FGM (2012) Design for maintenance. Guidelines to enhance maintainability, reliability and supportability of industrial products. Enschede, University of Twente. ISBN: 978-94-6190-993-0

19. Parada Puig JE, Basten RJI, van Dongen LAM (2015) Understanding maintenance decisions: how to support acquisition of capital assets. In *Through-life engineering services decision engineering*, Springer International Publishing Switzerland. doi:[10.1007/978-3-319-12111-6_13](https://doi.org/10.1007/978-3-319-12111-6_13)
20. Patton J. (1980) *Maintainability and maintenance management*, Research Triangle Park, N.C: Instrument Society of America
21. Rajabalinejad M, Martinetti A, van Dongen LAM (2016) Operation, safety and human factors: critical for the success of railway transportation. In *Systems of systems engineering*, Kongsberg, Norway, 12–16 May 2016
22. Ruitenbregt RJ, Braaksma AJJ, van Dongen LAM (2017) Asset life cycle plans: twelve steps to assist strategic decision-making in asset life cycle management. *Optimum Decision Making in Asset Management*, IGI Global
23. Todinov MT (2005) *Reliability and risk models: setting reliability requirements*. John Wiley & Sons Publication. doi:[10.1002/0470094907.ch1](https://doi.org/10.1002/0470094907.ch1)
24. Umeda Y, Takata S, Kimura F, Tomiyama T, Sutherland JW, Kara S, Herrmann C, Dufloy JR (2012) Toward integrated product and process life cycle planning an environmental perspective. *CIRP Ann Manuf Technol* 61(2):681–702. doi:[10.1016/j.cirp.2012.05.004](https://doi.org/10.1016/j.cirp.2012.05.004)
25. United Nations Environment Programme UNEP (2011) *Towards a green economy: pathways to sustainable development and poverty eradication*. www.unep.org/greeneconomy
26. van Dongen LAM (2015) *Through-life engineering services: the nedtrain case*
27. World Health Organization (1946) Preamble to the constitution of the world health organization as adopted by the international health conference, New York, 19–22 June 1946; signed on 22 July 1946 by the representatives of 61 states (official records of the world health organization, no 2, p 100) and entered into force on 7 April 1948