



ENHANCING THERMAL MANAGEMENT APPLICATIONS THROUGH POROUS STRUCTURES FABRICATED BY SELECTIVE LASER MELTING

Davoud Jafari, Wessel W. Wits


Faculty of Engineering Technology, University of Twente, Enschede, Netherlands

Highlights


- ✓ A rectangular-shaped stainless steel 316L porous structure is additively manufactured by selective laser melting (SLM).
- ✓ Effective thermal conductivity to the porous structure have been experimentally analyzed.
- ✓ The experimentally obtained values of thermal conductivity do not correspond well with correlations available in the literature.
- ✓ The experimental results show that SLM technology can be used to fabricate porous structures for heat pipes technology.

Fabrication & Morphology analysis

- ✓ The porous sample is manufactured using a Concept Laser Mlab Cusing 90, 3D metal printing machine.
- ✓ The porous structure of $1 \times 20 \times 40 \text{ mm}^3$ is manufactured with a $500 \mu\text{m}$ octahedral unit cell size.
- ✓ SS 316L powder size is in the range of $15\text{-}20 \mu\text{m}$ and pore sizes in the fabricated sample are around $160 \mu\text{m}$.
- ✓ The porosity of the sample, measured by the Archimedes method, is 0.461.

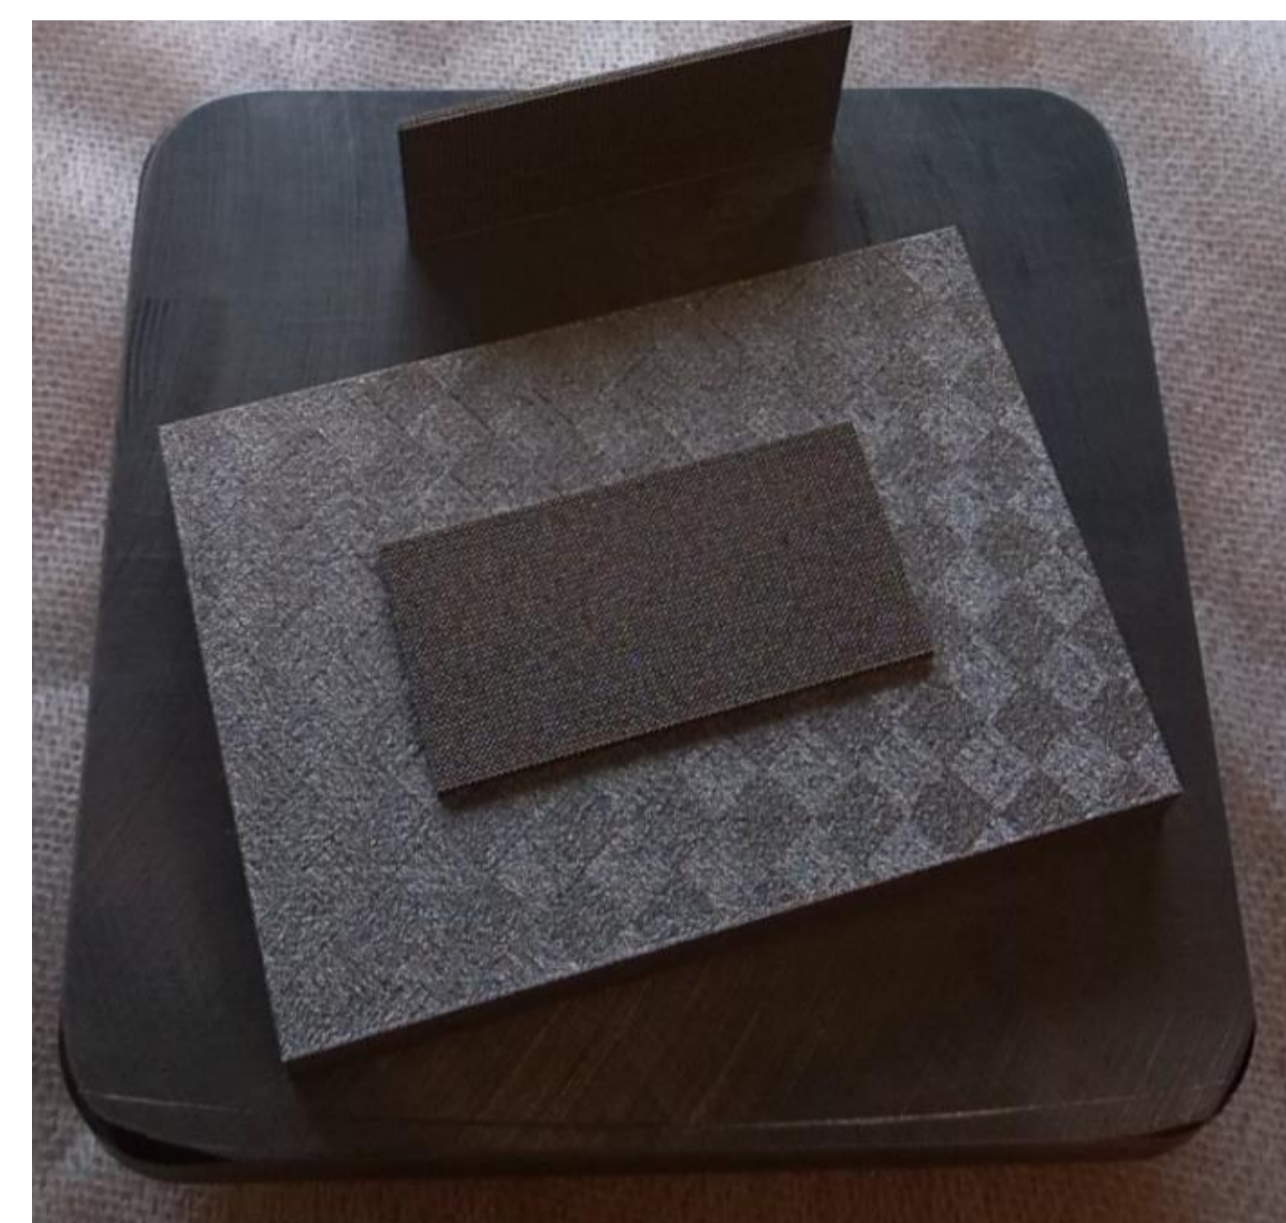

The fabricated sample

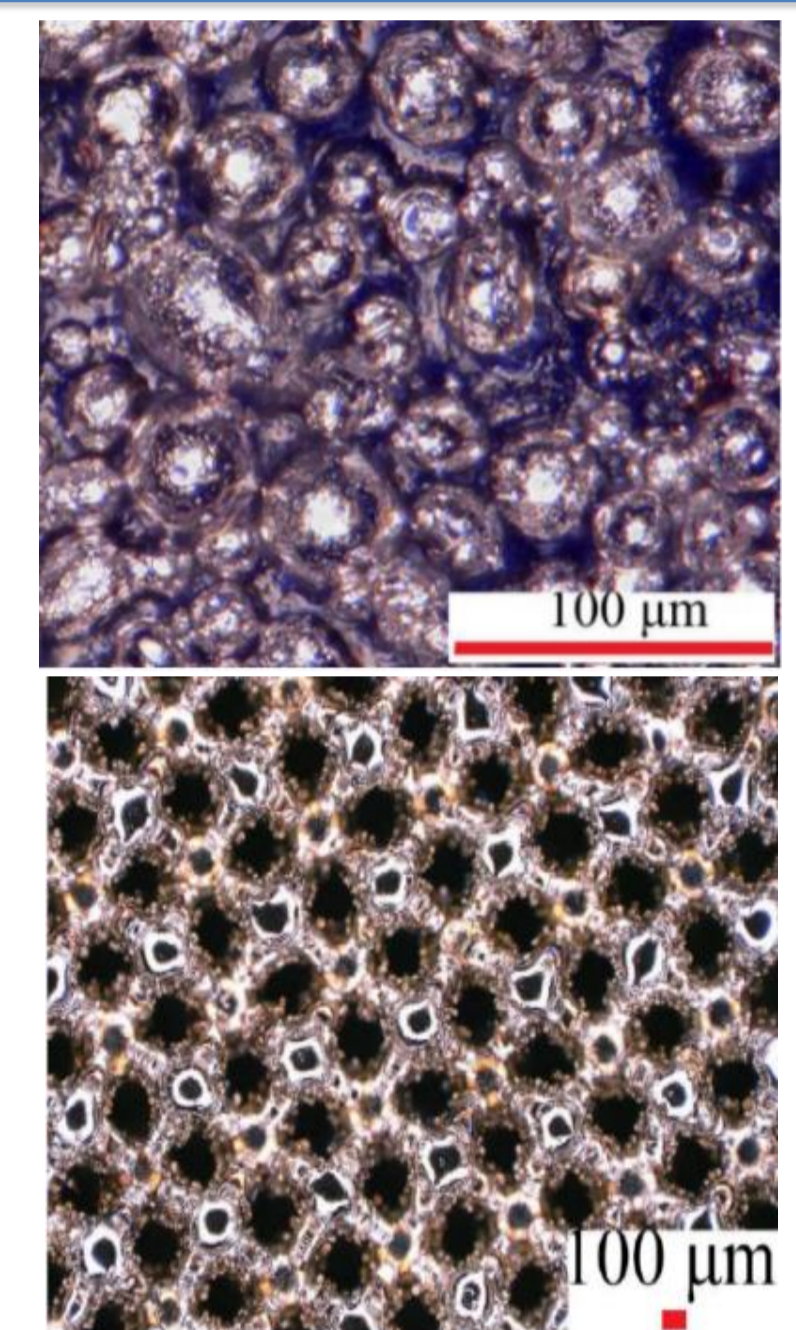


Spherical powder and the build structure


Development of experimental devices and results

Effective thermal conductivity


- ✓ The experimental set up includes a heating and cooling sections and the test chamber.
- ✓ Using the Fourier model the porous media effective thermal conductivity is calculated.

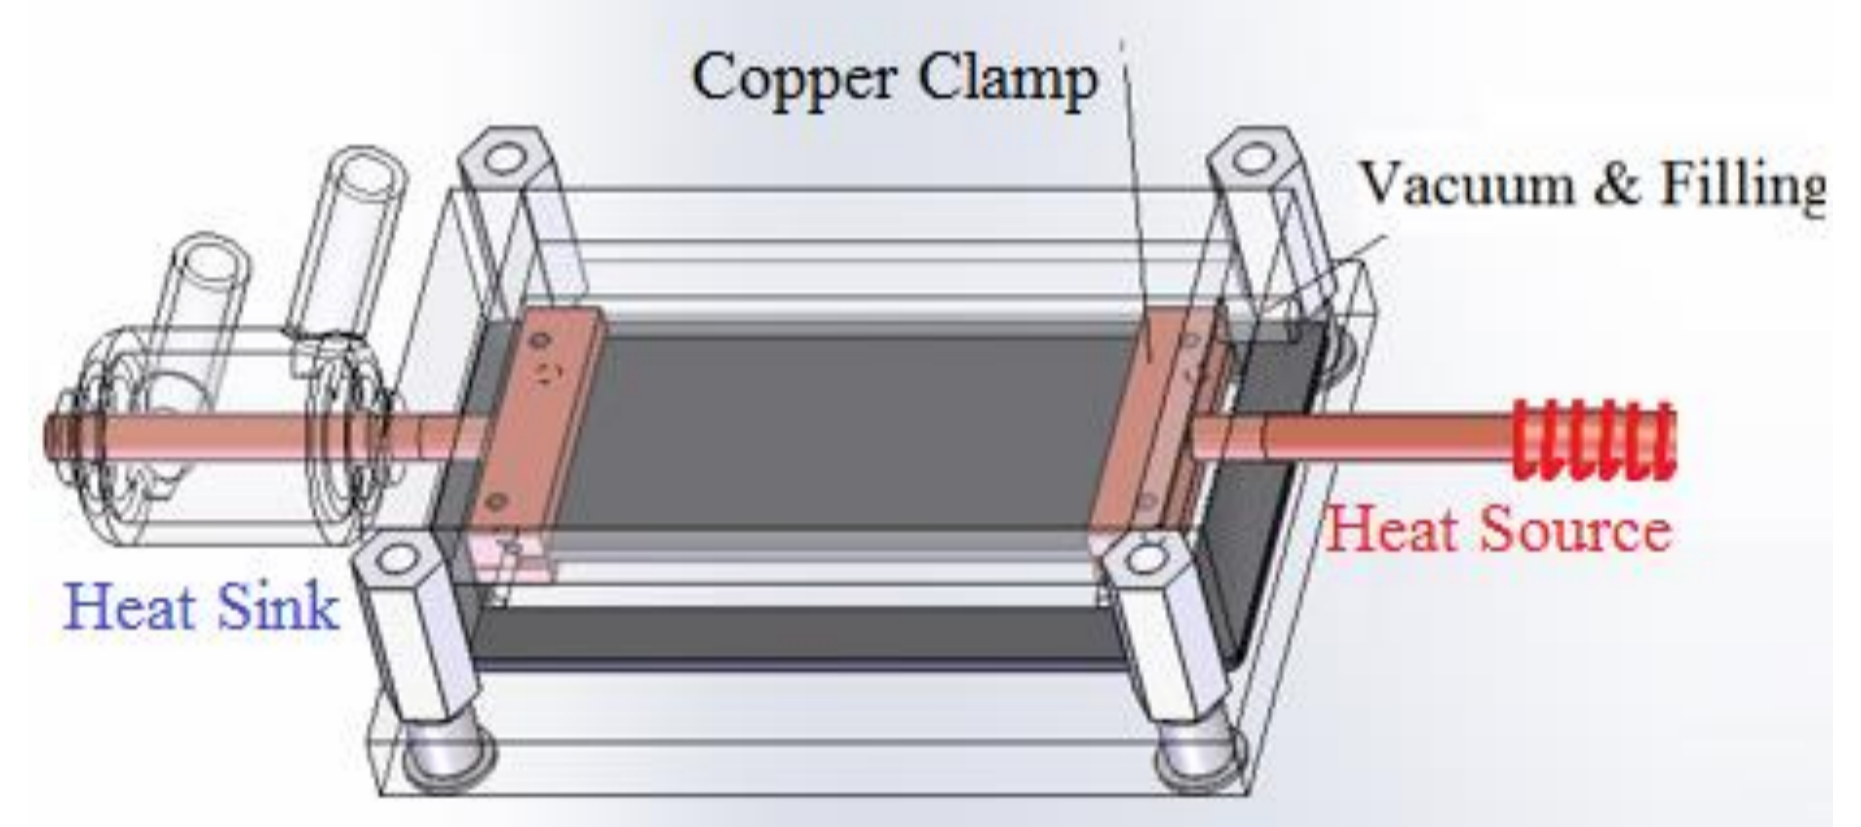

The thermal conductivity measurement set-up

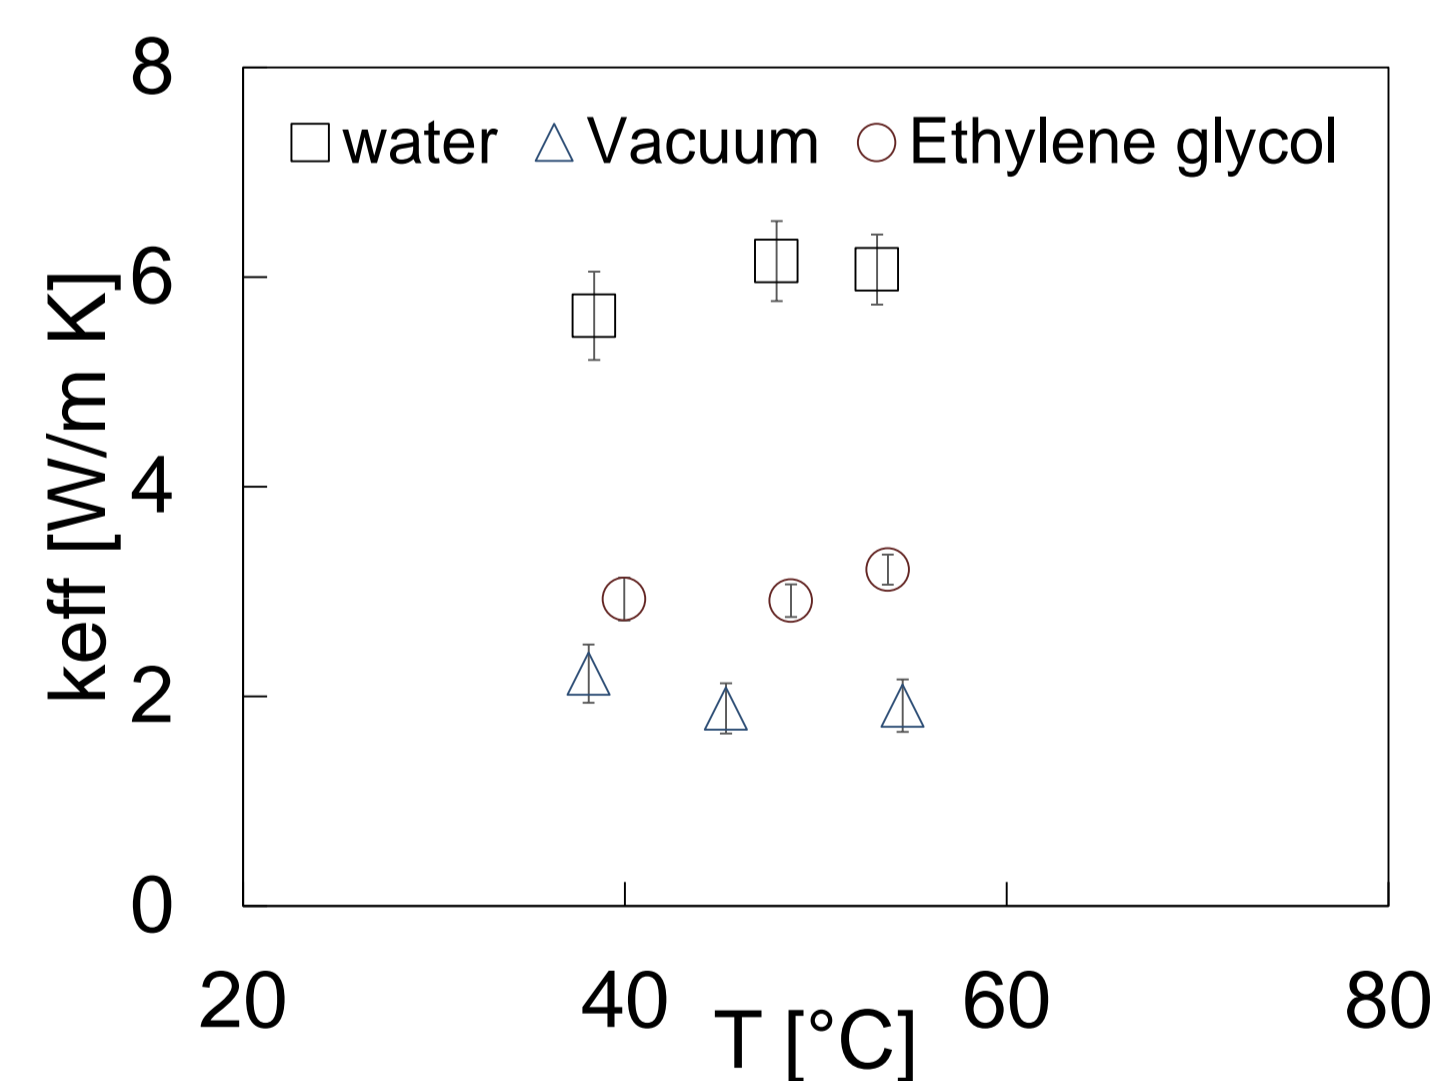

The effective thermal conductivity of the sample for different saturated fluids

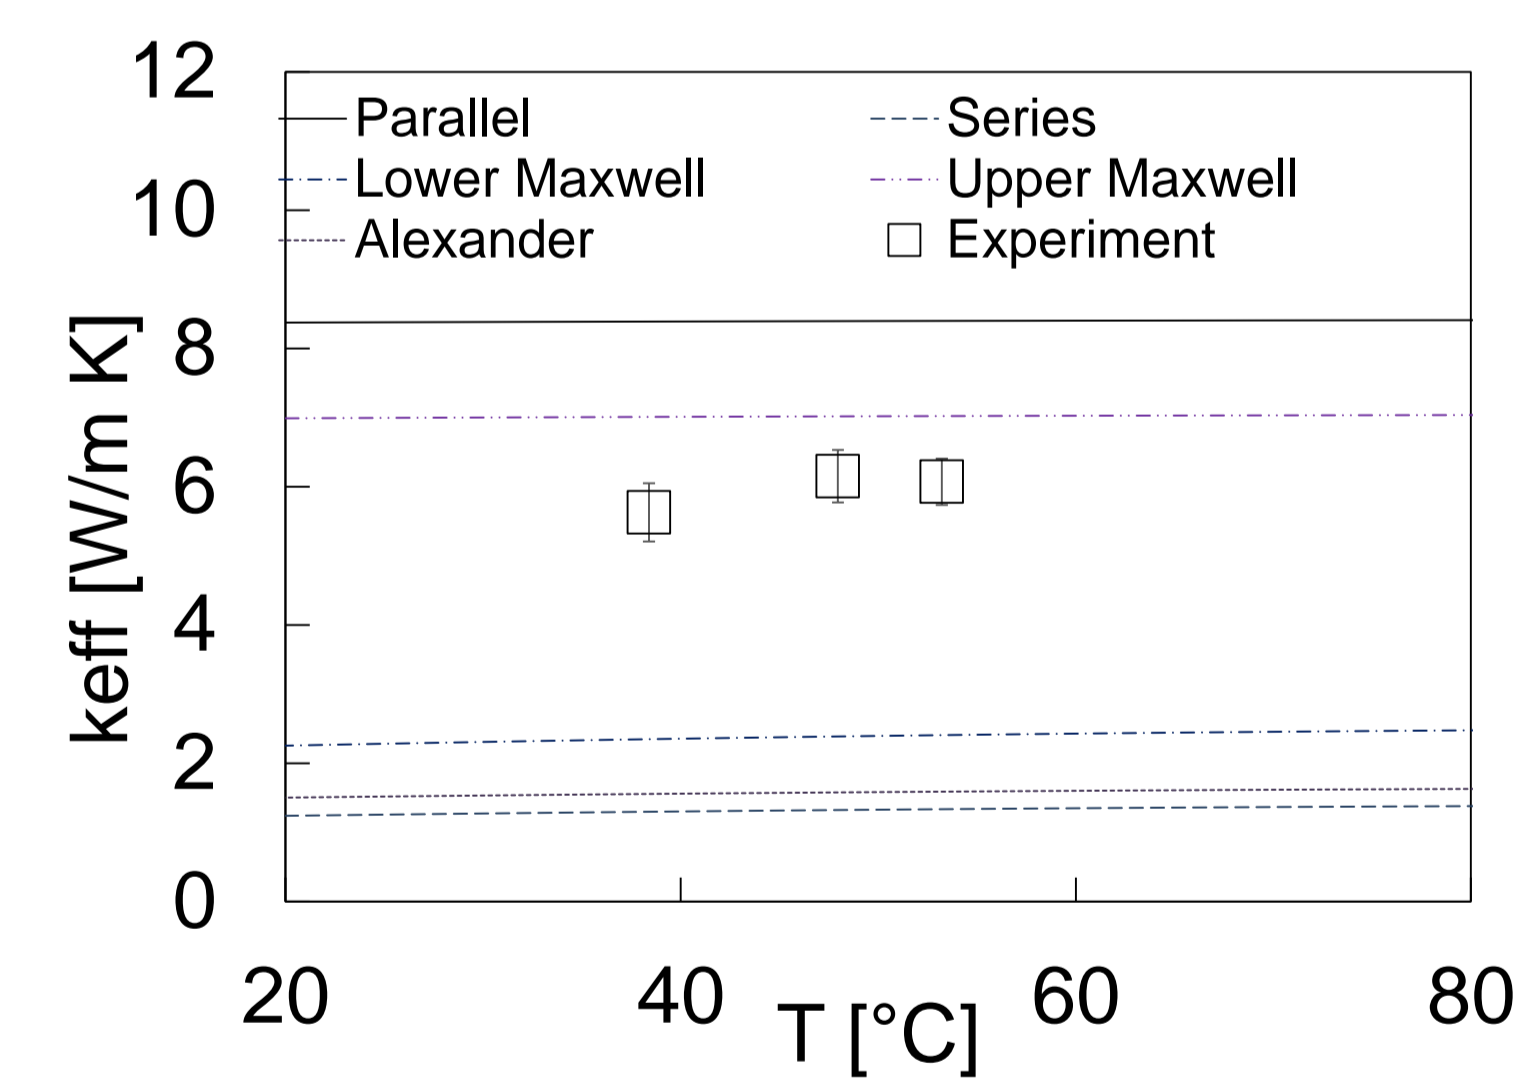

Comparison of the experimental values of the effective thermal conductivity of the water-saturated porous sample

Droplet test

- ✓ A water droplet ($4.5 \mu\text{L}$) is deposited into the wick structure.
- ✓ The droplet infiltrates the porous layer in $<0.02 \text{ s}$ confirming excellent wetting.



Instantaneous state photos of a deionized water droplet released onto the porous sample



Conclusions

- ✓ The effective thermal diffusivity is in the range of $1.8\text{-}2.2 \text{ W/m}\cdot\text{K}$ in vacuum condition, $\sim 3 \text{ W/m}\cdot\text{K}$ for ethylene glycol and $\sim 6 \text{ W/m}\cdot\text{K}$ for water, thus observing high sensitivity to the interstitial fluid.
- ✓ A comparison of the experimental results with available correlations in the literature shows the effective thermal conductivity is between the upper and lower Maxwell model, albeit with a fairly large margin.