



Proc. Eurosensors XXVI, September 9-12, 2012, Kraków, Poland

Comparison between Two Implementations of iCub's Fingertip

A. Ascia, M. Biso, L. Natale, D. Ricci, G. Metta, G. Sandini

Department of Robotics, Brain and Cognitive Sciences, Istituto Italiano di Tecnologia, Genova, Italy

Abstract

Object grasping and manipulation in humanoid robots depend, for advanced and long lasting performance, on the development of reliable tactile sensors. Materials used for sensor implementation have to be chosen accurately and optimized in order to endow the device with sufficient resilience to endure long lasting grasping tasks. In particular care has to be taken when trying to enhance durability by the use of materials with high shore hardness as this choice can noticeably reduce pressure sensitivity. In this paper, a comparison between two implementations of the fingertip sensor of the humanoid robot iCub is presented by using a raw characterization of the response along a straight line. Prototypes differ in the materials used for the dielectric and protective layers, while maintaining the same capacitive architecture. The relevant result that emerges from the characterization is that the prototype with Soma Foama presents a higher sensitivity compared to the prototype in PDMS, while the second has a higher mechanical strength.

© 2012 The Authors. Published by Elsevier Ltd. Selection and/or peer-review under responsibility of the Symposium Cracoviense Sp. z.o.o. Open access under [CC BY-NC-ND license](https://creativecommons.org/licenses/by-nc-nd/4.0/).

Keywords: Tactile sensors, human-robot interaction, capacitive pressure sensors

1. Introduction

Humans interact with the external world by using their sensory systems; in particular tactile and kinesthetic systems provide information about position and physical interaction with the environment and about first impact contact, shape, roughness and positions of objects placed near them. In recent years, the development of artificial skin is becoming mandatory for the development of humanoid robots capable of safely interacting with the environment especially where human-robot interaction is needed [1]. Force feedback control, unsafe impact avoidance and object manipulation are examples of primary goals that a humanoid robot may achieve by the use of artificial tactile sensors employed in synergy with other

sensors (such as force sensors on the joints). In particular, the object manipulation requires the development of reliable tactile sensors able to obtain tactile images on the end effector of the robot.

2. Fingertip architecture

The fingertip sensor [2] is composed of a plastic support holding a PCB with twelve flat single plate electrode capacitors connected to a commercial programmable capacitance to digital converter (CDC AD7147 from Analog Device[3]) also placed on the PCB. In order to detect deformations due to the interaction with any object during grasping, the architecture of the sensor needs the development of the following layered structure:

- First, a dielectric layer made with soft material. Mechanical deformation due to external pressure on the soft dielectric material leads to capacitance variations on the corresponding plate electrode; therefore it is possible to detect pressures applied on the fingertip.
- Second, an isopotential layer above all electrodes placed on the PCB made with flexible and elastic conductive fabric connected to the digital ground of the CDC by one flat pad on the PCB. This allows to detect interactions with conductive and non-conductive objects, therefore reducing noise coming from the environment.
- Third, a protective layer to increase fingertip sensor lifetime, also preventing perturbations on the isopotential layer. For sake of manufacturing simplicity it is made with a soft dielectric material.

In this paper are presented two different fingertips that differ in the materials used for the crafting the first and third layer. In particular, Fig.1.a shows the prototype of the fingertip sensor that has the dielectric and protective layers made using Soma Foama 15 (from Smooth-On) while Fig.1.b shows the prototype of the fingertip sensor with the dielectric layer made using PDMS RTV 4524 (from Rhodorsil) and the protective layer made with Sylgard[®] 184 (from Dow Corning).

3. Fingertip comparison

A Cartesian robot applied different pressures on different position by the use of a non conductive probe (with a diameter of 4mm) along one straight line (depicted on Fig.2) 3mm long with a step resolution of 0.5mm. A microcontroller has been used to collect data coming from the CDC and send them to a computer (PC). Each pressure has been applied for two seconds, with a repetition rate of 2 second. Moreover each pressure has been repeated fifty times in order to collect a significant dataset. Only two capacitors (C1 and C2) had a relevant variation during the whole test, therefore the characterization is related only to them. Fig.3 and Fig.4 show the mean value of the steady state response of capacitors for both materials used at a probe position of 1.5mm. The least square method has been used to fit polynomial models on each steady state response, afterwards the behavior of fingertip sensors when stressed with a fixed pressure has been estimated as shown in Fig 5, Fig. 6 and Fig. 7

4. Conclusions

Two different fingertip prototypes were presented. As can be observed in Fig. 3 and 4, that represent the response of the two sensors as a function of the applied pressure, the prototype realized in Soma Foama has a greater sensitivity, while the one made in PDMS has a greater intrinsic strength due the material properties. Future efforts will be aimed at improving the sensitivity of the prototype made of

PDMS to obtain a higher transduction performance. A possible approach relies on the introduction of high dielectric constant powders (or liquids) in the elastomer.



Fig. 1. Photo of iCub’s Fingertip sensors with dielectric made with: Soma Foama (a) and PDMS (b).

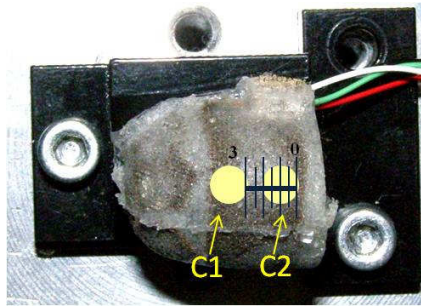


Fig. 2 Schematic drawing of the straight line used for measurements.

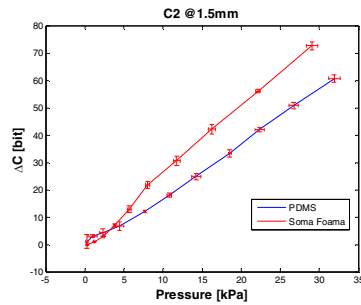


Fig. 3. Variation of capacitor C2 as a function of the applied pressure for both materials used at position 1.5mm.

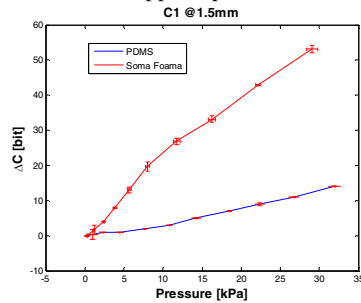


Fig. 4. Variation of capacitor C1 as a function of the applied pressure for both materials used at position 1.5mm.

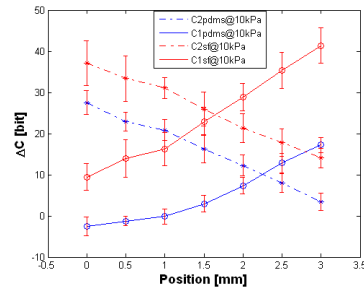


Fig. 5. Capacitors variations as a function of position for a fixed pressure value of 10kPa.

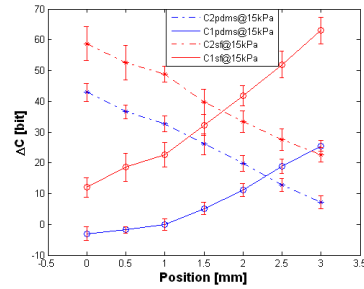


Fig. 6. Capacitors variations as a function of position for a fixed pressure value of 15kPa.

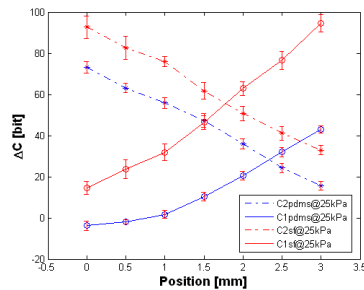


Fig. 7. Capacitors variations as a function of position for a fixed pressure value of 25kPa.

Acknowledgements

This work is funded by the European Commission as part of the project ICT-FP7-231500 RoboSKIN.

References

- [1] G. Cannata, R. S. Dahiya, M. Maggiali, F. Mastrogiovanni, G. Metta, M. Valle, *Modular Skin for Humanoid Robot Systems*,” in 4th Int. Conf. on Cognitive Systems, 2010.
- [2] A. Schmitz, M. Maggiali, L. Natale, B. Bonino and G. Metta “A tactile sensor for the fingertip of the humanoid robot iCub”, Intelligent Robots and Systems (IROS), 2010 IEEE/RSJ International Conference on, pp.2212-2217, 18-22, Oct. 2010, doi: 10.1109/IROS.2010.5648838.
- [3] A. Ascia, M. Biso, A. Ansaldo, A. Schmitz, D. Ricci, L. Natale, G. Metta, G. Sandini; , *Improvement of tactile capacitive sensors of the humanoid robot iCub's fingertips*, Sensors, 2011 IEEE , vol., no., pp.504-507, 28-31 Oct. 2011, doi: 10.1109/ICSENS.2011.6127098