

# Lagrangian stochastic modeling of acceleration in turbulent wall-bounded flows

Alessio Innocenti<sup>1</sup>, Nicolas Mordant<sup>2</sup>, Nick Stelzenmuller<sup>2</sup>, and Sergio Chibbaro<sup>1</sup>

<sup>1</sup>Sorbonne Université, CNRS, UMR 7190, Institut Jean Le Rond d'Alembert, F-75005 Paris, France

<sup>2</sup>Laboratoire des Ecoulements Géophysiques et Industriels, Université Grenoble Alpes, CNRS, Grenoble-INP, F-38000 Grenoble, France

(Received xx; revised xx; accepted xx)

The Lagrangian approach is natural to study issues of turbulent dispersion and mixing. We propose in this work a general Lagrangian stochastic model for inhomogeneous turbulent flows, using velocity and acceleration as dynamical variables. The model takes the form of a diffusion process, and the coefficients of the model are determined via Kolmogorov theory, and the requirement of consistency with velocity-based models. We show that this model generalises both the acceleration-based models for homogeneous flows, as well as velocity-based generalised Langevin models. The resulting closed model is applied to a channel flow at high Reynolds number, and compared to experiments as well as direct numerical simulations. A hybrid approach coupling the stochastic model with a Reynolds-Averaged-Navier-Stokes (RANS) is used to obtain a self-consistent model, as is commonly used in probability density function methods. Results highlight that most of the acceleration features are well represented, notably the anisotropy between stream-wise and wall-normal components and the strong intermittency. These results are valuable, since the model improves on velocity-based models for boundary layers while remaining relatively simple. Our model also sheds some light on the statistical mechanisms at play in the near-wall region.

## 1. Introduction

Lagrangian stochastic models are widely used to describe complex turbulent flows (Pope 2000; Fox 2003; Chibbaro & Minier 2014), and are of particular relevance for turbulent dispersion (Wilson & Sawford 1996), reactive flows (Pope 1985; Fox 2003) and inertial particles (Minier & Peirano 2001; Peirano *et al.* 2006; Minier 2016). They are also appealing when Lagrangian properties are under investigation (Yeung & Pope 1989; Mordant *et al.* 2002; Meneveau 2011; Watteaux *et al.* 2019).

Lagrangian stochastic models produce collections of synthetic trajectories that reproduce the statistical and, in some less accurate weak sense (*i.e.* the convergence is assured only in distribution), the dynamical properties of particles advected by the flow (Kloeden & Platen 1992; Pope 1985). In this framework, stochastic models focus generally on the dynamics of the one-point and one-time probability density function (PDF) of the state-vector of the system (Pope 2000).

The choice of the relevant variables for the model (*i. e.* the appropriate state-vector) is key to an accurate description of a given turbulent flow. In particular, it is essential to retain enough variables to have a state-vector which can be described as Markovian (Onsager & Machlup 1953; Gardiner 1990; Marconi *et al.* 2008). Since these models are mainly conceived to tackle general non-homogeneous flows relevant for applications, the

state-vector is usually limited to the position and velocity of the fluid particles ( $\mathbf{x}, \mathbf{U}$ ). These observables are modelled as a diffusion process, which is justified in relation to Kolmogorov theory (Pope 1994a). A variety of models have been proposed for such a process (Lundgren 1969; Pope 1981), but one of the more widely accepted is the so-called generalised Langevin model (GLM), which reads as

$$\begin{aligned} dx_i &= U_i dt \\ dU_i &= -\frac{1}{\rho} \frac{\partial \langle P \rangle}{\partial x_i} dt + G_{ij} (U_j - \langle U_j \rangle) dt + \sqrt{C_0 \langle \epsilon \rangle} dW_i, \end{aligned} \quad (1.1)$$

where  $\mathbf{W}$  is an isotropic Wiener process (Gardiner 1990), and

$$G_{ij} = -\frac{1}{T_L} \delta_{ij} + G_{ij}^a \quad \text{and} \quad T_L = \left( \frac{1}{2} + \frac{3}{4} C_0 \right)^{-1} \frac{k}{\langle \epsilon \rangle}, \quad (1.2)$$

where  $G_{ij}^a$  is a traceless matrix with the dimension of the inverse of time,  $k(\mathbf{x})$  is the turbulent kinetic energy,  $\langle \epsilon \rangle(\mathbf{x}) = \nu \langle |\nabla \mathbf{u}|^2 \rangle$  is the average dissipation-rate, and  $C_0$  is a dimensionless constant of the model. The specification of  $C_0$  and  $G_{ij}^a$  define the particular model.

These models have some limitations, and their validity may become questionable in some circumstances. In particular, in stationary isotropic turbulence the auto-correlation of the velocity for such models is given by (Pope 2000)

$$\rho(s) = \frac{\langle U(t)U(t+\tau) \rangle}{\langle U^2 \rangle} = \exp\left(\frac{-|s|}{T_L}\right). \quad (1.3)$$

This formula shows that the auto-correlation is non-differentiable at the origin, reflecting the fact that the velocity process is not differentiable. Only one time-scale, namely  $T_L$  that is related to large energy-containing scales, is included in the model, and there is no Reynolds-number effect. Indeed, the separation of time scales  $\tau_\eta \ll T_L$ , where  $\tau_\eta$  is the Kolmogorov time-scale  $\tau_\eta \equiv (\nu/\langle \epsilon \rangle)^{1/2}$  allows these models to neglect high time-frequency behavior, and limit the state-vector to fluid particle position and velocity. This criterion is no longer met at low Reynolds numbers, with the Reynolds number defined as  $Re = UL/\nu$ , where  $U$  and  $L$  are typical velocity and length of large scales, and  $\nu$  is the kinematic viscosity. This assumption is not valid everywhere in a turbulent boundary layer, where the characteristic time-scale of the flow in the near-wall region is of the order of the Kolmogorov scale. In this case, there is not a separation of scales sufficient to justify the Markovian description of the process ( $\mathbf{x}, \mathbf{U}$ ).

Some proposals have been made to address these issues in isotropic turbulence (Krasnoff & Peskin 1971; Sawford 1991) by introducing a second time-scale, which consequently introduces Reynolds-number dependence. Furthermore, experimental measurements of Lagrangian fluid acceleration in isotropic flows (Voth *et al.* 1998, 2002; Mordant *et al.* 2004b) have motivated several models with the purpose of fitting the experimental data, but without a sound link to turbulence theory (Gotoh & Kraichnan 2004), with the notable exception of Lamorgese *et al.* (2007). An important step forward has been taken by Pope (2002), who has proposed the use a general diffusion stochastic model for fluid particle velocity and acceleration, and has considered in detail the case of homogeneous anisotropic turbulence. The goal of that work was not to propose a specific model, but rather to show that a diffusion process may reproduce quite well the DNS data if coefficients are correctly prescribed. However, no attempt has been made to develop a consistent model for general non-homogenous flows, although this is the more realistic and relevant situation for applications.

The aim of the work reported here is to propose a first model that includes the

acceleration of fluid particles for the general case of statistical inhomogeneous turbulence, and it follows recent experimental and DNS measurements of the acceleration of tracer particles in a turbulent channel-flow at high Reynolds number (Stelzenmuller *et al.* 2017). The model is developed in the general framework of a diffusion process for the fluid particle velocity and acceleration (Pope 2002), and can be applied also to statistical unsteady flows, even though the present work is focused on a statistical stationary channel-flow. The coefficients of the model are not constrained by measurements, but rather on the basis of Kolmogorov theory and by the general analysis of the behaviour of the statistical moments, notably the Reynolds stresses, which can be extracted from the model. In the simplest case of isotropic flows, the model reverts to one that has been previously proposed (Krasnoff & Peskin 1971; Sawford 1991). In non-homogeneous flows, when the acceleration can be considered as a fast process, *i.e.* when the observation scale is much larger than the characteristic acceleration scale, the model is consistent instead with the standard Langevin models for the fluid velocity given by Eqs. (1.1). The resulting model therefore fulfils the criteria set down to characterise an acceptable model for general applications (Pope 2000; Minier *et al.* 2014), and thus it could be applied to realistic flows of practical interest. Still, limitations inherent to the present approach are expected to require some improvements, at least in specific cases and for particular questions. Some possible ameliorations are discussed in the conclusions.

As well as being interesting in its own right, we also regard the present model as an intermediate step in the development of an improved Lagrangian stochastic model for inertial particles. In particular, the possible Reynolds-number dependency has not yet been considered for such phenomena.

The paper is organised as follows: in Sec. 2, we propose the new theoretical model and how to specify the coefficients of the governing equations. The different limit cases are also discussed. In Sec. 3, the numerical approach is analysed, and we describe the numerical scheme developed to deal with the set of stochastic equations, which is stiff. In Sec. 4, the results are reported: mean, variance, and PDF of the acceleration components are compared against DNS and experimental data. The discussion and the conclusions are given in Sec. 5

## 2. Theoretical Model

In this work, we develop a Lagrangian stochastic model which consists of an ordinary differential equation for  $\mathbf{U}$ , which models the exact fluid-particle velocity  $\mathbf{U}^+$ , and a stochastic differential equation (SDE) for an acceleration variable  $\mathbf{A}$ , which models the exact acceleration

$$\mathbf{A}^+ = \frac{d\mathbf{U}^+}{dt} = \mathbf{A}[\mathbf{X}^+(t), t], \quad (2.1)$$

where  $\mathbf{X}^+(t)$  is the position of the fluid-particle. The acceleration can be decomposed into its mean and fluctuating parts, based on the mean ( $\langle P \rangle$ ,  $\langle \mathbf{U} \rangle$ ) and fluctuating ( $p'$ ,  $\mathbf{u}$ ) components of the pressure and velocity:

$$A_i = -\frac{1}{\rho} \frac{\partial \langle P \rangle}{\partial x_i} - \frac{1}{\rho} \frac{\partial p'}{\partial x_i} + \nu \frac{\partial^2 \langle U_i \rangle}{\partial x_k \partial x_k} + \nu \frac{\partial^2 \langle u_i \rangle}{\partial x_k \partial x_k}. \quad (2.2)$$

We propose a model in terms of a fluctuating component of the acceleration denoted by  $\mathbf{a}(t)$ , as suggested in earlier works (Krasnoff & Peskin 1971; Pope 2002). The model we

propose reads as:

$$dx_i = U_i dt \quad (2.3)$$

$$dU_i = -\frac{1}{\rho} \frac{\partial \langle P \rangle}{\partial x_i} dt + D_{ij}(U_j - \langle U_j \rangle) dt + a_i dt, \quad (2.4)$$

$$da_i = -\beta a_i dt + \sqrt{B} dW_i. \quad (2.5)$$

Comparing the equations (2.2) and (2.4) reveals that the mean-pressure term is included in the equation for the particle velocity, as well as a term which is linear in the velocity fluctuations. This approach follows directly from the form of the first-order models as expressed by Eq. (1.1), and the linear term models a part of the fluctuating pressure gradient. Therefore,  $\mathbf{a}(t)$  models the viscous contribution and pressure effects not taken into account in the model. In particular,

$$D_{ij}(U_j - \langle U_j \rangle) + a_i(t) \equiv A_i(t) - \langle A_i(t) | \mathbf{x}(t) \rangle \quad (2.6)$$

where  $\mathbf{x}(t)$  represents the position of the model particle. The tensor coefficients depend on space  $\mathbf{x}$ , namely  $\langle P \rangle(\mathbf{x}, t)$ ,  $D_{ij}(\mathbf{x}, t)$ ,  $\langle U_i \rangle(\mathbf{x}, t)$ ; as well as in general the coefficients  $\beta$  and  $B$  are functions of  $\mathbf{x}$ , as will be made explicit shortly.

The structure of the model is such that some terms contributing to acceleration, namely those evolving on a slower time-scale, are included directly in the equation for the velocity (2.4); we recognise the mean pressure gradient and the return-to-the-mean term modelling the pressure fluctuations in the generalised Langevin model (GLM) (Pope 2000, 2002) as such terms. The other contributions to the acceleration, whose dynamics are generally faster, are modelled *via* the stochastic differential equation (2.5) for  $\mathbf{a}(t)$ . The neglected part of the fluctuating pressure-gradient and the viscous contribution are hence included in this term. A similar reasoning informs the structure of the model proposed in the framework of homogeneous turbulence (Pope 2002), when the mean  $\langle \mathbf{A}(t) | \mathbf{x}(t) \rangle$  is zero. In any case, this formulation is equivalent to that based on the total acceleration  $\mathbf{A}(t) = d\mathbf{U}/dt$ , as pointed out by Sawford (1991) for the isotropic case.

Within the present structure of the model, it is possible to highlight the differences with respect to models that include only the position and velocity of the fluid parcels  $(\mathbf{x}, \mathbf{U})$ , as shown in general Eqs. (1.1)-(1.2). Indeed, the model we propose is based on the idea to retain the GLM modelling for the mean and fluctuating pressure gradients, while replacing the white noise appearing in the velocity Eq. (1.1) with a differentiable process  $\mathbf{a}$ , treated as an independent variable. In particular, we replace the white-noise term, which is a delta-correlated stochastic process, with a coloured noise, that is a differentiable process  $\mathbf{a}$  with a finite correlation time. In this work, we have chosen to model  $a_i$  as a Ornstein-Uhlenbeck process (Gardiner 1990). This process is the solution of the linear stochastic equation (2.5), and is a continuous process with time-correlation given by

$$\langle a_i(t) a_j(t') \rangle = \langle a^2 \rangle \exp(\beta(|t - t'|) \delta_{ij}); \quad (2.7)$$

as a consequence, the typical time-scale of  $\mathbf{a}(t)$  is given by  $\beta^{-1}$ . Given that  $\mathbf{a}$  is the fast fluctuating part of the total acceleration, this will also be a characteristic time-scale of the total acceleration, as already pointed out in homogeneous turbulence (Sawford 1991; Pope 2002). This means that the choice of the time-scale  $\beta^{-1}$  should be directly related to the typical correlation-time of the full acceleration.

Some properties of the model can be deduced even before fixing the coefficients. In the case of homogeneous turbulence, the model takes the form of a linear SDE with constant coefficients, and therefore it yields Gaussian processes. More specifically, the two variables  $\mathbf{a}(t)$  and  $\mathbf{U}(t)$  are jointly Gaussian. While the one-point pdf of the velocity

has been found to be Gaussian (Tavoularis & Corrsin 1981), it is well known from experimental measurements (Voth *et al.* 1998; La Porta *et al.* 2001; Mordant *et al.* 2001) and numerical simulations (Yeung & Pope 1989) that acceleration is highly non-Gaussian. This departure from Gaussianity in homogeneous turbulence is not described by the present model. It is possible to correctly reproduce this intermittent effect by making the coefficients stochastic processes (Pope & Chen 1990*a*; Lamorgese *et al.* 2007). However, since we consider here non-homogeneous flows we retain constant coefficients, and do not attempt to represent these higher-order effects. In fact, it is worth emphasising that the Gaussianity of the model is confined to homogeneous turbulence. For inhomogeneous flows, non-Gaussian statistics such as the velocity triple correlation can be accurately calculated by such linear stochastic models, because the coefficients may change in space. The internal intermittent corrections are usually negligible in these cases (Pope 2000).

In homogeneous isotropic turbulence, the mean gradients are zero and the coefficients are isotropic, so the three components are statistically independent. In this case, our model becomes simply

$$dU = D U dt + a dt, \quad (2.8)$$

$$da = -\beta a dt + \sqrt{B} dW. \quad (2.9)$$

In this way, we retrieve the original model by Krasnoff & Peskin (1971), which is in turn identical to the model proposed by Sawford (1991) in terms of different coefficients. In this case, the velocity time-correlation can be calculated analytically as the sum of two decaying exponentials with two different time-scales, which are the inverse of the eigenvalues of the system (Pope 2002). The coefficients  $D$ ,  $\beta$  and  $B$  are unique functions of the variance of the processes  $\langle a^2 \rangle$ ,  $\langle U^2 \rangle$  and the integral time-scale  $T_L$ . This shows again that the choice of the coefficient  $\beta$  is related to the time-scale of the acceleration. The fact that our model reverts to this previous model in the isotropic case is valuable since the predictions of this model are excellent with respect to DNS data (Sawford 1991).

Let us now fix the unknown coefficients. The first requirement we ask of the model is to be consistent with the Langevin model for non-homogeneous flows given by Eq. (1.1). This condition fixes immediately  $D_{ij} = G_{ij}$ . As displayed in Eq. (1.2), this tensor is composed of an isotropic term related to the integral time-scale with the possible addition of another anisotropic trace-less term. The first term forms the core of current PDF approach to turbulent flows, while the second term allows for a more refined representation of the Reynolds-stress dynamics through the adequate choice of the matrix  $G_{ij}^a$ , as explained in detail by Pope (1994*b*). In particular, a realisable Reynolds-stress model corresponds to each acceptable choice of this matrix, and the adding of such a term is important in shear-flows to reproduce complex behaviour not properly taken into account by the isotropic term, notably the rapid-distortion effects (Pope 2000). It is important to stress here this correspondence between the Lagrangian stochastic models of turbulence and the second-order closures in anisotropic flows. Since in this work we use a refined RANS model (to obtain average quantities) together with the addition of the acceleration variable in the stochastic model, we want to appraise the effect of this inclusion and therefore we take  $G_{ij}^a = 0$  for the sake of simplicity. As it will be clear later, even with this approximation the model is satisfactory.

To fix the coefficients for the acceleration process  $\mathbf{a}(t)$ , first we use dimensional arguments *à la Kolmogorov* to give an estimate of the time-scale, and then we impose that the form given by (1.1) is retrieved in the limit of infinite  $\beta$ , that is when the

acceleration process is so fast that it can be considered a white noise and adiabatically eliminated (Gardiner 1990).

Concerning the time-scales of the problem, we consider the time-increment  $\delta U_\tau = |\mathbf{U}(t + \tau) - \mathbf{U}(t)|$  and then the second-order Lagrangian structure function  $D^L(\tau) = \langle (\delta U_\tau)^2 \rangle = v_\eta^2 \zeta(\phi)$ , where the Kolmogorov scales have been used,  $v_\eta \equiv (\nu / \langle \epsilon \rangle)^{1/4}$ ,  $\tau_\eta \equiv (\nu / \langle \epsilon \rangle)^{1/2}$ , and  $\zeta(\phi)$  is an universal function of a dimensionless time  $\phi = \tau / \tau_\eta$ . In the inertial range similarity hypothesis gives  $D^L(\tau) \sim \mathcal{C}_0 \langle \epsilon \rangle \tau$ , where  $\mathcal{C}_0$  is the Kolmogorov constant. This implies for the velocity autocorrelation function that

$$R_L(\tau) \equiv \frac{\langle U(t)U(t + \tau) \rangle}{\langle U^2 \rangle} = 1 - \frac{D^L(\tau)}{2\langle U^2 \rangle} \sim 1 - \frac{\mathcal{C}_0 \tau}{2T}, \quad (2.10)$$

with  $T$  the time-scale of large scales, such that  $R_L(\tau) \sim 1$  in the inertial range far from boundaries when  $\tau \ll T$  (Monin & Yaglom 2013; Pope 1994a). It is worth remarking that  $\mathcal{C}_0$  should not be confused with the model constant  $C_0$  as the link between the two is not straightforward, notably in the inhomogeneous case. This issue will be discussed later.

We can generalise this result for the correlation of velocity derivatives in the case of locally isotropic variables

$$B_n^L(\tau) = \left\langle \frac{d^n U}{dt^n}(t) \frac{d^n U}{dt^n}(t + \tau) \right\rangle, \quad (2.11)$$

where the same hypotheses yields

$$B_n^L(\tau) = \left( \frac{v_\eta}{\tau_\eta^n} \right)^2 \alpha_n(\phi) = \nu^{1/2-n} \langle \epsilon \rangle^{n+1/2} \alpha_n(\phi), \quad (2.12)$$

where  $\alpha_n(\phi)$  should be universal functions. In particular, using the definition of  $D^L$ , we find

$$B_n^L(\tau) = \frac{(-1)^{(n-1)}}{2} \frac{d^{2n} D^L}{d\tau^{2n}}, \quad (2.13)$$

that means

$$\alpha_n(\phi) = \frac{(-1)^{(n-1)}}{2} \frac{d^{2n} \zeta(\phi)}{d\phi^{2n}}. \quad (2.14)$$

If  $\tau$  is in the inertial range, we require that the function  $B_n^L$  be independent of  $\nu$ . We then obtain

$$B_n^L(\tau) \approx \langle \epsilon \rangle \tau^{1-2n}, \text{ i.e. } \alpha_n(\phi) \sim \phi^{(1-2n)}. \quad (2.15)$$

For  $n = 1$ , the same formulas give for the mean square of the turbulent acceleration

$$\langle A^2 \rangle = K \nu^{-1/2} \langle \epsilon \rangle^{3/2} \quad (2.16)$$

where  $K$  is a universal constant. Hence we can find the acceleration correlation behaviour

$$R_A(\tau) = \frac{\langle A(t + \tau)A(t) \rangle}{\langle A^2 \rangle} \sim \frac{\tau_\eta}{\tau} \quad (2.17)$$

and in the same way that of the derivative of acceleration for  $n = 2$

$$R_{\dot{A}}(\tau) \sim \left( \frac{\tau_\eta}{\tau} \right)^3 \quad (2.18)$$

These formulas show that the turbulent acceleration and higher derivatives are correlated for a time comparable to  $\tau_\eta$ . Furthermore, the mean acceleration, as displayed by Eq.

(2.16), as well as its derivatives depend explicitly on the fluid viscosity  $\nu$ . Since for high-Re numbers the viscosity affects only the very small scales of turbulent motion, in locally isotropic turbulence these variables are determined largely by scales  $l \leq \eta$ . On the basis of these estimates, the fluid particle acceleration timescale  $\beta^{-1}$  is taken as proportional to the local Kolmogorov timescale, assuming a constant of proportionality of one we get

$$\beta^{-1} = \tau_\eta. \quad (2.19)$$

Our derivation shows also that the higher the derivative the faster the process loses correlation, so that higher order variables can be considered random noise. Nevertheless, for  $\tau \lesssim \tau_\eta$  this reasoning ceases to be true and higher-order models may have some justification (Reynolds 2003b).

Once the time-scale of the process  $\mathbf{a}$  is fixed, the requirement of consistency with the velocity-model (1.1) allows us to fix the diffusion term in (2.5). The stochastic differential equations (2.3)-(2.5) constitute a diffusion process, or more loosely are Langevin equations, and therefore correspond to a Fokker-Planck equation for the Lagrangian pdf (Gardiner 1990). In the case of the incompressible fluids treated here, this equation is identical to the equation for the Eulerian pdf (Pope 1985). In this way, starting from equations (2.3)-(2.5), it is possible to formally derive the corresponding equations for the statistical moments, and notably the Reynolds-stress equations (Pope 1994b)

$$\begin{aligned} \frac{\partial \langle u_i u_j \rangle}{\partial t} + \langle U_k \rangle \frac{\partial \langle u_i u_j \rangle}{\partial x_k} + \frac{\partial \langle u_i u_j u_k \rangle}{\partial x_k} = & - \langle u_i u_k \rangle \frac{\partial \langle U_j \rangle}{\partial x_k} - \langle u_j u_k \rangle \frac{\partial \langle U_i \rangle}{\partial x_k} \\ & + \langle u_i a_j \rangle + \langle u_j a_i \rangle - \frac{2}{T_L} \langle u_i u_j \rangle. \end{aligned} \quad (2.20)$$

where the correlations  $\langle u_i a_j \rangle$  are solutions of transport equations, which reflect the non-zero memory effects due to the coloured noise in the velocity. Specifically, the transport equations for the  $\langle u_i a_j \rangle$  correlation are

$$\frac{\partial \langle u_i a_j \rangle}{\partial t} + \langle U_k \rangle \frac{\partial \langle u_i a_j \rangle}{\partial x_k} + \frac{\partial \langle u_i a_j u_k \rangle}{\partial x_k} = -\frac{1}{T_L} \langle a_j u_i \rangle + \langle a_i a_j \rangle - \langle a_j u_k \rangle \frac{\partial \langle U_i \rangle}{\partial x_k} - \frac{\langle u_i a_j \rangle}{\tau_\eta}; \quad (2.21)$$

and for the covariance of the process  $\mathbf{a}$ :

$$\frac{\partial \langle a_i a_j \rangle}{\partial t} + \langle U_k \rangle \frac{\partial \langle a_i a_j \rangle}{\partial x_k} + \frac{\partial \langle a_i a_j u_k \rangle}{\partial x_k} = -2 \frac{\langle a_i a_j \rangle}{\tau_\eta} + B \delta_{ij}. \quad (2.22)$$

The finite value of the timescale  $\tau_\eta$  is responsible for the memory effect, thus, in the limit of  $\tau_\eta \rightarrow 0$ , the same source term in the Reynolds-stress equations as given by the model (1.1) should be found. Considering the limit in the homogeneous case, we have

$$\langle a_i a_j \rangle \rightarrow \frac{B \tau_\eta}{2} \delta_{ij} \Rightarrow \langle u_i a_j \rangle = \tau_\eta \left( \langle a_i a_j \rangle - \frac{\langle u_i a_j \rangle}{T_L} \right), \quad (2.23)$$

and thus,

$$\langle u_i a_j \rangle \rightarrow \frac{B}{2} \tau_\eta \left( \frac{1}{\tau_\eta} + \frac{1}{T_L} \right)^{-1}; \quad (2.24)$$

therefore, in order to have the correct limit, it is necessary to impose

$$B = \frac{C_0 \langle \epsilon \rangle}{\tau_\eta} \left( \frac{1}{\tau_\eta} + \frac{1}{T_L} \right) \approx \frac{C_0 \langle \epsilon \rangle}{\tau_\eta^2} \quad (2.25)$$

In this way, we have fixed all the parameters and the model is complete, except for the value of the constant  $C_0$ . Some comments are in order concerning this issue. In

principle, given the relationship between the Langevin equation (1.1) and the Kolmogorov theory, one might think that  $C_0$  would be related to the Kolmogorov constant  $\mathcal{C}_0$  and hence should be universal. However, extensive analysis (Sawford & Guest 1988; Pope 2000) have shown that this is not the case even in homogeneous turbulence, and this is why we distinguish in the notation between the stochastic model parameter  $C_0$  and the Kolmogorov constant  $\mathcal{C}_0$ . Specifically, even different laboratory data of homogeneous turbulence are best fitted with different values of  $C_0$  (Sawford & Guest 1988), and for exemple excellent agreement with atmospheric data have been obtained with  $C_0 \approx 2.1$  (Pope 2000), whereas best experimental and numerical experiments indicate a value greater than 6 (Biferale *et al.* 2008) for isotropic turbulence. As a matter of fact,  $C_0$  must be considered a free parameter which may be calibrated for different test-cases. In particular, as detailed in Pope (2000), in the general case of non-homogeneous flows  $C_0$  and the matrix  $\mathbf{G}$  simply define the particular model, and the only constraint is that  $C_0$  is non-negative and that  $C_0$  and  $G_{ij}$  are bounded to ensure the realisability of the model (Pope 1985). No link is now present with the Kolmogorov constant  $\mathcal{C}_0$ . The value of  $C_0$  will be made clear once the numerical approach is presented in the next section.

Finally, as discussed by Pope (2014), a link can be made between the acceleration-velocity correlation and Reynolds-stress turbulence models. In the present acceleration-based model, these correlations appear as closed terms in the equation for the second-order velocity tensor Eq. (2.20). We can therefore deduce for our model the following relation

$$\begin{aligned} \langle u_i A_j \rangle &= \left\langle \frac{p'}{\rho} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \right\rangle - 2\nu \left\langle \frac{\partial u_j}{\partial x_k} \frac{\partial u_i}{\partial x_k} \right\rangle - \frac{1}{\rho} \left( \frac{\partial \langle p' u_i \rangle}{\partial x_j} + \frac{\partial \langle p' u_j \rangle}{\partial x_i} \right) + \nu \Delta \langle u_i u_j \rangle \\ &= \langle u_i a_j \rangle + \langle u_j a_i \rangle - \frac{2}{T_L} \langle u_i u_j \rangle, \end{aligned} \quad (2.26)$$

where  $A_i = dU_i/dt$  as above; the second term in the right hand side of the first line is the pseudo-dissipation that to an excellent approximation is equal to the mean dissipation  $\epsilon_{ij} = (2/3)\langle \epsilon \rangle \delta_{ij}$ , and the last term is the viscous transport and is known to be negligible in almost all situations. The second line clarifies how the pressure transport and the viscous dissipation are modelled in the present picture. Taking the trace of the equation, the equation for turbulent kinetic energy is retrieved, and hence the mean dissipation rate is implicitly defined by the relation

$$\sum_i \langle u_i A_i \rangle = 2\langle u_i a_i \rangle - \frac{2}{T_L} \langle u_i u_i \rangle \approx -\langle \epsilon \rangle. \quad (2.27)$$

These relations are valuable, since measurements of the velocity-acceleration correlation allow us to better reproduce the corresponding Reynolds-stress equation terms in the model.

### 3. Numerical approach

We study the turbulent flow in a channel between two parallel walls separated by a distance  $2h$  using the same Reynolds number ( $Re_\tau = \frac{u_\tau h}{\nu} \approx 1440$ ) chosen in a recent campaign of experiments and DNS (Stelzenmuller *et al.* 2017), where  $u_\tau$  is the friction velocity associated to the shear stress  $\tau_w$  at the wall and  $\nu$  the kinematic viscosity. In the following, the superscript  $+$  indicates quantities expressed in wall units by  $u_\tau$  and  $\nu$ . By convention,  $x$  is the stream-wise direction,  $y$  the wall-normal and  $z$  the span-wise.



We give a brief account of how experimental data were obtained. More details about the experimental techniques and their validation can be found in a recent article (Stelzenmuller *et al.* 2017), where also the DNS approach is described. Experiments are carried out with a centerline velocity  $U_0 = 1.75 \text{ m s}^{-1}$ , that corresponds to a bulk Reynolds number  $Re = U_0 h / \nu = 34000$ . The experiment consists of measurements made in a closed-loop water tunnel. The experimental test section is 3.2 m long with a cross-section of  $37.5 \text{ mm} \times 316 \text{ mm}$ . The development length is  $155h$  and the channel height is  $16.9h$ , ensuring statistical homogeneity in the streamwise and spanwise directions. The wall unit is  $\delta = \nu / u_\tau = 13 \mu\text{m}$  in our conditions. Three dimensional particle trajectories are measured by particle tracking velocimetry (Ouellette *et al.* 2006) in a  $35 \text{ mm} \times 20 \text{ mm} \times 8 \text{ mm}$  measurement volume. Particle velocity and acceleration are obtained by convolution of the trajectories with Gaussian differentiating kernels, which also serves to filter out noise from the measurements (Mordant *et al.* 2004a). The closest distance at which accurate detection of the particle was possible is  $y^+ = 4$  i.e. about  $50 \mu\text{m}$ . Thus our range of measurement spans the interval  $y^+ \in [4, 1400]$  i.e. more than two orders of magnitude in wall distance.

### 3.1. Fluid-particle hybrid method

We must solve the stochastic differential equations (2.3)-(2.5) that contain several mean fields. To cope with this issue, we use here a hybrid RANS/PDF approach. In this approach, first suitable Reynolds averaged Navier-Stokes (RANS) equations are solved on a Eulerian grid for the necessary mean quantities, namely  $\langle \mathbf{U} \rangle$ ,  $\langle P \rangle$ ,  $\langle \epsilon \rangle$ ,  $k$ . Then, the stochastic equations are solved through a particle method, and the mean quantities present in the coefficients are interpolated at the position of the particles (Hockney & Eastwood 1988). This method guarantees that the mean fields are not noisy, is efficient, and therefore is the main tool for the practical applications of stochastic models to fluid flows (Muradoglu *et al.* 2001; Jenny *et al.* 2001), and the only viable choice for flows carrying inertial particles (Peirano *et al.* 2006).

Concerning the RANS model, we have implemented the standard LRR-IP model (Launder *et al.* 1975), with the addition of the near-wall model based on the elliptic relaxation (Durbin 1991). We have used the same parameters and boundary conditions suggested in the original proposal (Durbin 1993). These Reynolds-stress equations together with the equation for  $\langle \epsilon \rangle$  are solved through a standard finite-difference method.

As explained in the previous section, on the basis of the choice of  $C_0$  and the matrix  $\mathbf{G}$ , each Lagrangian stochastic model corresponds to a realisable Reynolds-stress model (Pope 1994b). This points to a specific issue of consistency in hybrid RANS/PDF approach (Minier *et al.* 2014), which can be easily overlooked. In fact, the final results in terms of Lagrangian particles are deeply impacted by the choice of both the Eulerian RANS and Lagrangian models, and large errors may be found when the Lagrangian and RANS models chosen are much different, *i.e.* inconsistent. In particular, it has been shown numerically that to directly use DNS values in the coefficients of a standard stochastic model leads to unphysical results in terms of the Reynolds stress (Chibbaro & Minier 2011). The choice of RANS model should therefore inform the choice of the coefficients in the Lagrangian stochastic model to ensure that the two models are as consistent as possible. In our case, the presence of the acceleration variable in the Lagrangian model makes full consistency between the RANS and Lagrangian models impossible.

We have thus chosen the Lagrangian model in the following way. The RANS models implemented have three components: 1) the Rotta IP model, 2) the LRR term; and 3) the elliptic near-wall treatment. We have chosen the  $C_0$  and  $\mathbf{G}$  consistent with the first

2 terms. Consistency with the Rotta model leads in Lagrangian term to the relation  $C_R = 1 + 3/2C_0$  and  $\mathbf{G}^a = 0$  in Eq. (1.2) ((Pope 2000). Given that typical value of  $C_R$  is in the range  $1.5 \div 1.8$  that signifies  $C_0 \in [0.3, 0.55]$ . Adding the LRR terms, which gives the LRR-IP model, means for consistency to take would lead to the relations  $G_{ij} = -1/2C_R\delta_{ij} + C_2\partial\langle U \rangle_i/\partial x_j$  and  $C_R = 1 + 3/2C_0 + \mathcal{P}/\epsilon$ , from which  $C_0$  can be computed.  $C_R$  is still the Rotta constant and  $C_2$  is a constant of the RANS LRR model whose standard value is 0.6. For  $C_2 = 0$  the Rotta model is retrieved. The third term models the viscous and pressure contributions which are important near the walls. Following the rationale behind our model structure, these terms are modelled in the Lagrangian model by the new acceleration variable, at least to some extent, and therefore we do not add other terms in the model. In fact, we have tested our results with both the Rotta ( $C_2 = 0$ ) and the LRR-IP model without finding any notable differences in the acceleration statistics, provided the near-wall term is added. For this reason, results are presented in this work only for the simpler Rotta model taking  $C_2 = 0$ . Moreover, the results are robust with regard to the choice of the value  $C_R$  and hence  $C_0$ , such that similar results are obtained in the range  $C_0 \in [0.2, 1.5]$ . In the following, we show the results obtained with  $C_0 = 0.35$  which is a standard value and appears to give best results. A thorough assessment of the impact of changing Reynolds-stress modelling is certainly interesting for applications and is left to a future work.

### 3.2. Numerical scheme for the SDEs

The coefficients in the stochastic differential equations may diverge as the wall is approached. In particular, the matrix  $G_{ij}$  in the linear drift term of Eq. (2.4) becomes negatively unbounded. This can be clearly seen from Eq. (1.2), since approaching the wall we have

$$G_{ij} \sim T_L^{-1}\delta_{ij} \sim \frac{-\epsilon}{k}\delta_{ij} \sim \frac{-1}{y^2}\delta_{ij} \quad (3.1)$$

and because of no-slip condition on the velocity,

$$(U_i - \langle U \rangle_i) \sim y. \quad (3.2)$$

Using this relations in the the stochastic equations (2.3)-(2.5), which are of the form

$$d\mathbf{X} = \mathbf{A} dt + \mathbf{D}\mathbf{X} dt + \mathbf{B} d\mathbf{W}(t), \quad (3.3)$$

we find that they are stiff, as we have

$$\lim_{y \rightarrow 0} \det[\mathbf{D}] = -\infty, \quad (3.4)$$

since the drift coefficient  $[\mathbf{D}]\mathbf{U}$  scales with  $1/y$  and remains unbounded for  $y \rightarrow 0$ .

In our system, the matrix  $\mathbf{A}$  may cause numerical problems, because the time-scale  $\beta^{-1}$  may be very small, and instabilities may also arise far from the boundaries if the time-step is bigger than  $\beta^{-1}$  and the numerical scheme is not stable. For these reasons, the stochastic equations must be solved with a special treatment. To address these issues, we have developed a numerical scheme unconditionally stable for the set of equations (2.3)-(2.5), using an approach similar to previous works (Dreeben & Pope 1998; Peirano *et al.* 2006).

We solve the system (3.3) taking the matrix coefficients  $\mathbf{A}, \mathbf{D}, \mathbf{B}$  frozen during a time-step  $\Delta t$  in order to obtain analytical solutions using the integrating factor  $e^{-\mathbf{D}t}$ . Then,

the numerical scheme based on analytical solutions reads as:

$$x_i^{n+1} = x_i^n + A U_i^n + B a_i^n + C [T_L^n \mathcal{A}_{U,i}^n] + \Omega_i^n, \quad (3.5)$$

$$U_i^{n+1} = U_i^n \exp(-\Delta t/T_L^n) + [T_L^n \mathcal{A}_{U,i}^n][1 - \exp(-\Delta t/T_L^n)] + D a_i^n + \Gamma_i^n, \quad (3.6)$$

$$a_i^{n+1} = a_i^n \exp(-\Delta t/\tau^n) + \gamma_i^n. \quad (3.7)$$

The coefficients  $A$ ,  $B$ ,  $C$ ,  $D$  and  $\mathcal{A}_{U,i}$  are given by:

$$A = T_L^n [1 - \exp(-\Delta t/T_L^n)],$$

$$B = \theta^n [\tau^n (1 - \exp(-\Delta t/\tau^n)) - A] \quad \text{with} \quad \theta^n = (\tau T_L^n)/(\tau^n - T_L^n),$$

$$C = \Delta t - A,$$

$$D = \theta^n [\exp(-\Delta t/\tau^n) - \exp(-\Delta t/T_L^n)],$$

$$\mathcal{A}_{U,i} = -(1/\rho) \partial \langle P \rangle / \partial x_i + \langle U_i \rangle / T_L.$$

The stochastic integrals  $\gamma_i(t)$ ,  $\Gamma_i(t)$ ,  $\Omega_i(t)$  are given by:

$$\gamma_i(t) = \frac{\sqrt{C_0 \langle \epsilon \rangle}}{\tau} \exp(-t/\tau) \int_{t_0}^t \exp(s/\tau) dW_i(s), \quad (3.8)$$

$$\Gamma_i(t) = \exp(-t/T_L) \int_{t_0}^t \exp(s/T_L) \gamma_i(s) ds, \quad (3.9)$$

$$\Omega_i(t) = \int_{t_0}^t \Gamma_i(s) ds. \quad (3.10)$$

The stochastic integrals are then numerically solved using the Choleski decomposition (Peirano *et al.* 2006).

For the integration of the stochastic differential equations, we have used  $N = 5 \times 10^5$  tracer particles. The time-step used is  $\Delta t^+ = 4 \times 10^{-2}$ . Concerning the statistics, time-average is taken on  $10^6$  independent steps whenever possible. Instead, conditional statistics have been obtained tracking an ensemble of 1000 particles for each initial condition and averaging over 5000 independent ensembles.

## 4. Results

In Figure 1, mean-velocity profiles from experiments, DNS, and model simulations are compared. The agreement of mean velocity is overall very good. Notably the model behaviour is analogous to that of the DNS, yet some small discrepancies can be detected in the viscous- and buffer- layer ( $4 < y^+ < 50$ ), pointing to a small difference between experimental and numerical results. As highlighted by Stelzenmuller *et al.* (2017) the first experimental points computed in the vicinity of the wall are affected by more important errors, due to experimental difficulties in the measurements. In particular, the position is measured with some percent of error.

In Figure 2 the turbulent kinetic energy  $k$  is plotted (panel a), as well as each diagonal component of the Reynolds stress tensor (panel b). Given that we use a hybrid approach, all the Reynolds stresses are computed in the model by the RANS method. In the present model only the turbulent kinetic energy  $k$  (*i.e.* the trace of the Reynolds-stress tensor) is used in the Lagrangian stochastic model, so this is the key quantity for its performance. As shown in Figure 2 (a), the agreement among the three data sets is quite satisfactory. In particular, the model correctly represents the physics in the near-wall region, while it underestimates a little the turbulent energy far from the wall. Figure 2b shows that the Reynolds-stress model equipped with elliptical relaxation gives a

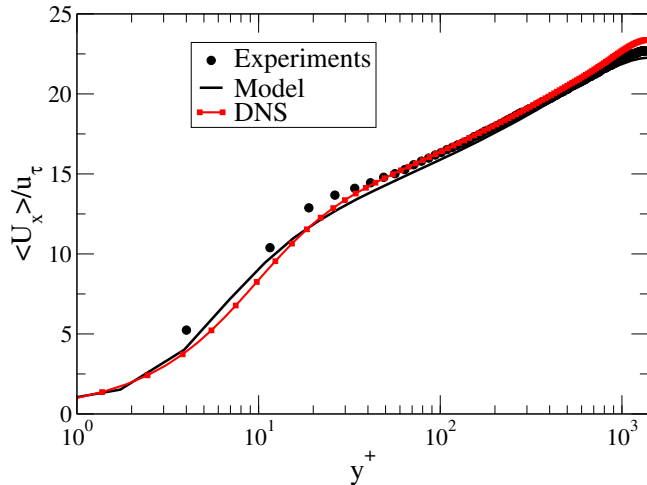


Figure 1: Mean velocity profiles. Comparison between experiments (points), DNS (squares-line), and the present model (solid line). All quantities are normalized in wall units.

satisfactory representation of each component of the Reynolds stress, notably in the near-wall region. Previous studies (Pope 2000) has shown that these RANS models tend nonetheless to underestimate the stream-wise component in the log-layer region in very high-Re flows, and that explains the slight discrepancy already remarked for the turbulent energy for  $y^+ > 200$ , see Figure 2 (a). The model used is the best available among realisable RANS models for general wall-bounded flows (Pope 2000), and the development of RANS models is not the focus of this work. Furthermore, as explained in section 3.1, it is more crucial to have consistency between the Eulerian and the Lagrangian model than to get perfect agreement with experiments at the level of mean fluid observables. The chosen model is therefore considered satisfactory with regard to the present purpose.

Figure 3 shows the acceleration mean (a) and the acceleration variance (b) profiles obtained from experiments, DNS, and the model. The average acceleration is well predicted by the stochastic model in both directions. Notably the model gives correctly the negative peak of mean stream-wise acceleration at  $y^+ \approx 7$ , which is a viscous effect. This shows that the acceleration model together with a RANS model including the boundary layer is able to describe this effect, despite the absence of ad-hoc low-Re terms in the stochastic model. It is also interesting to remark that the anisotropy between stream-wise and wall-normal acceleration is correctly captured.

Profiles of acceleration variance (Figure 3b) reveal a qualitative overall agreement, although larger discrepancies are found for the model concerning the acceleration variance. A slight overestimation of the stream-wise variance is present with respect to DNS, even though the value found is within the experimental error bars. The other two components are instead slightly under-estimated, notably the wall-normal component. Furthermore, the model displays a small degree of anisotropy between the  $y$  and  $z$  components, both in amplitude and in the position of the peak, which is found at around the same position, whereas experiments and DNS show some variability. Yet at their respective peaks the standard deviation of the acceleration is larger than the magnitude of the mean acceleration for all sets, which is one of the salient characteristics of the acceleration process. This indicates that the present stochastic model is able to reproduce the main features of the acceleration fluctuations that govern the dynamics near the wall,

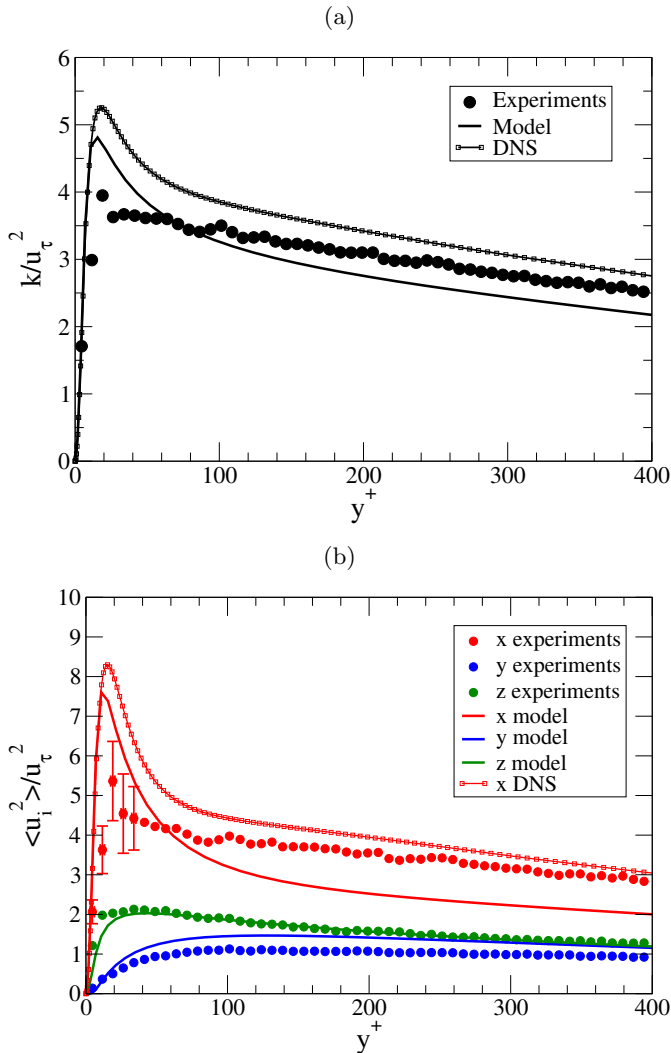


Figure 2: Comparison between experiments (points), DNS (squares-lines), and the present model (solid lines). All quantities are normalized in wall units: (a) Turbulent kinetic energy. (b) Reynolds stress components.

although it fails to reproduce the anisotropy between the span-wise and the wall-normal components.

Figure 4 shows  $y$  and  $z$  components of the acceleration correlation tensor  $\rho_{ij}$  calculated at different initial wall distances  $y_0^+$ . Correlations are computed as:

$$\rho_{ij}(\tau, y_0) = \frac{\langle A'_i(t_0, y_0) A'_j(t_0 + \tau, y_0) \rangle}{\langle A_i'^2(t_0, y_0) \rangle^{1/2} \langle A_j'^2(t_0 + \tau, y_0) \rangle^{1/2}}, \quad (4.1)$$

where  $A'_j(t_0 + \tau, y_0) = A_j(t_0 + \tau, y_0) - \langle A_j(t_0 + \tau, y_0) \rangle$  is the fluid particle acceleration fluctuation relative to the Lagrangian average, with  $i = x, y,$  or  $z$ . The agreement is satisfactory, showing that the stochastic model fairly reproduces both the inhomogeneity and the anisotropy of the flow, since all components are different and the decorrelation-

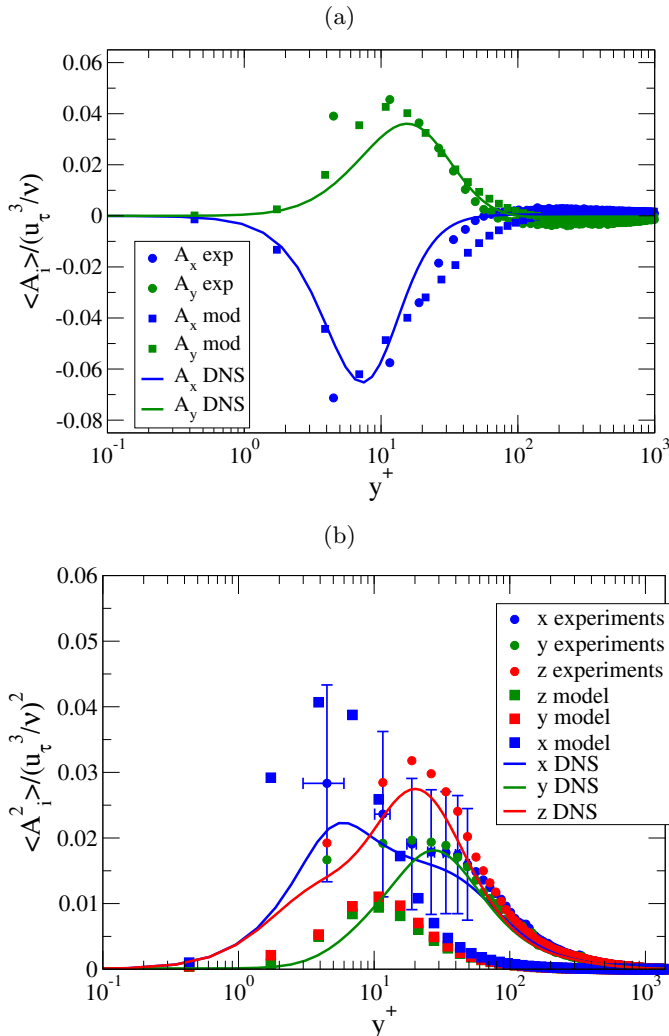


Figure 3: Mean (panel (a)) and variance (panel (b)) acceleration profiles. Comparison between experiments (points), stochastic model simulations (squares) and DNS (lines). Error bars are displayed for the x-component of variance in experiments. As already remarked, the first experimental data are affected by large errors both in the value and in the position.

time changes with the distance, as displayed by experiments and DNS. It is worth noting that the span-wise and wall-normal components as given by stochastic model are a little more isotropic than the experimental results, yet more similar to DNS ones.

Some small differences for small time-displacements, notably in the near-wall region, can be traced back to the presence of a white noise in the acceleration process which overlooks very short-memory effects. For long times, although the overall agreement remains pretty decent, the stochastic model slightly overestimates the correlation-time, so that acceleration appears to remain correlated over a longer time. This can be partially related to the choice of the coefficients of the model, and in particular we have chosen the time-scale of the acceleration equal to  $\tau_\eta$ , while a coefficient of the order of, but

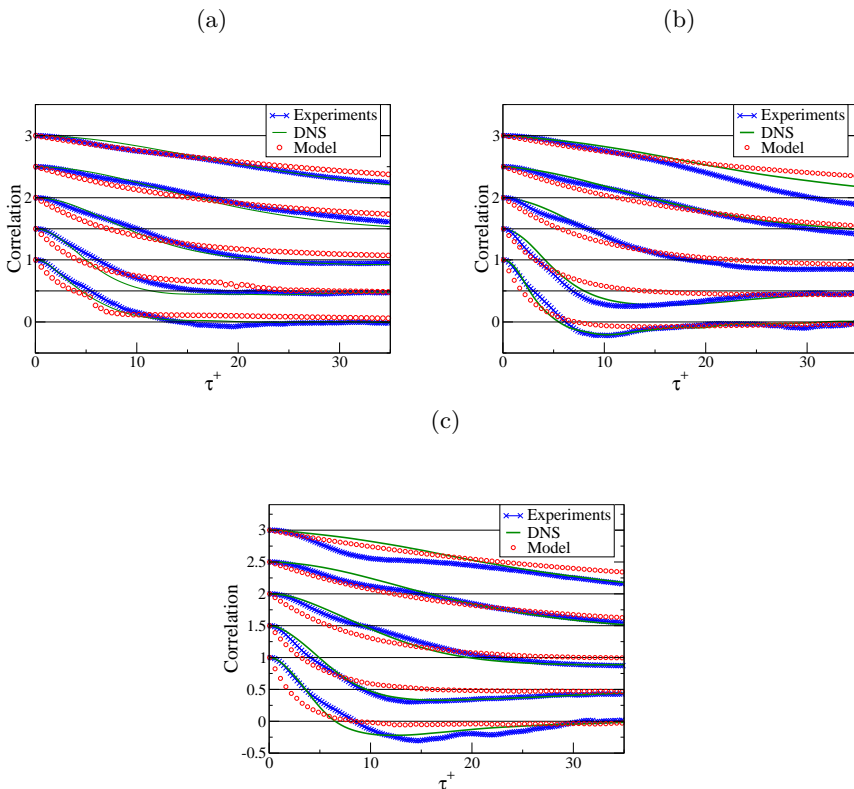


Figure 4: Lagrangian auto-correlations of wall-normal ( $\rho_{yy}$ , left) and span-wise ( $\rho_{zz}$ , right) fluid particle acceleration. Experimental results are shown by crossed blue lines, DNS results by solid green lines, and model results by red circles. Curves are shifted vertically by increments of 0.5 for clarity. From bottom to top, the curves correspond to particles located initially at  $y_0^+ = 20, 60, 200, 600$  and  $1000$ . Horizontal grid lines show the zero-correlation level for each  $y_0^+$ .

different from 1 might be used. Moreover, the statistical convergence of the correlations is particularly difficult and, therefore, a small residual bias error may be also present, for a finite number of particles have been used. The bias error is inherent to the stochastic models that include mean fields in the coefficients, whenever these coefficients are computed as averages over particles (Kloeden & Platen 1992; Xu & Pope 1999; Minier *et al.* 2003). This is precisely our case, as pointed out by formula (4.1).

Figure 5 shows the probability distribution function (PDF) of the three acceleration components. All curves present very long tails corresponding to extremely high acceleration events usually associated with intermittency (Mordant *et al.* (2002)). The model closely reproduces the experimental and DNS results. In particular, the model captures well the skewness of the acceleration, displaying a positive skewness for the wall-normal component and a negative skewness for the stream-wise component. The span-wise component is correctly not skewed. The tails of the extreme events ( $P < 10^{-4}$ ) appear slightly over-predicted by the model for the stream-wise component. However statistical error in this range is significant.

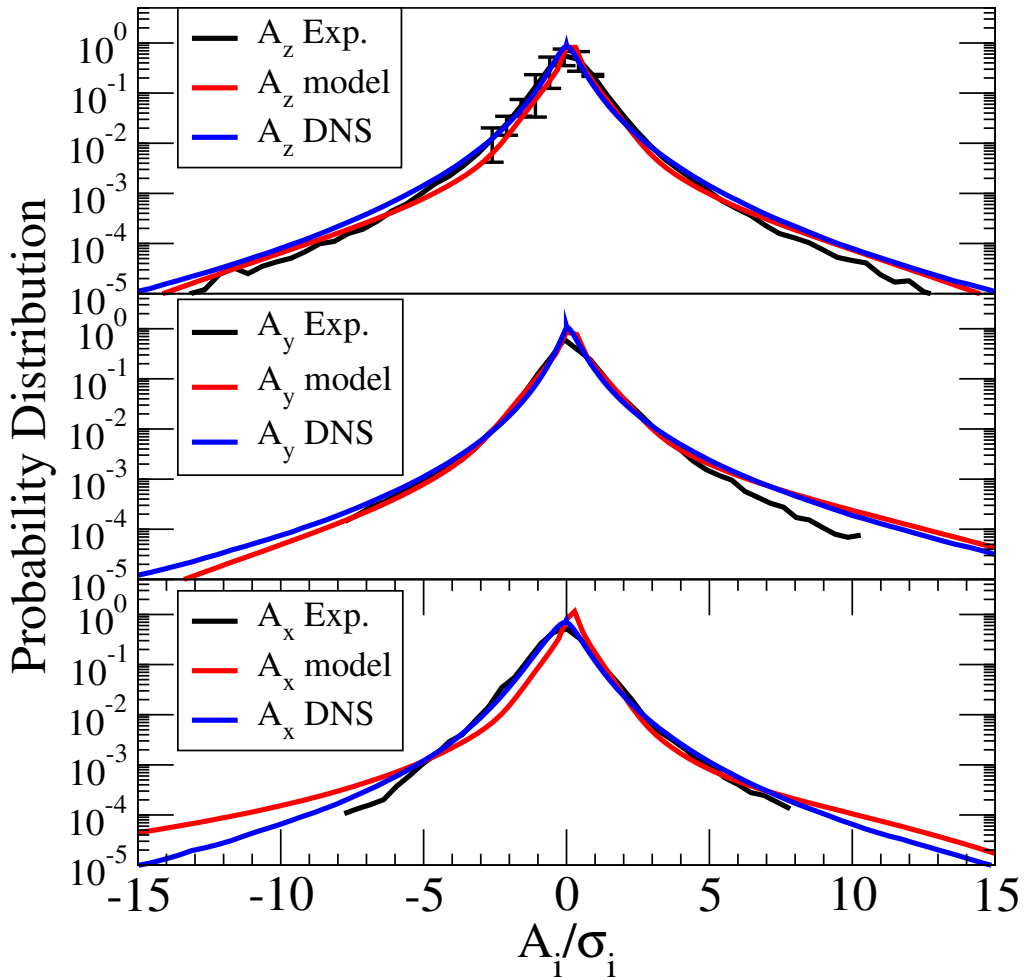


Figure 5: From top to bottom, PDFs of the span-wise ( $z$ ), wall-normal ( $y$ ), and stream-wise ( $x$ ) fluid particle acceleration. Experiments results are shown as solid black lines, DNS results as blue lines, model results as red lines. The PDFs are normalized by the root-mean-square value of acceleration (named  $\sigma_i$  for each component) Reynolds number. The PDF displayed represents an average over the whole channel in all cases. In experiments as well as in numerical simulations, we have released fluid parcels at different initial positions  $y_0^+$ , from  $y_0^+ = 15$  to  $y_0^+ = 1200$ , every  $y^+ = 10$ . The global pdf is computed integrating the conditional statistics over  $y_0$ .

## 5. Discussion and Conclusions

In this work, we have developed a novel stochastic N model including fluid particle acceleration for general non-homogeneous turbulent flows, focusing on wall-bounded flows. This model generalises previous propositions of Lagrangian stochastic models for acceleration in isotropic flows, as well as the velocity-based models for non-homogeneous flows. Model results are compared against experimental and DNS measurements in a channel-flow.

The Lagrangian stochastic model proposed has the structure of a diffusion process for the variables  $\mathbf{x}$ ,  $\mathbf{U}$ ,  $\mathbf{a}$ , where  $\mathbf{a}$  is a random acceleration process. The system appears as



a set of stochastic differential equations, and it is closed using similarity arguments *à la Kolmogorov* and consistency with previous models in some limit cases. The coefficients of the resulting equations are functions of space and time, as well as being dependant on average fields. To find the fluid averages necessary for calculating the coefficients, we have used a hybrid RANS/PDF approach, typically used in realistic computations, where average velocity and Reynolds stress are computed in a Eulerian framework. In particular, we have chosen the elliptic-relaxation Reynolds-stress model to get a fair agreement between the RANS fields and the experimental ones.

The inclusion of acceleration in this stochastic model was motivated by the importance of this variable in the modeling of fast processes, which become especially important in the near-wall region. The results presented here are useful to disentangle to what extent the accurate modeling of the acceleration is important, and to what extent more complex closures are required.

The overall agreement between the model and experiments is good, showing that the present model captures most of the features revealed by experiments. In particular, the average acceleration is in very good agreement with experiments and DNS. The Lagrangian autocorrelation given by the model reproduces correctly the time-scale and the non-homogeneous effects. These results are very encouraging for the modeling approach we have presented here, especially considering the relative simplicity of the model used for the acceleration variable, and that no free-parameter has been calibrated.

The PDFs are also fairly well captured, displaying skewness, anisotropy and highly non-Gaussian tails. In homogeneous turbulence, the very wide tails of the acceleration PDF are associated to intermittency (Mordant *et al.* (2001)). In order to reproduce these features in stochastic models of homogeneous turbulence, a multiplicative component is added in the noise term to take into account the fluctuations of the dissipation rate  $\epsilon$  that are often assumed to follow log-normal statistics and to have a rather long correlation time close to  $T_L$  (Pope & Chen (1990b); Mordant *et al.* (2002); Reynolds (2003a); Zamansky *et al.* (2010)). Our model does not have such a multiplicative term in eq. (2.5). However, the term  $B$  incorporates the dissipation rate ( $\epsilon$ ) which varies in space along the particle trajectory due to the inhomogeneity of the flow. It is thus a multiplicative term only related to inhomogeneity, and not with respect to the stochastic fluctuations of  $\epsilon$ . This contribution is enough to reproduce the wide-tail PDFs of the acceleration components. This confirms that in wall flows most of the extreme events are related to non-homogeneity (Lee *et al.* 2004). It also shows that the present model is able to capture the main statistical features of the near-wall structures which are responsible for the intermittency.

To further assess the acceleration model, we have also carried out simulations with the present stochastic model coupled with a simpler RANS model without the elliptical relaxation, see section 3. In this case, we assure consistency with the coefficients used in the velocity equation, but we lose the description of the near-wall region. For this reason, such a RANS model is much less accurate in wall flows; notably it is known to exaggerate the isotropy of the Reynolds stress, and to underestimate the kinetic energy (Pope 2000). Interestingly, while the results obtained with this simpler model are inferior to those obtained with the complete model, the qualitative picture is similar and a fair agreement for all acceleration observables is still obtained. This shows robustness with respect to the RANS model used for the mean fields.

It is important to discuss now the deficiencies of the present model and to point out how to improve it:

(a) The anisotropy of the flow is not fully captured in the present framework. While anisotropy in mean acceleration and the PDF is correctly reproduced, acceleration

variances in the span-wise and wall-normal directions turn out to be barely different, yet experiments and DNS show a more significant difference. Even if to a less extent, the same deficiency is found also looking at the correlations. This issue is mainly related to the modelling of the slow part of the fluctuating pressure-gradient in the velocity equation (2.4), which is given in term of the matrix  $G_{ij}$ . The simple Langevin model used here, eq. (1.2) with  $G_{ij}^a = 0$  is known to lead towards isotropy with respect to the two components (Pope 2000). While the additional acceleration variable partially corrects this tendency, it is found to be insufficient to get a quantitative agreement. An elliptical-relaxation model should be implemented also in the Lagrangian stochastic model, as developed by Dreeben & Pope (1997). Furthermore, that would make the hybrid RANS/PDF approach more consistent, probably helping to recover a better level of the amplitude of the variances.

(b) The mean viscous term in the acceleration, Eq. (2.2), and the viscous transport term in the Reynolds stress equations are neglected in the present approach, as displayed by Eq. (2.27). These terms are known to be very small except in a tiny region adjacent to walls (Pope 2000). That is consistent with the fact the mean acceleration is so well reproduced by the present model. However, the viscous transport term would introduce explicitly the viscous time-scale in the model and could help to further improve the prediction of the variances. Various models have been already proposed to include these terms (Dreeben & Pope 1998; Waclawczyk *et al.* 2004).

(c) Although most of the intermittency is already captured, it would be possible to add also the internal intermittency due to the fluctuations of the turbulent dissipation (Pope 2000; Lamorgese *et al.* 2007). Of course, these improvements bring a price in terms of computational and mathematical complexity.

In conclusion, despite some limitations, we believe that the present form of the stochastic model is adequate to model the acceleration dynamics in wall flows relevant for applications. As for the general perspectives, concerning fluid flows, it would be interesting to pursue the analysis of conditional statistics for dispersion studies. Finally, the present model should be the starting point to develop an acceleration-based model for inertial particles.

## REFERENCES

- BIFERALE, L., BODENSCHATZ, E., CENCINI, M., LANOTTE, A. S., OUELLETTE, N. T., TOSCHI, F. & XU, H. 2008 Lagrangian structure functions in turbulence: A quantitative comparison between experiment and direct numerical simulation. *Phys. Fluids* **20** (6), 065103.
- CHIBBARO, S. & MINIER, J.-P. 2011 A note on the consistency of hybrid eulerian/lagrangian approach to multiphase flows. *Intl J. Multiphase Flow* **37** (3), 293–297.
- CHIBBARO, S. & MINIER, J.-P. 2014 *Stochastic methods in fluid mechanics*. Springer.
- DREEBEN, T. D. & POPE, S. B. 1997 Probability density function and reynolds-stress modeling of new near-wall turbulent flows. *Phys. Fluids* **9**, 154.
- DREEBEN, T. D. & POPE, S. B. 1998 Probability density function/Monte Carlo simulation of near-wall turbulent flows. *J. Fluid Mech.* **357**, 141.
- DURBIN, P. A. 1991 Near-wall turbulence closure modeling without damping functions. *Theor. Comp. Fluid Dyn.* **3** (1), 1–13.
- DURBIN, P. A. 1993 A reynolds stress model for near-wall turbulence. *J. Fluid Mech.* **249**, 465–498.
- FOX, R. O. 2003 *Computational models for turbulent reacting flows*. Cambridge Univ. Press.
- GARDINER, C. W. 1990 *Handbook of Stochastic Methods for Physics, Chemistry and the Natural Sciences*. Springer.

- GOTOH, T. & KRAICHNAN, R. H. 2004 Turbulence and tsallis statistics. *Physica D* **193** (1-4), 231–244.
- HOCKNEY, R. W. & EASTWOOD, J. W. 1988 *Computer simulation using particles*. crc Press.
- JENNY, P., POPE, S. B., MURADOGLU, M. & CAUGHEY, D. A. 2001 A hybrid algorithm for the joint pdf equation of turbulent reactive flows. *J. Comput. Phys.* **166** (2), 218–252.
- KLOEDEN, P.E. & PLATEN, E. 1992 *Numerical solution of stochastic differential equations*. Springer-Verlag, Berlin.
- KRASNOFF, E. & PESKIN, R. L. 1971 The langevin model for turbulent diffusion. *Geophys. Astro. Fluid* **2** (1), 123–146.
- LA PORTA, A., VOTH, G. A., CRAWFORD, A. M., ALEXANDER, J. & BODENSCHATZ, E. 2001 Fluid particle accelerations in fully developed turbulence. *Nature* **409** (6823), 1017.
- LAMORGESE, A. G., POPE, S. B., YEUNG, P. K. & SAWFORD, B. L. 2007 A conditionally cubic-gaussian stochastic lagrangian model for acceleration in isotropic turbulence. *J. Fluid Mech.* **582**, 423–448.
- LAUNDER, B. E., REECE, G. JR. & RODI, W. 1975 Progress in the development of a reynolds-stress turbulence closure. *J. Fluid Mech* **68** (3), 537–566.
- LEE, C., YEO, K. & CHOI, J.-IL 2004 Intermittent nature of acceleration in near wall turbulence. *Phys. Rev. Lett.* **92** (14), 144502.
- LUNDGREN, T. S. 1969 Model equation for nonhomogeneous turbulence. *Phys. Fluids* **12** (3), 485–497.
- MARCONI, U. M. B., PUGLISI, A., RONDONI, L. & VULPIANI, A. 2008 Fluctuation–dissipation: response theory in statistical physics. *Phys. Rep.* **461** (4-6), 111–195.
- MENEVEAU, C. 2011 Lagrangian dynamics and models of the velocity gradient tensor in turbulent flows. *Ann. Rev. Fluid Mech.* **43**, 219–245.
- MINIER, J.-P. 2016 Statistical descriptions of polydisperse turbulent two-phase flows. *Phys. Rep.* **665**, 1–122.
- MINIER, J.-P., CHIBBARO, S. & POPE, S. B. 2014 Guidelines for the formulation of lagrangian stochastic models for particle simulations of single-phase and dispersed two-phase turbulent flows. *Phys. Fluids* **26** (11), 113303.
- MINIER, J.-P. & PEIRANO, E. 2001 The PDF approach to turbulent and polydispersed two-phase flows. *Phys. Rep.* **352** (1-3), 1–214.
- MINIER, J.-P., PEIRANO, E. & CHIBBARO, S. 2003 Weak first-and second-order numerical schemes for stochastic differential equations appearing in lagrangian two-phase flow modeling. *Monte Carlo Meth. App.* **9** (2), 93–133.
- MONIN, A. S. & YAGLOM, A. M. 2013 *Statistical fluid mechanics: mechanics of turbulence*. Dover.
- MORDANT, N., CRAWFORD, A. M. & BODENSCHATZ, E. 2004a Experimental Lagrangian acceleration probability density function measurement. *Physica D* **193** (14), 245–251.
- MORDANT, N., DELOUR, J., LÉVEQUE, E., ARNÉODO, A. & PINTON, J.-F. 2002 Long time correlations in lagrangian dynamics: a key to intermittency in turbulence. *Phys. Rev. Lett.* **89** (25), 254502.
- MORDANT, N., LÉVÊQUE, E. & PINTON, J.-F. 2004b Experimental and numerical study of the lagrangian dynamics of high reynolds turbulence. *New J. Phys.* **6** (1), 116.
- MORDANT, N., METZ, P., MICHEL, O. & PINTON, J.-F. 2001 Measurement of lagrangian velocity in fully developed turbulence. *Phys. Rev. Lett.* **87** (21), 214501.
- MURADOGLU, M., POPE, S. B. & CAUGHEY, D. A. 2001 The hybrid method for the pdf equations of turbulent reactive flows: consistency conditions and correction algorithms. *J. Comp. Phys.* **172** (2), 841–878.
- ONSAGER, L. & MACHLUP, S. 1953 Fluctuations and irreversible processes. *Phys. Rev.* **91** (6), 1505.
- OUELLETTE, N.T., XU, H. & BODENSCHATZ, E. 2006 A quantitative study of three-dimensional lagrangian particle tracking algorithms. *Exp. Fluids* **40**.
- PEIRANO, E., CHIBBARO, S., POZORSKI, J. & MINIER, J.-P. 2006 Mean-field/PDF numerical approach for polydispersed turbulent two-phase flows. *Prog. Energy Combust. Sci.* **32** (3), 315–371.
- POPE, S. B. 1981 Transport equation for the joint probability density function of velocity and scalars in turbulent flow. *Phys. Fluids* **24** (4), 588–596.

- POPE, S. B. 1985 Pdf methods for turbulent reactive flows. *Prog. Energy Combust. Sci.* **11**, 119–192.
- POPE, S. B. 1994a Lagrangian pdf methods for turbulent reactive flows. *Ann. Rev. Fluid Mech.* **26**, 23–63.
- POPE, S. B. 1994b On the relationship between stochastic Lagrangian models of turbulence and second-order closures. *Phys. Fluids* **6** (2), 973–985.
- POPE, S. B. 2000 *Turbulent Flows*. Cambridge University Press.
- POPE, S. B. 2002 Stochastic Lagrangian models of velocity in homogeneous turbulent shear flow. *Phys. Fluids* **14** (5), 1696–1702.
- POPE, S. B. 2014 The determination of turbulence-model statistics from the velocity–acceleration correlation. *J. Fluid Mech.* **757**, R1.
- POPE, S. B. & CHEN, Y. L. 1990a The velocity-dissipation probability density function model for turbulent flows. *Phys. Fluids A-Fluid* **2** (8), 1437–1449.
- POPE, S. B. & CHEN, Y. L. 1990b The velocity-dissipation probability density function model for turbulent flows. *Phys. Fluids A-Fluid* **2**, 1437.
- REYNOLDS, A. M. 2003a On the application of nonextensive statistics to Lagrangian turbulence. *Phys. Fluids* **15** (1), L1–L4.
- REYNOLDS, A. M. 2003b Third-order lagrangian stochastic modeling. *Phys. Fluids* **15** (9), 2773–2777.
- SAWFORD, B. L. 1991 Reynolds number effects in lagrangian stochastic models of turbulent dispersion. *Phys. Fluids A-Fluid* **3** (6), 1577–1586.
- SAWFORD, B. L. & GUEST, F. M. 1988 Uniqueness and universality of lagrangian stochastic models of turbulent dispersion. In *8th Symposium on Turbulence and Diffusion*, pp. 96–99.
- STELZENMULLER, N., POLANCO, J. I., VIGNAL, L., VINKOVIC, I. & MORDANT, N. 2017 Lagrangian acceleration statistics in a turbulent channel flow. *Phys. Rev. Fluids* **2** (5), 054602.
- TAVOULARIS, S. & CORRSIN, S. 1981 Experiments in nearly homogenous turbulent shear flow with a uniform mean temperature gradient. part 1. *J. Fluid Mech.* **104**, 311–347.
- VOTH, G. A., LA PORTA, A., CRAWFORD, A. M., ALEXANDER, J. & BODENSCHATZ, E. 2002 Measurement of particle accelerations in fully developed turbulence. *J. Fluid Mech.* **469**, 121–160.
- VOTH, G. A., SATYANARAYAN, K. & BODENSCHATZ, E. 1998 Lagrangian acceleration measurements at large reynolds numbers. *Phys. Fluids* **10** (9), 2268–2280.
- WACŁAWCZYK, M., POZORSKI, J. & MINIER, J.-P. 2004 Probability density function computation of turbulent flows with a new near-wall model. *Phys. Fluids* **16**, 1410–1422.
- WATTEAUX, R., SARDINA, G., BRANDT, L. & IUDICONE, D. 2019 On the time scales and structure of lagrangian intermittency in homogeneous isotropic turbulence. *J. Fluid Mech.* **867**, 438–481.
- WILSON, J. D. & SAWFORD, B. L. 1996 Review of lagrangian stochastic models for trajectories in the turbulent atmosphere. *Bound.-Lay. Meteorol.* **78**, 191–210.
- XU, J. & POPE, S. B. 1999 Assessment of numerical accuracy of pdf/monte carlo methods for turbulent reacting flows. *J. Comp. Phys.* **152** (1), 192–230.
- YEUNG, P. K. & POPE, S. B. 1989 Lagrangian statistics from direct numerical simulations of isotropic turbulence. *J. Fluid Mech.* **207**, 531–586.
- ZAMANSKY, R., VINKOVIC, I. & GOROKHOVSKI, M. 2010 LES approach coupled with stochastic forcing of subgrid acceleration in a high-Reynolds-number channel flow. *J. Turbul.* **11**, N30.