

Elastic post-buckling behaviour of uniformly compressed plates

Citation for published version (APA):

Bakker, M. C. M., Rosmanit, M., & Hofmeyer, H. (2006). Elastic post-buckling behaviour of uniformly compressed plates. In *Proceedings 18th International Specialty Conference on Cold-Formed Steel Structures 2006* (pp. 1-15). Department of Civil, Architectural & Environmental Engineering, University of Missouri-Rolla.

Document status and date:

Published: 01/01/2006

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Elastic post-buckling behavior of uniformly compressed plates

M. C. M. Bakker¹, M. Rosmanit², and H. Hofmeyer³

Abstract

In this paper it is discussed how existing analytical and semi-analytical formulas for describing the elastic-post-buckling behavior of uniformly compressed square plates with initial imperfections, for loads up to three times the buckling load can be simplified and improved. For loads larger than about twice the buckling load the influence of changes in the buckling shape, assumed sinusoidal, cannot be neglected anymore. These changes can be taken into account by using the perturbation approach. The existing and improved formulas are compared to the results of finite element simulations.

Introduction

In this paper the post-buckling behavior of square plates, as shown in fig. 1. is studied. All edges of the plate are simply supported ($u_z = 0$). The edges loaded by the compression force are forced to remain straight, but free to experience Poisson's contraction. The other two edges are free to wave in-plane, thus membrane stresses in the y -direction are equal to zero. These boundary conditions correspond to the boundary conditions usually used for the modeling of compression flanges in thin-walled steel deck sections. The reason to choose these boundary conditions is, that the research described in this paper is part of a research project on the strength of cold-formed deck sections subjected to the combined action of bending moment and concentrated load (see Hofmeyer *et al*, 2001, 2006). The concentrated load causes deformations of the compression flange which may be quite large. Therefore it was decided to study the behavior of uniformly compressed plates for loads up to three times the buckling load, and for initial imperfections up to two times the plate thickness.

¹ Associate Professor in Applied Mechanics, Structural Design Group, Technische Universiteit Eindhoven (TUE), The Netherlands

² Post-doc, Structural Design Group, TUE, The Netherlands

³ Assistant Professor in Applied Mechanics, Structural Design Group, TUE, The Netherlands

When a perfectly flat simply supported plate is subjected to uniaxial compression, the stress distribution is uniform over the plate, until the buckling load is reached. After buckling the stress distribution becomes non-uniform, both over the width b and the length a of the plate. For plates with initial imperfections the stress distribution is non-uniform from the onset of loading. In this paper, it is assumed that the plate has a sinusoidal initial imperfection, with the maximum imperfection w_0 occurring at the center of the plate.

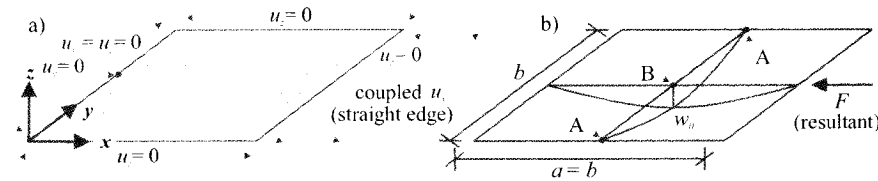


Fig. 1: Schematic view of numerical model:

- Boundary conditions;
- Initial imperfection, load, measures and location of points A and B.

In this paper the following results will be discussed as functions of the out-of-plane deflection w at the center of the plate, where w is the total out-of-plane deflection at the center of the plate, including the initial imperfection w_0 :

- the load F or average stress in x -direction: $\sigma_{x,av} = F/(bt)$;
- the axial shortening u or the average strain in x -direction: $\varepsilon_{x,av} = u/a$;
- membrane stresses $\sigma_{x,A}$ and $\sigma_{x,B}$ in the x -direction at points A and B.

These results can be made dimensionless, by using the buckling stress

$$\sigma_{cr} = K\pi^2 D / (b^2 t), \quad (1)$$

from which we can define the critical strain

$$\varepsilon_{cr} = \sigma_{cr} / E, \quad (2)$$

the critical axial shortening

$$u_{cr} = \varepsilon_{cr} a = (\sigma_{cr} a) / E, \quad (3)$$

and the critical load

$$F_{cr} = bt\sigma_{cr}. \quad (4)$$

In these equations D is the plate flexural rigidity factor:

$$D = Et^3 / (12(1 - \nu^2)), \quad (5)$$

t is the plate thickness, a and b are the length and width of the plate (for a square plate $a = b$), E is the modulus of elasticity and K is the buckling coefficient.

In the following first a small-deflection solution summarized by Rhodes (1982) and a large-deflection solution given by Williams and Walker (1975) are

discussed. Then two new solutions are proposed: a modified large-deflection solution which is consistent with the small-deflection solution and a modified strip model based on the strip model of Calladine (1985). The results of these four different solutions are compared to the results of a parameter study with the finite element program ANSYS.

The results discussed clearly illustrate the existing and newly proposed solutions. Other results (bending moments $m_{x,B}$ and $m_{y,B}$, and membrane stress $\sigma_{y,B}$) are discussed in Rosmanit and Bakker (2006). These results can be used to determine the failure loads of compressed square plates.

Small-deflection solution

The elastic post-buckling behavior of thin plates with initial imperfections is governed by Marguerre's equations; Marguerre (1938). Approximate analytical solutions for these equations can be found by postulating a form for the out-of-plane deflections w . At loads below about twice the buckling load the assumption of an unchanging buckled form gives results of engineering accuracy. According to Rhodes (1982) the solution based on an unchanging sinusoidal buckling shape can be described by the following equations:

$$\frac{F}{F_{cr}} = \frac{\sigma_{x,av}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_F \eta, \quad \text{with} \quad A_F = \frac{A E^*}{K E}; \quad (6)$$

$$\frac{u}{u_{cr}} = \frac{\varepsilon_{x,av}}{\varepsilon_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_u \eta, \quad \text{with} \quad A_u = \frac{A}{K}; \quad (7)$$

$$\frac{\sigma_{x,A}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_{\alpha,A} \eta, \quad \text{with} \quad A_{\alpha,A} = \frac{A E^*}{K E} \frac{\partial \sigma_{x,av}}{\partial \sigma_{x,A}}; \quad (8)$$

where:

$$\eta = \left(\frac{w}{t}\right)^2 - \left(\frac{w_0}{t}\right)^2, \quad (9)$$

A is a coefficient, E^* is an effective Young's modulus and the ratio $\frac{\partial \sigma_{x,av}}{\partial \sigma_{x,A}}$ is a partial variation of the average stress $\sigma_{x,av}$.

Rhodes gives values for the coefficients K , A , $\frac{E^*}{E}$ and $\frac{\partial \sigma_{x,av}}{\partial \sigma_{x,A}}$ depending on the

ratio $e = a/b$ of the buckle half width a and the plate width b of the plate. For the case $e = 1$ (square plates), he gives the following values for a simply supported plate with stress-free unloaded edges:

$K = 4$	$A = 2.31$	$\frac{E^*}{E} = 0.408$	$\frac{\partial \sigma_{x;av}}{\partial \sigma_{x;A}} = 0.26$
---------	------------	-------------------------	---

These values are valid for Poisson's ratio $\nu = 0.3$. The resulting A_F , A_u and $A_{\sigma_{x;A}}$ values are given in Table 1.

Rhodes did not give solutions for the membrane stresses $\sigma_{x;B}$. Using the solution of the Marguerre equations given in Murray (1986) it can be derived that:

$$\frac{\sigma_{x;B}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_{\sigma_{x;B}} \eta. \quad (10)$$

The thus determined $A_{\sigma_{x;B}}$ value is also given in Table 1.

Large-deflection solution

For loads larger than about twice the buckling load the changes in the buckling form must be accounted for. Williams and Walker (1975) gave an explicit solution for the elastic large-deflection analysis of compressed plates. The format of their expressions is based on the perturbation approach, but the value of the constants in these expressions has been determined from numerical simulations (using the finite difference method).

Their solution takes the following form:

$$A_w^{W\&W} \phi + B_w^{W\&W} \phi^3 = \sqrt{\eta}, \quad (11)$$

in which

$$\phi = \sqrt{\frac{F}{F_{cr}} - 1 + \frac{w_0}{w}}, \quad (12)$$

$$\frac{u}{u_{cr}} = \frac{F}{F_{cr}} + A_u^{W\&W} \eta + B_u^{W\&W} \eta^2, \quad (13)$$

$$\frac{\sigma_{x;A}}{\sigma_{cr}} = \frac{F}{F_{cr}} + A_{\sigma_{x;A}}^{W\&W} \eta + B_{\sigma_{x;A}}^{W\&W} \eta^2, \quad (14)$$

$$\frac{\sigma_{x;B}}{\sigma_{cr}} = \frac{F}{F_{cr}} + A_{\sigma_{x;B}}^{W\&W} \eta + B_{\sigma_{x;B}}^{W\&W} \eta^2. \quad (15)$$

For a square plate with simply supported edges, subjected to uniaxial compression with the unloaded edges stress free, Williams and Walker (1975) give the following values for the coefficients (valid for $\nu = 0.3$):

$A_w^{W\&W} = 2.157$ and $B_w^{W\&W} = 0.010$	$A_u^{W\&W} = 0.341$ and $B_u^{W\&W} = 0.013$
$A_{\sigma_{x;A}}^{W\&W} = 0.628$ and $B_{\sigma_{x;A}}^{W\&W} = 0.010$	$A_{\sigma_{x;B}}^{W\&W} = -0.383$ and $B_{\sigma_{x;B}}^{W\&W} = 0.011$

It was found that eqs. (11) to (15) can be rewritten in a format similar to eqs. (6), (7), (8) and (10). Therefore first the coefficient ϕ is solved from eq. (11) (using the Mathematica program), resulting in:

$$\phi = \frac{-2.71765 + 26.4567C^2}{C}, \quad (16)$$

with

$$C = \left(0.0027\sqrt{\eta} + 0.0027\sqrt{148.678 + \eta}\right)^{1/3}. \quad (17)$$

From eqs. (12), (16) and (17) the load F can be solved:

$$\frac{F}{F_{cr}} = \left(\frac{-2.71765 + 26.4567C^2}{C}\right)^2 + 1 - \frac{w_0}{w}. \quad (18)$$

Using a power series expansion for F/F_{cr} about the point $\eta = 0$ and leaving out negligible small terms, this equation can be further simplified to get:

$$\frac{F}{F_{cr}} = \frac{\sigma_{x;av}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_F \eta + B_F \eta^2. \quad (19)$$

Using eq. (19) the eqs. (13) to (15) can be written as:

$$\frac{u}{u_{cr}} = \frac{\varepsilon_{x;av}}{\varepsilon_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_u \eta + B_u \eta^2, \quad (20)$$

$$\frac{\sigma_{x;A}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_{\sigma_{x;A}} \eta + B_{\sigma_{x;A}} \eta^2, \quad (21)$$

$$\frac{\sigma_{x;B}}{\sigma_{cr}} = \left(1 - \frac{w_0}{w}\right) + A_{\sigma_{x;B}} \eta + B_{\sigma_{x;B}} \eta^2. \quad (22)$$

The resulting A and B values are given in Table 1.

Modified large-deflection solution

In the perturbation approach by Williams and Walker (1975), both the coefficients $A^{W\&W}$ and $B^{W\&W}$ were determined from the results of numerical solutions. In this paper it is proposed to take the coefficients A equal to the

coefficients determined in the small-deflection solution of the Marguerre equations, and fitting the coefficient B to the results of numerical simulations, using the format of eqs. (19) to (22) instead of (11) to (15). The resulting coefficients are given in table 1. The coefficients B were fitted for $w_0 = t$ and $F/F_{cr} = 3.0$, because it was found that these specific values yield the best results. For more results see Rosmanit and Bakker (2006).

Modified strip model

Calladine (1985) used a simple two-element model to represent the behavior of the plate (see fig. 2). In this model there are two edge strips with a total width b_{ed} that always remain straight, and one central strip with a width $b_{ce} = b - b_{ed}$ which behaves like a classical Euler column (i.e. it buckles at constant stress, equal to the buckling stress σ_{cr} of the plate). According to this model the total load carried by the plate can be calculated as:

$$F = b_{ed}\sigma_{ed}t + (b - b_{ed})\sigma_{ce}t. \quad (23)$$

This formula can also be written as:

$$\frac{F}{F_{cr}} = \frac{\sigma_{x;av}}{\sigma_{cr}} = \frac{b_{ed}}{b} \frac{\sigma_{ed}}{\sigma_{cr}} + \frac{b - b_{ed}}{b} \frac{\sigma_{ce}}{\sigma_{cr}}. \quad (24)$$

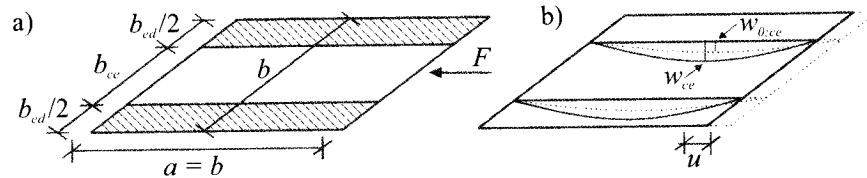


Fig. 2: a) Strip model of the compressed plate by Calladine (1985).
b) Deformed strip model of the compressed plate by Calladine (1985).

The strain of the central strip can be calculated as the sum of the elastic compressive strain and the geometric strain ε_g :

$$\frac{\varepsilon_{ce}}{\varepsilon_{cr}} = \frac{\sigma_{ce}}{E\varepsilon_{cr}} + \frac{\varepsilon_g}{\varepsilon_{cr}} = \frac{\sigma_{ce}}{\sigma_{cr}} + \frac{\varepsilon_g}{\varepsilon_{cr}}, \quad (25)$$

where ε_g is calculated from the shortening u of the central strip due to out-of-plane deflections (in the shape of a half-sine wave):

$$\varepsilon_g = \frac{u}{a} = \frac{\pi^2 (w_{ce}^2 - w_{0,ce}^2)}{4a^2}. \quad (26)$$

The central strip behaves like an Euler column, so that the imperfection amplification factor $\xi = w_{ce}/w_{0,ce}$ can be determined as:

$$\xi = \frac{n}{n+1} \quad \text{with} \quad n = \frac{\sigma_{ce}}{\sigma_{cr}}. \quad (27)$$

Eq. (27) can be used to calculate the stress in the central strip as a function of the out-of-plane deflection of the plate:

$$\frac{\sigma_{ce}}{\sigma_{cr}} = (1 - 1/\xi) = 1 - \frac{w_{0,ce}}{w_{ce}}. \quad (28)$$

Calladine (1985) assumed that the maximum lateral deflections w and w_0 of the plate are equal to the maximum lateral deflections w_{ce} and $w_{0,ce}$ of the central strip. In this paper it will be assumed that the maximum deflection of the central strip can be written as:

$$w_{ce} = \sqrt{C_w} w, \quad (29)$$

and the maximum initial deformation of the central strip can be written as:

$$w_{0,ce} = \sqrt{C_w} w_0. \quad (30)$$

Using eqs. (26) and (28) to (30), eq. (25) can be rewritten to give:

$$\frac{\varepsilon_{ce}}{\varepsilon_{cr}} = \left(1 - \frac{w_0}{w}\right) + \frac{C_w 3(1-\nu^2)b^2}{a^2 K} \eta. \quad (31)$$

It can be shown that for elastic edge strip and elastic central strip behavior the modified strip model and the small-deflection model give identical strains if:

$$C_w = \frac{Aa^2}{3(1-\nu^2)b^2}. \quad (32)$$

Compatibility requires that the strain in the edge strip equals the strain in the central strip:

$$\varepsilon_{ed} = \varepsilon_{ce} = \varepsilon_{x;av}. \quad (33)$$

The stress in the edge strip can be calculated as:

$$\sigma_{ed} = E\varepsilon_{ed}. \quad (34)$$

Using eqs. (28) to (34), eq. (24) can be written as:

$$\frac{F}{F_{cr}} = \left(1 - \frac{w_0}{w}\right) + \frac{b_{ed}}{b} \frac{A}{K} \eta = \left(1 - \frac{w_0}{w}\right) + A_F \eta. \quad (35)$$

Comparing Eq. (35) with Eq. (6) it can be seen that these two equations give identical results when:

$$\frac{b_{ed}}{b} = \frac{E^*}{E} = \frac{A_F}{A_u}, \quad (36)$$

where the coefficients A_F and A_u should be taken from the small-deflection solution.

The modified strip model can also be used in the large-deflection range by using eq. (20) instead of eq. (6) to determine the strains, resulting in:

$$\frac{F}{F_{cr}} = \left(1 - \frac{w_0}{w}\right) + \frac{b_{ed}}{b} (A_u \eta + B_u \eta^2). \quad (37)$$

Eqs. (37) and (19) give identical results if:

$$\frac{b_{ed}}{b} = \frac{A_F \eta + B_F \eta^2}{A_u \eta + B_u \eta^2}, \quad (38)$$

where the coefficients A and B should be taken from the modified large-deflection solution.

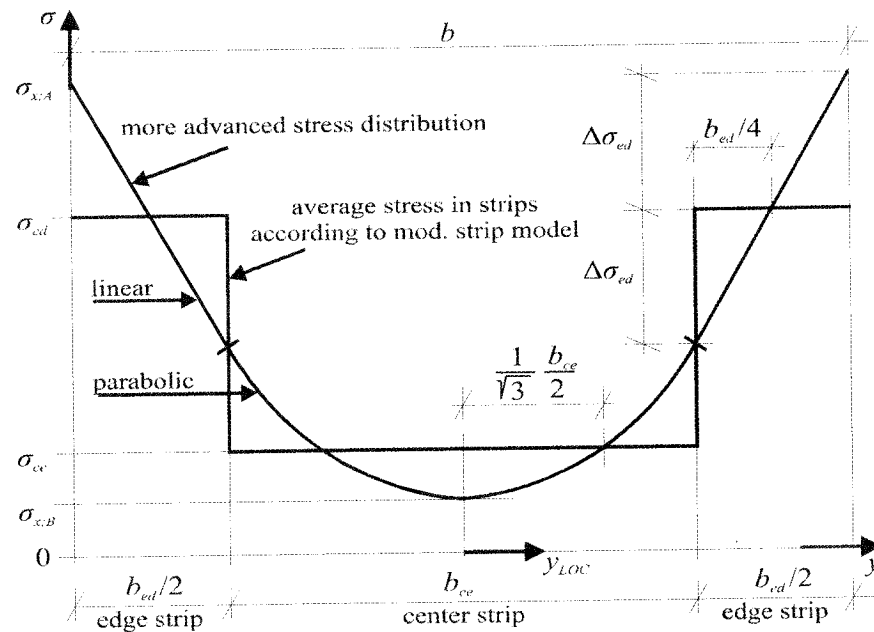


Fig. 3: Two models of stress distribution over the central cross section.

Calladine assumed that the stress in the edge strip equals the stress at the edges of the plate ($\sigma_{ed} = \sigma_{x,A}$). A more accurate edge stress can be calculated by assuming a linear stress distribution over the edge strip and a parabolic stress distribution in the central strip. By taking σ_{ed} and σ_{ce} equal to the average stress over edge and central strip, and requiring that the stresses and the stress gradients are continuous at the border between central strip and edge strip (see fig. 3), the membrane stresses at the edge and center of the plate can be calculated as:

$$\sigma_{x,A} = \sigma_{ed} + \Delta\sigma_{ed}, \quad (39)$$

$$\sigma_{x,B} = \sigma_{ce} - \frac{1}{3} \frac{b_{ce}}{b_{ed}} \Delta\sigma_{ed}, \quad (40)$$

with

$$\Delta\sigma_{ed} = (\sigma_{ed} - \sigma_{ce}) \left(1 + \frac{2}{3} \frac{b_{ce}}{b_{ed}}\right). \quad (41)$$

Note that by using this method the stresses can be calculated without knowing the small-deflection solution for stresses, and without curve fitting on stresses.

Using the Mathematica program and leaving out negligible small terms, eq. (39) and (40) can also be written in the format of the eq. for the stresses according to the modified large-deflection model (eqs. (21) and (22)). The resulting A and B values are given in Table 1.

The modified strip model is an interesting model, also for educational purposes, because it explains the various non-linear effects in the plate. It may be a useful tool for devising simple, rational rules for the design of plates in compression.

Tab. 1: Table of coefficients A and B .

	coefficients	small-deflection	large-deflection	mod. large-deflection	mod. strip
F/F_{cr}	A_F	0.2356	0.2149	0.2356	
	B_F	0	$-0.4283 \cdot 10^{-3}$	$-0.3137 \cdot 10^{-2}$	
u/u_{cr}	A_u	0.5775	0.5559	0.5775	
	B_u	0	$0.1257 \cdot 10^{-1}$	$0.7799 \cdot 10^{-2}$	
$\sigma_{x,A} / \sigma_{cr}$	$A_{\sigma x,A}$	0.9062	0.8429	0.9062	0.8710
	$B_{\sigma x,A}$	0	$0.9572 \cdot 10^{-2}$	$-0.2608 \cdot 10^{-2}$	$0.5223 \cdot 10^{-2}$
$\sigma_{x,B} / \sigma_{cr}$	$A_{\sigma x,B}$	-0.1676	-0.1681	-0.1676	-0.1420
	$B_{\sigma x,B}$	0	$0.1057 \cdot 10^{-1}$	$0.4489 \cdot 10^{-2}$	$-0.5189 \cdot 10^{-2}$

Dependency of coefficients A and B on Poisson's coefficient

The coefficients A and B given in table 1, are determined for plates with $\nu = 0.3$. Looking at a purely theoretical perturbation solution given by Walker (1969), it can be derived (Rosmanit and Bakker (2006)) that for plates with a coefficient of Poisson ν different from 0.3, the coefficients A and B can be calculated as:

$$A(\nu) = A \left(\frac{1-\nu^2}{1-0.3^2} \right) \tag{42}$$

and

$$B(\nu) = B \left(\frac{1-\nu^2}{1-0.3^2} \right)^2 \tag{43}$$

Finite element simulations

With the finite element program ANSYS 8.1 a numerical parameter study has been carried out. Using eqs. (1), (2), (3), (4), (19) and (20) it can be show that for elastic calculations only one specific geometry of compressed plate (with one critical stress) is needed. Therefore the plate length and width, plate thickness, Young's modulus and Poisson's coefficient were kept constant in the parameter study: $a = b = 99.8$ mm, $t = 0.7$ mm, $E = 210000$ N/mm², $\nu = 0.3$; resulting in a critical stress $\sigma_{cr} = 37.5$ N/mm².

All boundary conditions, axis convention and the specific points on the plate are presented in fig.1. The used initial imperfections were $0.01t$, $0.1t$, $0.25t$, $0.5t$, $1.0t$, $1.5t$ and $2.0t$. In the model rectangular elements Shell43 were used. The element has six degrees of freedom at each node: translations in the nodal x -, y -, and z -directions and rotations along the nodal axes. Calculations with this element are based on Mindlin plate theory. The deformation shapes are linear in both in-plane directions. The mesh density for each plate was 40×40 elements. In the calculations the effect of large deformations was included. The numerical analyses were performed for loads up to three times the buckling load.

Comparison of results

Graphical and numerical comparisons of a representative selection of results are shown in figs. 4-7, respectively at table 2. In this paper only the relations mentioned in the introduction were compared. For more results see Rosmanit and Baker (2006).

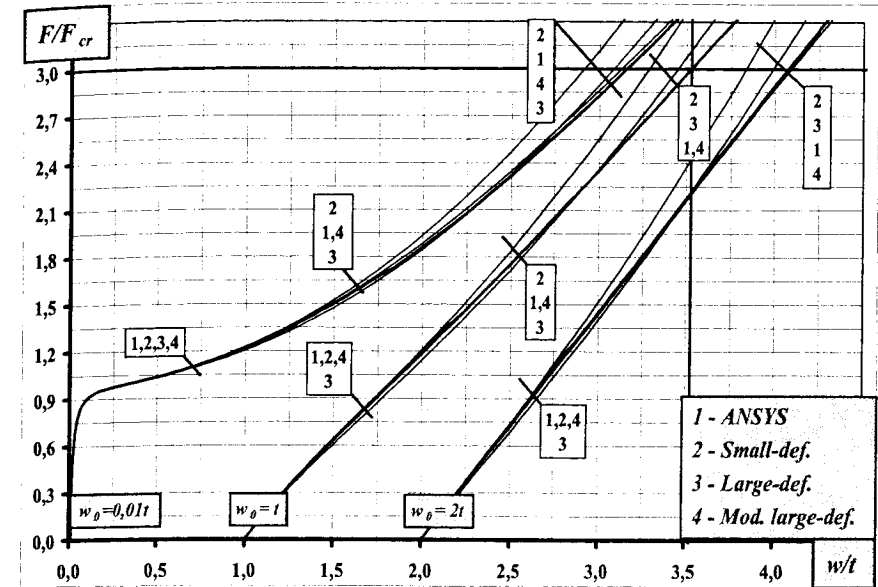


Fig. 4: Comparison of theories: F/F_{cr} and w/t relation.

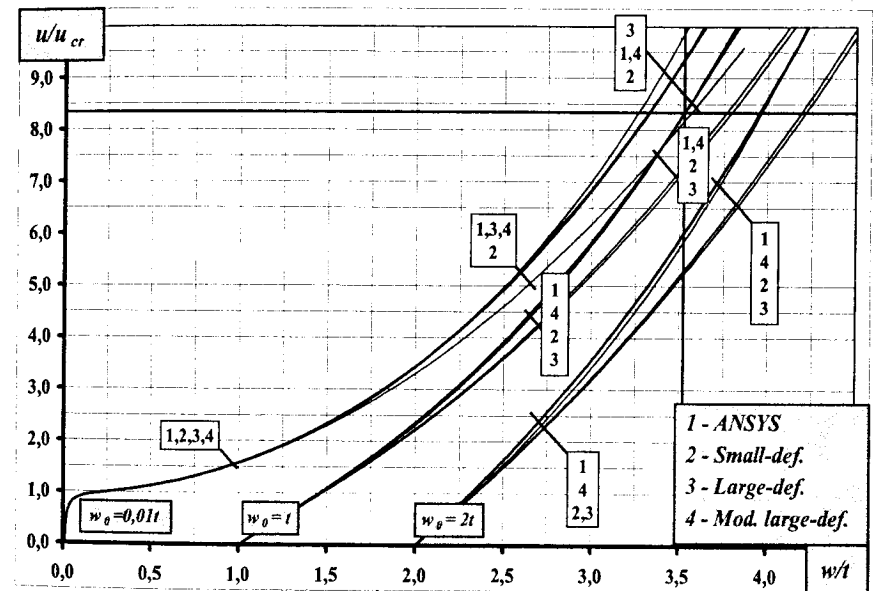


Fig. 5: Comparison of theories: u/u_{cr} and w/t relation.

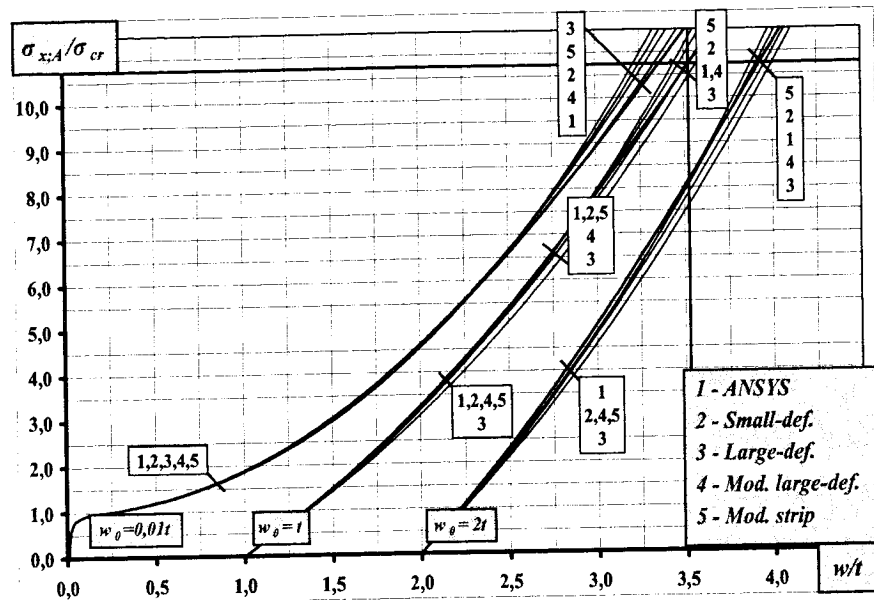


Fig. 6: Comparison of theories: $\sigma_{x:A}/\sigma_{cr}$ and w/t relation.

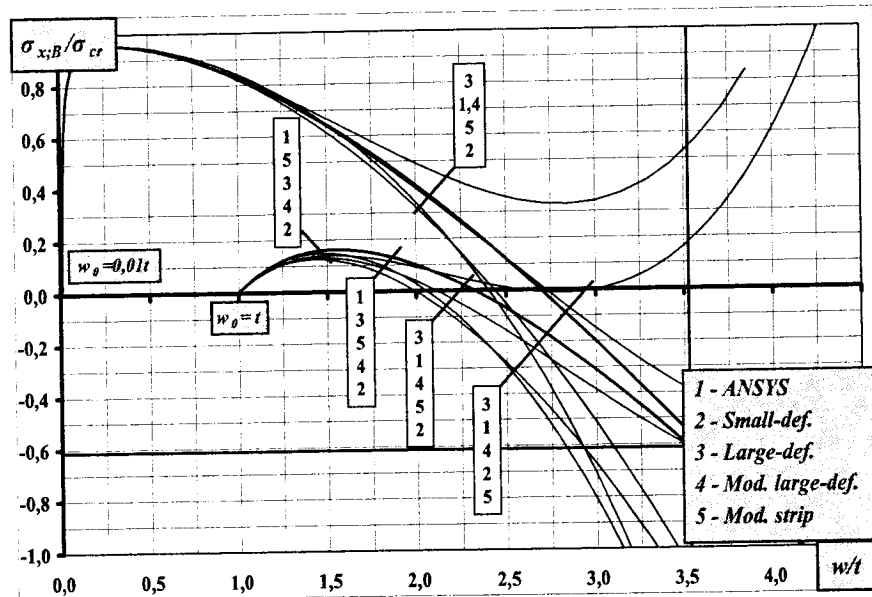


Fig. 7: Comparison of theories: $\sigma_{x:B}/\sigma_{cr}$ and w/t relation.

Tab. 2: Comparison of theories: The ratio's F/F_{cr} when the first 5% error occurs – safe validity of the theory.

variable	theory method	initial deflection						
		0.01t	0.10t	0.25t	0.50t	1.00t	1.50t	2.00t
F/F_{cr}	small-def.	2.16	2.14	2.09	2.03	1.90	1.77	1.63
	large-def.	3.00	3.00	3.00	3.00	3.00	3.00	3.00
	mod. large-def.	3.00	3.00	3.00	3.00	3.00*	3.00*	3.00*
u/u_{cr}	small-def.	2.10	2.05	1.95	1.76	1.20	0.35	0.00
	large-def.	3.00	1.77	1.66	1.42	0.80	0.00	0.00
	mod. large-def.	3.00	3.00	3.00	3.00	3.00	3.00	3.00*
$\sigma_{x:A}/\sigma_{cr}$	small-def.	3.00	3.00	3.00	3.00	3.00	3.00	3.00
	large-def.	2.91	3.00	3.00	3.00	0.48	0.00	0.00
	mod. large-def.	3.00	3.00	3.00	3.00	3.00	3.00	3.00
$\sigma_{x:B}/\sigma_{cr}$	small-def.	1.49	1.39	1.20	0.82	0.00	0.00	0.00
	large-def.	1.54	1.48	1.40	1.30	0.00	0.00	0.00
	mod. large-def.	2.38	2.38	1.58	1.02	0.00	0.00	0.00
F/F_{cr} according to first 5% error	mod. strip	1.71	1.63	1.48	1.21	0.50	0.00	0.00

- When the first 5% error does not occur in the ratio $F/F_{cr} = 3.0$, then it is 3.0.
 * Although errors are more than 5% during the first part of the range observed, they are less than 5% for the most relevant part (at least $1.14 < F/F_{cr} < 3.00$).

Discussion

The comparison of results shows that the modified large-deflection method gives the most accurate results for the ratio's F/F_{cr} and u/u_{cr} . For small imperfections the small-deflection solution gives results within 5% error for loads up to about twice the buckling load, but for large initial imperfections the 5% error occurs at lower loads. With respect to the membrane stresses $\sigma_{x:A}$, it is surprising to see that the small-deflection solution gives better results than the large-deflection solution, even for large initial imperfections and/or large deflections. The modified large-deflection solution does not really improve the small-deflection solution; the modified strip method is slightly less accurate. The accuracy of the membrane stress $\sigma_{x:B}$ is less than the accuracy of the membrane stress $\sigma_{x:A}$, for all models, and deteriorates with increasing initial imperfection. Thus as a final result, the modified large-deflection model gives the best results, followed by the modified strip method.

Conclusions

By rewriting the equations of the large-deflection solution given by Williams and Walker in a format similar to the format of the small-deflection solution

given by Rhodes these equations become easier to use. A more consistent large-deflection solution can be found by using the coefficients A from the small-deflection model, and fitting only the coefficients B to the results of finite element simulations. The thus determined modified large-deflection solution is more accurate than the large-deflection solution and gives results of engineering accuracy for the ratios F/F_{cr} , u/u_{cr} and $\sigma_{x,A}/\sigma_{cr}$ for loads up to three times the buckling load, and initial imperfections up to two times the plate thickness. For the ratio $\sigma_{x,B}/\sigma_{cr}$ engineering accuracy is obtained for smaller load ranges, which rapidly decrease with increasing initial imperfection.

The modified strip model, based on the strip model by Calladine is identical to the modified large-deflection solution, in the prediction of the ratios F/F_{cr} and u/u_{cr} . Using this model membrane stresses in point A and B can be calculated without fitting coefficients to stress results from numerical simulations. As such, the modified strip model can presumably play an important role in future web-crippling design rules.

It should be checked whether the proposed modified large-deflection method and modified strip model can also be used for other plate geometries, and other boundary conditions.

Appendix. – Acknowledgment

This research is part of an Aspasia programme and was supported by the Technology Foundation STW, applied science division of NWO and the technology programme of the Ministry of Economic Affairs. The help of Prof. J.G.M. Kerstens and Prof. H.H. Snijder to this work is highly appreciated.

Appendix. – References

- Calladine, C.R. (1985): The Strength of Thin Plates in Compression. In: Aspects of the Analysis of the Plate Structures: a volume in honour of Wittrick, W.H. Edited by Dawe, D.J., Horsinton, R.W., Little, A.G., Clarendon Press, Oxford.
- Hofmeyer, H., Kerstens, J.G.M., Snijder, H.H. and Bakker, M.C.M. (2001): New prediction model for failure of steel sheeting subject to concentrated load (web crippling) and bending. Thin Walled Structures, Vol. 39, Br. 9, pp. 773-796.
- Hofmeyer, H., Rosmanit, M., Bakker, M.C.M. (2006): Parameter study for first-generation sheeting failure using a theoretical and a FE model, 18th International Specialty Conference on Cold-Formed Steel Structures, Orlando, Florida.

- Marguerre, K. (1938): Zur Theorie der gekrümmter Platte grosser Formänderung. Proc. 5th Int. Congress for Applied Mechanics, Cambridge, UK.
- Murray, N.W. (1986): Introduction to the Theory of Thin-Walled Structures, Oxford University Press, New York
- Rhodes, J. (1982): Effective Widths in Plate Buckling, In: Developments in Thin-Walled Structures-1, Edited by Rhodes, J. and Walker, A.C., Applied Science publishers, London.
- Rosmanit, M., Bakker, M.C.M. (2006): Report on Elastic Post-Buckling Behaviour of Uniformly Compressed Plates, Res. Report O-2006.02, Eindhoven.
- Walker, A.C. (1969): The Post-Buckling Behaviour of Simply Supported Square Plates, The Aeronautical Quarterly, Volume XX.
- Williams, D.G., Walker, A.C. (1975): Explicit Solutions for the Design of Initially Deformed Plates Subjected to Compression, Proc. Instn. Civ. Engrs. Part 2.59, pages 763-787.

Appendix. – Notation

- A_i, B_i coefficients
- D plate flexural rigidity factor, see (5)
- E Young's modulus of elasticity
- E^* effective Young's modulus of elasticity by Rhodes (1982)
- F load – compression longitudinal force
- F_{cr} critical load, see (4)
- K buckling coefficient
- $m_{i,j}$ moment around axis i (x - or y -) at point j (A or B), see fig. 1
- a, b plate length/width; for a square plate $a = b$
- b_{ce}, b_{ed} width of the centre respectively edge strip, see figs. 2 and 3
- t plate thickness
- u, u_{cr} axial shortening respectively critical axial shortening
- w, w_0 total respectively initial out-of-plane deflection at the centre of the plate
- $\varepsilon_{ce}, \varepsilon_{ed}$ average strain at centre respectively edge strip according to σ_{ce}, σ_{ed}
- ε_{cr} critical strain of the plate, see (2)
- ε_g geometric strain, see (26)
- $\varepsilon_{x,av}$ average strain in x -direction, $\varepsilon_{x,av} = u/a$
- η second degree relation of w_0 and w , see (9)
- ν Poisson's ratio
- ζ imperfection amplification factor, see (27)
- σ_{ce}, σ_{ed} average membrane stress at centre respectively edge strip, see fig. 3
- σ_{cr} critical stress of the plate, see (1)
- $\sigma_{i,j}$ membrane stress on direction i at point j , see fig. 1
- $\sigma_{x,av}$ average stress in x -direction, $\sigma_{x,av} = F/(bt)$