

Stability analysis of viscoelastic fountain flows

Citation for published version (APA):

Bogaerds, A. C. B., Peters, G. W. M., Hulsen, M. A., & Baaijens, F. P. T. (2002). *Stability analysis of viscoelastic fountain flows*. Poster session presented at Mate Poster Award 2002 : 7th Annual Poster Contest.

Document status and date:

Published: 01/01/2002

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Stability Analysis of Viscoelastic Fountain Flows

Arjen Bogaerds, Gerrit Peters, Martien Hulsen and Frank Baaijens
 Eindhoven University of Technology, Department of Mechanical Engineering

Introduction

The occurrence of unstable secondary flows during the injection molding process can result in severe surface defects of the final polymer products. These defects are often referred to as ‘flow marks’ or ‘tiger stripes’ and have been observed in many polymer systems including polypropylene (fig. 1) [1].

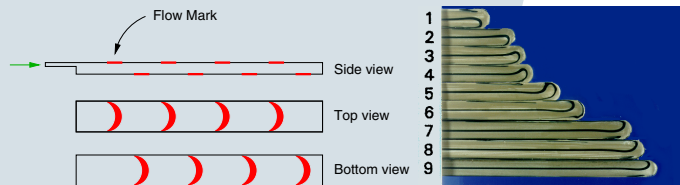


Figure 1: Flow marks in a model injection molding flow (left). Short shot experiments by M. Bulters and A. Schepens [1] using a two-color injection molding technique (right)

Important questions are:

- What are the critical flow conditions?
- How does this relate to the polymer rheology?

Numerical Tools

The stability behavior of the fountain flows is analyzed using a transient finite element method. Direct time integration of the linearized governing equations yield the growth (or decay) rates of randomly imposed perturbations. Essential features of the finite element technique are [2]:

- Stable & efficient time integration (Θ -scheme)
- Perturbations of the domain and the free surface

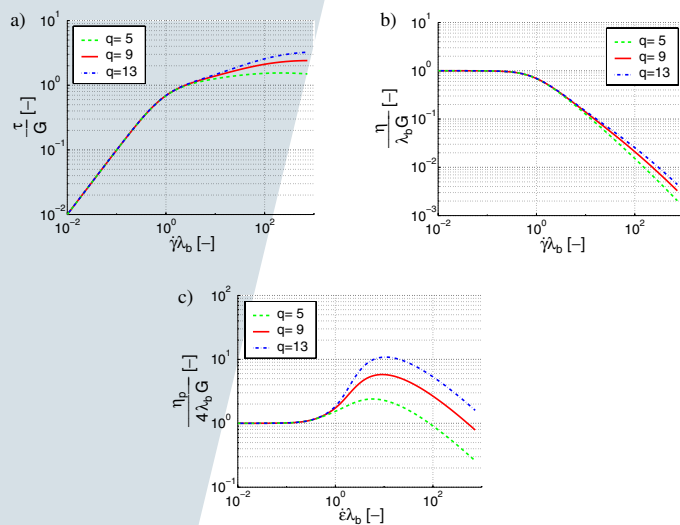


Figure 2: Steady state viscometric functions a) shear stress – shear rate b) viscosity – shear rate and c) planar elongational viscosity – extension rate, for different numbers of arms q and $r = 2$.

Constitutive Behavior

The eXtended Pom-Pom (XPP) model of Verbeeten *et al.* [3] is used to represent the dynamic behavior of the polymer melts. In order to investigate the influence of the fluid rheology on the onset of the instability, different sets of nonlinear data are selected. Viscometric functions of the XPP model for these sets of data are shown in figure 2.




Figure 3: Computed growth rates of randomly imposed perturbations of the fountain flows.

Stability of Fountain Flows

It is found that a linear instability sets in at $We \approx 2.5$ for $(r, q) = (2, 5)$ and $We \approx 2.8$ for $(r, q) = (2, 9)$ (fig. 3). The occurrence of instability, as a function of the dimensionless processing rate (We), is delayed when the number of arms in the XPP model is increased. This has a major effect on the extensional properties of the fluid which might indicate that the flows can be stabilized by fluids with increased strain hardening.

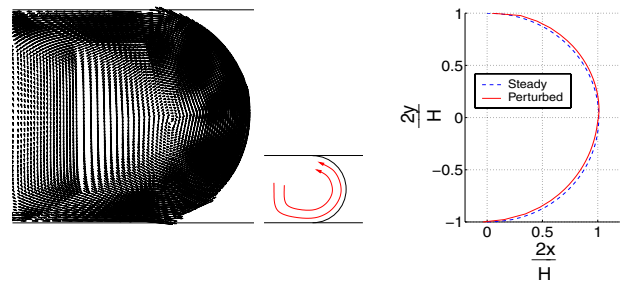


Figure 4: Results of the linear stability analysis for an XPP fluid for $(r, q) = (2, 5)$ and $We = 2.5$. Shown are the perturbation velocity near the free surface (left) and the linearly perturbed shape of the free surface (right).

After exponential growth of the perturbation, a swirling flow near the fountain flow surface is obtained which is consistent with the experimental observations (fig. 4).

References:

[1] M. BULTERS, A. SCHEPENS: *Proceedings of the 16th Annual Meeting of the Polymer Processing Society, Shanghai (2000)*.
 [2] A.C.B. BOGAERDS *et al.*: *J. NON-NEWT. FLUID MECH.*, SUBMITTED (2002)
 [3] W.M.H. VERBEETEN *et al.*: *J. RHEOL.* 45(4), 823-844 (2001)