

Multi-level modulation formats for optical access networks

Citation for published version (APA):

Sotiropoulos, N., Koonen, A. M. J., & Waardt, de, H. (2009). Multi-level modulation formats for optical access networks. In S. Beri, P. Tassin, G. Craggs, X. Leijtens, & J. Danckaert (Eds.), *Proceedings 14th Annual Symposium of the IEEE Photonics Benelux Chapter, 5-6 November 2009, Brussels, Belgium* (pp. 89-92). Brussels University Press.

Document status and date:

Published: 01/01/2009

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Multi-level modulation formats for optical access networks

N. Sotiropoulos,¹ A.M.J. Koonen,¹ and H. de Waardt¹

¹ Technische Universiteit Eindhoven, COBRA Research Institute, Den Dolech 2, P.O. Box 513 5600MB Eindhoven, The Netherlands

There is growing demand for higher bit rates at the access domain. The most promising and future-proof technology for providing end users with high bandwidth is Passive Optical Networks (PON). In order to provide these higher bit rates, the use of multi-level modulation has been proposed. By moving to multi-level signals, low speed electronics can be used, with some added complexity to the optical part. This paper investigates the performance of incoherent multi-level modulation formats (in particular QAM and DQPSK) in bidirectional PONs. The simulation results indicate that incoherent QAM is a strong candidate for future PONs.

Introduction

The explosive growth of the Internet has led to an increased demand for broadband access by business and home users. This demand has been met up to now using a variety of transmission media, but there is a consensus that the only ‘future-proof’ solution is Passive Optical Networks (PON). The most important types of PONs are Time Division Multiplexing (TDM) PON and Wavelength Division Multiplexing (WDM) PON. In TDM PON, a common feeder fiber is split in individual fibers close to the users’ premises, who are granted access to the fiber for a fraction of the time. Contrary to a TDM PON, in a WDM PON there is no bandwidth sharing, since each user uses a different pair of wavelengths, separated and combined in an Arrayed Waveguide Grating (AWG) (de)multiplexer [1].

In the physical layer, there is a resurgence of interest on multi-level modulation formats. In multi-level modulation using M levels, each symbol carries $\log_2 M$ bits. This means that for a given bit rate, the symbol rate will be $\log_2 M$ times lower. For access networks, this reduction of the symbol rate allows the use of cheaper electronic and optoelectronic components, helping to realize cost-effective PONs, and lowers the congestion probability. Multi-level formats can be demodulated either coherently or incoherently. In the first case, a local oscillator (a laser) is used in the receiver to track the phase of the received signal. In incoherent detection, no local oscillator is used and only the phase difference between the received symbols is known. In this case, the transmitted data must be differentially coded. Since complexity should be kept at a minimum we have focused on incoherent modulation formats.

The two most popular multi-level modulation formats are Differential Quaternary Phase Shift Keying (DQPSK) and Quadrature Amplitude Modulation (QAM). In DQPSK, two bits are encoded in one of the four possible phase differences between two consecutive symbols. Combined with Polarization Multiplexing (POLMUX), four bits can be

transmitted during each symbol period. In incoherent 16QAM, four bits are encoded in the amplitude and in the phase difference between consecutive symbols. In Sections II and III of the paper, the transmitter and receiver configurations that can produce and detect DQPSK and QAM signals are examined, respectively. In Section IV, the results from simulations regarding bidirectional transmission of DQPSK and QAM signals are shown. Finally, Section V provides some conclusions.

Transmitter structures

The basic building block of a DQPSK/QAM transmitter is an I/Q modulator [2]. The most straightforward implementation is a nested pair of Mach-Zehnder modulators, followed by a $\pi/2$ phase shift in the Quadrature phase component. With this method, NRZ signals are created. If RZ signals are preferable, an extra MZ modulator driven by a sine wave with 50% duty cycle can perform the RZ carving.

As already mentioned, incoherent communication requires differential coding of the transmitted data. The coding is performed in the electrical domain and is different for the two modulation formats in question. For DQPSK, the differential coding can be implemented with digital logic directly at the output bit stream of the PRBS. Then, NRZ pulses are created by the coded bit sequence, which are used to drive the MZ modulators. For incoherent QAM, the encoding is implemented in the analog domain [3]. Every four consecutive bits are mapped into a 16QAM symbol, denoted $a_k e^{j\phi_k}$. To enable differential detection, the phase pre-integration technique is used, adding the phase of the previous symbol to the current one. The transmitted symbol, therefore, becomes $a_k e^{j(\phi_k + \phi_{k-1})}$. The QAM symbol is then split into the I and Q components and is pre-distorted, to compensate for the nonlinear transfer function of the MZ modulator. The resulting I and Q optical components in each case are then combined to form the optical QAM or DQPSK signal. The schematic of the DQSK transmitter configuration used can be seen in Fig. 1, and the QAM transmitter in Fig. 2.

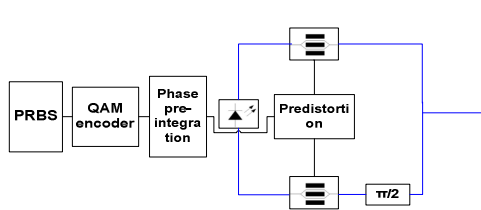


Figure 1 QAM transmitter

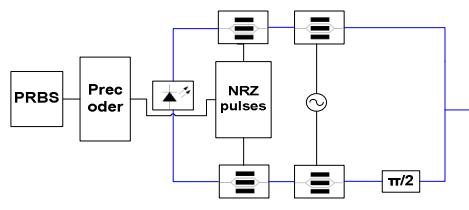


Figure 2 DQPSK RZ transmitter

Receiver structures

Incoherent modulation formats use interferometric-based demodulation ([2], [3]). An interferometric receiver consists of two asymmetric Mach-Zehnder interferometers, followed by two balanced detectors. Each MZ interferometer has a time delay equal to one symbol period and a phase shift of $\theta, \theta - 90^\circ$ respectively, with θ depending on the modulation format. For QAM, a separate photodiode is needed to produce an estimate of

the amplitude of the received signal. If the received signal is denoted as $r(t)e^{j\phi(t)} + n(t)$, the outputs of the balanced detectors are:

$$i_I(t) = \frac{r(t)r(t-T)}{4} \cos[\phi(t) - \phi(t-T) - \theta] + n_I(t)$$

$$i_Q(t) = \frac{r(t)r(t-T)}{4} \cos[\phi(t) - \phi(t-T) - \theta + 90^\circ] + n_Q(t)$$

For DQPSK demodulation, $\theta = 45^\circ$ and $r(t) = r(t-T) = A$. That means that the signs of the two output currents can be directly mapped to the detected pair of bits. The DQPSK receiver is shown in Fig. 3. For QAM, $\theta = 0^\circ$ and the output currents are proportional to $\cos \Delta\phi, \sin \Delta\phi$, where $\Delta\phi$ is the phase difference between the current and the previously received symbol. Using these two metrics, the inverse tangent is computed and an estimation of the phase difference is produced, which is an estimation of the phase of the original QAM symbol, before the pre-integration operation. Since amplitude estimation is also available, from the single photodiode, the transmitted symbol can be reconstructed at the receiver. A QAM decoder then maps the complex symbol into the four corresponding bits. The QAM receiver can be seen in Fig. 4.

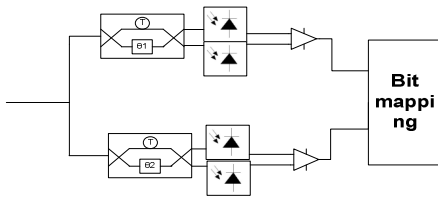


Figure 3 DQPSK receiver

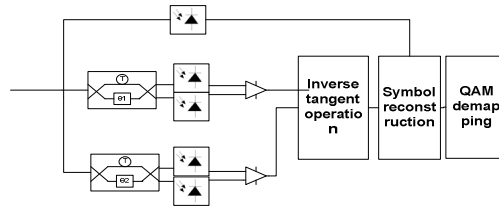


Figure 4 QAM receiver

Simulations

In order to evaluate the performance of multi-level modulation formats in the context of access networks, VPI was used to model bidirectional transmission over 20 km of fiber in hybrid TDM/WDM topology. The system model can be seen in Fig. 5. The modulated signal is multiplexed with an unmodulated carrier, which is modulated at the Optical Network Unit (ONU). After transmission over 20 km of SSM fiber and a WDM demultiplexer, an attenuator models the losses caused by the TDM splitter. In the ONU, a demultiplexer separates the data signal from the unmodulated carrier. The data signal is then demodulated and the BER is estimated. The unmodulated carrier is amplified, filtered and modulated by the upstream data. The upstream signal undergoes the same operations as the downstream data signal and is received at the Central Office (CO). In the DQPSK-POLMUX case, the transmitter and receiver indicated in Fig. 5 consist of two identical (de)modulators who use two orthogonal polarizations. Polarization splitters and combiners and polarization control are also necessary for this scheme.

The performance of the two modulation formats was evaluated by constructing the BER vs. the received power curves. For the DQPSK-POLMUX format, a preamplifier was

