

A micromechanical model for the elastic properties of semi-crystalline polymers

Citation for published version (APA):

Sedighiamiri, A., & Dommelen, van, J. A. W. (2008). *A micromechanical model for the elastic properties of semi-crystalline polymers*. Poster session presented at Mate Poster Award 2008 : 13th Annual Poster Contest.

Document status and date:

Published: 01/01/2008

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.



A Micromechanical Model for the Elastic Properties of Semi-crystalline Polymers

A. Sedighiamiri, J.A.W. van Dommelen

Eindhoven University of Technology, Department of Mechanical Engineering

Introduction

Elastic moduli of semi-crystalline polymers are important properties and difficult to predict due to their dependence on many factors, such as: molecular weight, cooling rate, annealing, etc. To better design products, it is of significance to accurately predict these properties as a function of the microstructural morphology and crystallinity.

Micromechanical Model

Semi-crystalline polymers can be modeled as two-phase composites, the crystalline phase and the amorphous phase. By using a layered micromechanical model, overall properties can be predicted as a function of crystallinity (figure 1).

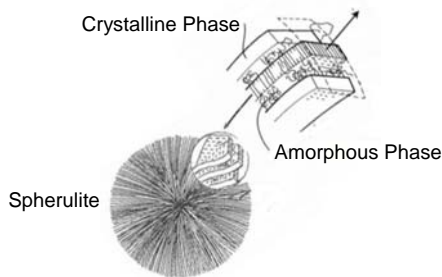


Figure 1: Morphology of a spherulitic semi-crystalline polymer [1].

It is shown that a three-phase model can better predict the elastic modulus of semi-crystalline polymers [2], as a two phase model ignores the effect of the inter-phase, which has properties between the crystalline and amorphous phases.

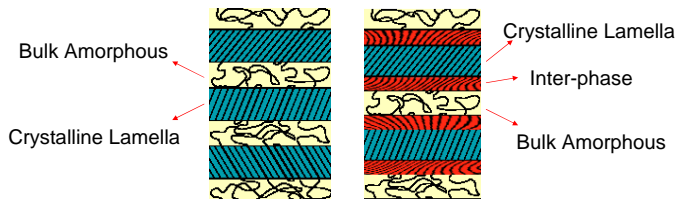


Figure 2: Schematic of the two-phase and three-phase models

$$\text{Interface conditions: } \begin{cases} \sigma^a \cdot \bar{n} = \sigma^c \cdot \bar{n} = \sigma^l \cdot \bar{n} \\ \bar{x}_i \cdot \epsilon^a \cdot \bar{x}_j = \bar{x}_i \cdot \epsilon^c \cdot \bar{x}_j = \bar{x}_i \cdot \epsilon^l \cdot \bar{x}_j \end{cases}$$

The three-phase model also incorporates crystalline lamellar and inter-phase thicknesses, while no length scales were included in the two-phase model.

Homogenization Methods

Three methods have been used for obtaining the overall properties: Voigt, Reuss and Voigt-Reuss-Hill average.

Results and Discussion

In this section, a two-phase and a three-phase composite inclusion model are used to obtain the effective behavior of HDPE. The spherulitic structure of HDPE is presented by an aggregate of 120 inclusions with random orientation of crystallographic directions and interface normals (figure 3). Monte-Carlo simulation results show that $\delta^r = 1$ to 2 nm (inter-phase thickness) while $\delta^c = 6.8$ nm (crystal thickness) [2].

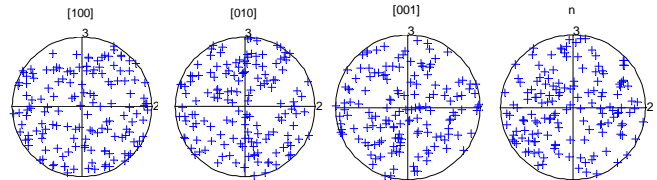


Figure 3: Equal area projection pole figures of random orientation of crystallographic directions and interface normals

It can be seen in figure 4 that a three-phase model agrees much better with experiments than a two phase model.

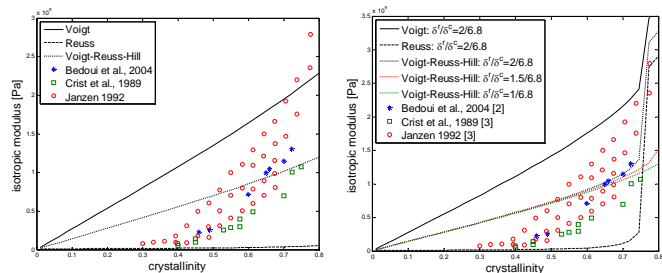


Figure 4: Predicted Young's modulus using a two-phase model (left) and a three-phase model with different inter-phase thickness (right).

Conclusions and Future Work

- ✓ The properties of semi-crystalline polymers can better be predicted if a three-phase composite inclusion model is used.
- ✓ Hybrid interaction models will be used to form an intermediate approach between the upper bound Voigt and the lower bound Reuss models.

References

[1] L. Lin, A.S. Argon, Journal of Materials Science, 29 (1994): 294-323
 [2] T.N. Pham, C.L. Tucker, Polymer processing society 24th annual meeting, 2008, Italy
 [3] X. Guan, R. Pitchumani, Polymer Engineering and Science, 44(3) (2004): 433-451.