

Audio device for improved sound reproduction

Citation for published version (APA):

Aarts, R. M. (2012). Audio device for improved sound reproduction. (Patent No. *US8189809*).

Document status and date:

Published: 29/05/2012

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.



US008189809B2

(12) **United States Patent**
Aarts

(10) **Patent No.:** **US 8,189,809 B2**

(45) **Date of Patent:** **May 29, 2012**

(54) **AUDIO DEVICE FOR IMPROVED SOUND REPRODUCTION**

(58) **Field of Classification Search** None
See application file for complete search history.

(75) Inventor: **Ronaldus Maria Aarts**, Eindhoven (NL)

(56) **References Cited**

(73) Assignee: **Koninklijke Philips Electronics N.V.**,
Eindhoven (NL)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1334 days.

5,388,992	A	2/1995	Franklin et al.
5,528,697	A	6/1996	Saito
6,298,141	B1	10/2001	Hickman et al.
6,628,798	B2	9/2003	Teshima et al.
6,809,635	B1	10/2004	Kaaresoja
2004/0252857	A1	12/2004	Lewis

(21) Appl. No.: **11/815,108**

FOREIGN PATENT DOCUMENTS

(22) PCT Filed: **Jan. 30, 2006**

EP	1053796	A1	11/2000
EP	1170709	A2	1/2002
EP	1222971	A1	7/2002
WO	W02005027570	A1	3/2005
WO	WO2005/027570	A1	* 3/2005

(86) PCT No.: **PCT/IB2006/050318**

§ 371 (c)(1),
(2), (4) Date: **Jul. 31, 2007**

* cited by examiner

(87) PCT Pub. No.: **WO2006/082553**

PCT Pub. Date: **Aug. 10, 2006**

Primary Examiner — Charles Garber
Assistant Examiner — Yasser Abdelaziez

(65) **Prior Publication Data**

US 2010/0046787 A1 Feb. 25, 2010

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Feb. 3, 2005 (EP) 05300086


An audio device includes a first audio path with a loudspeaker for reproducing an audio signal, and a second audio path. The second audio path includes in series a band-pass filter for filtering an audio signal, a detector for detecting the amplitude of the band-pass filtered audio signal, a multiplier for multiplying a periodic signal by the amplitude of the band-pass filtered audio signal, and a vibration device for reproducing the multiplied periodic signal. The frequency of the periodic signal is substantially equal to the resonance frequency of the vibration device.

8 Claims, 1 Drawing Sheet

(51) **Int. Cl.**

H04B 15/00 (2006.01)

(52) **U.S. Cl.** **381/94.1; 381/92; 381/93; 381/94.2; 381/94.3; 381/94.9; 381/95; 381/96; 381/98; 381/99; 381/101; 381/102; 381/103; 381/396**

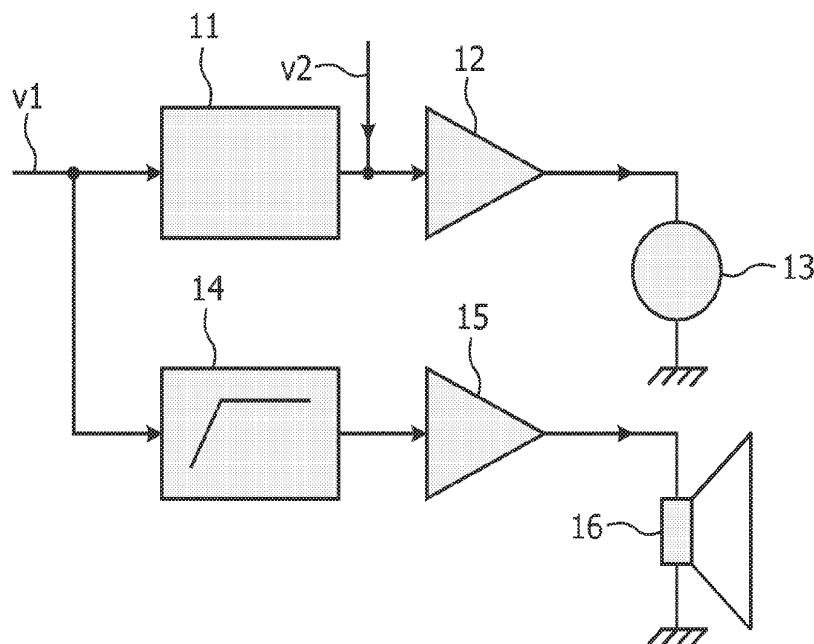

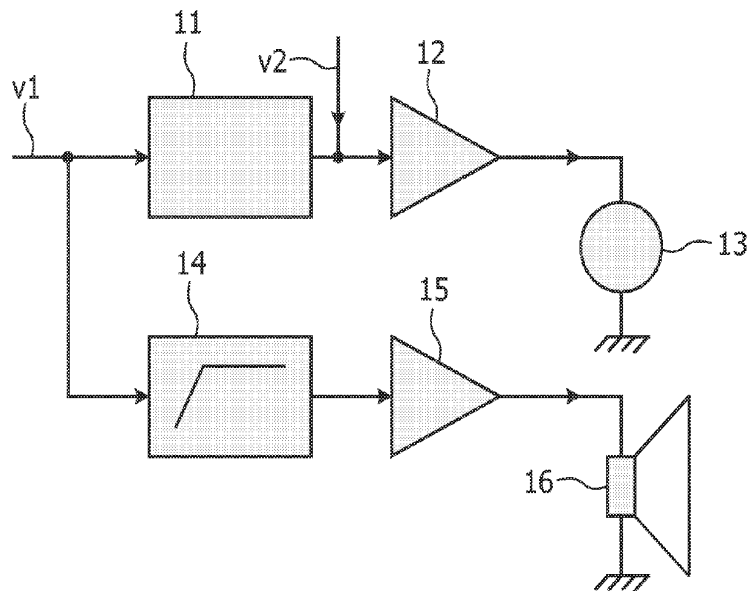


FIG. 1

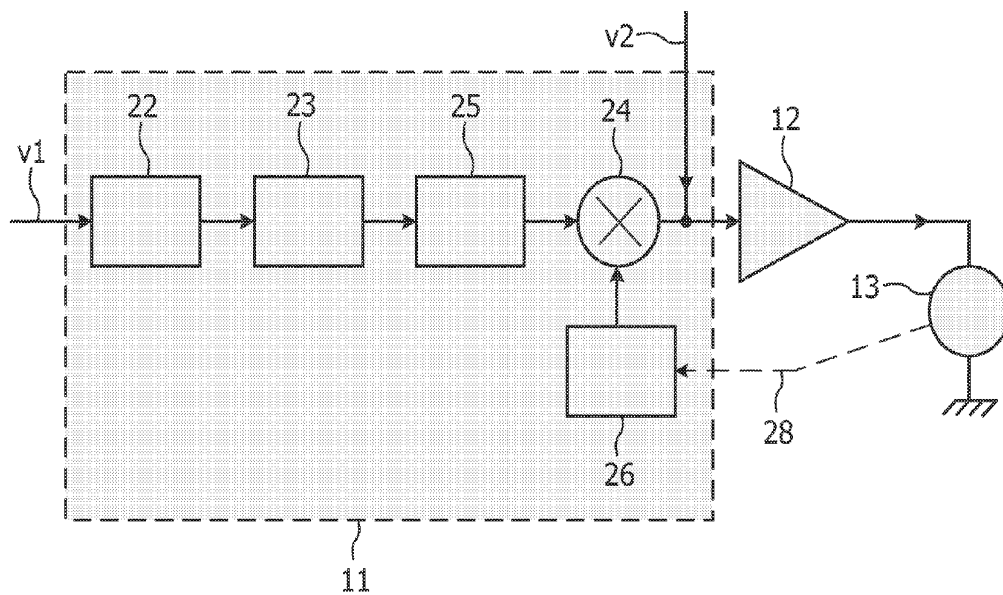


FIG. 2

1

AUDIO DEVICE FOR IMPROVED SOUND REPRODUCTION

FIELD OF THE INVENTION

The present invention relates to audio device comprising a first audio path comprising a loudspeaker for reproducing the higher frequency part of an audio signal, and a second audio path comprising a vibration device for reproducing the lower frequency part of the audio signal.

This invention may be used, for example, in mobile phones or in gaming devices.

BACKGROUND OF THE INVENTION

The U.S. Pat. No. 6,809,635 discloses a mobile telecommunications device which splits the demodulated audio communications into two paths. The first path comprises in series a low-pass filter, a first audio amplifier and a vibration motor. The second path comprises in series a high-pass filter, a second audio amplifier and a tweeter. The pass-band of the two filters may be chosen to change the sound quality of the audio communications which is reproduced. The output of the low-pass filter, which passes the lower frequency components in a substantially non-attenuated manner and substantially attenuates the higher frequency components is an input to the first audio amplifier having a relatively high gain for driving the vibration motor with sufficient input power to produce an acceptable output of audible sound which reproduces the lower frequency components present in the audio communications. The output of high-pass filter is an input to the second audio amplifier having a relatively lower gain than the gain of the first audio amplifier as a result of the higher efficiency of the tweeter in reproducing the higher frequency audible sound.

SUMMARY OF THE INVENTION

It is an object of the invention to propose an audio device which permit an improved sound reproduction compared with the one of the prior art.

To this end, the audio device in accordance with the invention is characterized in that it comprises:

- a band-pass filter for passing frequency components of the audio signal lying between a first frequency and a second frequency, said first frequency being lower than said second frequency, and for attenuating frequency components of the audio signal lower than said first frequency and higher than said second frequency,
- a detector for detecting an amplitude of the band-pass filtered audio signal,
- a multiplier for multiplying a periodic signal having a third frequency by the amplitude of the band-pass filtered audio signal,
- a vibration device for reproducing the multiplied periodic signal, wherein the third frequency is substantially equal to the resonance frequency of the vibration device.

Thanks to a processing device comprising in series the band-pass filter, the detector and the multiplier, the lower frequency part of the audio signal is reproduced in a very efficient and accurate manner.

The first audio path may comprise a high-pass filter for passing frequency components of the audio signal higher than the second frequency and for attenuating frequency components of the audio signal lower than said second frequency, the loudspeaker being adapted to reproduce the high-pass filtered audio signal. This first audio path may further com-

2

prise an amplifier for amplifying the audio signal, the loudspeaker being adapted to reproduce the amplified audio signal.

Beneficially, the detector is a peak detector or an envelope detector or a diode and the first frequency is substantially equal to 20 Hz and the second frequency is substantially equal to 100 Hz.

The second audio path may comprise a generator for generating the periodic signal. It may also comprise a low-pass filter arranged between the detector and the multiplier, for passing frequency components of the detected band-pass filtered audio signal lower than the second frequency and for attenuating frequency components of the detected band-pass filtered audio signal higher than said second frequency. This second audio path may comprise a control path arranged between the vibration device and the generator, the generator being adapted to adjust the third frequency in dependence on parameters of the vibration device. It may also comprise an amplifier arranged between the multiplier and the vibration device.

The present invention also relates to a mobile phone comprising such an audio device.

These and other aspects of the invention will be apparent from and will be elucidated with reference to the embodiments described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail, by way of example, with reference to the accompanying drawings, wherein:

FIG. 1 is a block diagram of the audio device in accordance with the invention;

FIG. 2 is a block diagram of the processing device in accordance with the invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, the audio device in accordance with the invention is depicted. The audio device may be incorporated in a portable apparatus which is, for example, a mobile phone. However, it will be apparent to a skilled person that this portable apparatus can be any other portable apparatus comprising an audio device such as, for example, a personal digital assistant PDA, a gaming device, etc.

The portable apparatus comprises an audio receiver (not represented), e.g. a radio frequency RF receiver in the example of a mobile phone, for receiving an input audio signal and for providing a demodulated output audio signal v1 in the same example.

The demodulated output audio signal v1 is then split into two paths. The first path comprising in series a processing device 11, which will be described in more detail hereinafter, a first audio amplifier 12, and a vibration device 13, e.g. a conventional transducer. Additionally, the vibration device 13 is utilized to perform its conventional function of producing a silent vibration alert when programmed to do so by the user of the mobile phone in response to incoming calls or messages v2. The first audio amplifier 11 has typically a relatively high gain for driving the vibration device 13 with sufficient input power to produce an acceptable output of audible sound.

The second path comprises in series a high-pass filter 14, a second audio amplifier 15 and a conventional loudspeaker 16. The high-pass filter 14 passes substantially the higher frequency components (e.g. above than 100 Hz) in a substantially non-attenuated manner and substantially attenuates the lower frequency components (e.g. below 100 Hz). The sec-

ond audio amplifier **15** has a relatively lower gain than the gain of the first audio amplifier as a result of the higher efficiency of the loudspeaker **16** in reproducing the higher frequency audible sound.

The high-pass filter is not essential to a proper operation of the audio device. It could be replaced by a band-pass filter or there could even be no filter at all.

The portable apparatus may comprise a handset and a headset. In this case, the vibration device **13** can be in the handset or in the headset or both. The same applies to the loudspeaker. The handset and headset may be wired or wireless connected to each other.

The processing device in accordance with the invention is schematically shown in FIG. **2**. The processing device **11** comprises a band-pass filter **22**, a detector **23** and a multiplier **24**.

The band-pass filter **22** has a pass-band which corresponds to the low frequency range, that is to say approximately 20 Hz-100 Hz. The band-pass filter **22** thus eliminates all frequencies outside this low frequency range.

The detector **23** is adapted to detect the signal received from the band-pass filter **22**. The detector **23** is for example a peak detector known per se, but may also be an envelope detector known per se. In a very economical embodiment, the detector may be constituted by a diode. The signal produced by the detector **23** represents the amplitude of the combined signals present within the low frequency range.

Multiplier **24** multiplies this signal by a periodic (e.g. sinusoidal) signal having a frequency f_G which is generated by a generator **26**. The generator frequency f_G is beneficially equal to the resonance frequency f_0 of the vibration device.

The output signal of the multiplier **24** has a frequency f_G while its amplitude is dependant on the signals contained in the low frequency range. Note that any signal contained in the low frequency range will cause an output signal having a frequency equal to f_G to be produced.

In addition, the processing device may comprise a low-pass filter **25** arranged between the detector **23** and the multiplier **24**, for attenuating the higher frequency components (above 100 Hz). This low-pass filter serves to reduce any undesired frequencies which may be generated by the detector **23**.

The vibration device **13** is preferably driven at its resonance frequency f_0 . This results in a high sound level. As will be clear from the above discussion, the processing device produces sound output at the resonance frequency f_0 for all audio signals falling within the low frequency range defined by band-pass filter **22**. This makes it possible to "adjust" low audio frequencies to the properties of the vibration device in order to reproduce them at a suitable sound level.

Optionally, a control path **28** may be present between the vibration device **13** and the generator **26**. This control path allows the generator **26** to adjust the frequency f_0 in dependence on parameters of the vibration device such as its (instantaneous) impedance, in particular since f_0 may vary due, for example, to temperature variations and/or deviations in production parameters.

It should be noted that the above-mentioned embodiment illustrates rather than limits the invention, and that those skilled in the art will be capable of designing many alternative embodiments without departing from the scope of the invention as defined by the appended claims.

For example, the principle of the invention can be generalized to more than two paths, each additional path comprising an additional processing device and an additional vibration device, each vibration device corresponding to a given low frequency range. In that case, the final audio signal heard

by a user is the sum of the high frequency audio signal coming from the loudspeaker and the low frequency audio signals coming from the different vibration devices.

In the claims, any reference signs placed in parentheses shall not be construed as limiting the claims. The word "comprising" and "comprises", and the like, does not exclude the presence of elements or steps other than those listed in any claim or the specification as a whole. The singular reference of an element does not exclude the plural reference of such elements and vice-versa. The invention may be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In a device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

The invention claimed is:

1. An audio device comprising a first audio path comprising a loudspeaker for reproducing an audio signal, and a second audio path comprising in series:

a band-pass filter for passing frequency components of the audio signal lying between a first frequency and a second frequency, said first frequency being lower than said second frequency, and for attenuating frequency components of the audio signal lower than said first frequency and higher than said second frequency,

a detector for detecting an amplitude of the band-pass filtered audio signal,

a multiplier for multiplying a periodic signal having a third frequency by the amplitude of the band-pass filtered audio signal,

a vibration device for reproducing the multiplied periodic signal, wherein the third frequency is substantially equal to a resonance frequency of the vibration device,

wherein the second audio path further comprises a generator for generating the periodic signal, and

wherein the second audio path further comprises a control path arranged between the vibration device and the generator, the generator being adapted to adjust the third frequency in dependence on parameters of the vibration device.

2. The audio device as claimed in claim **1**, wherein the first audio path further comprises a high-pass filter for passing frequency components of the audio signal higher than the second frequency and for attenuating frequency components of the audio signal lower than said second frequency, the loudspeaker being adapted to reproduce the high-pass filtered audio signal.

3. An audio device as claimed in claim **1**, wherein the first audio path further comprises an amplifier for amplifying the audio signal, the loudspeaker being adapted to reproduce the amplified audio signal.

4. The audio device as claimed in claim **1**, wherein the detector is a peak detector or an envelope detector or a diode.

5. The audio device as claimed in claim **1**, wherein the second audio path further comprises a low-pass filter arranged between the detector and the multiplier, for passing frequency components of the detected band-pass filtered audio signal lower than the second frequency and attenuating frequency components of the detected band-pass filtered audio signal higher than said second frequency.

6. The audio device as claimed in claim **1**, wherein the first frequency is substantially equal to 20 Hz and the second frequency is substantially equal to 100 Hz.

5

7. The audio device as claimed in claim 1, wherein the second audio path further comprises an amplifier arranged between the multiplier and the vibration device.

8. A mobile phone comprising an audio device, the audio device comprising a first audio path comprising a loudspeaker 5 for reproducing an audio signal, and a second audio path comprising in series:

a band-pass filter for passing frequency components of the audio signal lying between a first frequency and a second 10 frequency, said first frequency being lower than said second frequency, and for attenuating frequency components of the audio signal lower than said first frequency and higher than said second frequency,

a detector for detecting an amplitude of the band-pass filtered audio signal,

6

a multiplier for multiplying a periodic signal having a third frequency by the amplitude of the band-pass filtered audio signal,

a vibration device for reproducing the multiplied periodic signal, wherein the third frequency is substantially equal to a resonance frequency of the vibration device,

wherein the second audio path further comprises a generator for generating the periodic signal, and

wherein the second audio path further comprises a control path arranged between the vibration device and the generator, the generator being adapted to adjust the third frequency in dependence on parameters of the vibration device.

* * * * *