

An axisymmetric finite element analysis of the mechanical function of the meniscus

Citation for published version (APA):

Sauren, A. A. H. J., Huson, A., & Schouten, R. Y. (1984). An axisymmetric finite element analysis of the mechanical function of the meniscus. *International Journal of Sports Medicine*, 5(suppl.), 93-95.

Document status and date:

Published: 01/01/1984

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

An Axisymmetric Finite Element Analysis of the Mechanical Function of the Meniscus

A.A.H.J. Sauren, A. Huson, and R.Y. Schouten

Eindhoven University of Technology, Department of Mechanical Engineering, Eindhoven, The Netherlands

Introduction

According to the literature the function of the menisci of the knee has been studied almost only in laboratory experiments and clinical studies (Jaspers et al., 1980; Seedhom and Hargreaves, 1979; Krause et al., 1976; Walker and Erkman, 1975; Fairbank, 1948). The interindividual variations with respect to dimensions and mechanical properties of the distinct joint structures require quite large series of experiments in order to obtain definite quantitative results. Moreover, the experimental investigations are hampered by the poor accessibility of the meniscal structures, emanating from the complex anatomy of the knee joint and imposing heavy demands upon the measurement techniques used. Only De Lange et al. (1979) compared experimental results with the theoretical predictions of a phenomenological rheologic model of the menisci and found them to act as nonlinear springs. Although the menisci might have a joint stabilizing function as well (Minns and Muckle, 1982; Jaspers et al., 1980) the most important function of the menisci is constituted by their load carrying capacity. In this paper a simple theoretical model is presented that is expected to serve as a versatile tool for the exploration of the basic mechanisms and parameters governing the load transmitting function of the menisci.

Description of the model

The aim of the model is to obtain fundamental insight into the importance of the menisci for the load transmission from femur to tibia. As a starting-point served an axially loaded knee joint in full extension. The model is axisymmetric (Fig. 1) and comprises a plane tibial plateau, a spherical femoral condyle and a ring in between, representing the meniscus. In the unloaded situation the lower and upper surfaces of the ring match the respective tibial and femoral surface and there is direct femorotibial contact at the axis of symmetry. The model is based on a finite Element Method. This is a numerical approach, based on piecewise approximations to continuous fields. In using this method a structure is modeled as an assemblage of elementary building blocks, called elements, which are interconnected at a finite number of locations, called nodes. The distribution of elements that was actually used for the present analysis is shown in Fig. 2. The most important characteristic of this model is that it allows frictionless displacement of the meniscus with respect to the tibia and the femur. This is achieved by the use of especially developed gap elements. Both the bones and the meniscus are assumed isotropic and linearly elastic.

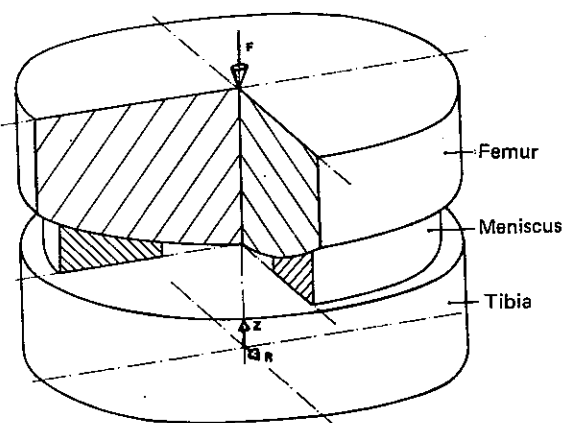


Fig. 1

Results

The analysis performed thus far comprised the following: On exertion of an axial load F (Figs. 1, 2) the axial compression of the joint and the radially outward displacement of the meniscus were computed. Attention was paid also to the contribution of the meniscus to load transmission. This was done for the three different combinations of material properties shown in Table 1. Moreover, for combination 1, which served as a reference, the joint behaviour was analyzed after omitting either the total meniscus or its outer half.

From Figs. 3 and 4 both the axial compression u and the radial displacement v can be seen to depend in a nonlinear way on F . A comparison of curves 1, 2, and 3 in Fig. 3 shows an increase of the Young's modulus of the bones (curve 2) or of both the bones and the meniscus (curve 3) to result in a decrease of the axial compression of the joint under the same axial joint load. Removal of the meniscus results in an increase of the axial compression (curve 5). Curves 1 and 4 show only a relatively slight increase of the axial compression after removal of solely the outer half of the meniscus. For the radially outward displacement of the meniscus in a qualitative sense the same results are found.

In Fig. 5 the percentage of the total axial load transmitted by the meniscus is given as a function of the total load. For the reference combination of material properties (curve 1) about 50% of the total joint load is transmitted by the meniscus. This percentage is diminished drastically by an increase of the Young's modulus of the bones (curve 2)

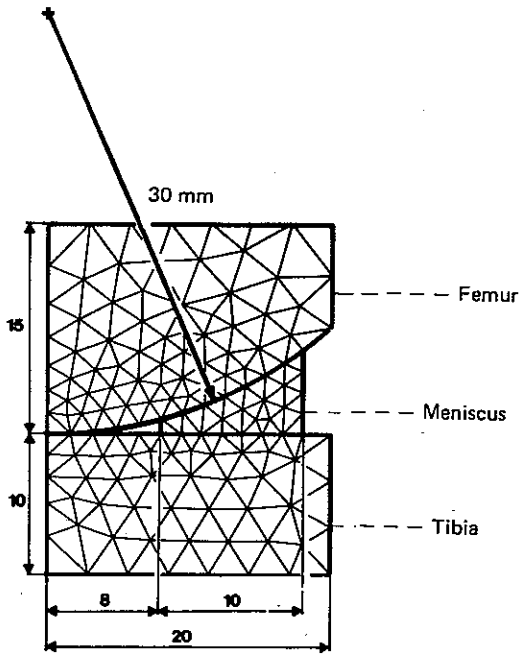


Fig. 2

Table 1 Combinations of Youngs' moduli (MPa)

Bone ($\nu = 0.2$)	Meniscus ($\nu = 0.3$)
500	20
5000	20
5000	200

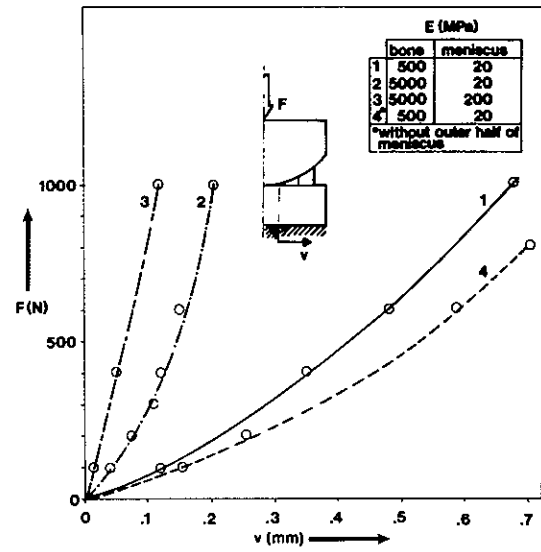


Fig. 4

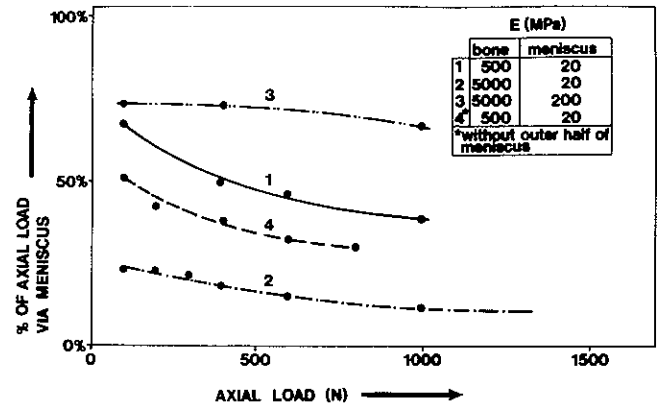


Fig. 5

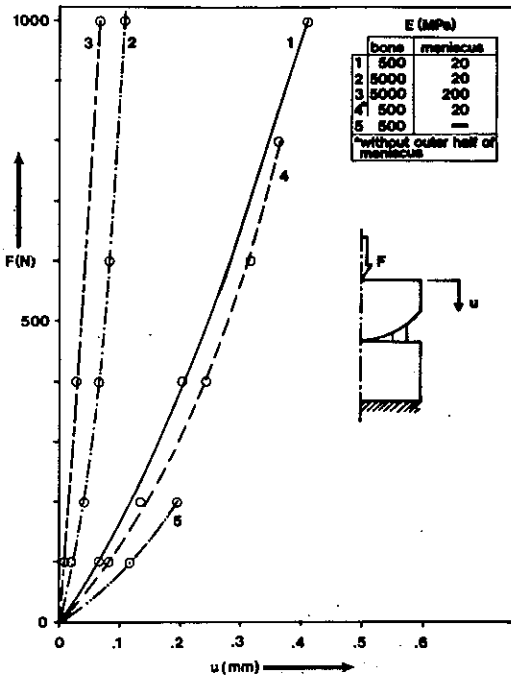


Fig. 3

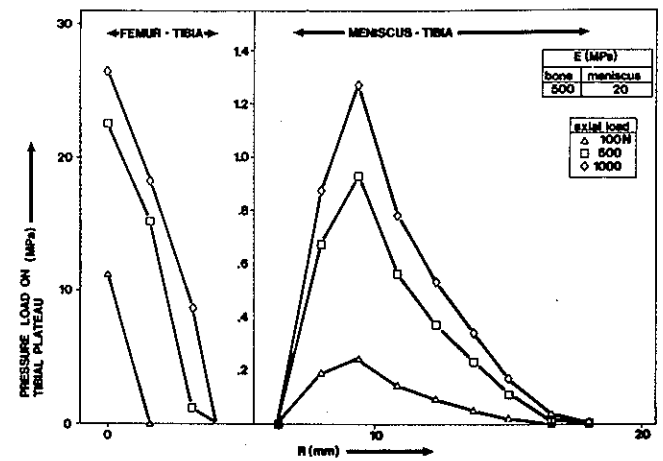


Fig. 6

whereas it increases after an increase of the Young's moduli of both the bones and the meniscus. A half meniscus appears to contribute less to load transmission than a whole meniscus. However, the diminution of meniscal load transmission is less than would be expected from the decrease of the load carrying area (50%). The explanation of this finding is found in the load distribution on the tibial plateau (Fig. 6). From the load distribution in the meniscotibial contact area for a whole meniscus its inner half is seen to carry considerably more load than the outer half. Consequently, removal of the outer half of the meniscus will have a relatively slight effect on the meniscal share of load transmission. Fig. 6 shows the maximum pressure load on the tibial plateau in the femorotibial contact area to be about a factor of 20 higher than the maximum values in the meniscotibial contact zone.

Furthermore, the numerical results showed the highest stress values to occur in the bone at the site of femorotibial contact, while the stresses in the meniscus were about a factor of 10 smaller. Removal of the meniscus resulted in an increase of the former of about 40% whereas this increase amounted only 5 to 15% (depending on the total axial load) upon removal of the outer half of the meniscus.

Concluding Remarks

- From a simple axisymmetric finite element model the meniscus appears to contribute significantly to load transmission in the knee joint;
- The presence of a meniscal structure causes a considerable reduction of stresses in the femorotibial contact area;
- In the geometrical configuration, chosen in the present study, the inner half of the meniscus accounts for the major part of meniscal load transmission.
- The axial compression of the joint and the radially outward displacement of the meniscus depend nonlinearly on the axial joint load.
- The combination of material properties of bone and meniscal tissue is found to be more important for the amount of meniscal load transmission than the dimensions of the meniscus.

The results of this theoretical analysis support experimental findings reported in literature on the load-carrying function of the meniscus (Seedhom and Hargreaves, 1979; Walker and Erkman, 1975). However, extrapolation of these results towards biological reality would be unwarranted because of the gross simplifications made with regard to both geometry and material properties. By successive elimination of these simplifications it is possible to make a stepwise analysis of the importance of various parameters. Investigations on the importance of the geometry of the tibial plateau (e.g. slightly convex or concave instead of plane), the presence of articular cartilage layers on the bones as well as the actual anisotropic material properties of notably the meniscal tissues will be the logical continuation of this work. In this way we hope to obtain fundamental insight into some of the basic mechanisms that govern the mechanical function of the meniscus.

References

- Fairbank T.J.: Knee joint changes after meniscectomy. *Journal of Bone and Joint Surgery*, Vol 30-B, No. 4, 664-670, 1948.
- Jaspers P., de Lange A., Huiskes R., van Rens Th.J.G.: The mechanical function of the meniscus, experiments on cadaveric pig knee-joints. *Acta Orthopaedica Belgica* Vol 46, 663-668, 1980.
- Krause W.R., Pope M.J., Johnson R.J., Wilder D.G.: Mechanical changes in the knee after meniscectomy. *J Bone Joint Surg* Vol. 58-A, No. 5, 599-604: 1976.
- de Lange A., Jaspers P., Huiskes R., van Rens Th.J.G.: A rheologic model of the menisci in static and dynamic load transmission. Paper presented at the VII. Int. Congress of Biomechanics, Warsaw, Poland, 1979.
- Minns R.J., Muckle D.S.: The role of the meniscus in an instability model for osteoarthritis in the rabbit knee. *British Journal of Experimental Pathology*, Vol 63, 18-24, 1982.
- Seedhom B.B., Hargreaves D.J.: Transmission of the load in the knee joint with special reference to the role of the menisci. *Engineering in Medicine*, Vol 8, No. 4, 220-228, 1979.
- Walker P.S., Erkman M.J.: The role of the menisci in force transmission across the knee. *Clinical Orthopaedics and Related Research*, No 109, 184-192, 1975.