

Design of an optical nanoantenna with focusing subwavelength grating couplers and metallic reflector

Citation for published version (APA):

Millan Mejia, A. J., Jiao, Y., van der Tol, J. J. G. M., & Smit, M. K. (2016). Design of an optical nanoantenna with focusing subwavelength grating couplers and metallic reflector. In *International Workshop on Optical Wave and Waveguide Theory and Numerical Modelling*

Document license:
Unspecified

Document status and date:
Published: 21/05/2016

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Design of an optical nanoantenna with focusing sub-wavelength grating couplers and metallic reflector

A.J. MILLAN-MEJIA*, Y. JIAO, J.J.G.M. VAN DER TOL, M.K. SMIT

Photonic Integration Group (PhI), Dept. of Electrical Engineering, Technische Universiteit, Eindhoven, De Rondom 70, 5612AP, Eindhoven, The Netherlands

* a.millan.mejia@tue.nl

In the development of integrated large-scale optical phase array, compact optical nanoantennas are needed. For high resolution arrays, the nanoantenna footprint and the separation between them should be as small as possible to reduce the number of interference orders in the far field [1]. In the development of this nanoantennas in our InP membrane on Silicon (IMOS) platform [2], we use deeply etch focusing grating to reduce the size [3]. In order to increase the optical power emitting up, we add a metal reflector of Silver underneath the semiconductor with a small buffer of 50 nm of SiO_2 . This metal layer will also works as a thermal heater, which will change the optical properties of the semiconductor changing the direction of the upcoming light. The last element to be add is a subwavelength ridge which reduces the unwanted Fresnel reflections by reducing the refractive index contrast [3].

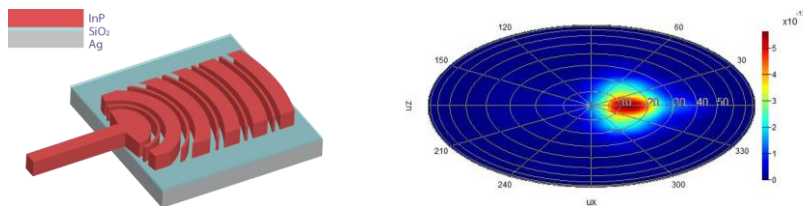


Fig. 1. (a) A schematic of the optical nanoantenna, (b) The far-field emission profile .

We simulated the nanoantenna using the 3D-FDTD model. In this case, the commonly 2D-FDTD approximation used in grating simulations is not valid anymore due to the high lateral confinement in the structure. In our 300 nm thick InP membrane, the best grating we got has 5 periods with a pitch of $\Lambda = 880nm$ with a filling factor of 0.52. The subwavelength ridge is 100 nm. Figure 1a illustrated the grating design. We add a buffer layer between the InP and the metal to reduce mode mismatch and therefore, reflections due to the metal. The efficiency obtained at $1.55\mu m$ is 59% of upcoming light and 8% reflections. The far-field emission is centred about 13° from the zenith (Fig 1b). We predict that further optimization could improve this performance. This work was supported by the ERC Project NOLIMITS

References

- [1] J. Sun *et al.* *Large-Scale Silicon Photonic Circuits for Optical Phased Arrays*, IEEE journal of selected topics in quantum electronics, vol. 20, no. 4, 2014
- [2] J. van der Tol *et al.* *Photonic integration in indium-phosphide membranes on silicon (IMOS)*, Integrated Optics: Devices, Materials, and Technologies XVIII, pp. 89880M-89880M-17, 2014
- [3] F. van Laere *et al.* *Compact Focusing Grating Couplers for Silicon-on-Insulator Integrated Circuits*, IEEE photonics technology letters, vol. 19, no. 23, pp 1919-1921, 2007
- [4] Y. wang *et al.* *Focusing sub-wavelength grating couplers with low back reflections for rapid prototyping of silicon photonic circuits*, Optics express, vol. 22, no. 17, pp 20652-20662, 2014