



**AALBORG UNIVERSITY**  
DENMARK

**Aalborg Universitet**

## **LSICC Deliverable 1 - Carbon Capture Technology Overview**

Thelluksen, Jakob Zinck; Wild, Christopher

*Publication date:*  
2023

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*

Thelluksen, J. Z., & Wild, C. (2023). LSICC Deliverable 1 - Carbon Capture Technology Overview.

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

### **Take down policy**

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

# Deliverable 1- Carbon Capture Technology Overview

Authors: Jakob Zinck Thellufsen, Christopher Wolfgang Wild

Department of Planning, Aalborg University

The technology overview of carbon capture can be divided into two main categories. Point source carbon capture and direct air capture. The focus of this technology catalogue is the mechanical/chemical processes of capturing CO<sub>2</sub>, and does not focus on biogenic capture such as forestry and agriculture.

The main outcome is the technology overview table, which can be found as an Excel spread sheet by following this link: <https://www.energyplan.eu/wp-content/uploads/2023/06/LSICC-Technology-Overview.xlsx>

## 1 Point source carbon capture

The overview concerns two overall types of point source capture of CO<sub>2</sub>. One is post-combustion processes, with the other being an oxy-fuel process. Within the post-combustion processes, amine, electro-chemical and enzymatic carbon capture technologies are highlighted. It is not equally simple to find costs for all these types, so the objective is to describe the overall concept and highlight the important energy flows.

The post-combustion types can also be applied to direct air capture principles.

### 1.1 Post combustion capture

Post combustion carbon capture means that the carbon is captured after combustion processes, e.g., being extracted from the flue gas. Thus, these potential pathways can also be used in direct air capture.


For all these processes compression or liquefaction plant (including dehydration). This ensures either the right conditions for pipeline or road/ship water transport of the CO<sub>2</sub>.

#### 1.1.1 Amine

Amine carbon capture technology is based on circulation of an amine solvent to both absorb and desorb the CO<sub>2</sub> from the flue gas. During the absorption of CO<sub>2</sub>, the flue gas is maintained cool to keep the most efficient absorption of CO<sub>2</sub> from the flue gas. The CO<sub>2</sub> rich solvent is then pumped to the desorber, where the CO<sub>2</sub> is cleaned from the solvent, ready for transportation, utilisation and storage. To release the CO<sub>2</sub> from the solvent, the desorber is heated to around 120-130 degrees. After this release, the solvent is cooled again, ready to work in the absorber [1].

The heat removed can potentially be used in district heating.

The figure below illustrates the overall energy flows.

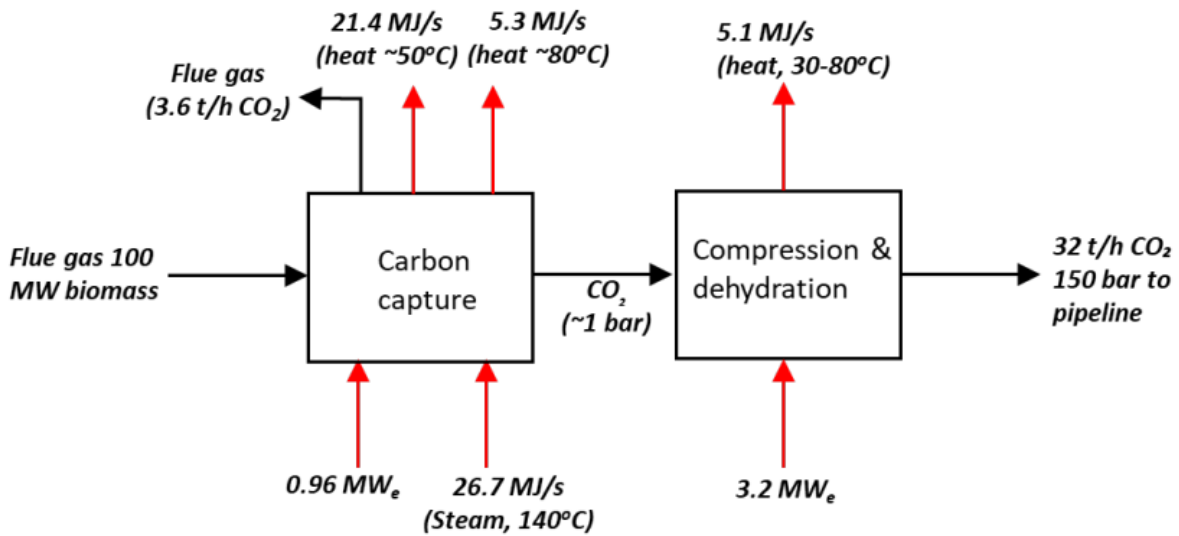

Energy flows of amine carbon capture, including compression and dehydration. [1]

The amine technology is the most mature CO<sub>2</sub> capture method but have concerns regarding energy consumption in the heating and cooling of the solvent. This explains the development in other methods for CO<sub>2</sub> capture.

### 1.1.2 Electrochemical capture

Electrochemical CO<sub>2</sub> capture can be applied to all “types” of CO<sub>2</sub>. This means the process can be used both in relation to direct air capture and flue gas capture.


Electrochemical capture technologies primarily rely on the concept “pH-swing”. CO<sub>2</sub> is captured and released by shifting the pH value of the working fluid, thus shifting between the fluid being basic and acidic. This can be achieved since the pH level impacts CO<sub>2</sub> hydration and dehydration of the working fluid.

To achieve the pH swing different electrochemical processes can be applied, depending on the specific technology. This includes electrolysis, bipolar membrane electrodialysis, reversible redox reactions for instance. To run these processes, electrical energy is required, but there are potentially lower energy requirements than for the amine process. Heat is not necessarily required but can be beneficial for some processes. [2]

However, costs are currently quite high, so technology development is required.

Certain electrochemical processes have shown potential of achieving an energy consumption of 100 kJ/mol of CO<sub>2</sub>, which corresponds to 0.63 MWh/ton of CO<sub>2</sub> [2]. The amine processes currently have an electricity input of 0.03 MWh/ton and a heat input of 0.83 MWh/ton [1].

The figure below shows the overall concept of electrochemical CO<sub>2</sub> capture.

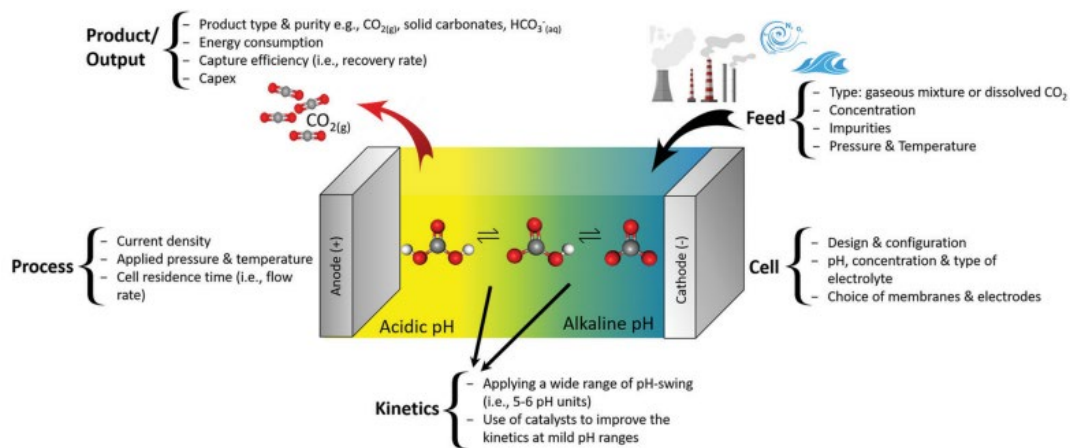

Overall process concept of electrochemical CO<sub>2</sub> capture. [2]

### 1.1.3 Enzymatic capture

The concept of enzymatic carbon capture is to use carbonic anhydrase instead of chemicals present in for instance the amine process or the electrochemical process. The advantage of the process is a potential lower heat demand, with the concept working on 80 degrees instead of the 120-130 degrees in the amine process[3].

The process with enzymatic capture is quite like the amine carbon capture[3]. Based on [3] energy consumptions can be reduced by up to 40% compared to an amine- carbon capture.

[4] Investigates the use of carbonic anhydrase and finds a lower energy use as well as a cost reduction from 68.3 USD/t CO<sub>2</sub> in the amine case, to 38.5 USD/t CO<sub>2</sub> in the enzymatic carbon capture process. This is due to lower costs both in terms of investments, as well as operation and maintenance. Furthermore, it is also less energy intensive. [4] identifies a reduction from 0.35 MWh/t in the amine process to 0.20 MWh/t in the enzymatic capture process. This is approximately 40%, similar to the result found in [3]

## 1.2 Oxy fuel combustion

Oxy fuel refers to changing the combustion process of a power station/boiler. Conventional boilers use atmospheric air with high Nitrogen contents. The oxy fuel combustion remove nitrogen before combustion. This ensures a flue gas consisting mostly of water vapor and carbon dioxide, thus removing the need for post combustion separation. [1]

Due to this technology being based on combustion processes, oxy fuel combustion only is relevant as a point source technology.

To save the post combustion carbon capture, other investments must be made in the air separation unit, and the CO<sub>2</sub> purification unit. Both these are also expensive. Thus, the potential of oxy fuel combustion might exist in combination with electrolysis in a future 100% renewable energy system, where oxygen is a waste product from hydrogen production in electrolysis.[1]

## 2 Direct air capture

Direct air capture focuses on the concept of removing CO<sub>2</sub> by capturing ambient air at any point, instead of cleaning flue gas.

The CO<sub>2</sub> content in ambient air is quite low, approximately 200-300 times lower than typical flue gas[1], the technology requires large volumes of air to capture significant amounts of CO<sub>2</sub>.

There are several ways of approaching DAC, ranging biogenic to energy based solutions. These are all described in detail in [5].

About the energy system, the main consequence of direct air capture are the high investment costs, since the units are quite large and the energy requirement to capture the amount of ambient air needed.

The current, most mature technologies, rely on a low temperature absorption, by adsorbing CO<sub>2</sub> from the air, for instance by using electrical energy. To desorb the CO<sub>2</sub> from the filter material, higher temperatures will be applied. The filter will be heated to around 85-100 degrees. [1] Another option is high temperature liquid absorption developed by Carbon Engineering. This stores the CO<sub>2</sub> through a calcination process requiring 600-900 degrees [1,6]. To reach these temperatures, the burning of natural gas is required. Thus, further CO<sub>2</sub> capture is needed to completely achieve CO<sub>2</sub> neutrality in the case of high temperature absorption.

## 3 Summary

The economic and technical sheets can be found in the link in the introduction.

To further model carbon capture, the work here indicates the following model improvements required:

- 1) Carbon capture balances, to be depending on the operation of point sources.
- 2) Synergies with both heat input and heat output, as the technologies require heating.
- 3) Potentially a natural gas demand for certain types of DAC.
- 4) Oxy fuel modelling should be linked to electrolysis and oxygen outputs, to ensure synergies between different types of modelling.
- 5) Potentials for combination of DAC and point source capture to ensure stable CO<sub>2</sub> capture loads potentially required for CCU.