



THE UNIVERSITY *of* EDINBURGH

Edinburgh Research Explorer

The effect of fuel bed structure on Rothermel model performance

Citation for published version:

Campbell-Lochrie, Z, Gallagher, M, Skowronski, N & Hadden, RM 2023, 'The effect of fuel bed structure on Rothermel model performance', *International Journal of Wildland Fire*. <https://doi.org/10.1071/WF23046>

Digital Object Identifier (DOI):

[10.1071/WF23046](https://doi.org/10.1071/WF23046)

Link:

[Link to publication record in Edinburgh Research Explorer](#)

Document Version:

Publisher's PDF, also known as Version of record

Published In:

International Journal of Wildland Fire

General rights

Copyright for the publications made accessible via the Edinburgh Research Explorer is retained by the author(s) and / or other copyright owners and it is a condition of accessing these publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

The University of Edinburgh has made every reasonable effort to ensure that Edinburgh Research Explorer content complies with UK legislation. If you believe that the public display of this file breaches copyright please contact openaccess@ed.ac.uk providing details, and we will remove access to the work immediately and investigate your claim.





The effect of fuel bed structure on Rothermel model performance

Zakary Campbell-Lochrie^{A,*} , Michael Gallagher^B, Nicholas Skowronski^C and Rory M. Hadden^A

For full list of author affiliations and declarations see end of paper

***Correspondence to:**

Zakary Campbell-Lochrie
School of Engineering, The University of
Edinburgh, Edinburgh, UK
Email: Z.Campbell.Lochrie@ed.ac.uk

Received: 3 April 2023

Accepted: 22 June 2023

Published: 14 July 2023

Cite this:

Campbell-Lochrie Z *et al.* (2023)
International Journal of Wildland Fire
doi:[10.1071/WF23046](https://doi.org/10.1071/WF23046)

© 2023 The Author(s) (or their employer(s)). Published by CSIRO Publishing on behalf of IAWF. This is an open access article distributed under the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License ([CC BY-NC-ND](https://creativecommons.org/licenses/by-nc-nd/4.0/))

OPEN ACCESS

ABSTRACT

Background. Fifty years after its initial publication, Rothermel's model continues to underpin many operational fire modelling tools. Past authors have, however, suggested a possible over-sensitivity of the Rothermel model to fuel depth in certain fuel types. **Aims.** To evaluate Rothermel model performance based on previous observations of the effect of fuel structure on flame spread through porous fuel beds. This is informed by the consideration of the effect of fuel structure on the physical mechanisms underpinning surface flame spread. **Methods.** This study uses an existing dataset of flame spread experiments in pine needle beds to evaluate the effect of fuel structure on Rothermel model predictions of spread rate and reaction intensity. **Key results.** Underpredictions of spread rate occurred for compressed fuel beds, apparently driven by an underprediction of the reaction intensity. **Conclusions.** A greater understanding of the role of fuel structure on the energy release within the fire front region is therefore required. **Implications.** The current tendency for spread rate to be underestimated in the studied fuel beds in quiescent (no wind or slope) conditions requires further consideration given the widespread use of Rothermel's model in current operational modelling tools.

Keywords: energy release, fire behaviour, fire intensity, flame spread, fuel loading, fuel structure, modelling, operational fire models, pine needle beds, reaction intensity, Rothermel.

Introduction

Fifty years after its introduction, Rothermel's semi-empirical flame spread model (Rothermel 1972) continues to underpin many current fire modelling systems, particularly in the USA (e.g. BehavePlus (Andrews 2014), FlamMap (Finney 2006)). Present-day implementations of this surface flame spread model typically differ little from Rothermel's original mathematical formulations except for the inclusion of a small number of modifications suggested by Albini shortly after the model's introduction (Albini 1976) (and more recently, a recommendation that the original upper limit on wind speed influences on spread rate should not be imposed (Andrews *et al.* 2013)).

There are ongoing efforts throughout the wildfire research community to develop new and improved fire models. In a recent Position Statement on Climate Change (International Association of Wildland Fire 2022), the International Association of Wildland Fire (IAWF) called for further research to develop and improve modelling tools to support efforts to address the challenges and effects of climate change on wildland fires. Changes in fire management strategies, focusing on increasing prescribed burning, drive a need for improved fire behaviour models to aid in planning, training and strategy development (Hiers *et al.* 2020; Sample *et al.* 2022).

However, presently, 'the Rothermel surface fire spread model continues to be the foundation of many research and management applications' (Andrews 2018, p. iii). Therefore, in this intervening period, it is important that model limitations, and where possible their root causes, are identified given the potential influence of model predictions on fire and fuels management strategies. Understanding limitations in the development approach for previous operational models is particularly pressing given ongoing efforts to develop and deploy new physics-based operational models (Finney *et al.* 2021).

It is therefore important to understand the implications of using a model developed using a small number of fuel types to predict the effect of fuel structure on the rate of spread across a range of natural fuel types. In this study, the performance of the Rothermel model across a range of (pine needle) fuel bed structural conditions was investigated through comparison with an existing experimental dataset (Campbell-Lochrie *et al.* 2021).

Rothermel model sensitivity and limitations

Past evaluation of the Rothermel model has typically involved sensitivity analysis (e.g. Dell'Orfano 1996; Salvador *et al.* 2001; Ujjwal *et al.* 2021) and/or model testing and validation with fire behaviour observations from a laboratory or field environment (e.g. Barney *et al.* 1978; Norum 1982; Van Wagtenonk and Botti 1984; Van Wilgen *et al.* 1985; Van Wilgen and Wills 1988; McAlpine and Xanthopoulos 1989; Gould 1991; Masters and Engle 1994; Marsden-Smedley and Catchpole 1995; Dell'Orfano 1996; Grabner *et al.* 1997; Hély *et al.* 2001; Fernandes *et al.* 2002; Streeks *et al.* 2005; Cruz and Fernandes 2008; Athanasiou and Xanthopoulos 2010; Weise *et al.* 2016), with several earlier validation studies summarised in Andrews (1980) as cited in Rothermel (1983).

Fuel bed depth has been identified as one of the highest-sensitivity model parameters in several previous studies (e.g. Dell'Orfano 1996; Salvador *et al.* 2001; Bachmann and Allgöwer 2002). As described by Saltelli (2000), sensitivity analysis of a mathematical model not only allows the determination of 'the factors that mostly contribute to the output variability and that require additional research to strengthen the knowledge base' but also allows determination of whether 'a model resembles the system or processes under study'.

There are suggestions within the existing literature that the high sensitivity of the Rothermel model to fuel depth may not accurately reflect existing fire behaviour observations and that model bias may exist because of inaccurate representation of the effects of fuel depth. However, the difficulty in characterising fuel depth, particularly in heterogeneous fuels should also be considered (Hough and Albini 1978). For example, Catchpole *et al.* stated that 'in recent (as yet unpublished) experiments we have found that the Rothermel model is overly sensitive to fuel depth' (Catchpole *et al.* 1993, p. 53), with additional detail subsequently provided in a later publication (Catchpole *et al.* 1998). Similarly, in a previous field comparison (Dell'Orfano 1996), overpredictions of spread rates were observed in Northeastern US pine-oak forests during winter fires, which was attributed to the sensitivity of BEHAVE (underpinned by the Rothermel model) to fuel bed depth and surface-to-volume ratio of 1 h fuels (corresponding to size class of <6.35 mm diameter) (overpredictions for summer fires were attributed to the model's inability to accurately incorporate the effect of high live Fuel Moisture Contents (FMCs)).

An oversensitivity of the Rothermel model to fuel depth was also observed (Gould 1991) in comparison with observed spread rates in grassland fire experiments. Underpredictions of spread rate occurred for fuel depths less than 0.15 m but overpredictions occurred at fuel depths greater than 0.25 m. An oversensitivity to bulk density was also observed. Neither the experimentally observed nor predicted spread rates were significantly affected by the fuel loading.

In a series of field experiments (Brown 1972) (involving two fuel loadings with three different fuel depths at each loading), greater deviations were observed between predicted and observed spread rates at lower packing ratios and fuel loadings. However, the slash fuel beds in Brown's study were highly discontinuous (large spacing between fuel elements) and flaming was observed to be sporadic for the lower fuel loading cases.

The above examples provide motivation for further investigation of the causes of model bias. Missing from many of the existing studies is the opportunity for systematic evaluation of the model performance as a function of the fuel depth. A detailed evaluation of model performance therefore requires an understanding of the interdependent effects of fuel structure parameters on the flame spread process and on model predictions.

Effects of fuel bed structure on flame spread

For a fuel bed of fixed area, the packing ratio can be altered by varying either the fuel loading or the fuel height of the fuel bed. A fuel bed of fixed fuel loading can be compressed, thereby lowering the fuel depth and increasing the packing ratio or bulk density. Alternatively, a constant packing ratio or bulk density can be maintained while the fuel loading is altered, therefore also altering the fuel depth.

The interdependent interactions of these three parameters must therefore be considered. For example, it was previously noted (Catchpole *et al.* 1998) that the effect of fuel loading depends on the manner in which it is altered. Catchpole *et al.* observed only a slight effect on spread rate when fuel depth was increased at a constant packing ratio (addition of fuel) but a reduction in spread rate when packing ratio was increased at a constant fuel depth (fuel added and compacted).

Accurate modelling of the fire behaviour as a function of the fuel structure therefore requires a greater appreciation of the physical processes responsible for variations in fire behaviour. Varying the fuel loading alters the total amount of available combustible fuel. Varying the packing ratio alters the separation distance and pore geometry between neighbouring fuel particles, thereby altering both the flow dynamics (and hence convective heat transfer and oxygen supply) and radiative heat transfer through a porous fuel bed.

Different relationships between fuel depth and spread rate have been observed in past studies. Wilson observed a positive correlation between spread rate and the square root

of the fuel depth (Wilson 1990). However, in pine needle fuel beds, Anderson (Anderson 1964) observed spread rate to be independent of fuel depth for fuel beds greater than 0.0762 m in depth (with a positive relationship observed below this depth threshold). This matched previous observations from an extensive series of crib fire experiments conducted by earlier researchers at the US Forest Service during the Project Fire Model study (Byram *et al.* 1966). Catchpole and colleagues (including Rothermel) (Catchpole *et al.* 1998) have therefore outlined the need to test, over a wider range of fuel depths, the assumption within the Rothermel model that spread rate is dependent on (and proportional to) fuel depth. This is particularly important for horizontal fuel beds (e.g. litter layer) in which the fuel depth increases much less rapidly with fuel loading than in vertically oriented fuel beds such as grasses and brush. As a result, the typical range of fuel depths observed in horizontal fuel beds such as pine needle litter layers is often below the 0.0762 m threshold observed by Anderson.

Incorporation of fuel structure effects in the Rothermel model

Rothermel's model is based on the principle of energy conservation, with the steady-state rate of spread (R) described by the ratio between the energy transferred to the unburnt fuel and the energy required for ignition. For homogeneous fuel beds, R is calculated according to Eqn 1,

$$R = \frac{I_R \xi (1 + \phi_w + \phi_s)}{\rho_b \epsilon Q_{ig}} \quad (1)$$

As previously described (Rothermel 1972), I_R is the reaction intensity, ξ is the propagating flux ratio, ϕ_w and ϕ_s are the wind and slope correction factors respectively, ρ_b is the oven-dry bulk density, ϵ is the effective heating number, and Q_{ig} is the heat of pre-ignition. The fuel bed structure (fuel loading, packing ratio, bulk density) affects both the numerator (energy transferred to unburnt fuel) and denominator (heat sink term).

In quiescent conditions, the energy transferred to the unburnt fuel is simply the product of the reaction intensity (I_R) and the propagating flux ratio (ξ), where, as illustrated in Fig. 1, the reaction intensity describes the overall heat energy released per unit area of the fire front (in any direction) and the propagating flux describes the proportion of this energy that is actually transferred to the unburnt fuel ahead of the flame front (which ultimately sustains flame spread). The influence of wind speed and fuel bed slope can then be accounted for by inclusion of empirical coefficients (Rothermel 1972); however, these are not described in further detail here because the present study is concerned with quiescent flame spread. Both the reaction intensity and the propagating flux ratio are dependent on the fuel bed structure as described below.

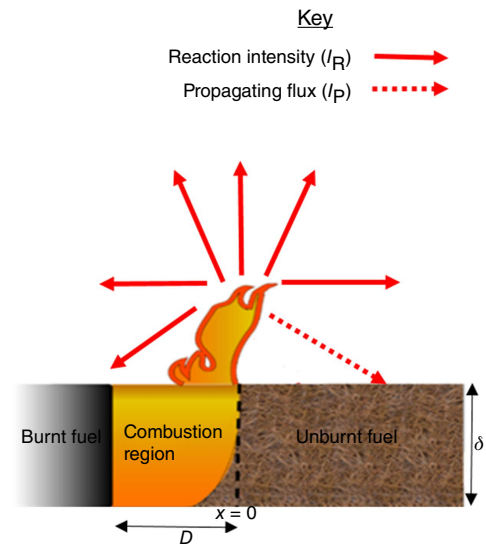


Fig. 1. Illustration of the conceptual flame spread theory underpinning the Rothermel model, for a fuel bed of depth δ and flame front depth D , with $x=0$ at the leading edge of the combustion region.

Reaction intensity

The reaction intensity (I_R) is defined by Eqn 2,

$$I_R = r' w_n h \eta_M \eta_s \quad (2)$$

where r' is the optimum reaction velocity, w_n is the net fuel loading, h is the low heat content, η_M is the moisture damping coefficient, and η_s is the mineral damping coefficient.

The reaction intensity, therefore, varies directly with the net fuel loading (and hence, if total mineral content is constant, with the oven-dry fuel loading). However, the fuel bed structure also affects the value of other parameters in the above equation. The optimum reaction velocity (r') is a function of the packing ratio (β), and also the maximum reaction velocity (r'_{max}), optimum packing ratio (β_{op}) and an arbitrary variable A , as shown in Eqn 3. The latter three parameters are all functions only of the surface-to-volume ratio of the fuel elements (σ),

$$r' = r'_{max} \left(\frac{\beta}{\beta_{op}} \right)^A \exp[A(1 - \beta/\beta_{op})] \quad (3)$$

The optimum packing ratio attempts to describe 'an optimum arrangement of fuel that will produce the best balance of air, fuel, and heat transfer for both maximum fire intensity and reaction velocity' (Rothermel 1972, p. 13). The maximum reaction intensity is therefore obtained at the optimum packing ratio, i.e. $\frac{\beta}{\beta_{op}} = 1$.

Propagating flux ratio

The propagating flux ratio describes the proportion of the overall energy released in the flame front (reaction

intensity) that is actually transferred to the unburnt fuel in the absence of wind or slope. The propagating flux ratio can range from zero (no transfer of heat to unburnt fuel) to one (all of heat produced in flame front transferred to unburnt fuel); however, it has been suggested that values ranging from 0.01 to 0.2 are typical (Burgan and Rothermel 1984).

Rothermel determined an empirical expression (shown in Eqn 4) for the propagating flux ratio (ξ), as a function of packing ratio (β) and surface-to-volume ratio (σ), from experimental data obtained using three fuel types (12.7 mm sticks, 6.35 mm sticks, excelsior),

$$\xi = (192 + 0.2595\sigma)^{-1} \exp[(0.792 + 0.681\sigma^{0.5})(\beta + 0.1)] \quad (4)$$

The propagating flux ratio therefore varies positively with surface-to-volume ratio and packing ratio and tends towards zero as each of these parameters decreases. The effect of increased surface-to-volume ratio is greater at higher packing ratios and vice versa (Burgan and Rothermel 1984).

Role of fuel bed structure in heat sink term

The heat sink term describes the energy required for ignition of the fuel. As such, if the energy transferred to the fuel remains constant, then the spread rate will vary negatively with the heat sink magnitude. The overall heat sink term is the product of the bulk density (ρ_b), effective heating number (ϵ) and heat of pre-ignition (Q_{ig}). Therefore, the magnitude of the heat sink term clearly varies positively with bulk density. The fuel bed structure does not affect the other terms but the effect of fuel element structure is incorporated within the effective heating number.

The effective heating number describes the actual proportion of a fuel element that is heated to the ignition temperature prior to the onset of flaming combustion (Burgan and Rothermel 1984; Andrews 2018). Therefore, an effective heating number of one describes a thermally thin fuel in which the entire fuel element is heated uniformly to the ignition temperature. Within the Rothermel model, the effective heating number is a function only of the surface-to-volume ratio, as shown in Eqn 5,

$$\epsilon = \exp(-138/\sigma) \quad (5)$$

Rothermel defined the above equation based on a curve-fit of earlier experimental data (Frandsen 1973). However, Frandsen acknowledged that several possible curves could be fitted to the experimental data given the small number of conditions studied. This simple analysis also assumes that the effect of the thermal diffusivity of fuel elements and any moisture gradient can be considered negligible (Frandsen 1973).

The heat of pre-ignition describes the heat energy required for ignition per unit mass of fuel. An analytically determined term for cellulose was used during model

development (Rothermel 1972) in which heat of pre-ignition is a function of moisture content only (with heat of pre-ignition varying positively with fuel moisture because the energy required for vaporisation increases).

Study aims

This study utilised existing observations for pine needle litter beds (a typical surface fuel layer) from a previous experimental study (Campbell-Lochrie et al. 2021) in which the effects of fuel bed structure (fuel depth, fuel loading, bulk density) were evaluated in a series of laboratory-based, quiescent flame spread experiments. The fuel conditions studied represent typical field conditions for fuel loading and fuel depth for *Pinus rigida* Mill. litter layers in the New Jersey Pinelands National Reserve, based on available data from previous studies (e.g. Gallagher et al. 2017; Mueller et al. 2017). This dataset is particularly relevant as similar fuel bed constructions, composed of *Pinus rigida* needles, have been used in a number of recent studies into flame spread mechanisms and various modelling approaches (e.g. El Houssami et al. 2016; Mueller et al. 2021).

A comparison of predicted and observed spread rates across a range of fuel bed structural conditions was therefore possible allowing comparison of the predicted and actual sensitivity to the fuel structure terms of interest. However, the main aim was to identify possible physical phenomena that are insufficiently or inadequately incorporated within the semi-empirical Rothermel model and that may contribute to any model bias.

Calorimetric measurements from the flame spread experiments also allowed comparison of predicted and observed total energy release. The total energy release is an important consideration when evaluating fire behaviour and is one of three key components in the Rothermel model flame spread equation in quiescent conditions. In turn, the fuel loading and packing ratio affect the calculation of the energy release within the Rothermel model and are generally known to influence fire behaviour. In summary, the present study therefore attempts to compare and rectify existing experimental observations, our limited porous flame spread theory and the methods by which fuel structure is included within Rothermel model predictions.

Methods

A systematic experimental study of the effect of fuel bed structure on flame spread through pine needle fuel beds was previously presented in Campbell-Lochrie et al. (2021). These laboratory-based experiments were conducted in quiescent conditions (no wind or slope). The experimental series incorporated fuel beds of various fuel loadings, bulk densities and fuel bed depths. These pine needle beds are representative of typical litter layer fuels in several pine-dominated ecosystems and fall within the original intended

application of the Rothermel model for largely homogeneous surface fuels contiguous to the ground. To explore the dependence on fuel depth, the performance of the Rothermel model was evaluated through comparison with observed spread rates from this experimental series.

Existing experimental dataset

Pine needle fuel beds were constructed on a flame spread table (1.5 by 0.67 m) with a vermiculite substrate and adjustable steel sidewalls. The fuel bed structure was varied by either altering the wet fuel loading (0.2–1.6 kg/m²) at a fixed fuel bed height (allowing bulk density to vary; 10–40 kg/m³) or by simultaneously varying fuel loading (0.2–1.6 kg/m²) and fuel depth (0.01–0.08 m) for a fixed bulk density.

The pine needles were dead pitch pine (*Pinus rigida* Mill.) or pitch-loblolly hybrid (*Pinus rigida* x *taeda*) needles collected from the Silas Little Experimental Forest in the New Jersey Pinelands National Reserve (latitude 39°54'58"N, longitude 74°35'55"W). Needles were air-dried in a storage room prior to use and fuel moisture samples were collected prior to ignition of each fuel bed and oven-dried at 60°C for 24 h. The fuel properties for each pine needle species are summarised in Table 1. The fairly constant surface-to-volume ratio throughout the experimental series allows a focus on the effects of overall fuel bed structure on model performance.

The spread rate was calculated by video analysis of the flame front position over time. The combustion products were collected by a 1 MW furniture calorimeter exhaust hood and the Heat Release Rate (HRR) was calculated using oxygen consumption calorimetry, as in similar previous studies (Morandini *et al.* 2013). Fire intensity (as originally defined by Byram as 'the rate of energy release, or rate of heat release, per unit time per unit length of fire front' (Byram 1959, p. 79)) was calculated by dividing the HRR by the fire front length (0.67 m except at the lowest fuel loading of 0.2 kg/m² where a non-linear flame front was observed). Additional experimental details and fuel properties were previously provided (Campbell-Lochrie *et al.* 2021).

Model implementation

In the present study, Rothermel's original mathematical model (Rothermel 1972) was used with the later Albini modifications (Albini 1976) incorporated, and conversion to SI units using updated constants in Wilson (1980) (accounting for the listed errata added to the latter report

and which are also discussed in Andrews (2018)). The mathematical flame spread model was incorporated within a MATLAB code and this implementation was verified through comparison with the SURFACE module of the BehavePlus fire modelling system (Version 6) (Andrews 2014).

Albini modifications

The fuel beds considered in this study were homogeneous beds of dead pine needles and therefore some of Albini's modifications (Albini 1976) (related to live fuel moisture of extinction or mixed fuel bed weighting factors) were not relevant. The modifications that were included are summarised in Table 2.

The modified combustible dry fuel loading parameter provides greater accuracy by reflecting the fact that the oven-dry fuel loading (w_o) includes the mineral content. The inclusion of an upper limit of the mineral damping coefficient ($\eta_s \leq 1$) prevents physically unrealistic estimates of $\eta_s > 1$ for effective mineral contents (S_e) of less than 1.5×10^{-4} . The alternative equation for the reaction velocity variable (A) prevents the occurrence of negative values for $\sigma < 67.73$, which would be physically unrealistic, as this would exceed the maximum reaction velocity.

Model inputs and assumptions

Various fuel and environmental properties are required as model inputs including six fuel properties (heat content (h), moisture content (M_f), total (S_T) and effective (S_E) mineral contents, fuel particle density (ρ_p) and surface-to-volume ratio (σ)), three fuel bed properties (oven-dry fuel loading (w_o), fuel depth (δ) and moisture of extinction (M_x)), and two environmental parameters (mid-flame wind speed (\bar{U}) and slope angle (ϕ)).

Table 2. Summary of modifications to original Rothermel flame spread equations.

Modified parameter	Original Rothermel	Albini modification
Combustible dry fuel loading (W_n)	$w_n = \frac{w_o}{1 + S_T}$	$w_n = w_o (1 - S_T)$
Mineral damping coefficient (η_s)	$\eta_s \geq 0$	$\eta_s \leq 1$
Reaction velocity variable (A)	$A = \frac{1}{4.774\sigma^{0.1} - 7.27}$	$A = 133\sigma^{-0.7913}$

Table 1. Summary of fuel element properties for each pine needle species.

Species	Needle diameter (mm) (\pm s.d.)	High heat of combustion (kJ/kg) (\pm max./min.)	Surface-to-volume ratio (m ⁻¹) (\pm s.d.)	Density (kg/m ³) (\pm s.d.)
Pitch pine	1.31 \pm 0.15	19 669 \pm 422	5063 \pm 640	706 \pm 71
Pitch-loblolly pine	1.34 \pm 0.12	19 672 \pm 346	4899 \pm 446	725 \pm 33

Table 3. Summary of model inputs.

Parameter	Assumed value
Heat content (h)	18 608 kJ/kg
Moisture content (M_f)	Measured for each fuel bed
Total mineral content (S_T)	0.0555
Effective mineral content (S_E)	0.010
Fuel particle density (ρ_p)	Pitch pine: 706 kg/m ³ Pitch-loblolly pine: 725 kg/m ³
Surface-to-volume ratio (σ)	Pitch pine: 5063 m ⁻¹ Pitch-loblolly pine: 4899 m ⁻¹
Oven-dry fuel loading (w_o)	Measured for each fuel bed
Fuel depth (δ)	Measured for each fuel bed
Moisture of extinction (M_x)	30%
Mid-flame wind speed (\bar{U})	0 km/h
Slope angle (ϕ)	0°

In the present study, custom fuel models were defined for each fuel species and fuel bed condition, based on the actual measured fuel bed, and fuel element properties as summarised in Table 1. As the flame spread experiments considered in the present study were conducted in the absence of wind or slope, the mid-flame wind speed and angle were both assumed to equal zero. The other model inputs are summarised in Table 3 and important assumptions are discussed below.

Heat content

The heat of combustion of both pine needle species was previously measured using bomb calorimetry (Campbell-Lochrie et al. 2021) with measured values given here in Table 1. The heat of combustion for both species varied slightly; however, this variation was within the range of experimental uncertainty. These measured values were similar to previous measurements for other pine needle species (e.g. Ovington and Heitkamp 1960; Hough 1969; Rothermel 1976) and were also similar to the generic dead fuel heat content specified in all 53 standard fuel models of 8000 BTU/lb (18 608 kJ/kg) (Burgan 1987). Therefore, this generic value was assumed for both fuel types throughout all calculations in the present study.

Moisture of extinction

The moisture of extinction is the minimum moisture content at which flame spread is not sustained. This parameter is difficult to establish experimentally, particularly given the potential dependence on fuel structure. Rothermel suggested, however, that for dead fuels the moisture of extinction may vary between 0.1 and 0.4 and therefore assumed a constant value of 0.30 during the model development (Rothermel 1972). This value represents the typical fibre saturation

point of wood (Byram et al. 1952; Rothermel 1972) and is similar to the range of extinction values observed or extrapolated from previous experiments (Rothermel and Anderson 1966; Anderson 1969). This constant value was also incorporated in the initial 11 fuel models (Rothermel 1972).

In the present study, the same constant moisture of extinction value (0.30) is assumed, allowing greater focus on other input parameters. In this study, as a result of air-drying the fuel, the FMC was likely significantly lower than the extinction value. The significance of the extinction value is therefore likely to be reduced, because Rothermel's model displays increased sensitivity to this parameter for cases in which the actual FMC approaches the extinction moisture value (Burgan 1987).

Mineral contents

Constant values of 0.0555 for the total mineral content and 0.010 for the effective mineral content were assumed throughout. These match the values assumed in the standard fuel models (Andrews 2018).

Model verification

The implementation of the Rothermel equations (with Albini modifications) in this study was verified by comparison with the SURFACE module in BehavePlus (Version 6) (Andrews 2014), which uses the Rothermel model for surface flame spread rate predictions. Custom static fuel models were used within BehavePlus to represent each of the fuel beds conditions studied in the existing experimental dataset (Campbell-Lochrie et al. 2021). These fuel beds cover a range of structural conditions with fuel loading ranging from 0.2 to 1.6 kg/m², and fuel depths ranging from 0.01 to 0.08 m. However, the lowest fuel depth cases (10 mm) were excluded from this verification analysis as the minimum valid fuel depth in BehavePlus is 20 mm. A single fuel size class (1 h dead fuels) was specified for each fuel bed.

The fuel element density and the total and effective mineral contents are fixed constant values in BehavePlus with values of 32 lbs/ft² (512.6 kg/m³), 0.0555 and 0.010 respectively. Therefore, for the validation study, these values were also used as model inputs in the custom MATLAB script to allow comparison of model predictions. Agreement in predicted spread rates was observed for all fuel bed conditions verifying the implementation of the model equations in this study.

Results and discussion

Rate of spread comparison

The predicted and experimentally observed Rate of Spread (RoS) for each fuel condition is shown in Table 4. The fuel structure was described in terms of fuel depth, fuel loading, packing ratio and the dimensionless parameter $\alpha\sigma\delta$, which incorporates porosity (α), surface-to-volume ratio (σ) and

Table 4. Comparison of Rothermel model predictions and experimentally observed spread rates for various fuel bed conditions (avg \pm s.d.).

Fuel type	Fuel loading (kg/m ²)	δ (m)	β	$\alpha\delta$	FMC (dry basis) (%)	Observed RoS (mm/min)	Predicted RoS (mm/min)	Deviation (%)
Pitch pine	0.2	0.02	0.014	100	10.1 \pm 1.1	108 \pm 31	59	45
	0.2	0.01	0.028	49	10.0 \pm 1.2	114 \pm 24	30	74
	0.4	0.04	0.014	200	9.6 \pm 0.8	144 \pm 20	120	17
	0.4	0.02	0.028	98	9.6 \pm 0.6	126 \pm 17	60	52
	0.6	0.06	0.014	300	10.9 \pm 2.1	180 \pm 28	169	6
	0.6	0.03	0.028	148	9.8 \pm 0.7	132 \pm 19	90	32
	0.8	0.08	0.014	399	10.1 \pm 0.5	210 \pm 26	234	-11
	0.8	0.04	0.028	197	10.2 \pm 0.7	162 \pm 16	117	28
	0.8	0.02	0.055	96	10.1 \pm 0.9	126 \pm 37	45	64
	1.2	0.06	0.028	295	11.3 \pm 0.3	174 \pm 33	167	4
	1.6	0.08	0.028	394	12.3 \pm 1.7	246 \pm 39	214	13
Pitch-loblolly hybrid pine	0.2	0.02	0.014	97	16.6 \pm 1.9	Unsustained	44	N/A
	0.2	0.01	0.028	48	16.6 \pm 1.9	Unsustained	23	N/A
	0.4	0.04	0.014	194	15.3 \pm 1.2	114 \pm 25	92	19
	0.4	0.02	0.028	96	15.5 \pm 0.3	90 \pm 21	47	48
	0.6	0.06	0.014	290	15.6 \pm 0.3	156 \pm 39	136	13
	0.6	0.03	0.028	144	17.1 \pm 0.7	114 \pm 18	67	41
	0.8	0.08	0.014	387	15.9 \pm 0.6	162 \pm 28	180	-11
	0.8	0.04	0.028	191	15.7 \pm 2.4	126 \pm 21	93	26
	0.8	0.02	0.055	93	16.0 \pm 0.8	96 \pm 11	37	61

Experimental observations from [Campbell-Lochrie et al. \(2021\)](#).

N/A indicates not applicable.

fuel depth (δ). Similar trends between RoS and fuel structure were apparent in both the predicted and observed spread rates although absolute values varied. A positive trend between RoS and fuel loading (for a fixed bulk density with fuel depth allowed to vary) was observed for both the predicted and observed RoS. A negative trend between RoS and bulk density (for a fixed fuel loading with fuel depth allowed to vary) was also apparent in both the predicted and observed spread rates. As described in [Campbell-Lochrie et al. \(2021\)](#), the spread rate was previously observed to be strongly correlated with the fuel bed parameter $\alpha\delta$ and a positive trend was also predicted by the Rothermel model.

The deviation between the experimentally observed RoS and the RoS predicted by the Rothermel model is also shown in [Table 4](#) for each fuel condition. The deviation is defined as the difference between observed and predicted RoS, divided by the observed RoS, and therefore represents the percentage error, with a positive value indicating an underprediction, and a negative value an overprediction.

Despite the similar trends between RoS and fuel structure, significant deviation (ranging from -11 to 74%) between predicted and observed spread was observed,

with a mean deviation of 29% across all fuel conditions. For the pitch-loblolly hybrid pine needles, non-zero spread rates were predicted for the lowest fuel loading cases (0.2 kg/m²). However, experimentally, flame spread was not sustained at this fuel condition.

In general, there was a tendency for underpredictions compared with the experimentally observed RoS, as shown in [Fig. 2](#). A similar tendency towards underprediction was also observed when comparing Rothermel spread predictions with observations in laboratory-based flame spread experiments involving ponderosa pine litter beds ([McAlpine and Xanthopoulos 1989](#)). The range of underpredictions observed by McAlpine and Xanthopoulos (15–60%) was also similar to those observed in the present study; however, there was limited variation in the fuel structures they studied (two fuel loadings were studied at a single wind speed and fuel structure was otherwise held constant).

Effect of fuel structure on rate of spread

As shown in [Table 4](#) and [Fig. 2](#), the deviation between predicted and observed spread rates varied with the fuel structure. In [Fig. 2](#), it is apparent that the deviation between

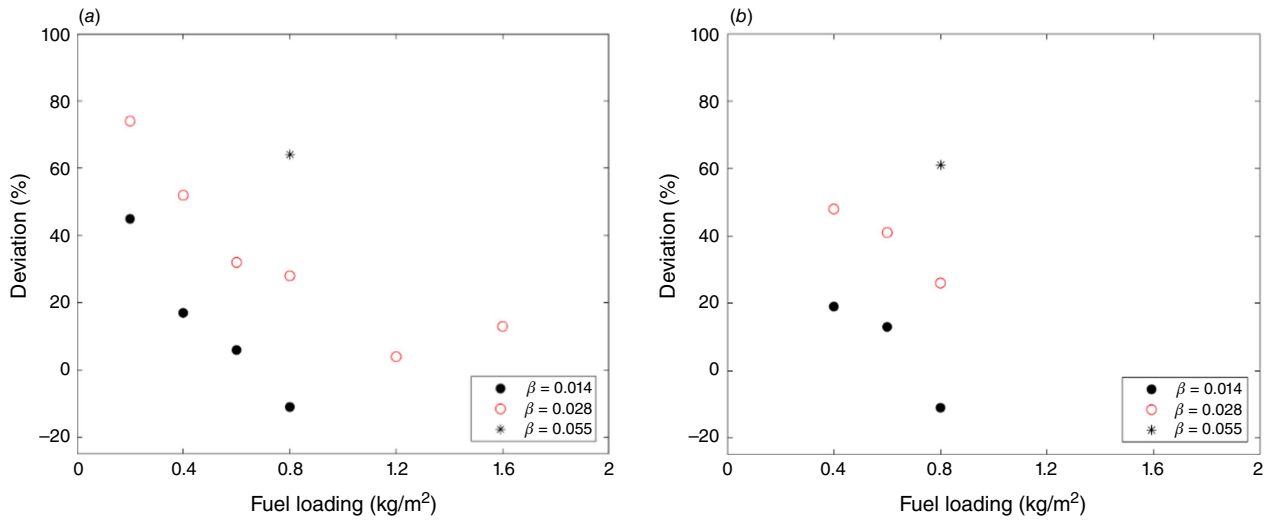


Fig. 2. Dependence of observed and predicted spread rate deviation on fuel loading and packing ratio for: (a) pitch pine needle fuel beds; (b) pitch-loblolly hybrid pine needle fuel beds.

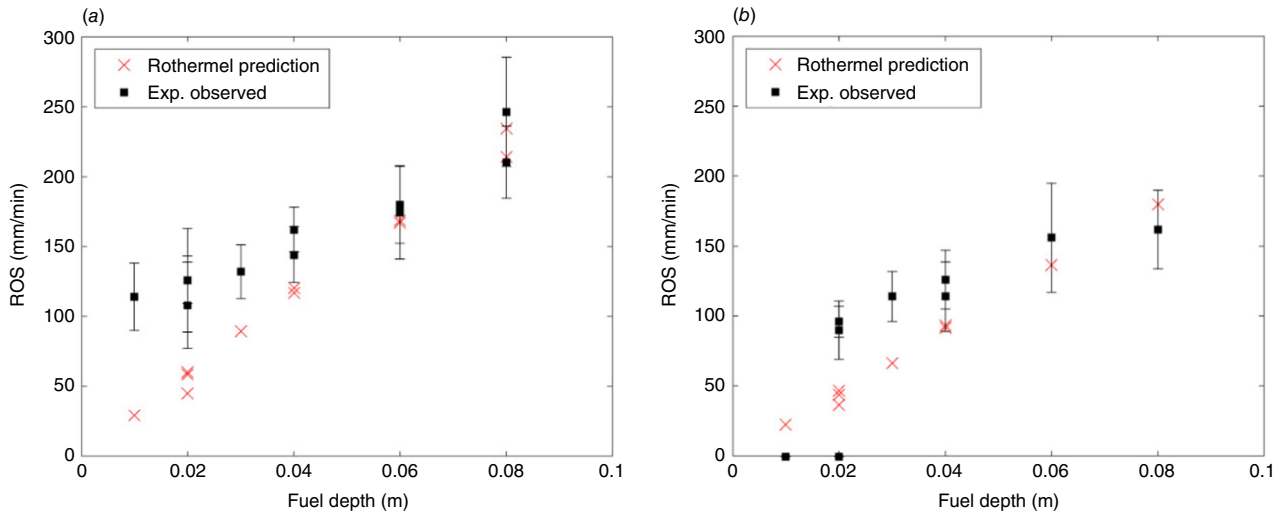


Fig. 3. Comparison of Rothermel model predictions and experimentally (Exp.) observed spread rates (RoS) for fuel beds of various fuel depth composed of: (a) pitch pine needles; (b) pitch-loblolly hybrid needles.

predicted and observed spread rates varies with fuel loading and packing ratio. For fuel beds of constant fuel loading, greater deviation was observed at higher packing ratios (more compressed fuel beds) as shown in Table 4. For fuel beds of constant packing ratio, the deviation was greatest at lower fuel loadings (also shown in Table 4).

As shown in Fig. 3, significant underpredictions of spread rate (for cases in which sustained flame spread occurred experimentally) are also observed for fuel depths of 0.04 m or less. This underprediction bias supports previous suggestions of an oversensitivity of the Rothermel model to fuel depth and fuel compaction. This may therefore indicate an under-prediction of the energy released within the fire front (the reaction intensity) or of the proportion of this energy transferred to the fuel (the no-wind propagating flux).

Reaction intensity

In this study, the availability of experimental HRR measurements allows further evaluation of model predictions of energy release within the fire front (reaction intensity). The measured HRR can be converted to Byram fireline intensity, which is a commonly used descriptor in wildland fire studies (Byram 1959). The Byram fireline intensity (I_B) is defined as the HRR per unit length of the fire front and therefore differs from the reaction intensity (I_R), which describes the HRR per unit area of the fire front. The fireline intensity (calculated from the measured HRR) can therefore be related to the reaction intensity according to Eqn 6,

$$I_B = \frac{I_R t_r R}{60} \tag{6}$$

Table 5. Comparison of Rothermel model predictions and experimentally observed reaction intensity (I_R) for various fuel bed conditions (avg \pm s.d.).

Fuel type	Fuel loading (kg/m ²)	β	Observed I_R (kW/m ²)	Predicted I_R (kW/m ²)	Deviation (%)
Pitch pine	0.2	0.014	506	181	64
	0.2	0.028	43	128	-198
	0.4	0.014	479	366	24
	0.4	0.028	373	258	31
	0.6	0.014	600	531	12
	0.6	0.028	631	384	39
	0.8	0.014	840	722	14
	0.8	0.028	799	508	36
	0.8	0.055	N/A	192	N/A
	1.2	0.028	N/A	747	N/A
	1.6	0.028	N/A	983	N/A
Pitch-loblolly hybrid pine	0.2	0.014	Unsustained	162	N/A
	0.2	0.028	Unsustained	121	N/A
	0.4	0.014	365	330	10
	0.4	0.028	328	245	25
	0.6	0.014	520	493	5
	0.6	0.028	515	360	30
	0.8	0.014	799	654	18
	0.8	0.028	622	488	22
	0.8	0.055	555	203	63

HRR measured by oxygen consumption calorimetry and converted to fireline intensity (I_B).

where t_r is the residence time (in minutes). An equation for the residence time in uniform surface fuel beds, as a function only of fuel size (diameter (d) in inches or surface-to-volume ratio (σ) in inches⁻¹), was previously proposed (Anderson 1969) on the basis of unpublished data and a review of existing studies (Fons *et al.* 1960, 1962; McCarter and Broido 1965; Woolliscroft and Law 1967), and is shown in Eqn 7,

$$t_r = 8d = \frac{384}{\sigma} \quad (7)$$

Measurements of the surface-to-volume ratio and diameter of the fuels considered in the present study were previously obtained via random sampling (see Table 1), and therefore either form of the above equation could be used. The residence time was calculated independently using both values and the average residence time value (20 s for both fuel species) was used in Eqn 6 to relate the reaction intensity and fireline intensity. It should, however, be noted that the fuel bed properties (e.g. fuel depth, packing ratio) may also affect the residence time (Catchpole *et al.* 1993).

The experimentally observed reaction intensity values (based on this conversion from the measured HRR) are given in Table 5, and plotted in Fig. 4, for both species. In general, a positive linear trend between fuel loading and reaction intensity was observed, as shown in Fig. 4. Deviation from this general linear trend was observed at the lowest fuel loading in this study (0.2 kg/m²); however, the non-linear nature of the flame front at this condition (given the needle sparsity, and as observed in other similar experiments (Campbell-Lochrie *et al.* 2023)), should also be considered. The flame front length is therefore poorly defined at these lowest fuel loadings and conversion to a fireline intensity based on the fuel bed width may be less appropriate for these conditions.

The observed trends in the experimentally observed reaction intensity are, therefore, broadly in line with the assumptions used in the model's development. Rothermel assumed a linear trend between reaction intensity of the flame front and fuel loading (as shown in the predicted reaction intensity values presented in Table 5). Further study is required to disentangle the effects of needle sparsity and fuel loading at the lowest fuel loadings. The need for

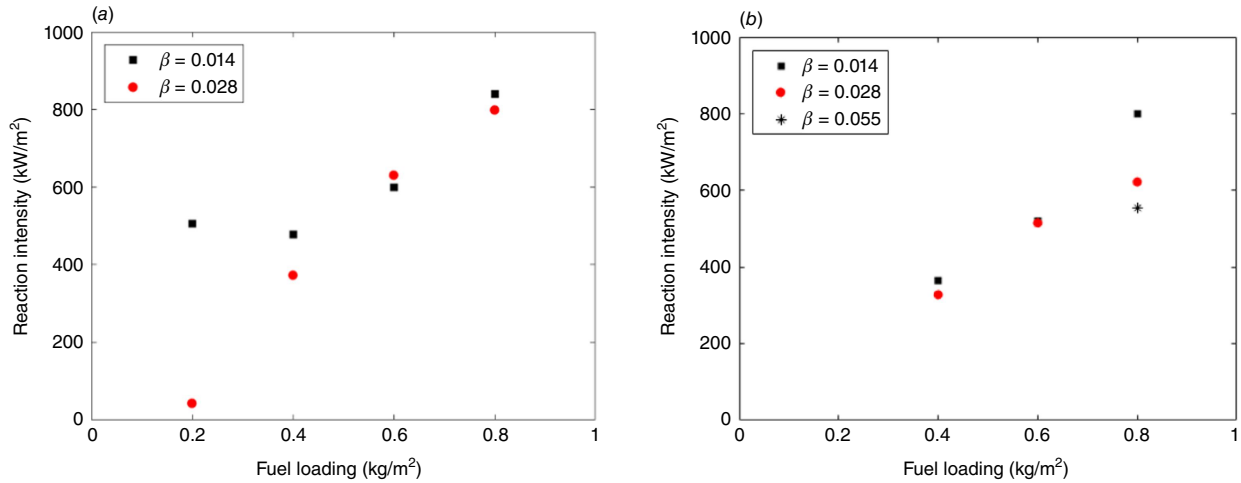


Fig. 4. Dependence of experimentally observed reaction intensity on fuel loading and packing ratio (β) for: (a) pitch pine; (b) pitch-loblolly hybrid pine needle beds.

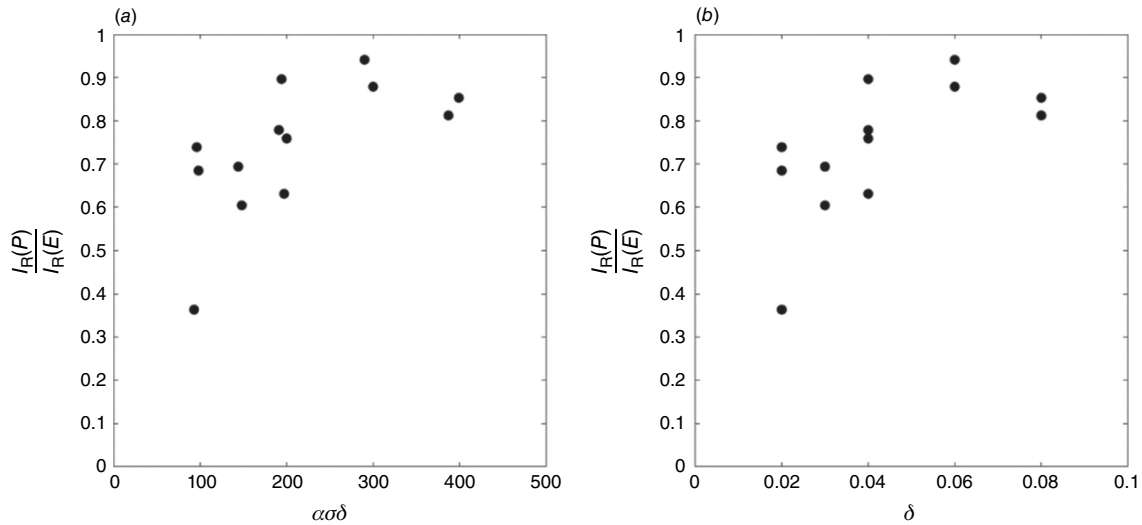


Fig. 5. Ratio of Rothermel model predictions ($I_R(P)$) to experimental observations ($I_R(E)$) of reaction intensity for fuel beds of: (a) different $\alpha\delta$; (b) different fuel bed depths (δ). Both fuel species plotted (lowest fuel loading (0.2 kg/m^2) cases omitted owing to lack of linear flame front).

further investigation of this linear trend at lower fuel loadings has been previously highlighted (Wilson 1982).

As shown in Table 5, Rothermel model predictions of reaction intensity were typically underestimates compared with the reaction intensity calculated from the measured HRR (note that experimental HRR observations were unavailable at some fuel conditions). The tendency for underestimation is also seen in Fig. 5, where the ratio of the predicted reaction intensity to the experimentally observed reaction intensity is plotted at each fuel condition for both fuel species. A ratio of less than 1 indicates an underprediction compared with the experimentally observed reaction intensity.

It should be noted that the experimentally measured reaction intensity is derived from the HRR, which is a global

measurement of the energy release including heat released in the trailing combustion region, which can be significant (Perez-Ramirez et al. 2017). Therefore, some variation between predicted and observed reaction intensity would be expected because the Rothermel model considers energy release only in the primary fire front region. Despite this, similar values were obtained at higher fuel depths, with the ratio between predicted and observed values >0.8 . However, increased divergence is observed in the same lower fuel depth range in which spread rates were also significantly underpredicted ($\delta \leq 0.04 \text{ m}$). It therefore appears that the Rothermel model underpredicts the energy release occurring in the fire front region for these lower fuel depth cases.

Physical implications for fuel structure

Unlike empirical operational models, the Rothermel flame spread model has a physics-based, theoretical framework. This therefore allows, to a certain extent, the previously discussed reduction in model performance in low $\alpha\sigma\delta$ (low fuel depth or highly packed) fuel beds to be examined in the context of the underlying physical phenomena controlling the flame spread process. The experimental observations considered in this study show clear effects of fuel loading and packing ratio on the spread rate and fire behaviour. Spread rate correlates positively with fuel loading (for fixed packing ratio and variable fuel depth) and negatively with packing ratio (for fixed fuel loading and variable fuel depth). These trends are also predicted by the Rothermel model; however, deviations between observed and predicted spread rates increase for greater packing ratios at a given fuel load. This suggests that the effects of these fuel structure properties are not adequately represented in the model for this fuel type.

It appears that the energy release in the fire front (reaction intensity) is underpredicted by the Rothermel model in these more compact fuel beds. Various explanations are possible, including the lack of consideration of any packing ratio influence on other model parameters such as the moisture of extinction. However, it is also possible that the fundamental influence of the packing ratio on the energy release in the fire front is not adequately characterised for this fuel type. It was previously observed (Frandsen and Rothermel 1972) that the combustion zone depth and burning rate profile within the combustion zone vary with packing ratio but as the focus of this previous study was on the development of a novel experimental method, further systematic investigation of this trend was not pursued.

In understanding possible discrepancies, it is useful to revisit the experiments used to inform the development of empirical terms for calculation of the reaction intensity and reaction velocity (Rothermel 1972). This involved mass loss measurements during flame spread experiments in three different fuel types (12.7 mm^{1/2} inch sticks, 1/4 inch 6.35 mm sticks excelsior) at various packing ratios. However, the fuel depth was held constant and therefore the fuel loading must also vary in each case, complicating efforts to separate the independent effects of fuel loading and packing ratio on the reaction velocity and reaction intensity. Indeed, it is for the same reason that Rothermel cautioned against comparison between fuels that 'is not intended, nor can it be made because loading was not held constant.' (Rothermel 1972, p. 17). However, no similar warning around comparisons between packing ratios is given.

This has important implications for the optimum packing ratio that is currently represented in the model as a function only of surface-to-volume ratio. This does not therefore allow for the interdependent effect of fuel loading and packing ratio on the combustion process and subsequent

energy release. Issues around the optimum packing ratio are further complicated for the litter beds considered in this study given that is unclear exactly where their behaviour lies within the context of the wood cribs and excelsior fuels used in the model's development.

This is particularly important given the lack of experimental observation of an optimum packing in excelsior fuel beds, with the selection of an optimum packing ratio instead relying on the assumption that a reaction velocity of zero occurs for cases where 'there is no fuel to support combustion' (Rothermel 1972, p. 16). Particularly given the complex role of fuel sparsity observed in the present study, such an assumption again requires consideration of the interdependent roles of fuel loading and packing ratio, and the effects on the underlying physical phenomena controlling flame spread (e.g. convective heat transfer, O₂ supply).

Conclusions

The performance of the Rothermel flame spread model was assessed using an existing series of pine needle fuel bed experiments in which the fuel bed structure (fuel loading, packing ratio, fuel depth) was systematically varied. In general, Rothermel model predictions of spread rate were underestimated compared with the experimentally observed spread rates. Divergence between predicted and observed spread rates was greatest in fuel beds with lower fuel depths (≤ 0.04 m). For fuel beds of fixed fuel loading, divergence increased as the packing ratio increased (compaction of fuel bed). These observations support previous suggestions of an oversensitivity of the Rothermel model to fuel depth or fuel bed compaction. The non-conservative bias observed in model predictions at these fuel conditions is an important consideration in operational model use and highlights the need for further study of the complex effects of fuel structure on fire behaviour.

For low fuel depths, significant deviation between the predicted and experimentally observed reaction intensity was also observed. This suggests that underpredictions of energy release in the fire front are a significant contributor to underpredictions of spread rate for these shallow and/or compressed fuel beds. Further investigation of the energy release and combustion wave profile as a function of fuel structure is required to address this oversensitivity to fuel depth and compaction.

Efforts to compare experimental observations and predictions of reaction intensity highlight the importance of accurately determining the residence time; however, the effects of fuel bed structure are not adequately incorporated within existing empirical residence time formulations. Separation of the primary fire front and secondary trailing region represents an important aspect of experimental determination of residence time and is important in understanding the effect of fuel structure on the reaction intensity and

subsequently the propagating flux sustaining flame spread. It is important that further work acknowledges the important influences of fuel loading and bulk density (or packing ratio) and that this is considered when applying concepts such as the optimum packing ratio.

References

- Albini FA (1976) 'Computer-based models of wildland fire behavior: A users' manual' (USDA Forest Service)
- Anderson HE (1964) Mechanisms of Fire Spread Research Progress Report No. 1. Research Paper INT-8 (USDA Forest Service)
- Anderson HE (1969) Heat transfer and fire spread. Research Paper INT-69. (USDA Forest Service) doi:10.5962/bhl.title.69024
- Andrews PL (1980) Testing the fire behaviour model. In 'Proceedings of the 6th Conference on fire and Forest Meteorology', Seattle. (Society of American Foresters: Seattle)
- Andrews PL (2014) Current status and future needs of the BehavePlus Fire Modeling System. *International Journal of Wildland Fire* **23**, 21–33. doi:10.1071/WF12167
- Andrews PL (2018) The Rothermel surface fire spread model and associated developments: A comprehensive explanation. General Technical Report RMRS-GTR 2018. pp. 1–121. (USDA Forest Service)
- Andrews PL, Cruz MG, Rothermel RC (2013) Examination of the wind speed limit function in the Rothermel surface fire spread model. *International Journal of Wildland Fire* **22**, 959–969. doi:10.1071/WF12122
- Athanasios M, Xanthopoulos G (2010) Fire behaviour of the large fires of 2007 in Greece. In 'Proceedings of the 6th International Conference on Forest Fire Research'. (Ed. DX Viegas) pp. 15–18. (University of Coimbra)
- Bachmann A, Allgöwer B (2002) Uncertainty propagation in wildland fire behaviour modelling. *International Journal of Geographical Information Science* **16**, 115–127. doi:10.1080/13658810110099080
- Barney RJ, Noste N V, Wilson RA (1978) Rates of Spread of Wildfire in Alaskan Fuels. Research Note PNW-311. (USDA Forest Service)
- Brown JK (1972) Field Test of a Rate-of-Fire-Spread Model in Slash Fuels. Research Paper INT-116. (USDA Forest Service)
- Burgan RE (1987) Concepts and Interpreted Examples In Advanced Fuel Modeling. General Technical Report INT-238. (USDA Forest Service)
- Burgan RE, Rothermel RC (1984) BEHAVE: Fire Behavior Prediction and Fuel Modeling System – FUEL Subsystem. PMS 439-1. (USDA Forest Service)
- Byram GM (1959) Combustion of Forest Fuels. In 'Forest Fire: Control and Use'. (Ed. KP Davis) pp. 61–89. (McGraw-Hill: New York)
- Byram GM, Sauer FM, Fons WL, Arnold RK (1952) Thermal Properties of Forest Fuels. Interim Technical Report AFSWP - 404. (USDA Forest Service)
- Byram GM, Clements HB, Bishop ME, Nelson Jr RM (1966) Final Report. Project Fire Model – An experimental study of model fires. (USDA Forest Service: Macon, GA)
- Campbell-Lochrie Z, Walker-Ravena C, Gallagher M, Skowronski N, Mueller EV, Hadden RM (2021) Investigation of the role of bulk properties and in-bed structure in the flow regime of buoyancy-dominated flame spread in porous fuel beds. *Fire Safety Journal* **120**, 103035. doi:10.1016/j.firesaf.2020.103035
- Campbell-Lochrie Z, Walker-Ravena C, Gallagher M, Skowronski N, Mueller E.V., Hadden R.M. (2023) Effects of fuel bed structure on heat transfer mechanisms within and above porous fuel beds in quiescent flame spread scenarios. *International Journal of Wildland Fire* **32**, 913–926. doi:10.1071/WF22129
- Catchpole EA, Catchpole WR, Rothermel RC (1993) Fire behavior experiments in mixed fuel complexes. *International Journal of Wildland Fire* **3**, 45–57. doi:10.1071/WF9930045
- Catchpole WR, Catchpole EA, Butler BW, Rothermel RC, Morris GA, Latham DJ (1998) Rate of spread of free-burning fires in woody fuels in a wind tunnel. *Combustion Science and Technology* **131**, 1–37. doi:10.1080/00102209808935753
- Cruz MG, Fernandes PM (2008) Development of fuel models for fire behaviour prediction in maritime pine (*Pinus pinaster* Ait.) stands. *International Journal of Wildland Fire* **17**, 194–204. doi:10.1071/WF07009
- Dell'Orfano ME (1996) 'Fire Behavior and Fuel Modeling of Flammable Shrub Understories in Northeastern Pine–Oak Forests.' (Worcester Polytechnic Institute)
- El Houssami M, Thomas JC, Lamorlette A, Morvan D, Chaos M, Hadden R, Simeoni A (2016) Experimental and numerical studies characterizing the burning dynamics of wildland fuels. *Combustion and Flame* **168**, 113–126. doi:10.1016/j.combustflame.2016.04.004
- Fernandes PM, Botelho HS, Loureiro C (2002) Models for the sustained ignition and behaviour of low-to-moderately intense fires in maritime pine stands. In 'Forest Fire Research and Wildland Fire Safety: Proceedings of IV International Conference on Forest Fire Research 2002 Wildland Fire Safety Summit', 18–23 November 2002, Luso, Coimbra, Portugal. (Ed. DX Viegas) p. 98. (University of Coimbra)
- Finney MA (2006) An overview of FlamMap fire modeling capabilities. In 'Fuels Management – How to Measure Success: Conference Proceedings', 28–30 March 2006, Portland, OR. (Eds PL Andrews, BW Butler) Proceedings RMRS-P-41. (USDA Forest Service, Rocky Mountain Research Station: Fort Collins, CO)
- Finney MA, McAllister SS, Forthofer JM, Grumstrup TP (2021) 'Wildland fire behaviour: dynamics, principles and processes.' (CSIRO Publishing)
- Fons WL, Bruce HD, Pong WY, Richards S (1960) Project Fire Model: Summary Progress Report. (USDA Forest Service: Berkeley, CA)
- Fons WL, Clements HB, Elliot ER, George P (1962) Project Fire Model: Summary Progress Report - II. (USDA Forest Service: Macon, GA)
- Frandsen WH (1973) Effective Heating of Fuel Ahead of Spreading Fire. Research Paper INT-140. (USDA Forest Service)
- Frandsen WH, Rothermel RC (1972) Measuring the energy-release rate of a spreading fire. *Combustion and Flame* **19**, 17–24. doi:10.1016/S0010-2180(72)80082-8
- Gallagher MR, Clark KL, Thomas JC, Mell WE, Hadden RM, Mueller E V, Kremers RL, El Houssami M, Filkov AI, Simeoni AA, Skowronski NS (2017) 'New Jersey fuel treatment effects: pre-and post-burn biometric data.' (Forest Service Research Data Archive) doi:10.2737/RDS-2017-0061
- Gould J (1991) Validation of the Rothermel fire spread model and related fuel parameters in grassland fuels. In 'Proceedings of the Conference on Bushfire Modelling and Fire Danger Rating Systems'. (Eds NP Cheney, AM Gill) pp. 51–64. (CSIRO Division of Forestry)
- Grabner K, Dwyer J, Cutter B (1997) Validation of Behave Fire Behavior Predictions in Oak Savannas Using Five Fuel Models. In 'Proceedings of the 11th Central Hardwood Forest Conference'. (Eds SG Pallardy, RA Cecich, GH Garrett, PS Johnson) Gen. Tech. Rep. NC-188. (U.S. Department of Agriculture, Forest Service, North Central Forest Experiment Station: St. Paul, MN)
- Hély C, Flannigan M, Bergeron Y, McRae D (2001) Role of vegetation and weather on fire behavior in the Canadian mixedwood boreal forest using two fire behavior prediction systems. *Canadian Journal of Forest Research* **31**, 430–441. doi:10.1139/x00-192
- Hiers JK, O'Brien JJ, Varner JM, Butler BW, Dickinson M, Furman J, Gallagher M, Godwin D, Goodrick SL, Hood SM, Hudak A, Kobziar LN, Linn R, Loudermilk EL, McCaffrey S, Robertson K, Rowell EM, Skowronski N, Watts AC, Yedinak KM (2020) Prescribed fire science: the case for a refined research agenda. *Fire Ecology* **16**, 11. doi:10.1186/s42408-020-0070-8
- Hough WA (1969) Caloric Value of Some Forest Fuels of the Southern United States. Research Note SE-120. (USDA Forest Service)
- Hough WA, Albini FA (1978) Predicting fire behavior in palmetto–gallberry fuel complexes. Research Paper SE-174 44. Available at <https://www.fs.usda.gov/research/treesearch/45139>
- International Association of Wildland Fire (2022) IAWF Position Statement on Climate Change and Wildland Fire. Available at <https://www.iawfonline.org/wp-content/uploads/2021/11/IAWF-Position-statement-on-climate-change--FINAL.pdf>
- Marsden-Smedley JB, Catchpole WR (1995) Fire behaviour modelling in Tasmanian buttongrass moorlands. I. Fuel characteristics. *International Journal of Wildland Fire* **5**, 203–214. doi:10.1071/WF9950203
- Masters RE, Engle DM (1994) Behave: Evaluated for Prescribed Fire Planning in Mountainous Oak: Shortleaf Pine Habitats. *Wildlife Society Bulletin* **22**, 184–191.
- McAlpine RS, Xanthopoulos G (1989) Predicted vs Observed Fire Spread Rates in Ponderosa Pine Fuel Beds: A Test of American and

- Canadian Systems. In 'Proceedings of the 10th Conference on Fire and Forest Meteorology'. (Eds DC MacIver, H Auld, R Whitewood) pp. 287–295. (Forestry Canada, Northern Forestry Centre, Edmonton, Alberta, Environment Canada, Ottawa, Ontario)
- McCarter RJ, Broido A (1965) Radiative and convective energy from wood crib fires. *Pyrodynamics* **2**, 65–85.
- Morandini F, Perez-Ramirez Y, Tihay V, Santoni PA, Barboni T (2013) Radiant, convective and heat release characterization of vegetation fire. *International Journal of Thermal Sciences* **70**, 83–91. doi:10.1016/j.ijthermalsci.2013.03.011
- Mueller EV, Skowronski N, Clark K, Gallagher M, Kremens R, Thomas JC, El Houssami M, Filkov A, Hadden RM, Mell W, Simeoni A (2017) Utilization of remote sensing techniques for the quantification of fire behavior in two pine stands. *Fire Safety Journal* **91**, 845–854. doi:10.1016/j.firesaf.2017.03.076
- Mueller EV, Gallagher MR, Skowronski N, Hadden RM (2021) Approaches to Modeling Bed Drag in Pine Forest Litter for Wildland Fire Applications. *Transport in Porous Media* **138**, 637–660. doi:10.1007/s11242-021-01637-8
- Norrum RA (1982) Predicting wildfire behavior in black spruce forests in Alaska. Research Note PNW-401. (USDA Forest Service)
- Ovington JD, Heitkamp D (1960) The Accumulation of Energy in Forest Plantations in Britain. *Journal of Ecology* **48**, 639–646. doi:10.2307/2257339
- Perez-Ramirez Y, Mell WE, Santoni PA, Tramoni JB, Bosseur F (2017) Examination of WFDS in Modeling Spreading Fires in a Furniture Calorimeter. *Fire Technology* **53**, 1795–1832. doi:10.1007/s10694-017-0657-z
- Rothermel RC (1972) A Mathematical Model for Predicting Fire Spread in Wildland Fuels. Research Paper INT-115. (USDA Forest Service, Intermountain Forest and Range Experiment Station: Ogden, UT)
- Rothermel RC (1976) 'Forest Fires and the Chemistry of Forest Fuels.' (Academic Press) doi:10.1016/b978-0-12-637750-7.50018-2
- Rothermel RC (1983) How to predict the spread and intensity of forest and range fires. General Technical Report INT-GTR-143. (USDA Forest Service) doi:10.2737/INT-GTR-143
- Rothermel RC, Anderson HE (1966) Fire Spread Characteristics Determined In The Laboratory. Research Paper INT-30. (US Forest Service, Intermountain Forest & Range Experiment Station: Ogden, UT)
- Saltelli A (2000) What is Sensitivity Analysis. In 'Sensitivity Analysis'. (Eds A Saltelli, K Chan, EM Scott) pp. 3–12. (Wiley: Chichester)
- Salvador R, Piñol J, Tarantola S, Pla E (2001) Global sensitivity analysis and scale effects of a fire propagation model used over Mediterranean shrublands. *Ecological Modelling* **136**, 175–189. doi:10.1016/S0304-3800(00)00419-1
- Sample M, Thode AE, Peterson C, Gallagher MR, Flatley W, Friggens M, Evans A, Loehman R, Hedwall S, Brandt L, Janowiak M, Swanston C (2022) Adaptation Strategies and Approaches for Managing Fire in a Changing Climate. *Climate* **10**, 58. doi:10.3390/cli10040058
- Streeks TJ, Owens MK, Whisenant SG (2005) Examining fire behavior in mesquite–acacia shrublands. *International Journal of Wildland Fire* **14**, 131–140. doi:10.1071/WF03053
- Ujjwal KC, Aryal J, Garg S, Hilton J (2021) Global sensitivity analysis for uncertainty quantification in fire spread models. *Environmental Modelling & Software* **143**, 105110. doi:10.1016/j.envsoft.2021.105110
- Van Wagtenonk JW, Botti SJ (1984) Modeling Behavior of Prescribed Fires in Yosemite National Park. *Journal of Forestry* **82**, 479–484. doi:10.1093/jof/82.8.479
- Van Wilgen BW, Wills AJ (1988) Fire behaviour prediction in savanna vegetation. *South African Journal of Wildlife Research* **18**, 41–46. doi:10.10520/AJA03794369_3478
- Van Wilgen BW, Le Maitre DC, Kruger FJ (1985) Fire Behaviour in South African Fynbos (Macchia) Vegetation and Predictions from Rothermel's Fire Model. *Journal of Applied Ecology* **22**, 207–216. doi:10.2307/2403338
- Weise DR, Koo E, Zhou X, Mahalingam S, Morandini F, Balbi JH (2016) Fire spread in chaparral – A comparison of laboratory data and model predictions in burning live fuels. *International Journal of Wildland Fire* **25**, 980–994. doi:10.1071/WF15177
- Wilson R (1980) Reformulation of Forest Fire Spread Equations in SI Units. Research Note INT-292. (USDA Forest Service)
- Wilson Jr RA (1982) A Reexamination of Fire Spread in Free-Burning Porous Fuel Beds. Research Paper INT-289. (US Forest Service)
- Wilson Jr RA (1990) Reexamination of Rothermel Fire Spread Equations in No-Wind and No-Slope Conditions. Research Paper INT-434. (USDA Forest Service, Intermountain Research Station)
- Woolliscroft MJ, Law M (1967) A Report on Forest Fire Fieldwork (New Forest, March 1965). Fire Research Note No. 647. (UK Fire Research Station)

Data availability. The data that support this study are available in the article.

Conflicts of interest. The authors declare no conflicts of interests.

Declaration of funding. This work was funded by the US Department of Defense – Strategic Environmental Research and Development Program (SERDP) under project grant RC-2641.

Author affiliations

^ASchool of Engineering, The University of Edinburgh, Edinburgh, UK.

^BNorthern Research Station, USDA Forest Service, New Lisbon, NJ, USA.

^CNorthern Research Station, USDA Forest Service, Morgantown, WV, USA.