



Title	Effects of livestock wastewater variety and disinfectants on the performance of constructed wetlands in organic matters and nitrogen removal
Authors(s)	Hu, Y.S., Kumar, J.L.G., Babatunde, A.O., Zhao, X.H., Zhao, Y.Q.
Publication date	2011-09
Publication information	Hu, Y.S., J.L.G. Kumar, A.O. Babatunde, X.H. Zhao, and Y.Q. Zhao. "Effects of Livestock Wastewater Variety and Disinfectants on the Performance of Constructed Wetlands in Organic Matters and Nitrogen Removal" 18, no. 8 (September, 2011).
Publisher	Springer
Item record/more information	http://hdl.handle.net/10197/3978
Publisher's statement	The final publication is available at www.springerlink.com/content/97m71r7622ql2x01/
Publisher's version (DOI)	10.1007/s11356-011-0507-3

Downloaded 2023-10-05T14:16:07Z

The UCD community has made this article openly available. Please share how this access benefits you. Your story matters! (@ucd_oa)



© Some rights reserved. For more information

Effects of livestock wastewater variety and disinfectants on the performance of constructed wetlands in organic matters and nitrogen removal

Y.S. Hu*, J.L.G. Kumar, A.O. Babatunde, X.H. Zhao and Y.Q. Zhao

Centre for Water Resources Research, School of Architecture, Landscape and Civil Engineering, Newstead Building, University College Dublin, Belfield, Dublin 4, Ireland

*Corresponding author: Yuansheng Hu, e-mail, yuansheng.hu@ucd.ie; telephone, +353-1-7163209; fax. +353-1-7163297

Abstract

Background, aim and scope Treatment performance of constructed wetlands (CWs) is largely dependent on the characteristics of the wastewater. Although livestock wastewater is readily biodegradable in general, its variety in biodegradability can still be significant in practice. In addition, it is a common practice to periodically use disinfectants in livestock activities for health concerns. Obviously, the residual of the disinfectants in livestock wastewater may have serious inhibitory effect on the microbial activities during wastewater treatment. Thus, the main objective of this study was to examine the variety of livestock wastewater in biodegradability and its effect on the performance of a pilot scale tidal flow CWs (TFCWs) in organic matter and nitrogen removal. Furthermore, investigation of the potential inhibition of the chosen disinfectants on organic matter biodegradation and nitrification was another aim of this study.

Materials and methods The TFCWs system consisted of four-stage down flow reed beds with a hydraulic loading rate of $0.29 \text{ m}^3/\text{m}^2 \text{ d}$. Long term stored livestock wastewater and fresh livestock wastewater were used, respectively, as feed to the system in different periods. Meanwhile, batch aeration tests were carried out to investigate the difference in biodegradation of the two types of wastewaters. Inhibitions of two types of disinfectants, namely UNIPRED and HYPROCLOR ED, on microbial activities were investigated in laboratory batch tests, with dosage of from 0.05% to 0.5%.

Results With fresh livestock wastewater, removal efficiencies of up to 93% and 94% could be achieved with average of 73% and 64% for COD and TN, respectively. The performance deteriorated when the system was fed with long-term stored wastewater. In the batch tests, the long time stored wastewater was characterized as non-biodegradable or at least very slowly biodegradable, while the fresh wastewater was readily biodegradable. UNIPRED showed very strong inhibition on both heterotrophic organisms and nitrifiers. Tested inhibition started from content of 0.05%, which is 1/10 of the recommended usage rate. Inhibitory effect of HYPROCLOR ED on COD degradation started from 0.1% and complete inhibition occurred from content of 0.3%, while significant inhibition on nitrification started from 0.1%.

Conclusions Livestock wastewater could vary significantly in biodegradability and it may turn to be non-biodegradable after a long-term storage. The variety of the livestock wastewater has a decisive influence on the performance of the CWs system, especially in TN elimination. In addition, the application of disinfectants UNIPRED and HYPROCLOR ED may cause serious inhibition on microbial activities and subsequent system failure.

Keywords Biodegradability, Constructed wetlands, Disinfectant, Livestock wastewater, Nitrogen

1 Background, aim and scope

Constructed wetlands (CWs) as a low-cost technology is becoming a popular alternative for livestock wastewater treatment (Cronk 1996; Hunt et al. 2001; Mankin and Ikenberry 2004; Harringtona and McInnesb 2009; Lee et al. 2010). With typical configurations (surface CWs and subsurface CWs), average removal efficiencies of 65%, 53%, 48%, 42% and 42% were obtained for BOD₅, TSS, NH₄-N, TN and TP, respectively, were reported for livestock wastewater treatment (Knight et al. 2000). More significantly, to overcome wastewater distribution problem and the poor oxygen transfer rate, a so called 'tidal flow' CWs (TFCWs) was proposed and developed over the last two decades (Green et al. 1997; Sun et al. 1999; Zhao et al. 2004; Sun et al. 2006; Zhao et al. 2009). The 'tidal flow' refers to the rhythmic and fast filling/draining generated by pumps in the bed matrices. During the draining process, air is drawn into the bed matrices from the atmosphere and thereby oxygen transfer is greatly enhanced. With this operation strategy, treatment capacity can be remarkably enhanced with hydraulic loading of up to $0.43 \text{ m}^3/\text{m}^2 \text{ d}$ and organic loading of $1,055 \text{ gCOD}/\text{m}^2 \text{ d}$ (Zhao et al. 2004), which almost decuples the general loading rate adopted in most CWs systems (Knight et al. 2000; Sundaravadivel and Vigneswaran 2001).

Despite the significant development in the CWs process, less attention has been paid in the characteristics of the livestock wastewater itself. However, the treatment performance is largely dependent on the characteristics of the wastewater, especially in biological nutrient removal (Melcer et al. 2003). According to the treatment ability, influent total COD can be divided into two major components: the biodegradable COD and the non-biodegradable (inert) COD. Each of them can be further subdivided into soluble part and particulate part. The inert soluble COD fraction in the

1 influent bypasses the treatment system without any changes. While the inert particulate fraction can be entrapped in the
2 treatment system, so certain reduction of this part can still be achieved although it is non-biodegradable. Within the
3 biodegradable components, only the soluble biodegradable COD fraction can be readily utilized by microorganisms,
4 whereas the particulate biodegradable fraction has to be converted to soluble fraction before it can be up-taken (Henze et
5 al. 1987; Orhon et al. 1997). Therefore the soluble biodegradable fraction has the prominent influence on the pollutants
6 conversion rates, such as COD degradation and denitrification. When the wastewater passes through the treatment system,
7 most of the biodegradable fractions and the inert particulate fraction will be removed, and the influent inert soluble
8 fraction becomes the major component of the effluent COD. In general, the major COD fraction in livestock wastewater
9 is easily biodegradable. However, its variety in biodegradability can still be significant in practice depending on
10 management and storage conditions before the treatment. This variety may significantly affect the treatment ability of the
11 organic matters themselves and the biological nitrogen removal performance (Boursier et al. 2005). Furthermore,
12 considerable quantities of wastewater are generated on animal farms from washing water and yard runoff. This contains
13 animal faeces and urine as well as parlour washings. It is therefore a common practice to periodically use disinfectants
14 for health concerns during cleaning operation. Obviously, the residual of the disinfectants in wastewater may have
15 serious inhibitory effect on the microbial activities (Bod k et al. 2008).

16 Thus, the main objective of this study was to examine the variety of livestock wastewater in biodegradability and its
17 effect on the performance of a pilot scale TFCWs in organic matters and nitrogen removal. The potential inhibition of the
18 chosen disinfectants on organic matter biodegradation and nitrification was also investigated.

19 20 **2 Materials and methods**

21 22 **2.1 Pilot scale alum sludge based tidal flow constructed wetlands**

23
24 The pilot-scale tidal flow CWs system was located at an animal farm in Newcastle, Co. Dublin, Ireland (Fig. 1). The
25 system consisted of four-stage down flow reed beds. In particular, the system innovatively uses dewatered alum sludge as
26 the main substrate to improve the phosphorus removal. Alum sludge refers to the drinking water treatment residual when
27 aluminium sulphate is adopted as coagulant for purification purpose. Each stage of the CWs was constructed using
28 identical 1100L plastic bins and connected with submersible pumps. In tidal flow operation, there were 3 cycles per day
29 and each cycle consists of 4 hours of wastewater contact and 4 hours of rest (during which wastewater is drained out to
30 the next stage), giving a hydraulic loading rate of $0.29 \text{ m}^3/\text{m}^2 \text{ d}$. Details of the system set up and operation was described
31 in Zhao et al. (2010). Grab samples were taken once a week from the influent, effluent and each stages and analyzed for
32 COD, BOD₅, TN, NH₄⁺-N, TP, pH and SS.



33
34
35 **Fig. 1 Pilot-scale tidal flow constructed wetlands system**

36 37 **2.2 Livestock wastewater**

38
39 The farm currently comprises of ca 17,000m² of farm and laboratory buildings with over 2,000 livestock units of sheep,
40 pigs, cattle and horses. Wastewater from the farm activities is collected from the different units and finally stored in a
41 main holding tank with the approximate capacity of 1,000 m³ on the farm before its spreading on the grass of the
42 farmland. Close to the main holding tank, there is a small underground wastewater tank, which is used to temporarily
43 hold the wastewater produced from the piggery before it's transferred into the main holding tank. The system operation
44 was classified into four periods with different raw wastewater sources. In period 1 (06/02/2009-02/06/2009), the system
45 started up with the long time stored wastewater from the main holding tank (stored wastewater). In period 2 (05/06/2009-
46 17/08/2009), raw piggery wastewater (fresh wastewater) from the pig unit of the farm was introduced to the CWs system

1 from the underground tank before it was mixed with the long stored wastewater in the main holding tank. During period
 2 3 (18/08/2009-22/10/2009), no piggery wastewater was produced because the pigs were moved after maturation and the
 3 raw wastewater was fed into the system from the main holding tank again. In period 4 (25/10/2009-10/12/2009), raw
 4 wastewater was changed back to piggery wastewater produced with the new batch of pigs. Appropriate dilution was
 5 carried out using tap water to achieve desired concentration throughout the whole experimental period. The composition
 6 of the influent wastewater into the system was summarized in Table 1.
 7

8 Table 1 Composition (average) of the influent wastewater into the CWs system

	Period 1 (06/02/-02/06)	Period 2 (05/06-17/08)	Period 3 (18/08-22/10)	Period 4 (25/10-10/12)
Influent	stored wastewater	fresh wastewater	stored wastewater	fresh wastewater
COD (mgL ⁻¹)	463	527	723	1306
BOD ₅ (mgL ⁻¹)	45	302	261	716
TN (mgL ⁻¹)	61	117	211	149
NH ₄ ⁺ -N (mgL ⁻¹)	41	75	165	131
TP (mgL ⁻¹)	15	11	24	36
SS (mgL ⁻¹)	175	115	177	365

9
 10 To explore the difference between the long time stored wastewater and the fresh piggery wastewater in
 11 biodegradability, series of batch tests were conducted to investigate the reduction of soluble COD with alum sludge (Al-S)
 12 samples (collected from the field CWs system after three months operation) and activated sludge (AS) samples (collected
 13 from a local municipal wastewater treatment plant) in a series of beakers at room temperature. Unlike the particulate
 14 COD fractions, which can be entrapped in a porous medium, soluble COD can only be reduced through biological
 15 conversion. Hence, the reduction of soluble COD in the aerobic batch tests indicates the amount of soluble biodegradable
 16 COD fraction. Furthermore, the residual soluble COD in the aerobic batch tests represents the amount of inert soluble
 17 fraction of the influent organic matters, which determine directly the extent of the treatment ability of the wastewater.
 18 500 mL wastewater from the main holding tank with COD of 1,345 mgL⁻¹ was put into beaker (2000mL capacity) No. 1
 19 and No. 2, respectively, while 48 mL fresh piggery wastewater with COD of 14,980 mgL⁻¹ was put into beaker No. 3.
 20 Thereafter, 100g Al-S was added into beaker No. 1 and then the beaker was made up to 1600 mL level with tap water.
 21 The same volume was made up in beaker No. 2 and beaker No. 3 with activated sludge of solids concentration of 3,100
 22 mgL⁻¹. The activated sludge was pre-aerated for 3 hrs and settled and washed for several times with tap water before it
 23 was introduced into the beakers. In beaker No. 4, the same activated sludge sample as beaker No. 2 and No. 3 was mixed
 24 with sodium acetate (NaAc) and nutrient buffer. In such the preparation of all the four beakers, initial conditions were
 25 thus as soluble COD 200-350 mgL⁻¹, NH₄⁺-N 30-32 mgL⁻¹, PO₄³⁻-P 15.9-18.2 mgL⁻¹ and pH 7-8. Thereafter, the four
 26 beakers were aerated with diffusers placed at the button of each beaker to keep DO above 3 mgL⁻¹. Samples were taken
 27 over time and filtered with 0.45 µm filter paper for soluble COD monitoring.
 28

29 2.3 Effect of disinfectants on COD degradation and nitrification

30
 31 Two types of disinfectants, UNIPRED and HYPROCLOR ED (HYPRED, France) were used for cleaning and
 32 disinfection purpose in the dairy unit (the equipment, pipelines and bulk tanks) in the farm. UNIPRED contains over 50%
 33 concentrated phosphoric acid and high levels of surfactants. The recommended usage rate is 0.4-0.6%. HYPROCLOR
 34 ED consists of 444 gL⁻¹ sodium hypochlorite together with sodium hydroxide. Usage rate is recommended as 0.5%. In
 35 practice, UNIPRED was applied once a week with the dosage of 1% (2 liters UNIPRED in 200 liters water), while
 36 HYPROCLOR ED was applied every day with the usage rate of 0.5% (1 liter per day in 200 liters water). The residual
 37 waters from the cleaning & disinfection process were then mixed with the dairy wastewater (approx. 2m³ day⁻¹) and
 38 finally transferred into the main holding tank. To investigate the potential inhibition of these two disinfectants on
 39 microbial activities, lab batch tests were performed with the fresh piggery wastewater and activated sludge in series of
 40 1000 mL beakers at room temperature. Aeration was supplied with diffusers placed at the button of each beaker to keep
 41 DO above 3 mgL⁻¹. Experimental conditions were summarized in Table 2 and Table 3 with UNIPRED and
 42 HYPROCLOR ED, respectively. Samples were taken over time and filtered with 0.45 µm filter paper for soluble COD
 43 and NH₄⁺-N monitoring.
 44

45 Table 2 Batch aeration tests with UNIPRED

Beaker No.	0	1	2	3	4
AS (gL ⁻¹)	2	2	2	2	2
UNIPRED (% , V/V)	0	0.05	0.1	0.3	0.5
pH _{initial}	7.3	4.6	3.2	2.6	2.4

46

1 Table 3 Batch aeration tests with HYPROCLOR ED

Beaker No.	0	1	2	3	4	5
AS (gL^{-1})	2	2	2	2	2	0
HYPROCLOR ED (% V/V)	0	0.05	0.1	0.3	0.5	0.5
$\text{pH}_{\text{initial}}$	7.3	8.8	9.3	10.4	11.5	11.7


2
3 2.4 Analyses

4
5 COD, TN, $\text{NH}_4^+\text{-N}$, TP and SS were analyzed using a Hach DR/2400 spectrophotometer according to its standard
6 operating procedures. BOD_5 was measured with a Hach BODTrak instrument. pH was measured with a pH meter (Orion
7 920 A+, Thermo). DO was monitored with a microprocessor oximeter (Oxi 325, WTW).
8

9 **3 Results and discussion**


10 3.1 CWs system performance in organic matter and nitrogen removal

11
12 The overall performances in organic matters and nitrogen removal are illustrated in Fig. 2 and Fig. 3, respectively. The
13 results demonstrate that the COD removal efficiency is largely dependant on the source of the wastewater. In the start-up
14 period with the long time stored wastewater (Period 1), only 26% COD removal in average (average effluent 355 mgL^{-1})
15 was achieved over the first 3 months. In most cases, insufficient DO is the main reason for the poor biological COD
16 removal. In such case, nitrification is restrained more seriously than COD reduction because oxygen is utilized for carbon
17 oxidization prior to nitrification due to the much faster growth rate of heterotrophic organisms than nitrifiers (Henze et al.
18 1987). However, very good nitrification had been established during this period since $\text{NH}_4^+\text{-N}$ removal had reached to
19 93% with the average of 85% (average effluent 7.7 mgL^{-1}) in the third month (Fig. 3). This suggests that DO is not the
20 reason for the poor COD removal performance in this case. Instead, other factors such as biodegradability of the
21 wastewater and toxicity should be examined. After fresh piggery wastewater was fed to the CWs system (Period 2), COD
22 removal increased steadily and reached to 94% (with effluent of 44 mgL^{-1}) one and half month later. At the same time,
23 nitrification still maintained above 80%. This indicates that the tidal flow operation strategy can provide sufficient oxygen
24 for both COD oxidization and nitrification. Thereafter, COD removal dropped again when the influent was changed back
25 to the long time stored wastewater during Period 3. Finally, good COD removal of up to 84% (with effluent of 197 mgL^{-1})
26 was restored with fresh piggery wastewater produced by the new batch of pigs in Period 4. In spite of the changes of the
27 wastewater/source, the CWs system performed more stable in BOD_5 removal (data not shown). Average BOD_5 removal
28 was recorded as 65%, 79%, 63% and 73% with average effluent of 28, 60, 113 and 191 mgL^{-1} from Period 1 to Period 4,
29 respectively. This could be explained with the fact that BOD represents the biodegradable part of organic matters,
30 wherefore there is no difficulty for microorganisms to degrade this part if DO is adequate.
31
32

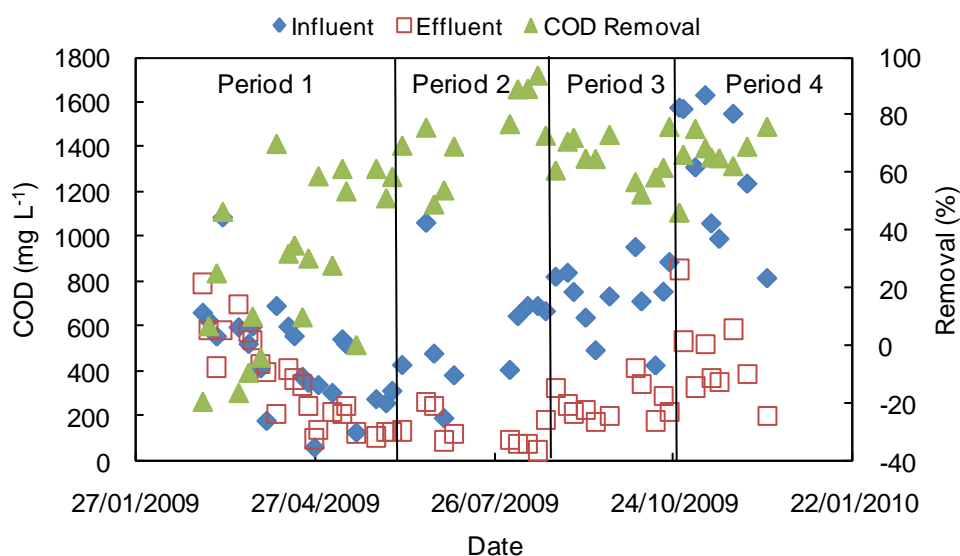

33 Fig. 2 System performance in organic matter removal
34
35

1 The total nitrogen elimination showed the same trend as COD removal. During period 1, poor TN removal efficiency
 2 with an average of only 27% (average effluent 52 mgL⁻¹) was achieved in despite of good nitrification performance. In
 3 period 2, the total nitrogen removal increased markedly from 50% to over 90% with the average of 64% (average effluent
 4 32 mgL⁻¹) after the fresh piggery wastewater was introduced into the CWs system. After that, it dropped dramatically to
 5 13.5-47.8% (average effluent 150 mgL⁻¹) due to the lack of carbon source for denitrification with the long stored
 6 wastewater in period 3. In period 4, it rapidly jumped to around 80% (average effluent 40 mgL⁻¹) after the influent source
 7 was changed back to the fresh piggery wastewater. However, the drop after 23 Nov. 2009 should not be explained with
 8 the variety of the wastewater since the system was still fed with the same piggery wastewater. Instead, it was in
 9 accordance with the decrease in nitrification performance due to low temperature (below 5 °C) as shown in Fig. 3
 10 (Wiesmann et al. 2007). TN elimination showed more sensitive to the wastewater variety comparing with COD removal.
 11 Average TN removal decreased from 66% in Period 2 to 32% in period 3, while COD removal only dropped from 72%
 12 to 65%. This is mainly because carbon source is always oxidized firstly with oxygen rather than utilized for
 13 denitrification. Unless sufficient carbon is available, denitrification is limited due to lack of carbon source (Henze et al.
 14 1997). Furthermore, less DO was consumed with the stored wastewater, and therefore it was more difficult to create
 15 anoxic condition for denitrification.
 16

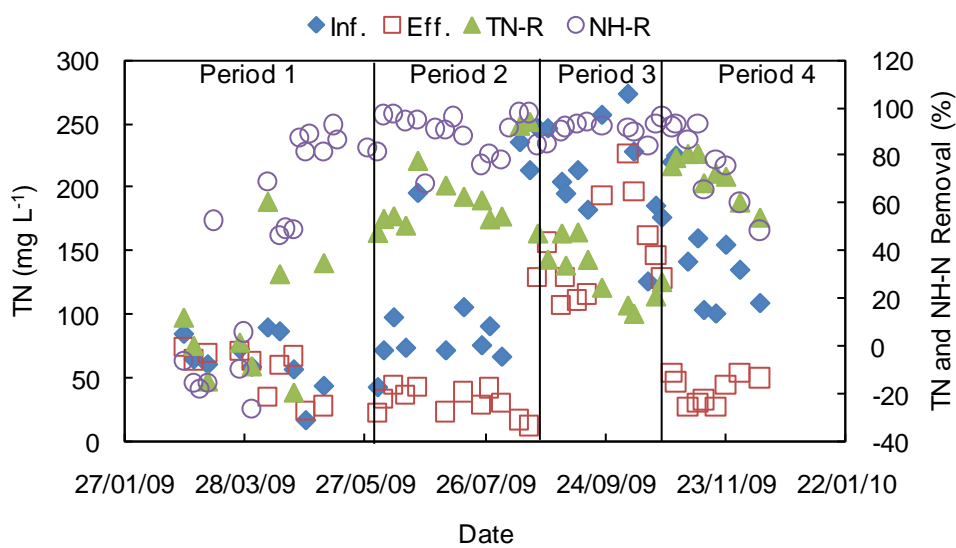

17
 18 Fig. 3 System performance in total nitrogen removal
 19

20 3.2 Biodegradability of long time stored livestock wastewater and fresh piggery wastewater
 21

22 To facilitate the understanding of the performance of the CWs system, laboratory batch tests on the biodegradation of the
 23 long time stored livestock wastewater and the fresh piggery wastewater were conducted and the results are illustrated in
 24 Fig. 4. Soluble COD of the long stored wastewater kept more or less constant over 9 hrs aeration with activated sludge
 25 while it even increased slightly with the alum sludge sample obtained from the CWs system. However, the fresh piggery
 26 wastewater showed similar trend with NaAc in biodegradation. Significant reduction of soluble COD from 310 mgL⁻¹ to
 27 45 mgL⁻¹ after 9 hrs aeration was observed with activated sludge. The results clearly revealed the significant difference
 28 between the two types of wastewaters in biodegradability. The stored livestock wastewater can be characterized as non-
 29 biodegradable or at least very slowly biodegradable, while the fresh piggery wastewater is readily biodegradable as NaAc.
 30 The dramatic variety of the livestock wastewater during the long term storage might be attributed to the fact that the main
 31 holding tank was served as a facultative lagoon, which has been widely applied for the treatment of high strength
 32 agricultural wastewaters (Hart and Turner 1965; Schulz and Barnes 1990). Aerobic zone formed in the top layer of the
 33 tank with DO diffused from the air and produced through photosynthesis with algae on the water surface, while the
 34 middle and bottom layer turned to be facultative or anaerobic. Readily biodegradable fraction of the livestock wastewater
 35 degraded in both of the aerobic zone and anaerobic zone via oxidation and anaerobic conversions. As a result, the
 36 livestock wastewater changed to be slowly biodegradable or non-biodegradable (Hamilton et al. 2006).
 37

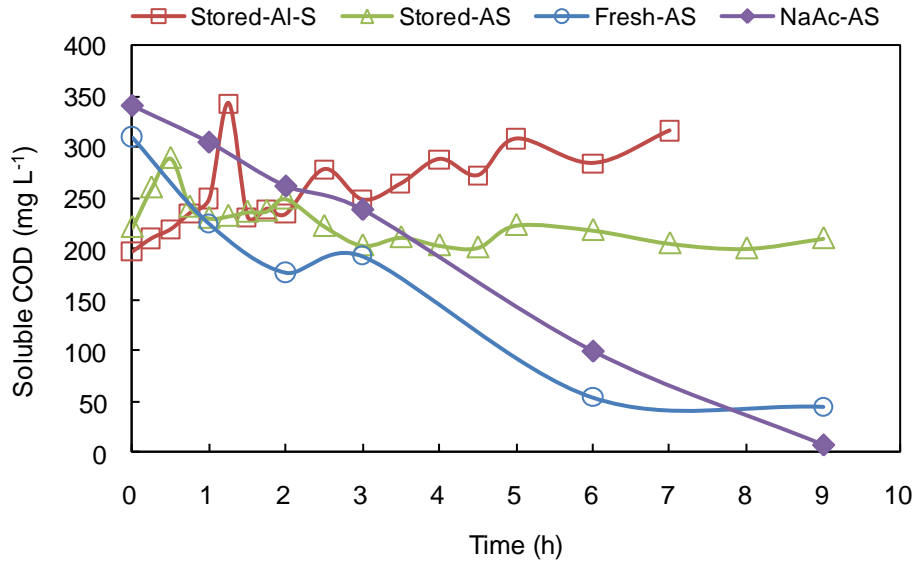


Fig. 4 Degradation of the long stored livestock wastewater (Stored) and fresh piggery wastewater (Fresh) with field alum sludge (Al-S) and activated sludge (AS)

3.3 Inhibition of UNIPRED on COD degradation and nitrification

The effects of UNIPRED on COD biodegradation and nitrification are shown in Fig. 5(a, b). UNIPRED showed very strong inhibition on both heterotrophic organisms and nitrifiers. Only 0.05% of UNIPRED, which is of 1/10 of the recommend usage rate, was strong enough to completely inhibit COD biodegradation and nitrification. The main inhibition mechanism is probably the acidic condition created by the concentrated phosphoric acid, as the initial pH showed in Table 2. For carbonaceous removal with aerobic biological oxidation, the tolerable pH range is 6-9. For nitrification, rates decline significantly at pH below 6.8 (Tchobanoglous et al. 2003). While the pH values were 4.2, 3.6, 2.6 and 2.4 with 0.05%, 0.1%, 0.3% and 0.5% of UNIPRED, respectively (Table 2) in the batch tests, which exceeded the tolerable range for both heterotrophic organisms and nitrifiers. The increasing of the initial soluble COD with the addition of UNIPRED may be caused by the surfactants contained in the disinfectant. The significant increase of soluble COD with high content of UNIPRED along with time might result from the cell death and the consequent lysis, similar to COD release caused by microbial cell disruption with high salt concentrations (Kincannon and Gaudy 1966), toxic compounds (Aquino and Stuckey 2004) and ultrasonic treatment of biological sludge (Tiehm et al. 1997).

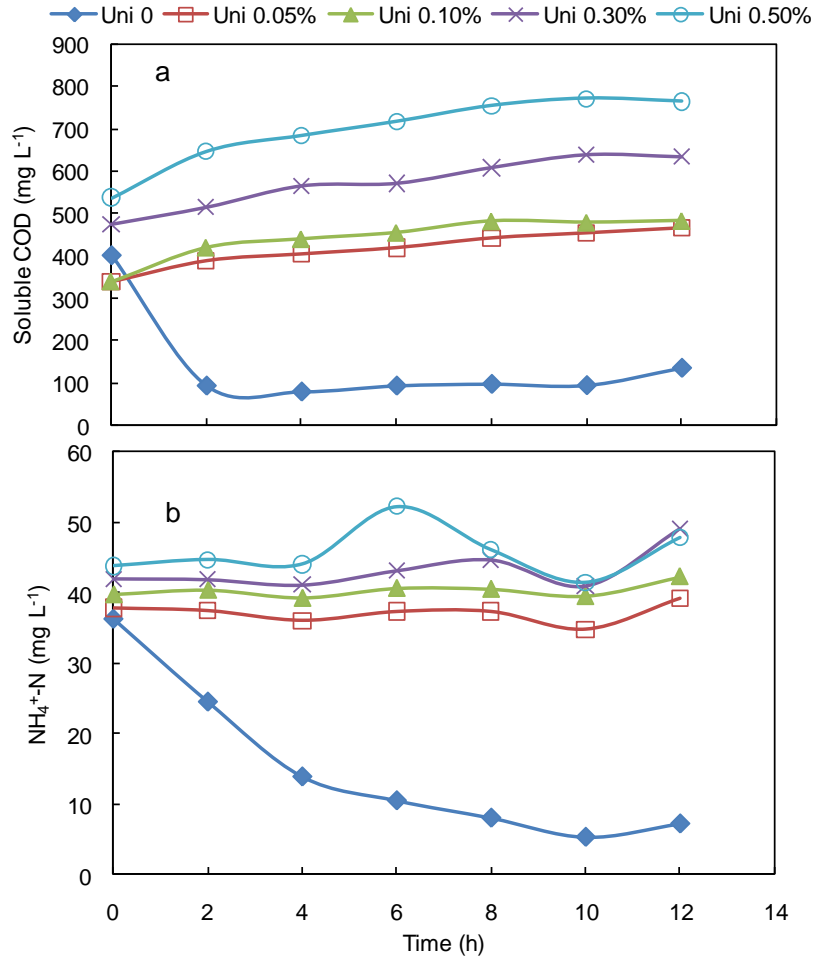


Fig. 5 Inhibition of UNIRED on COD biodegradation (a) and nitrification (b)

3.4 Inhibition of HYPROCLOR ED on COD Degradation and nitrification

The effect of HYPROCLOR ED on carbonaceous oxidation is demonstrated in Fig. 6. The results showed that the inhibitory effect existed from 0.1% of HYPROCLOR ED. Although soluble COD reduced to the same level at HYPROCLOR ED content of 0.1% as the contents of 0 and 0.05%, the degradation rate reduced. When the content was above 0.1%, COD degradation was completely inhibited. Dramatic increase of soluble COD with high content of the disinfectant was observed, probably due to cell death and lysis, as discussed above. This was justified with test No. 5 with 0.5% HYPROCLOR ED but without activated sludge, in which the soluble COD maintained more or less constant through the whole test period.

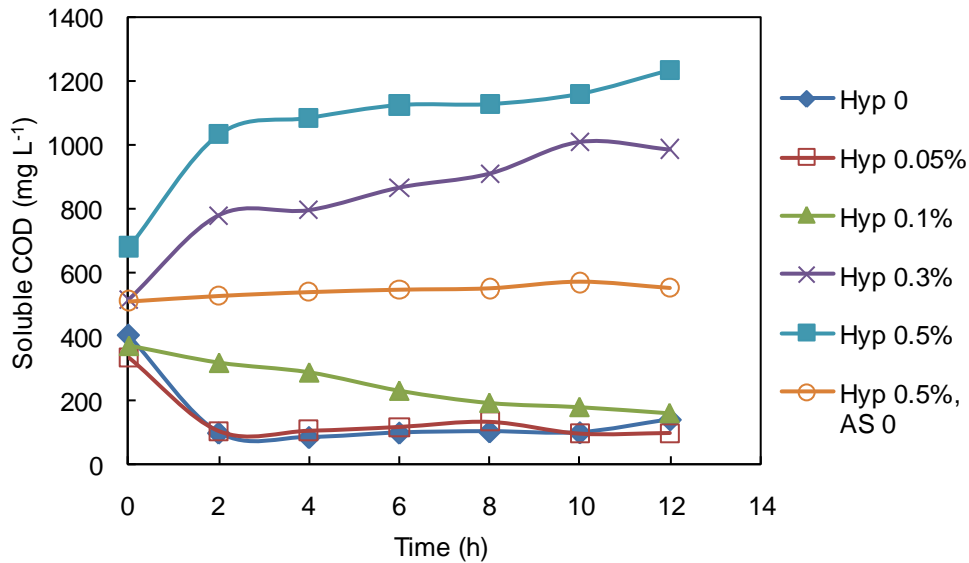


Fig. 6 Inhibition of HYPROCLOR ED (Hyp) on COD degradation

Fig. 7 reveals the effect of HYPROCLOR ED on nitrification. Significant inhibition on nitrification was recorded from HYPROCLOR ED of 0.1%, indicating nitrifiers are more sensitive to HYPROCLOR ED comparing with heterotrophic organisms. Although ammonia-N reduction was also observed at high contents of HYPROCLOR ED (0.3% and 0.5%), this should not be explained as a result of microbial activities. If these reductions at high disinfectant contents were also caused by nitrification, it should be less than the value at HYPROCLOR ED of 0.1% since the inhibition increased with the increasing of the disinfectant content. However, the results showed an opposite situation. Instead, these reductions were probably as a result of the ammonia gas stripping. The initial pH values were recorded as 10.4 and 11.5 with HYPROCLOR ED contents of 0.3% and 0.5 respectively (Table 3). When pH is above 10, more than 80% ammonia-N exists as ammonia gas (Tchobanoglous et al. 2003), which will be stripped when aeration is supplied. This was validated with test No. 5 with 0.5% HYPROCLOR ED but without activated sludge, in which almost the same reduction rate with HYPROCLOR ED content of 0 was observed. The difference between the tests with the same 0.5% HYPROCLOR ED but with/without activated sludge (Hyp 0.5% and Hyp 0.5%, AS 0) might also be attributed to cell death and lysis of the activated sludge (as significant soluble COD release showed in Fig. 6). In the both tests, ammonia-N reduced due to ammonia gas stripping. But ammonia-N was also continuously produced during the experimental period due to cell death and lysis of the activated sludge in the former, while no ammonia-N was produced in the latter since it didn't contain activated sludge. Consequently, more significant ammonia reduction took place in the test without activated sludge (Hyp 0.5%, AS 0).

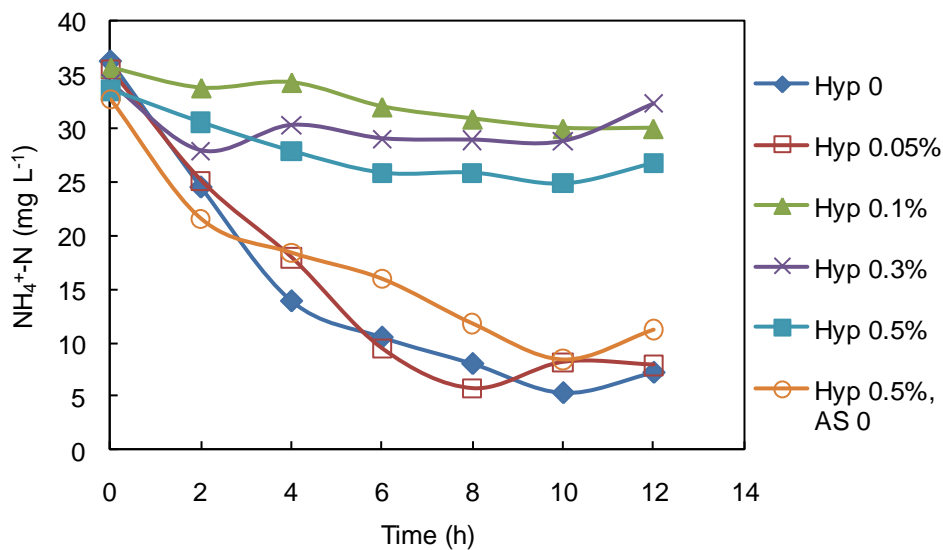


Fig. 7 Inhibition of HYPROCLOR ED on nitrification

3.5 Potential impacts of disinfectants on CWs performance

Although the laboratory batch tests showed strong inhibitions of the chosen disinfectants on COD degradation and nitrification, no direct impacts were recorded in the field study. This is because the disinfectants were highly diluted in the main holding tank. Without regard to other wastewaters (from other units), the residual disinfectants concentrations in the main holding tank were less than 0.02% for UNIPRED and near 0.05% for HYPROCOLOR ED, based on the consideration of the usage rate of 2 L a week and 1 Ld⁻¹ for UNIPRED and HYPROCOLOR ED, respectively, and the flow rate of around 2,200 Ld⁻¹ from the dairy unit. In fact, the amount of other units wastewaters entering the main holding tank were significant at times of the dairy wastewater. This means that the actual concentrations in the feed to the CWs system were less than 0.01% for UNIPRED and 0.025% for HYPROCOLOR ED. This explains why no direct inhibitions were observed in the field CWs study. However, there is still a great risk of system failure due to the inhibitions of the disinfectants if the dairy wastewater was introduced into the CWs system directly. Two potential impacts can be defined depending on the flow rate of the dairy wastewater, which are loss in activity and cell death. When the flow rate is between 1m³d⁻¹ and 2m³d⁻¹, UNIPRED will be 0.02-0.03% and HYPROCOLOR ED will be 0.05-0.1%. Within this range, microbe may still keep alive, but their activities will be significantly reduced as showed in Fig. 6 and Fig. 7. As a result, pollutants removal rate will be decreased significantly. When the flow rate reduces to below 1 m³d⁻¹, cell death could be significant and irreversible system failure happens consequently. Therefore, direct introduction of the dairy wastewater into the CWs system should be avoided in this case.

4 Conclusions

Significant variety of livestock wastewater in biodegradability during long time storage was observed in this study. Results of the laboratory batch tests showed that fresh livestock wastewater was readily biodegradable, while it turned to be non-biodegradable after long time storage. The variety of the livestock wastewater has a decisive influence on the performance of the tidal flow CWs system regarding the removals of organic matters and nitrogen. With fresh livestock wastewater, removal efficiencies up to 93% and 94% could be obtained with average of 73% and 64% for COD and TN, respectively. However, the performance deteriorated when the system was fed with long time stored livestock wastewater. The application of disinfectants UNIPRED and HYPROCOLOR ED may cause serious inhibition on microbial activities. Both heterotrophic organisms and nitrifiers could be inhibited with UNIPRED content from 0.05%, which is 1/10 of the recommended usage rate. Inhibitory effect of HYPROCOLOR ED on COD biodegradation exists from 0.1% and complete inhibition occurs from content of 0.3%, while significant inhibition on nitrification starts from content of 0.1%.

Acknowledgements

Authors gratefully acknowledge financial support received from: the Irish state Department of Agriculture, Fisheries and Food under the Research Stimulus Fund (project no. RSF 07-528). The UCD farms, Lyons Estate, Newcastle, Co. Dublin, Dr Edward Jordan and Mr Michael Hegarthy are all sincerely thanked for their support for the field study.

References

- Aquino SF and Stuckey DC (2004) Soluble microbial products formation in anaerobic chemostats in the presence of toxic compounds. *Water Res* 38(2): 255-266
- Bodik I, Gasparikova E, Dancova L, Kalina A, Hutnan M and Drtil M (2008) Influence of disinfectants on domestic wastewater treatment plant performance. *Bioresour Technol* 99(3): 532-539
- Boursier H, Bédine F and Paul E (2005) Piggery wastewater characterization for biological nitrogen removal process design. *Bioresour Technol* 96: 351-358
- Cronk JK (1996) Constructed wetlands to treat wastewater from dairy and swine operations: a review. *Agric Ecosys Environ* 58(2-3): 97-114
- Green M, Friedler E, Ruskol Y and Safrai I (1997) Investigation of alternative method for nitrification in constructed wetlands. *Water Sci Technol* 35 (5): 63-70
- Hamilton DW, Fulhage CD, Fathepure BZ, Clarkson WD and Lalman JL (2006) Treatment lagoons for animal agriculture. *In Animal Agriculture and the Environment: National Center for Manure and Animal Waste Management White Papers*. Rice JM, Cadwell DF and Humenik FJ eds. Pub. No. 913C0306. St. Joseph, MI: ASABE
- Harringtona R and McInnesb R (2009) Integrated Constructed Wetlands (ICW) for livestock wastewater management. *Bioresour Technol* 100(22): 5498-5505
- Hart SA and Turner ME (1965) Lagoons for livestock manure. *J Water Pollut Control Fed* 37: 1578-1596
- Henze M, Grady Jr CPL, Gujer W, Marais GvR and Matsuo T (1987) Activated Sludge Model No. 1. IAWPRC Scientific and Technical Reports No. 1, IAWQ, London, UK
- Henze M, Harremoës P, La Cour Jansen J and Arvin E (1997) Wastewater treatment: biological and chemical processes,

1 2nd edition. Springer, Berlin, Germany

2 Hunt PG and Poach ME (2001) State of the art for animal wastewater treatment in constructed wetlands. *Water Sci*

3 *Technol* 44 (11–12): 19-25

4 Kincannon DF and Gaudy AF (1966) Some effect of high salt concentrations on activated sludge. *J Wat Poll Cont Fed* 38:

5 1148-1159

6 Knight RL, Payne Jr VWE, Borer RE, Clarke Jr RA and Pries JH (2000) Constructed wetlands for livestock wastewater

7 management. *Ecol Eng* 15: 41-55

8 Lee MS, Drizo A, Rizzo DM, Druschel G, Hayden N and Twohig E (2010) Evaluating the efficiency and temporal

9 variation of pilot-scale constructed wetlands and steel slag phosphorus removing filters for treating dairy wastewater.

10 *Water Res* 44(14): 4077-4086

11 Mankin RK and Ikenberry CD (2004) Batch reactor unvegetated wetland performance in treating dairy wastewater.

12 *Journal of the American Water Resources Association* 40: 1527–1535

13 Melcer H, Dold PL, Jones RM, Bye CM, Takacs I, Stensel HD, Wilson AW, Sun P and Bury S (2003) Methods for

14 wastewater characterization in activated sludge modeling. Water Environment Research Foundation (WERF),

15 Alexandria, VA, USA.

16 Orhon D, Ubay Cokgör E (1997) COD fractionation in wastewater characterization-the state of the art. *J Chem Tech*

17 *Biotechnol* 68: 283-293

18 Schulz TJ and Barnes D (1990) The stratified facultative lagoon for the treatment and storage of high strength

19 agricultural wastewaters. *Water Sci Technol* 22(9): 43-50

20 Sun G, Gray KR, Biddlestone AJ and Cooper D (1999) Treatment of agricultural wastewater in a combined tidal flow-

21 downflow reed bed system. *Water Sci Technol* 40 (3): 139-146

22 Sun G, Zhao Y, Allen S and Cooper D (2006) Generating “Tide” in pilot-scale constructed wetlands to enhance

23 agricultural wastewater treatment. *Eng Life Sci* 6(6): 560-5

24 Sundaravadivel M and Vigneswaran S (2001) Constructed wetlands for wastewater treatment. *Crit Rev Env Sci Technol*

25 31: 351-409.

26 Tchobanoglous G, Burton FL and Stensel HD (2003) *Wastewater engineering: treatment and reuse*, 4th ed. Metcalf and

27 Eddy Inc. McGraw-Hill, New York, N.Y.

28 Tiehm A, Nickel K and Neis U (1997) The use of ultrasound to accelerate the anaerobic digestion of sewage sludge.

29 *Water Sci Technol* 36(11): 121-128

30 Wiesmann U, Choi IS and Dombrowski EM (2007) *Fundamentals of Biological Wastewater Treatment*. Wiley-VCH,

31 Weinheim, Germany, pp. 237

32 Zhao YQ, Sun G and Allen SJ (2004) Purification capacity of a highly loaded laboratory scale tidal flow reed bed system

33 with effluent recirculation. *Sci Total Environ* 330: 1-8.

34 Zhao YQ, Zhao XH and Babatunde AO (2009) Use of dewatered alum sludge as main substrate in treatment reed bed

35 receiving agricultural wastewater: Long-term trial. *Bioresour Technol* 100(2): 644-648

36 Zhao YQ, Babatunde AO, Hu YS, Kumar JLG and Zhao XH (2010) Pilot field-scale demonstration of a novel alum

37 sludge-based constructed wetland system for enhanced wastewater treatment. *Process Biochemistry* 46: 278-283

38

39

40