

Cumulative biophysical impact of small and large hydropower development in Nu River, China

Kelly M. Kibler¹ and Desiree D. Tullos²

Received 19 July 2012; revised 1 April 2013; accepted 8 April 2013; published 3 June 2013.

[1] Support for low-carbon energy and opposition to new large dams encourages global development of small hydropower facilities. This support is manifested in national and international energy and development policies designed to incentivize growth in the small hydropower sector while curtailing large dam construction. However, the preference of small to large dams assumes, without justification, that small hydropower dams entail fewer and less severe environmental and social externalities than large hydropower dams. With the objective to evaluate the validity of this assumption, we investigate cumulative biophysical effects of small (<50 MW) and large hydropower dams in China's Nu River basin, and compare effects normalized per megawatt of power produced. Results reveal that biophysical impacts of small hydropower may exceed those of large hydropower, particularly with regard to habitat and hydrologic change. These results indicate that more comprehensive standards for impact assessment and governance of small hydropower projects may be necessary to encourage low-impact energy development.

Citation: Kibler, K. M., and D. D. Tullos (2013), Cumulative biophysical impact of small and large hydropower development in Nu River, China, *Water Resour. Res.*, 49, 3104–3118, doi:10.1002/wrcr.20243.

1. Introduction

[2] The hydropower sector currently comprises 80% of global capacity for renewable energy generation and is considered a conduit between dependence on fossil-based energy sources and alternative energy futures [Frey and Linke, 2002; *Renewable Energy Policy Network for the 21st Century (REN21)*, 2010]. However, as dam construction often encompasses undesirable social, environmental, and political externalities [McCully, 1996; *World Commission on Dams*, 2000; Postel and Richter, 2003], development of new large dams can be politically untenable. The current upsurge in construction of smaller, geographically distributed hydrodevelopment schemes [Painuly, 2001] may be, in part, a result of increasing acknowledgement of and aversion to impacts of large dams.

[3] A growing number of nations have recently highlighted development of small hydropower resources in national energy policies [China: Li et al., 2009; Zhou et al., 2009; Nepal: Agrawala et al., 2003; India: Dudhani et al., 2006; Purohit, 2008; Turkey: Yuksel, 2007; Latin America and Caribbean: Benstead et al., 1999]. New national-level regulations, as well as international energy and development

policies, such as the Kyoto Protocol's Clean Development Mechanism (CDM), allow streamlined permitting processes for new hydropower facilities falling below thresholds in installed capacity, as well as other incentives designed to encourage small hydropower development in lieu of large dams [REN21, 2010; UNFCCC and CCNUCC, 2006a]. These policies are established with the intent of fostering renewable energy development, allowing realization of low-carbon energy potential in developing areas with growing demands for electricity, while avoiding the undesirable social and environmental consequences associated with large dams.

[4] Such decisions and development strategies crafted at the national and international level have immense potential to shape both energy and hydroecologic landscapes. However, although the literature is replete with research and case studies documenting unintended consequences of large dams [Abell, 2002; Cernea, 1999; Giordano et al., 2005; Lerer and Scudder, 1999; Petts, 1984; Poff et al., 1997; Rosenburg et al., 2000; Williams and Wolman, 1984], similar investigations of small hydropower effects are scarce [see Gleick, 1992]. The lack of analogous research addressing the effects of small hydropower limits opportunity to recognize potential impacts and mitigate negative consequences. Adequate consideration of cumulative effects is a particularly salient issue related to small hydropower impact assessment, yet this topic has received little attention of researchers or water resources managers [see Irving and Bain, 1993] and is rarely considered with sufficient rigor in impact evaluations. Given the potential for effects to accumulate under current policies encouraging development of many small facilities over fewer large facilities, the lack of comprehensive analysis regarding cumulative impact of small hydropower is a significant research gap with important policy implications.

¹Department of Water Resources Engineering, Oregon State University, Corvallis, Oregon, USA.

²Department of Biological and Ecological Engineering, Oregon State University, Corvallis, Oregon, USA.

Corresponding author: K. M. Kibler, International Centre for Water Hazard & Risk Management under the auspices of UNESCO, Public Works Research Institute, 1-6 Minamihara, Tsukuba, Ibaraki, 305-8516, Japan. (kibler55@pwri.go.jp)

[5] We thus present an investigation of cumulative biophysical effects associated with large and small hydropower dams built or proposed on the mainstem and tributaries of China's Nu River in Nujiang Prefecture, Yunnan Province (Figure 1). We define large and small hydropower dams in this work according to Chinese law, which states that hydropower dams exceeding 50 MW installed capacity are large, while those falling below 50 MW installed capacity are small. Our objectives in evaluating the relative cumulative impacts of small and large hydropower are to (a) augment the sparse body of evidence that currently documents effects of small hydropower, (b) support discourse and policies regarding renewable energy development and mitigation of environmental effects, and (c) to present new data on one of the world's last undammed, and arguably least-studied, rivers.

2. Materials and Methods

2.1. Study Site: Nujiang Prefecture

[6] Nujiang Lisu Autonomous Prefecture (hereafter, Nujiang Prefecture) is located in Northwest Yunnan Province, China, south of the Yunnan-Tibet provincial border

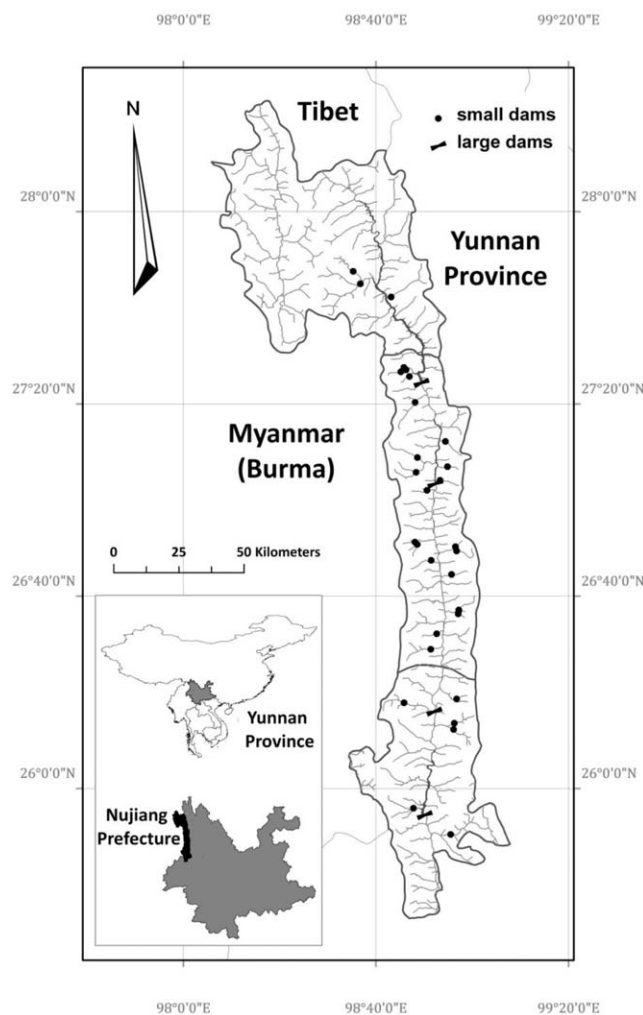


Figure 1. Nujiang Prefecture. Study area and samples of small and large dams investigated.

and east of the international border between China and Myanmar (Figure 1). From sources on the Qinghai-Tibet Plateau, the Salween River flows south through Nujiang Prefecture before entering Myanmar. China, Myanmar, and Thailand share portions of the international Salween River basin. However, the headwaters of the Salween River are located in China, where it is known by its Chinese name, the Nu River. Because our analysis focuses on the reach of the Salween River within China's borders, herein we refer to the study area as the Nu River, except in places (e.g., analysis of affected conservation lands) where analysis extends across international borders.

[7] The upper reaches of the Nu River flow through an orogenic belt, downcutting through steep gorges, the course entrenched by constrained, high-relief valleys [Owen, 2006]. Intercontinental deformation associated with subduction and collision is manifested through several large, active strike-slip fault systems extending from the northwest to southeast through Yunnan Province, which trigger regular seismic events [He and Tsukuda, 2003; Allen et al., 1991; Zhou et al., 1997]. River flows in Nujiang Prefecture generate primarily through rainfall-runoff processes, with two distinct seasonal pulses of rainfall driving periods of high river flows. The first rains in Nujiang Prefecture occur each year between February and May and historically deliver between 40% and 50% of the yearly precipitation [Institute of Water Resources (IWR), 2006a]. A second system of precipitation, driven by the East Asian monsoon, persists from June to October and delivers a further 40% to 50% of annual precipitation. Snow and glacial melt contribute runoff to the Nu River mainstem during summer months, with some portions of the upper Nu River basin in Tibet contributing over 2000 mm of meltwater [Chinese Academy of Sciences, 1990]. Conversely, snowmelt is a relatively inconsequential source of runoff in tributaries to the Nu River in Nujiang Prefecture [Yunnan Bureau of Hydrology and Water Resources (YBHWR), 2005].

[8] Nujiang Prefecture lies within a designated hotspot of global biodiversity [Zhou and Chen, 2005; United Nations Educational, Scientific, and Cultural Organization (UNESCO), 2002]. A high proportion of endemic species characterize the vastly diverse organisms of Northwest Yunnan [Xu and Wilkes, 2003], and many species are protected at the provincial or national level or listed on the International Union for Conservation of Nature (IUCN) Red List of Threatened Species [IUCN, 2001]. For example, of 48 species of fish known to inhabit the Nu River in Yunnan Province, 32 are endemic and several are protected [Chu and Chen, 1989, 1990]. In addition to possessing rich biodiversity, Nujiang Prefecture is also one of the most ethnically diverse regions of China, with ethnic minorities comprising 92% of the prefectural population [Magee, 2006]. The three counties of Nujiang Prefecture (Gongshan, Fugong, and Lushui) are also listed amongst the most poverty-stricken counties of China and continue to face significant challenges to economic development.

2.2. Study Design and Data Procurement

[9] Two distinct models of hydropower, large and small, are developing side by side in Nujiang Prefecture, driven by China's state-mandated development policies of "Western Development" and "Send Western Energy East." We

distinguish large and small hydropower dams in this study based on the Chinese regulatory threshold of 50 MW, whereby stations with installed capacity not exceeding 50 MW classify as small hydropower [Ministry of Water Resources (MWR), 2002]. We note that, internationally, the definition of small hydropower varies considerably across governments and agencies and that China's definition of small hydropower is highly inclusive relative to other standards. For example, small hydropower within the United States is defined as not exceeding 25 MW, whereas many European countries specify standards of less than 10 MW. On the Nu River, a cascade of up to 13 large hydropower dams has been proposed for the mainstem in Tibet and Yunnan Province, with eight projects slated to fall within Nujiang Prefecture. Small hydropower dams are already developed on tributaries throughout the Nu River basin. Although the number of small hydropower dams in operation or planned for tributaries to the Nu River is unreported, our field surveys indicate that nearly 100 small dams currently exist within Nujiang Prefecture alone.

[10] From the population of hydropower dams proposed or constructed on the mainstem and tributaries to the Nu River in Nujiang Prefecture, we investigate samples of four large dams (totaling 10,400 MW installed capacity) and 31 small dams (totaling 417 MW installed capacity) (Table 1). The collective installed capacities of large and small hydropower

stations investigated in this study indicate potential for annual certified emissions reductions of 45 million and 1.5 million metric tons of carbon dioxide (CO₂), respectively [United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC), 2006b].

[11] In this investigation, we define potential for biophysical change according to a suite of metrics indicating absolute environmental impact (Table 2). We then normalize cumulative impacts of small and large dams by installed capacity to compare the cumulative impact of 1 MW of power generated by small and large dams. Impact evaluation in China's Nu River basin is challenging, primarily because access to and availability of robust and accurate information is extremely limited. Regarding data access, information pertaining to Nujiang Prefecture dams is closely guarded by the central government due to the sensitivity of the region, which is home to large proportions of Chinese ethnic minorities and potentially valuable natural resources. In addition, proposals to construct dams on the Nu River mainstem are highly controversial, both domestically and internationally. As a result, access to hydrologic, hydraulic, and geomorphic data related to the international Nu River (e.g., discharge, stage, and sediment transport), as well as plans for dam development and operations, is prohibited under the Chinese State Secrets Act. Regarding data availability, smaller catchments in Nujiang Prefecture, where

Table 1. Design Characteristics of Large and Small Dams

Dam Name	Project County	River Name	Installed Capacity (MW)	Dam Height (m)	Project Head (m)	River Gradient (mm ⁻¹)	Mean Flow (m ³ s ⁻¹)
Maji	Fugong	Nu River	4200	300.0	300.0	0.001	1270.0
Lumadeng	Fugong	Nu River	2000	165.0	165.0	0.006	1330.0
Yabiluo	Lushui	Nu River	1800	133.0	133.0	0.009	1430.0
Lushui	Lushui	Nu River	2400	175.0	175.0	0.005	1500.0
Pula	Gongshan	Pula River	24.8	19.3	390.2	0.120	3.5
Qiqiluo	Gongshan	Qiluo River	20.0	18.7	80.0	0.036	13.1
Galabo	Gongshan	Galabo River	14.0	17.8	140.1	0.111	6.3
Mujiajia	Fugong	Mujiajia River	18.9	6.0	380.0	0.098	2.1
Mujiajia trib. 2	Fugong	Mujiajia tributary	NA ^a	5.0	NA	0.182	0.8
Mujiajia trib. 3	Fugong	Mujiajia tributary	NA	6.0	NA	0.045	0.9
Mujiajia Erji	Fugong	Mujiajia River	10.0	10.0	224.0	0.143	1.9
Mukeji	Fugong	Mukeji River	31.5	10.5	640.0	0.084	3.4
Lishiluo	Fugong	Lishiluo River	6.4	14.5	338.0	0.108	1.9
Yamu	Fugong	Yamu River	49.0	8.7	367.0	0.071	3.9
Yamu trib.	Fugong	Yamu tributary	NA	8.7	NA	0.093	3.4
Alu	Fugong	Alu River	12.6	5.5	648.9	0.233	1.2
Zhali	Fugong	Zhali River	2.6	4.0	155.3	0.086	1.7
Ganbu	Fugong	Ganbu River	3.8	4.0	316.0	0.118	1.5
Guquan	Fugong	Guquan River	22.0	11.0	580.0	0.121	1.7
Guquan trib.	Fugong	Wuke River	NA	10.0	NA	0.139	1.4
Zema	Fugong	Zema River	15.0	4.0	500.0	0.064	2.6
Zema trib.	Fugong	Zema tributary	NA	3.0	NA	0.342	0.8
Pushi	Fugong	Pushi River	10.0	5.0	376.0	0.124	2.1
Zilijia	Fugong	Zilijia River	6.4	7.0	534.0	0.122	1.5
Zileng	Fugong	Zileng River	24.0	7.0	702.2	0.166	1.8
Zileng trib.	Fugong	Zileng tributary	NA	8.0	NA	0.176	1.1
Zileng trib.	Fugong	Zileng tributary	NA	5.5	NA	0.174	0.6
Labuluo	Fugong	Labuluo River	26.0	10.3	391.0	0.078	4.6
Toulu	Fugong	Toulu River	NA	10.0	NA	0.128	1.5
Nalai	Lushui	Nalai River	24.0	9.1	830.0	0.127	1.6
Duduluo	Lushui	Duduluo River	48.0	15.5	598.5	0.100	4.4
Jidu	Lushui	Jidu River	16.0	4.6	464.9	0.040	2.6
Jidu trib.	Lushui	Jidu tributary	NA	4.6	NA	0.111	2.5
Gutan	Lushui	Gutan River	7.5	4.0	300.7	0.069	3.1
Laowo	Lushui	Laowo River	25.0	17.0	177.0	0.029	15.7

^aNA, not applicable.

Table 2. Metrics Evaluated to Characterize Biophysical Impact of Small and Large Dams

Metric	Description	Units
Habitat losses		
Reservoir surface area	Quantity of riparian and terrestrial habitat inundated	km ²
River channel inundated or dewatered	Quantity of aquatic habitat inundated or dewatered	km
Riparian and terrestrial habitat diversity	Diversity (number) of riparian and terrestrial habitats inundated or dewatered	Number
Catchment connectivity		
Basin-scale connectivity	Percentage of Salween River basin contributing to dam	Percent of basin
Sub-basin-scale connectivity	Percentage of subbasin contributing to dam	Percent of basin
Priority conservation land		
Direct effects to conservation land	Area of conservation land inundated or dewatered	km ²
Indirect effects to conservation land	Proximity of conservation areas to project site	Proximity index
Landscape stability		
Landslide risk	High and severe landslide risk areas inundated or dewatered	km ²
Seismic potential	Index of reservoir depth, volume, and proximity of active faults	Seismic index
Hydrologic and sediment regimes		
Potential for flow modification	Percentage of annual runoff stored in reservoir or diverted from river	Percent runoff
Potential for sediment modification	Trap efficiency of reservoir	Percent yield
Water quality		
Severity of channel dewatering (spatial)	Length of dewatered channel	km
Severity of channel dewatering (temporal)	Percent time channel is dewatered	Percent time
Residence time change	Change in residence time through impounded reach	Percent change

small hydropower dams are sited, are ungauged, and very little research has documented aquatic biodiversity of the remote Nu River and its tributaries.

[12] We thus assess biophysical effects of large and small dams according to the most comprehensive and complete set of information available, compiling data from a variety of sources to inform our modeling and analyses. To obtain information related to small dams, we consult reports generated during Environmental Impact Assessment (EIA) processes [YBHW, 2005; IWR, 2004, 2005, 2006a, 2006b, 2006c] and during certification through the Kyoto Protocol's CDM [UNFCCC/CCNUCC, 2007, 2008a, 2008b, 2008c, 2008d, 2009a, 2009b, 2009c]. We supplement this official reporting with information gained through our independent survey of 15 small hydropower stations. As access to analogous EIA reporting for large dams is restricted by the central government, we therefore model potential effects of large hydropower dams using publically available information from hydropower companies, development agencies, and academic literature [Plinston and He, 1999; Dore and Yu, 2004]. Given the data-poor environment in which our analysis occurs, we characterize and report uncertainty of each parameter estimate, modeling and reporting a range of possible effects for both small and large dams.

2.3. Data Analysis

2.3.1. Habitat Loss

[13] As a reservoir is filled, terrestrial and riparian habitats within the impoundment are transformed [Lewke and Buss, 1977; Oliver, 1974], and lotic aquatic habitats within the former channel become lentic environments [Petts, 1984], changing the habitat and resource base of local and regional ecosystems. To estimate the quantity of habitat disturbed by impoundment, we assess the area of land and length of channel inundated by reservoirs.

[14] Due to differences in system design characterizing large and small dams of Nujiang Prefecture, the primary location of direct impact varies. The large dams create large reservoirs, whereas the direct impacts of small dams

are concentrated within the channel downstream of the dam. Because the small dams we investigate divert a majority of river flows for much of the year, we use the term "dewatered" to describe reaches below diversion dams. To evaluate alteration of riparian and aquatic habitats downstream of small diversion dams due to channel dewatering [Smith *et al.*, 1991; Dewson *et al.*, 2007; Haxton and Findlay, 2008], we estimate the length of channel to which flows are reduced as the distance between locations of water withdrawal (from the reservoir) and return to the natural river system (at the tailrace leaving the penstock). Further, to assess the diversity of habitats disturbed by the small and large hydropower dams, we integrate areas inundated or dewatered with habitat classifications [The Nature Conservancy (TNC), 1999], determining the number of habitat types affected by each project.

2.3.2. Catchment Connectivity

[15] Dams influence the connectivity of river basins by impeding flows of energy and material from upper to lower reaches [Ward *et al.*, 1999] and by hindering passage of migrating or drifting aquatic fauna [Northcote, 1998]. We evaluate the fraction of catchment area contributing to each dam as an estimate of potential impact to hydraulic and ecological connectivity. To capture both localized and basinwide effects, we evaluate catchment connectivity at two scales of reference: at the scale of the international Salween River basin and at the scale of individual river catchments.

2.3.3. Priority Conservation Lands

[16] To assess the potential for dams to affect areas identified as global or regional conservation priorities, we estimate areas of designated conservation lands [UNESCO, 2010; TNC, 2006; Conservation International (CI), 2004, 2010] directly affected (inundated or dewatered) by each project. At the global scale, UNESCO designates the Three Parallel Rivers of Yunnan, including portions of the Nu River basin, as a World Heritage Site [UNESCO, 2003]. TNC and CI delineate regions of global importance for preserving biodiversity, termed Biodiversity Hotspots, within the Nu River basin. At the regional scale, comprehensive assessment and delineation of site-scale locations that

possess global value as conservation priorities, termed Key Biodiversity Areas (KBAs), have been undertaken by a partnership consisting of CI, IUCN, and the Critical Ecosystems Partnerships Fund (CEPF) [Langhammer *et al.*, 2007]. The CEPF delineates KBAs according to criteria of vulnerability and/or irreplaceability of species that are supported by the specific geographic location. Finally, our analysis includes Nature Reserves, areas protected at the national, provincial, or county level for conservation of biodiversity, where certain land uses are restricted for habitat protection.

[17] Research indicates that, in addition to directly affecting sensitive biological resources, dams may also indirectly influence off-site habitats. For instance, at Manwan Dam on the Lancang River, China, Zhao *et al.* [2012] observed conversion of forest and scrubland to roads, grasslands, and farmland and demonstrated a distance-decay relationship between land conversion and proximity to a new dam. This pattern of decreasing impact with increasing distance from the reservoir is relevant to species diversity and persistence, as changes in land use and habitat fragmentation may lead to species loss [Terborgh, 1974; Terborgh *et al.*, 2001; Laurance *et al.*, 2002]. We therefore estimate potential indirect or off-site effects to priority areas for conservation as an index of proximity to high-priority conservation areas within the Salween River Basin, including conservation areas in China, Myanmar, and Thailand. We calculate the proximity index as equation (1),

$$P_{\text{index}} = \sum_{i=1}^n \left(\frac{1}{d_i} \right), \quad (1)$$

where P_{index} is the proximity index, and d_i is the minimum distance between the dam and the i th conservation area (km) given with n conservation areas.

2.3.4. Landscape Stability

[18] Increasing water surface elevations in reservoirs may destabilize the base of hillslopes, and construction of hydropower infrastructure often entails expansion of power transmission routes and roads to the dam and power generation sites. Both may increase potential for land disturbance and landslides in the vicinity of dams. To assess potential for exacerbation of local landslide hazards, we integrate project footprints with landslide-risk information. Landslide-risk analysis is based on a spatial regression relating historic landslide occurrence in Nujiang Prefecture to the variables of slope, vegetation cover, precipitation, and proximity to roads [Li, 2010]. We then compute total areas characterized by high to severe risk of landslide that fall within the footprint of each reservoir.

[19] Reservoir filling can also contribute to landscape instability through intensification of seismicity [Gupta, 2002; Talwani, 1997]. Empirical data suggest that parameters of reservoir depth, volume, and proximity to active faults are associated with increased probability of reservoir-triggered seismicity, with most documented cases occurring near reservoirs over 92 m in depth and $12\text{E}8 \text{ m}^3$ in volume [Baecher and Keeney, 1982]. However, seismic events have been triggered by much smaller reservoirs [Chen and Talwani, 1998]. To evaluate potential for small and large reservoirs to induce seismic events, we introduce a seismic index (S_{index}) for each project (equation (2)) with

respect to maximum reservoir depth (h_{max}), maximum reservoir volume (vol_{max}), and minimum distance ($1/d_{\text{min}}$) to active faults.

$$S_{\text{index}} = h_{\text{max}} \times \text{vol}_{\text{max}} \times 1/d_{\text{min}}. \quad (2)$$

[20] In determining distances to active faults, we apply fault data mapped by He and Tsukuda [2003].

2.3.5. Potential for Modified Flow and Sediment Regimes

[21] Dams disrupt the natural flow of water and sediments through river systems [Poff *et al.*, 1997; Bunn and Arthington, 2002; Vorosmarty *et al.*, 2003], altering first-order determinants of the physical riverine environment that cascade to affect river morphology and ecology [Poff *et al.*, 2007; Schmidt and Wilcock, 2008; Lytle and Poff, 2004]. To evaluate the potential for large and small dams to modify river flows, we estimate the fraction of annual runoff controlled by each hydropower project, either through storage in reservoirs or diversion. With respect to large dams, from which water is not diverted, we assess potential for flow modification by comparing annual runoff at each dam [Dore and Yu, 2004] to modeled reservoir volumes.

[22] In the case of small dams, we estimate volumes of water controlled by both reservoir storage and diversion. We model natural and modified hydrographs at each dam site, as well as reservoir volumes. We then compare annual runoff to volumes of water diverted or stored. From this analysis, we express impacts to flows downstream of small dams as the proportion of time that downstream channel flows do not exceed 5% of the mean annual flow, a standard minimum ecological flow reportedly maintained below some small dams [e.g., UNFCCC/CCNUCC, 2008b].

[23] Hydrologic gauging stations record discharge on the mainstem of the Nu River, whereas tributaries to the Nu River are ungauged. We model flows in tributaries (equation (3)) following standard methods of runoff prediction for small hydropower planning and design in China [Chinese Ministry of Water Resources (MWR), 2002], which are based on hydrologic similarity (inferred from climatic and catchment similarity) to a nearby gauged catchment [Falkenmark and Chapman, 1989; Blocshi *et al.*, 2013].

$$Q_{\text{dam}} = Q_{\text{ref}} \times k_{\text{or}}(P_{\text{dam}}/P_{\text{ref}}) \times (A_{\text{dam}}/A_{\text{ref}}). \quad (3)$$

[24] Within equation (3), Q_{dam} and Q_{ref} [Chinese Ministry of Hydrology (CMH), 1970, 1971, 1974, 1977, 1982a, 1982b] are the respective mean daily flows simulated at the proposed dam site and observed at a gauged reference site. In this case, Q_{ref} is recorded at the Tang Shang gauge in the 200 km^2 Yongchun River catchment, a tributary to the neighboring Lancang River. k_{or} is an orographic constant correcting for elevation-driven differences in precipitation in the modeled catchment and at the basin precipitation gauge. P_{dam} and P_{ref} are daily precipitation observed within the basin containing the dam and at the Tang Shang gauge, respectively. A_{dam} and A_{ref} are the respective basin areas contributing to the dam and the Tang Shang gauge. We model mean daily flows at each small dam over three water

years known to be locally average (1972–1973), above average (1978–1979), and below average (1965–1966) with respect to runoff [YBHW, 2005].

[25] To evaluate potential effects to sediment transport, we compute the trap efficiency of each reservoir using equation (4) after *Brune's* [1953] trapping efficiency curve, where $\Delta\tau_R$ is change in residence time of water through the reservoir as compared to the free-flowing river.

$$\text{Reservoir trap efficiency} = 1 - \left(0.05 / \left((\Delta\tau_R)^{0.5}\right)\right). \quad (4)$$

[26] As management of reservoir sediments may moderate potential disturbance to sediment yields below dams, we also consider sediment management activities in our assessment of net reservoir trap efficiency. For example, EIAs, CDM design documents, and surveys related to small hydropower dams indicate that operators hydraulically flush sediments from behind small dams on a subannual to annual basis and that this management substantially reduces the net trap efficiency of small reservoirs.

2.3.7. Water Quality

[27] Processes affecting water quality, such as biogeochemical spiraling, and mass and energy transport, may change when a river is impounded [Stanley and Doyle, 2002] or when river reaches below a dam are dewatered [Meier et al., 2003]. To estimate potential for small and large dams to influence water quality, we evaluate the spatial and temporal extent of channel dewatering below the dam. We also evaluate potential water quality impacts as the relative (percent) change in residence time of water through the reservoir reach, calculated as the ratio of post-dam to predam residence time.

2.3.8. Assessment of Uncertainty

[28] Given restrictions regarding access to and availability of information, uncertainty of data used to model biophysical effects of hydropower dams in Nujiang Prefecture is often high. To characterize bounds of uncertainty, we model upper and lower bounds of possible effects and report ranges of likely potential impact. For example, uncertainty associated with an estimated reservoir surface area derives from ambiguity in true dam location, as well as variability in minimum and maximum operational pool elevations. We address both sources of uncertainty by modeling a minimum reservoir area, at the most upstream location and minimum pool, and a maximum reservoir area, modeled at the most downstream location with a maximum pool, and reporting the resulting range of possible reservoir areas.

3. Results

3.1. Habitat Loss

[29] The mean cumulative impact of land area transformed per unit of power produced is an order of magnitude greater for large than for small dams (Table 3 and Figure 2). In contrast, cumulative effects to lengths of river channel inundated or dewatered by small dams exceed those associated with large dams by an order of magnitude (Table 3 and Figure 2). Mean cumulative effect to habitat diversity, estimated as the number of riparian and terrestrial habitats affected, is larger for small dams than for large dams by 2 orders of magnitude (Table 3 and Figure 2).

3.2. Catchment Connectivity

[30] At the sub-basin scale, cumulative impact to river connectivity per megawatt of power generated is 2 orders of magnitude greater for small dams than for large dams. In contrast, at the scale of the Salween River basin, the mean effect of large dams is eight times greater than mean effect of small dams (Table 3 and Figure 2). Although the greater impact of large dams at the basin scale is not surprising, our results offer new evidence that illustrates how the cumulative interruption of network connectivity by many small projects may generate sizable impacts at the subbasin scale.

3.3. Priority Conservation Lands

[31] Our results indicate that cumulative effects to protected or high-priority conservation lands are greater for small dams than for large dams, according to measures of both direct and off-site impact (Table 3 and Figure 2). With regard to direct effects of inundation or dewatering, the mean cumulative effect per unit power of small dams is two to six times that of large dams, whereas the cumulative effect per unit power of indirect effects is 2 orders of magnitude greater for small dams than for large dams.

3.4. Landscape Stability

[32] Cumulative effects to landslide-risk areas affected by small and large dams are similar (Table 3 and Figure 2). With respect to potential for reservoir-induced seismicity, cumulative effects of large dams exceed those associated with small dams by many orders of magnitude, both in terms of absolute impact and impact per unit power generated (Table 3 and Figure 2).

3.5. Potential for Flow Modification

[33] Small dams divert flows up to the station design flow, dewatering downstream river channels during times of low to moderate flows (Figure 3). Design flows of the investigated hydropower stations vary from 38% to 286% of the mean annual flow, with a mean of 145%. Thus, on average, flows up to 1.45 times the mean annual flow are diverted. Consequently, rivers below the small dams investigated are dewatered between 69% and 83% of days, with a mean of 74% of days (Figure 4).

[34] Alternatively, reservoirs associated with the large dams store between 0.05% and 15% of the annual runoff and water is not diverted from the reservoirs. Thus, in comparing potential for modifications to the annual hydrograph, the mean cumulative impact per megawatt of power generated is 3 to 4 orders of magnitude greater for the small dams investigated than for the large dams (Table 3 and Figure 2).

3.6. Potential for Sediment Modification

[35] The mean cumulative effect of sediment trapping per unit power generated is greater for large dams (Table 3 and Figure 2). To maintain optimal water diversion, small reservoirs are managed to hydraulically flush stored sediments at least once per year. Thus, mean cumulative effects to annual sediment yields below small dams are negligible. Large reservoirs, by contrast, store large portions of annual sediment yields, with mean reservoir trapping efficiencies ranging from 26% to 87%.

Table 3. Cumulative Biophysical Impact Shown as Absolute Impact and Relative to Megawatts of Power Produced by Small (SHP) and Large (LHP) Dams

	Reservoir Surface Area		River Channel Inundated or Dewatered		Riparian and Terrestrial Habitat Diversity		Basin-Scale Connectivity		Subbasin-Scale Connectivity	
	Impact (km ²)	Impact Per Unit Power (km ² /MW)	Impact (km)	Impact Per Unit Power (km/MW)	Impact (Number)	Impact Per Unit Power (Number/MW)	Impact (Percent)	Impact Per Unit Power (Percent/MW)	Impact (Percent)	Impact Per Unit Power (Percent/MW)
SHP max	6.0E-03	2.9E-04	6.9E+00	4.3E-01	2.9E+00	2.5E-01	0.03	1.9E-03	73	7.4E+00
SHP min	3.4E-03	1.6E-04	NA	NA	NA	NA	NA	NA	NA	NA
LHP max	2.6E+01	8.5E-03	7.1E+01	2.5E-02	4.5E+00	1.8E-03	35	1.5E-02	35	1.5E-02
LHP min	1.1E+01	3.5E-03	3.0E+01	1.0E-02	3.3E+00	1.2E-03	NA	NA	NA	NA

	Direct Effect to Conservation Land		Indirect Effect to Conservation Land		Landslide Risk		Seismic Potential		Potential for Flow Modification	
	Impact (km ²)	Impact Per Unit Power (km ² /MW)	Impact (Index)	Impact Per Unit Power (Index/MW)	Impact (km ²)	Impact Per Unit Power (km ² /MW)	Impact (Index)	Impact Per Unit Power (Index/MW)	Impact (Percent)	Impact Per Unit Power (Percent/MW)
SHP max	0.4	2.1E-02	3.9	4.0E-01	7.6E-02	5.1E-03	7.0E-08	5.6E-09	75	8.3E+00
SHP min	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
LHP max	30.6	9.6E-03	3.6	1.5E-03	2.3E+01	7.8E-03	2.9E-01	8.0E-05	5	1.4E-03
LHP min	10.9	3.5E-03	3.0	1.2E-03	8.6E+00	2.9E-03	7.0E-02	1.8E-05	1	3.2E-04

	Potential for Sediment Modification		Severity of Channel Dewatering (Spatial)		Severity of Channel Dewatering (Temporal)		Change in Residence Time	
	Impact (Percent)	Impact Per Unit Power (Percent/MW)	Impact (km)	Impact Per Unit Power (km/MW)	Impact (Percent)	Impact Per Unit Power (Percent/MW)	Impact (Percent)	Impact Per Unit Power (Percent/MW)
SHP max	0	0.E+00	4.8	4.2E-01	83	7.7E+00	8.6E+02	6.1E+01
SHP min	0	0.E+00	NA	NA	69	6.3E+00	5.6E+02	3.7E+01
LHP max	63	3.E-04	0.0	0.0E+00	0	0.0E+00	2.2E+04	8.8E+00
LHP min	26	8.E-05	0.0	0.0E+00	0	0.0E+00	8.6E+03	3.3E+00

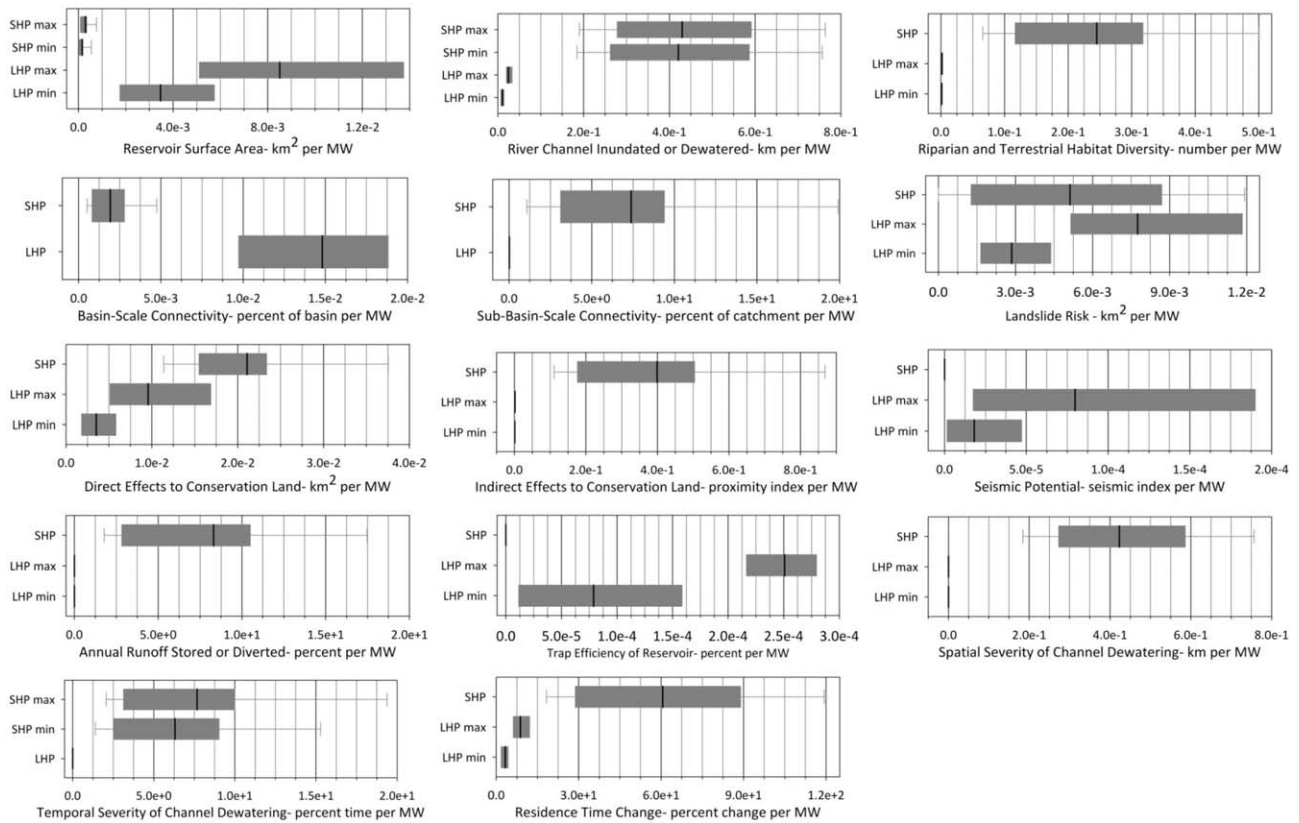


Figure 2. Cumulative biophysical effect per MW of power produced by small (SHP) and large (LHP) dams. Bold black lines indicate sample means; boxes and whiskers indicate quartiles and 10th and 90th percentiles, respectively.

3.7. Water Quality

[36] As a result of water diversion for hydropower production, each small dam dewateres a mean 6.8 km of river channel (Table 3) over 74% of days during an average water year (Figures 3 and 4). In contrast, large hydropower dams in this study do not dewater any length of river. The mean cumulative channel dewatering effect per megawatt of power produced is thus greater for small dams, with respect to both spatial and temporal parameters (Table 3 and Figure 2).

[37] Impoundments associated with small dams increase residence time of water through the inundated reach by a mean of 600% to 900%. Changes in residence time associated with large dams are much larger, with mean increases of 9000% to 22,000%. Although the percent change in residence time through small reservoirs is less than percent changes through large reservoirs, the mean cumulative impact of residence time change per unit power produced is 7 to 10 times greater for small dams than for large dams (Table 3 and Figure 2).

4. Discussion

4.1. Cumulative Biophysical Effects: Comparison of Small and Large Dams

[38] Our results illustrate that small dams in Nujiang Prefecture, defined by installed capacities less than 50 MW,

often generate greater cumulative biophysical effects per megawatt of installed capacity than large dams. This trend is demonstrated for 9 of 14 investigated metrics (Figure 5), including length of river channel affected, diversity of habitats affected, catchment connectivity at the sub-basin scale, direct and indirect influence to lands designated as conservation and biodiversity priorities, potential to modify hydrologic regimes, and potential to affect water quality. In contrast, large dams produce greater effect with respect to four investigated metrics (Figure 5), including total land inundation, catchment connectivity at the basin scale, potential to affect sediment transport, and potential to trigger seismicity. With respect to landslide-risk areas affected, we observed no measureable difference between large and small dams. With this exception, differences in magnitude of impact between groups of small and large dams are substantial, with mean effects often differing over several orders of magnitude.

[39] Our observations confirm conclusions of previous work by Gleick [1992], who found that small hydropower dams (defined in Gleick’s work according to US standards as dams with installed capacity <25 MW) exert greater biophysical impact per unit power produced than large hydropower dams. Rather than observing biophysical effects scaling to dam size, Gleick describes segregation of effect according to project design, reporting less severe consequences from diversion hydropower dams than from projects where dam height exceeds gross static head. More

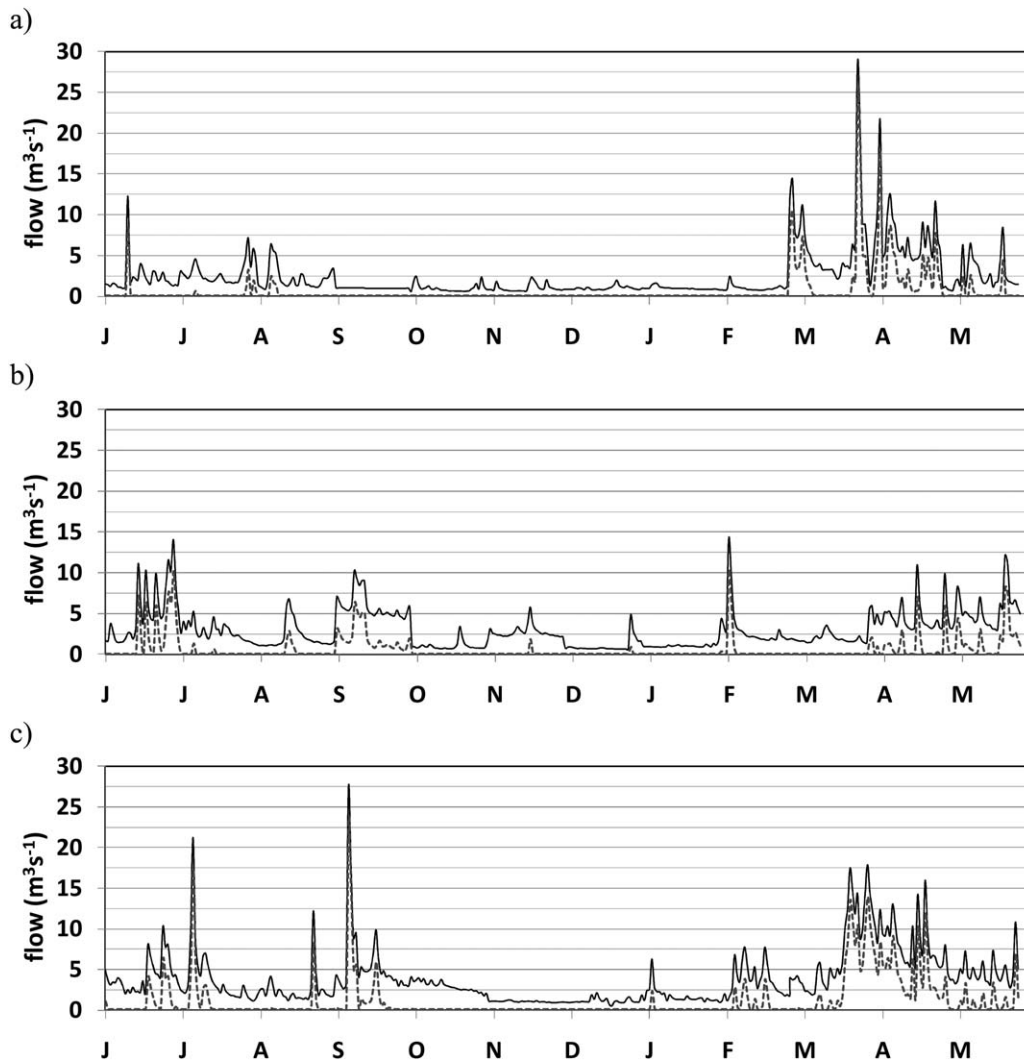


Figure 3. Modeled natural flows (solid lines) and modified flows (broken lines) of Gutan River, Lushui County, below the small Gutan Dam (7.5 MW) for regional (a) below average, (b) average, and (c) above-average water years.

recently, *Ziv et al.* [2012] found that cumulative effects of 78 tributary dams resulted in greater negative impacts to fish biomass and species at extinction risk than six proposed mainstem dams, while producing less energy and generating unaddressed transboundary impacts.

[40] In combination with *Gleick's* [1992] and *Ziv et al.'s* [2012] work, this study illustrates that the current standard for small hydropower definition, installed capacity, may be a poor indicator of biophysical impact. Evidence from these three studies suggests that installed capacity is unlikely to convey true potential for biophysical impact and that more comprehensive methods for differentiating high- from low-impact hydrodevelopment are necessary. The Swiss labeling of Green Hydropower [*Bratrich et al.*, 2004] or the International Hydropower Association criteria for Sustainable Hydropower [*International Hydropower Association*, 2007] are examples of more complex definitions that may come closer to defining appropriate standards for policies targeting low-impact hydropower.

[41] Furthermore, this study highlights the need to carefully consider potential differences in absolute and power-

scaled impacts of hydropower, both in definitions of low-impact hydropower as well as in planning and impact assessment. For instance, some absolute effects of an individual small dam may appear negligible as compared to absolute effects of a single large dam (Table 2). However, the comparison of absolute impact of one large dam to one small dam is subjective, as often many small dams must be built to match the power generation capacity of one large dam. Similarly, in this study, direct comparison of the absolute impact of infrastructure generating 417 MW of power (31 small dams) to infrastructure that generates 10,400 MW of power (four large dams) is arbitrary and potentially misleading. However, when effects are evaluated cumulatively over several projects and scaled to power generation, direct comparison of large and small dams is possible. Undertaking such direct comparison, we find that some cumulative, power-scaled effects of small hydropower dams exceed those of large hydropower dams. These results demonstrate the need for comprehensive planning of low-impact energy development that considers both the absolute effects of individual projects as well as the interactive and cumulative effects of multiple projects.

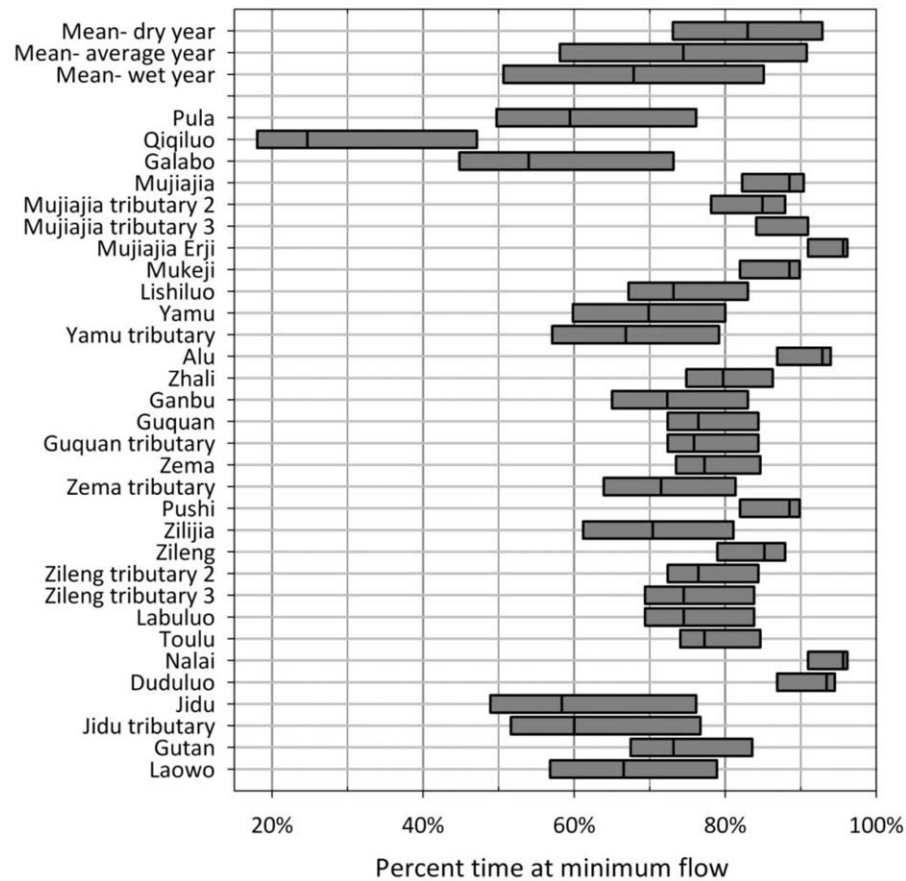


Figure 4. Percentage of time that small dams dewater downstream river channels. (top) Mean categories are mean percentages across the 31 small dams investigated (± 1 SD). Data displayed for (bottom) individual small dams illustrates how dewatering effects vary among small dams and across typical dry, average, and wet years.

4.2. Differential Effects of Large and Small Nu River Dams

[42] The large and small hydropower facilities investigated in this study segregate along a threshold of installed capacity (50 MW) determined by the Chinese government. However, other differences in design and operation better distinguish magnitudes and expression of potential environmental effects between the small and large dams. In particular, we observe pronounced differences in potential for small and large dams to modify discharge and sediment regimes. For instance, potential hydrologic alterations established by large hydropower dams relate to the extent to which reservoirs are able to capture and control flows, as well as planned operations. Large dams with storage reservoirs generally attenuate flood peaks and increase base-flows downstream [e.g., *Gregory et al.*, 2007]. On the contrary, reservoirs associated with small dams store relatively minor fractions of annual runoff. However, small dams divert large volumes of discharge from the river. Hydropower diversion from small dams predominantly affects magnitudes of low to moderate flows, as well as rates of change during transitions between low and high flows. Until the station design flow for optimal power generation is met, nearly all river flows are diverted, leaving

several kilometers of river channel below the small dams dewatered for a majority of the year (Figures 3 and 4).

[43] We observe that effects to sediment transport also diverge according to hydropower facility design. Reservoirs of small dams are hydraulically flushed on a subannual to annual basis, whereas sediment management is not planned at the large dams investigated. Flushing of stored sediments from small reservoirs substantially reduces net trapping efficiencies such that small dams do not appreciably affect annual sediment yields. However, temporary storage and pulse releases of sediments have potential to alter the timing and quality of sediments delivered to the downstream channel. Effects of periodic sediment deficit are likely to extend to the next significant sediment source downstream. The influence of periodic sediment surplus related to pulsed releases of stored sediments may be localized [*Kibler et al.*, 2011] or may propagate further downstream, with particular expression at tributary confluences [*Curtis et al.*, 2010; *Petts and Greenwood*, 1985]. In contrast, reduced sediment yield below large dams that continually trap and store sediments may lead to persistent sediment deficit downstream.

[44] We emphasize that our observation of greater potential for sediment transport disruption at large dams is

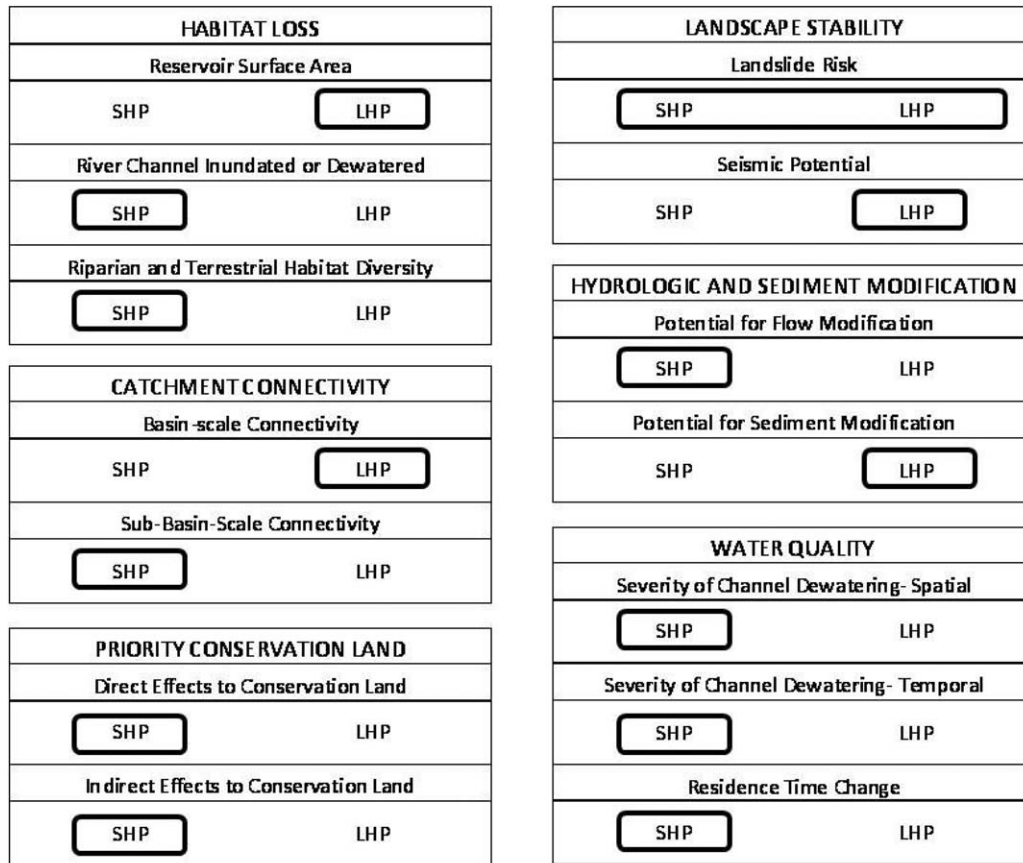


Figure 5. Summary of study results. Figure 5 indicates whether small hydropower dams (SHP) or large hydropower dams (LHP) have greater mean cumulative impact per megawatt of power.

related to dominant sediment transport processes in the Nu River and its tributaries and to management of reservoir sediments. The bedload-dominated sediment supply is stored by both large and small dams. However, because stored sediments are flushed from small reservoirs, with regard to annual sediment yields, the effect of sediment trapping by small dams is negligible. The dependence of our results on such sediment management in small reservoirs, and the lack of analogous sediment management in large reservoirs, is an important condition to our reported sediment-related impacts of large and small dams.

4.3. Differential Permitting and Consequential Development Trajectories of Large and Small Dams

[45] Large and small hydropower dams are often subject to divergent processes of permitting and environmental review. In China, large (>50 MW) dams require oversight and permissions from the National Development and Reform Commission at two stages of project development and may require additional oversight and permissions from the State Council or National People’s Congress [Magee, 2006]. Small dams are permitted and implemented at the Prefectural or Provincial level, requiring no collective oversight or consideration of potentially cumulative impacts. The localized effects and small number of people directly affected by each small dam allow for potential accumulations of incremental effects that are not evident at the time of decision making nor accounted for through environmental

review processes, whereas potential effects of large projects are investigated more thoroughly before projects are approved.

[46] The consequences of different development and governance trajectories of small and large dams are evident in the potential for mitigation opportunities to be adequately identified, implemented, and enforced. While interviewing local personnel at the Gongshan County (Nujiang Prefecture) Environmental Protection Board, where staff are responsible for enforcing EIA requirements of small hydropower stations, McDonald [2007] learned that mandatory monthly inspections of sites for EIA compliance were seldom completed and that mitigation requirements were often unmet. Lack of oversight at multiple levels of governance, paucity of expertise or resources at local government offices, superficial requirements for environmental assessment, and lack of enforcement creates opportunity for effects of small dams to accumulate more readily than those of large dams.

[47] The lack of consideration toward potential environmental effects and mitigation potential is evident in engineering design and operation of small hydropower stations in Nujiang Prefecture. For example, each small station is equipped with more than one turbine, such that turbines may be selectively taken offline during times when river flows are insufficient to meet design flows. There is opportunity during times of suboptimal flows to withdraw only the volume of water needed to power the turbines currently

in use, maintaining greater instream flows through much of the year. However, as flows are not gauged at the dam site and canal intake designs are not flexible enough to control the amount of water diverted given suboptimal hydropower generation scenarios, substantial volumes of water are diverted from the river but not used for hydropower production. The lack of gauging equipment at diversion sites also suggests that any minimum instream flow standards that may exist are also not monitored or strictly enforced. Indeed, we find no mention of mandatory minimum ecological flows in EIA reports nor did we observe evidence that minimum flow standards are upheld in practice during visits to diversion sites.

[48] Although policies mandating environmental standards for design and operation of small hydropower are often created at the local level, where projects are permitted, policies encouraging development of small hydropower are often crafted at the national or international level. For instance, many of the small hydropower projects investigated in this study are partially funded by the CDM, developed as carbon-offsetting projects under the international Kyoto Protocol climate change treaty. Effects of such development policies may be global, for instance in shaping energy landscapes, or through influences to freshwater biodiversity. Despite the global scale of CDM policies, actual implementation of CDM small hydropower projects proceeds according to standards set within the host country. As regulations regarding avoidance and minimization of ecological impact may vary tremendously throughout host countries, potential for identification and mitigation of harmful effects is also variable.

4.4. Study Limitations

[49] The setting of this study within the unique morphology of the Nu River basin is important in considering the transferability of our results to other basins and policy scenarios. The Nu River flows within a narrow gorge between two steep ridges, creating a network of relatively short, low-volume tributaries with comparatively small catchments that carry runoff from basin divides to the considerably larger (in terms of length, flow, and catchment size) mainstem river. Small dams constructed on tributaries of the Nu River are almost exclusively diversion dams that route water from small reservoirs high in the catchment to high-gradient penstocks and generating stations several kilometers away. Large dams are built on the mainstem of the Nu River and do not divert water. Due to these differences in design, small and large dams both segregate discretely in space with respect to size and design and also affect the surrounding landscape in profoundly different ways, complicating the process of selecting comparable evaluation metrics.

[50] As a consequence of the Nu River basin hydrogeology, our sample of small dams consist solely of diversion dams situated on small, steep tributaries, whereas the large mainstem dams investigated are comparatively very large with respect to installed capacity. A similar study set within a more dendritic river basin may have yielded a more varied selection of large dams, with the installed capacity of some facilities closer to the 50 MW policy threshold. We cannot provide conclusive evidence that our sample represents the population of dams in Nujiang Prefecture, as

information regarding the total population of dams is not available. However, field visits and examination of Nu River basin hydrology indicate that our sample is likely representative of the population. With exception of one river, the Dimaluo River, tributaries large enough to support large hydropower stations are not present in this portion of the Nu River basin.

[51] Our definition of small hydropower, set at < 50 MW according to the Chinese hydropower policy threshold, encompasses dams that would not classify as small hydropower elsewhere in the world where policies define small hydropower by lower thresholds of installed capacity. Our sample of small hydropower dams, varying between 2.5 to 49 MW, with a mean of 19 MW, covers a large range of dam sizes and impact magnitudes, as is reflected in the wide distribution of data around mean effects (Figure 2). Whether similar analysis using a different policy definition of small hydropower would result in comparable conclusions is uncertain and should be explored.

[52] The data environment in which this analysis is set may also influence study outcomes. Although our selection of dam impacts is independent of data accessibility, our methods of evaluating magnitudes of impact are influenced by availability of information. Estimates of effect are characterized by large uncertainties in the dataset, reflected for example, in the wide ranges between estimates of minimum and maximum effects of large dams (Figure 2). Our samples of large and small dams also often encompass great variability of effect, evident in the spread of data around mean effects (Figure 2). Additionally, tributary catchments to the Nu River are ungauged, thus the runoff models we apply to estimate flows are uncalibrated and we are unable to validate results. Although uncertainty related to flows modeled by this method is unknown, this runoff model is widely applied to hydropower design in the region and is used to determine design flows of the small hydropower dams analyzed in this study. As our assessment of flow modification below small dams is relative to design flows informed by this runoff model and is not contingent on accuracy of specific values, we are satisfied that flows simulated by this model are of sufficient quality for the purpose of our analysis.

[53] A number of sources of uncertainty are represented in our results, including the aforementioned sources related to ambiguity in final locations of the proposed large dams and details regarding planned reservoir operations. With restricted access to dam operations data, predicting the extent and severity of effects downstream of large dams is particularly challenging. In the case of the large Nu River dams, where detailed information regarding dam operations and subsequent changes to flow magnitudes, duration, timing, and predictability are not available, detailed predictions of change to downstream channel morphology are unachievable. Channel effects related to large dams may occur far from dam sites [*Richter et al.*, 2010], yet lacking sufficient data, we are unable to account for these potential changes with a high degree of confidence.

[54] Moreover, it is extremely difficult to predict how downstream changes to hydrology, river channels, and riparian areas may affect biodiversity. Although we directly estimate the area of conservation priority land inundated by reservoirs, our use of a distance-decay function to estimate

off-site impacts is inferential. However, because large and small dams in Nujiang Prefecture are built in different locations (large dams in the valley bottom, smaller dams higher in the catchment on tributaries), there is a distinct separation of effect between the proximity of small and large dams to conservation areas, which tend to occur in the more remote upper catchments where farming is limited by slope and where portions of original vegetation remain intact.

[55] Finally, although the objectives of this study are limited to investigation of biophysical impact, it is likely that socioeconomic consequences of small hydropower may exist and may be similar or dissimilar to what has been reported for large dams in the Nu River [Tullos *et al.*, 2013]. Further investigation of socioeconomic and geopolitical effects related to small and large dams are necessary to thoroughly inform integrative definitions of low-impact hydropower.

5. Conclusions

[56] Our results indicate that small and large hydropower dams, as defined by Chinese hydropower laws, affect aquatic ecosystems in different ways. Small dams (<50 MW) return greater impacts, per megawatt of power generated, with respect to the length of river channel affected, diversity of habitats affected, influence to lands designated as conservation and biodiversity priorities, and potential for modification of hydrologic regimes and water quality. Conversely, we report greater cumulative effects for large dams (>50 MW) related to total land inundation, potential sediment transport disruption, and potential for reservoir-induced seismicity. Effects to catchment connectivity vary according to the scale of reference, with effects of small dams exceeding those of large dams at a sub-basin scale and opposite trends observed at the international scale of the Salween Basin. Despite data uncertainties and variability, our results indicate differences in cumulative biophysical impact of large and small dams that exceed both modeling uncertainty and sample variability.

[57] Rooted in the assumption that the biophysical consequences of small hydropower dams are fewer and less severe than those associated with large hydropower, current national and international development policies often encourage growth in the small hydropower sector while discouraging construction of large dams. These policies often define small and large hydropower dams according to a simple metric of installed capacity. Our results indicate that this definition of small hydropower is inadequate for describing the scale of potential environmental impact. Results of this study present evidence that further and more rigorous investigation of the cumulative effects of small hydropower and comparative effects of large and small hydropower are needed to develop coupled water and energy policies that more accurately define and support low-impact hydropower development.

[58] **Acknowledgments.** The authors thank Aaron Wolf, Gordon Grant, Phil Brown, Darrin Magee, and Bryan Tilt for their contribution to the study design. He Daming, Feng Yan, and staff of the Asian International Rivers Centre of Yunnan University and the Chinese Hydrology Data Project provided support in data procurement. Gordon Grant helped to substantially improve this manuscript. This work was funded by the National Science Foundation (Awards 0623087 and 0826752).

References

- Abell, R. (2002), Conservation biology for the biodiversity crisis: A freshwater follow-up, *Conserv. Biol.*, 16, 1435–1437.
- Agrawala, S., V. Raksakulthai, M. van Aalst, P. Larsen, J. Smith, and J. Reynolds (2003), Development and climate change in Nepal: Focus on water resources and hydropower. Organization for Economic Cooperation and Development, 64, Paris, France.
- Allen, C. R., H. Qian, X. Wen, H. Zhou, and W. Huang (1991), Field study of a highly active fault zone: The Xianshuihe fault of southwestern China, *Geol. Soc. Am. Bull.*, 103, 1178–1199.
- Baecher, B. G., and R. L. Keeney (1982), Statistical examination of reservoir induced seismicity, *Bull. Seismol. Soc. Am.*, 72, 553–569.
- Benstead, J. P., J. G. March, C. M. Pringle, and F. N. Scatena (1999), Effects of a low-head dam and water abstraction on migratory tropical stream biota, *Ecol. Appl.*, 9, 656–668.
- Blocshii, G., M. Sivapalan, T. Wagener, A. Viglioni, and H. Savenije (Eds.) (2013), *Run-Off Prediction in Ungauged Basins: Synthesis Across Processes, Places and Scales*, Cambridge Univ. Press, Cambridge, U. K.
- Bratrich, C., B. Truffer, K. Jorde, J. Markard, W. Meier, A. Peter, M. Schneider, and M. Wehrli (2004), Green hydropower: A new assessment procedure for river management, *River Res. Appl.*, 20, 865–882.
- Brune, G. M. (1953), Trap efficiency of reservoirs, *Trans. Am. Geophys. Union*, 34, 407–418.
- Bunn, S. E., and A. H. Arthington (2002), Basic principles and ecological consequences of altered flow regimes for aquatic biodiversity, *Environ. Manage.*, 30, 492–507.
- Cernea, M. M. (1999), *The Economics of Involuntary Resettlement: Questions and Challenges*, World Bank, Washington, D. C.
- Chen, L. Y., and P. Talwani (1998), Reservoir induced seismicity in China, *Pure Appl. Geophys.*, 153, 133–149.
- Chinese Academy of Sciences (1990), *Qinghai Tibet Atlas* [in Chinese], Science Publishing House, Beijing, China.
- Chinese Ministry of Hydrology (1970), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1965*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chinese Ministry of Hydrology (1971), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1966*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chinese Ministry of Hydrology (1974), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1972*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chinese Ministry of Hydrology (1977), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1978*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chinese Ministry of Hydrology (1982a), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1979*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chinese Ministry of Hydrology (1982b), *Hydrologic Yearbook: Yunnan-Tibet International Rivers District, District 9 Region 2 1979*, [in Chinese], Ministry of Hydrology, Beijing, China.
- Chu, X. L., and Y. R. Chen (1989), *The Fishes of Yunnan, China* [in Chinese], vol. I, Science Press, Beijing, China.
- Chu, X. L., and Y. R. Chen (1990), *The Fishes of Yunnan, China* [in Chinese], vol. II, Science Press, Beijing, China.
- Conservation International (CI) (2004), *Biodiversity Hotspots Revisited [spatial data]*, Conservation International, Arlington, Va.
- Conservation International (CI) (2010), *Global Key Biodiversity Areas [spatial data]*, BirdLife International, Conservation International and Partners, Cambridge, U. K.
- Curtis, K. E., C. E. Renshaw, F. J. Magilligan, and W. B. Dade (2010), Temporal and spatial scales of geomorphic adjustments to reduced competency following flow regulation in bedload-dominated system. *Geomorphology*, 118, 105–117.
- Dewson, Z. S., A. B. W. James, and R. G. Death (2007), A review of decreased flow for instream habitat and macroinvertebrates, *J. North Am. Benthol. Soc.*, 26, 401–415.
- Dore, J., and X. G. Yu (2004), *Yunnan hydropower expansion: Update on China's energy industry reforms and the Nu, Lancang and Jinsha hydropower dams*, Chiang Mai University and Green Watershed, Chiang Mai, Thailand.
- Dudhani, S., A. K. Sinha, and S. S. Inamdar (2006), Assessment of small hydropower potential using remote sensing data for sustainable development in India, *Energy Policy*, 34, 3195–3205.
- Falkenmark, M., and T. Chapman (Eds.) (1989), *Comparative Hydrology: An Ecological Approach to Land and Water Resources*, UNESCO, Paris.

- Frey, G. W., and D. M. Linke (2002), Hydropower as a renewable and sustainable energy resource meeting global energy challenges in a reasonable way, *Energy Policy*, 30, 1261–1265.
- Giordano, M. F., M. A. Giordano, and A. T. Wolf (2005), International resource conflict and mitigation, *J. Peace Res.*, 42, 47–65.
- Gleick, P. H. (1992), Environmental consequences of hydroelectric development: The role of facility size and type, *Energy*, 17, 735–747.
- Gregory, S. V., L. Askenas, and C. Nygaard (2007), Summary report to assist development of ecosystem flow recommendations for the Coast Fork and Middle Fork of the Willamette River, Oregon, Institute for Water and Watersheds, Oregon State Univ. Press, Corvallis, Oreg.
- Gupta, H. K. (2002), A review of recent studies of triggered earthquakes by artificial water reservoirs with special emphasis on earthquakes in Koyna, India, *Earth Sci. Rev.*, 58, 279–310.
- Haxton, T. J., and C. S. Findlay (2008), Meta-analysis of the impacts of water management on aquatic communities, *Can. J. Fish. Aquat. Sci.*, 65, 437–447.
- He, H. L., and E. Tsukuda (2003), Recent progresses of active fault research in China, *J. Geogr.*, 12, 489–520.
- Institute of Water Resources (IWR) (2004), *Ganbu River Power Station Feasibility Study, Yunnan Province, Fugong County* [in Chinese], vol. 1, Hydropower Survey and Design, Chenzhou, Hunan.
- Institute of Water Resources (IWR) (2005), *Zhali River Power Station Feasibility Study, Yunnan Province, Fugong County* [in Chinese], vol. 1, Hydropower Survey and Design, Chenzhou, Hunan.
- Institute of Water Resources (IWR) (2006a), *Alu River Power Station Feasibility Study, Yunnan Province, Fugong County* [in Chinese], vol. 1, Hydropower Survey and Design, Chenzhou, Hunan.
- Institute of Water Resources (IWR) (2006b), *Zilijia River Power Station Feasibility Study, Yunnan Province, Fugong County* [in Chinese], vol. 1, Hydropower Survey and Design, Chenzhou, Hunan.
- Institute of Water Resources (IWR) (2006c), *Zileng River Power Station Feasibility Study, Yunnan Province, Fugong County* [in Chinese], vol. 1, Hydropower Survey and Design, Chenzhou, Hunan.
- International Hydropower Association (2007), *Sustainability Assessment Protocol*, International Hydropower Association, London Borough of Sutton, U. K.
- International Union for Conservation of Nature (IUCN) (2001), *IUCN Red List Categories and Criteria: Version 3.1, IUCN Species Survival Commission*, IUCN, Gland, Switzerland.
- Irving, J. S., and M. B. Bain (1993), Assessing cumulative impact on fish and wildlife in the Salmon River Basin, Idaho, in *Environmental Analysis: The NEPA Experience*, edited by S. G. Hildebrand and J. B. Cannon, pp. 357–372, Lewis, Boca Raton, Fla.
- Karki, S. K. (2007), Implications of small hydropower plants in power sector development: A case of Nepal.
- Kibler, K. M., D. D. Tullios, and G. M. Kondolf (2011), Evolving expectations of dam removal outcomes: Downstream geomorphic effects following removal of a small, gravel-filled dam, *J. Am. Water Res. Assoc.*, 47, 408–423.
- Langhammer, P. F., et al. (2007), *Identification and Gap Analysis of Key Biodiversity Areas: Targets for Comprehensive Protected Area Systems*, IUCN, Gland, Switzerland.
- Laurance, W. F., et al. (2002), Ecosystem decay of Amazonian forest fragments: A 22-year investigation, *Conserv. Biol.*, 16, 605–618.
- Lerer, L. B., and T. Scudder (1999), Health impacts of large dams, *Environ. Impact Assess. Rev.*, 19, 113–123.
- Lewke, R. E., and I. O. Buss (1977), Impacts of impoundment to vertebrate animals and their habitats along the Snake River Canyon, Washington, *Northwest Sci.*, 51, 219–270.
- Li, Y. (2010), Evaluation of landscape stability associated with hydropower stations: A case study of hydropower stations in Nu and Lancang Rivers, Yunnan Province [in Chinese], M.S. thesis, Yunnan Univ., China.
- Li, J. F., L. J. Ma, S. Wang, W. M. Xu, and F. Lu (2009), Background paper: Chinese renewables status report, October 2009, Chinese Renewable Energy Industrial Association and Renewable Energy Policy Network for the 21st Century, Paris.
- Lytle, D. A., and N. L. Poff (2004), Adaptation to the natural flow regime, *Trends Ecol. Evol.*, 19, 94–100.
- Magee, D. M. (2006), Powershed politics: Yunnan hydropower under Great Western Development, *China Q.*, 185, 23–41.
- McCully, P. (1996), *Silenced Rivers: The Ecology and Politics of Large Dams*, Zed Books, London, U. K.
- McDonald, K. N. (2007), *Damming China's Grand Canyon: Pluralization without democratization in the Nu River Valley*, PhD dissertation, Univ. of Calif., Berkeley, Calif.
- Meier W., C. Bonjour, A. Wuest, and P. Reichert (2003), Modeling the effect of water diversion on the temperature of mountain streams, *J. Environ. Eng.*, 128, 755–764.
- Ministry of Water Resources (MWR) (2002), *Small hydropower station design specifications* [in Chinese], Ref. No.: GB50071-2002, Chinese Ministry of Water Resources, Beijing, China.
- Northcote, T. G. (1998), Migratory behavior of fish and movement through fish passage facilities, in *Fish Migration and Fish Bypass*, edited by M. S. Jungwirth, S. Schmutz, and S. Weiss, *Fishing News Books*, Blackwell Science, Oxford, Engl, 3–18.
- Olivier, W. H. (1974), *Wildlife problems associated with hydropower reservoirs*, Bulletin 3, Washington Game Department, Environ. Manage. Div., Olympia, Washington, D. C.
- Owen, R. B. (2006), Physical geography and geology: Imprints on a landscape, Yunnan, China, *Geography*, 90, 279–287.
- Painuly, J. P. (2001), Barriers to renewable energy penetration: A framework for analysis, *Renewable Energy*, 24, 73–89.
- Petts, G. E. (1984), *Impounded Rivers: Perspectives for Ecological Management*, Wiley, New York.
- Petts, G. E., and M. Greenwood (1985), Channel changes and invertebrate faunas below Nant-y-Moch dam, River Rheidol, Wales, UK, *Hydrobiologia*, 122, 65–80.
- Plinston, D., and D. M. He (1999), Water resources and hydropower: Policies and strategies for sustainable development of the Lancang-Mekong River Basin, Rep. TA-3139, Asian Development Bank, Manila, Philipp.
- Poff, N. L., J. D. Allan, M. B. Bain, J. R. Karr, K. L. Prestegard, B. D. Richter, R. E. Sparks, and J. C. Stromberg, (1997), The natural flow regime: A paradigm for conservation and restoration of river ecosystems, *Bioscience*, 47, 769–784.
- Poff, N. L., J. D. Olden, D. M. Merritt, and D. M. Peppin (2007), Homogenization of regional river dynamics by dams and global biodiversity implications, *Proc. Natl. Acad. Sci. USA*, 104, 5732–5737.
- Postel, S., and B. R. Richter (2003), *Rivers for Life: Managing Water for People and Nature*, Island Press, Washington, D. C.
- Purohit, P. (2008), Small hydropower projects under Clean Development Mechanism in India: A preliminary assessment, *Energy Policy*, 36, 2000–2015.
- Renewable Energy Policy Network for the 21st Century (REN21) (2010), *Renewables 2010 global status report*, Renewable Energy Policy Network for the 21st Century, Paris.
- Richter, B. D., S. Postel, T. Scudder, B. Lehner, A. Churchill, and M. Chow (2010), Lost in development's shadow: The downstream human consequences of dams, *Water Alternatives*, 3: 14–42.
- Rosenburg, D. M., P. McCully, and C. M. Pringle (2000), Global-scale environmental effects of hydrological alterations: Introduction to a special issue devoted to hydrological alterations, *Bioscience*, 50, 746–751.
- Schmidt, J. C., and P. R. Wilcock (2008), Metrics for assessing the downstream effects of dams, *Water Resour. Res.*, 44, W04404, doi:10.1029/2006WR005092.
- Smith, S. D., A. B. Wellington, J. L. Nachlinger, and C. A. Fox (1991), Functional response of riparian vegetation to streamflow diversion in the Eastern Sierra Nevada, *Ecol. Appl.*, 1, 89–97.
- Stanley, E. H., and M. W. Doyle (2002), A geomorphic perspective on nutrient retention following dam removal, *Bioscience*, 52, 693–701.
- Talwani, P. (1997), On the nature of reservoir-induced seismicity, *Pure Appl. Geophys.*, 150, 473–492.
- Terborgh, J. (1974), Preservation of natural diversity: The problem of extinction prone species, *BioScience*, 24, 715–722.
- Terborgh, J., et al. (2001), Ecological meltdown in predator-free forest fragments, *Science*, 294, 1923–1926.
- The Nature Conservancy (TNC) (1999), *Vegetation Cover of Northwest Yunnan Province, China* [spatial data, 1:25,000], The Nature Conservancy, Kunming, China.
- The Nature Conservancy (TNC) (2006), *Biodiversity Hotspots of Northwest Yunnan Province, China* [spatial data], The Nature Conservancy, Kunming, China.
- Tullios, D., E. Foster-Moore, D. Magee, B. Tilt, A. Wolf, K. Kibler, E. Schmitt, and F. Gassert (2013), Biophysical, socioeconomic and geopolitical vulnerabilities to hydropower development on the Nu River, *China, Ecol. Soc.*, in press.
- United Nations Educational, Scientific, and Cultural Organization (UNESCO) (2002), *Three Parallel Rivers of Yunnan Protected Areas*

- World Heritage Nomination*, IUCN Technical Evaluation, UNESCO, Paris.
- United Nations Educational, Scientific, and Cultural Organization (UNESCO) (2003), *Three Parallel Rivers Protected Areas: Report of the 27th Session of the World Heritage Committee*, 27COM 8C.4, UNESCO World Heritage Convention, Paris.
- United Nations Educational, Scientific, and Cultural Organization (UNESCO) (2010), *Three Parallel Rivers of Yunnan World Heritage Nomination*, IUCN Technical Evaluation, UNESCO, Paris.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2006a), Thresholds and criteria for the eligibility of hydroelectric power plants with reservoirs as CDM project activities, CDM Executive Board Rep. 23, Annex 5, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2006b), Approved consolidated baseline and monitoring methodology ACM0002: Consolidated baseline methodology for grid-connected electricity generation from renewable sources, Executive Board Rep. 56, version 12.0, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2007), Lishiluo Erji 6.4 MW Small Hydropower Project in Yunnan Province Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2008a), Fugong Mukeji Hydropower Project Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2008b), Yunnan Nuijiang Fugong Guquan River Hydropower Station Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2008c), Yunnan Lushui County Laowohe 25 MW Hydropower Project Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2008d), Mujiajia Erji 10MW Small Hydropower Project in Yunnan Province Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2009a), 48 MW Duduluo River Hydroelectric Power Plant Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2009b), Mujiajia Yiji 18.9 MW Hydropower Project in Yunnan Province Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- United Nations Framework Convention on Climate Change (UNFCCC/CCNUCC) (2009c), Fugong Labuluo Hydropower Project Clean Development Mechanism Project Design Document, UNFCCC and CCNUCC, Bonn, Germany.
- Vorosmarty, C. J., M. Meybeck, B. Fekete, K. Sharma, P. Green, and J. P. M. Syvitski (2003), Anthropogenic sediment retention: Major global impact from registered river impoundments, *Global Planet. Change*, 39, 169–190.
- Ward, J. V., K. Tockner, and F. Schiemer (1999), Biodiversity of floodplain river ecosystems: Ecotones and connectivity, *Regul. Rivers: Res. Manage.*, 15, 125–139.
- Williams, G. P., and M. G. Wolman (1984), Downstream effects of dams on alluvial rivers, USGS Prof. Pap. 1286, USGS, Reston, Va.
- World Commission on Dams (2000), *Dams and Development: A New Framework for Decision-Making*, World Commission on Dams, Earthscan, London, U. K.
- Xu, J. C., and A. Wilkes (2003), Biodiversity impact analysis in northwest Yunnan, southwest China, *Biodiversity Conserv.*, 13, 959–983.
- Yuksel, I. (2007), Development of hydropower: A case study in developing countries, *Energy Sources*, 2, 113–121.
- Yunnan Bureau of Hydrology and Water Resources (YBHWR) (2005), *Gutan River Ecological Hydropower Station Project Water Resources Appraisal*, Nuijiang Prefecture, Lushui [in Chinese], Yunnan Bureau of Hydrology and Water Resources, Kunming, China.
- Zhao, Q., S. Liu, L. Deng, S. Dong, Z. Yang, and Q. Liu (2012), Determining the influencing distance of dam construction and reservoir impoundment on land use: A case study of Manwan Dam, Lancang River, *Ecol. Eng.*, 53, 235–242.
- Zhou, W., and B. K. Chen (2005), Biodiversity of Bitahai Nature Reserve in Yunnan Province, China, *Biodiversity Conserv.*, 15, 839–853.
- Zhou, R., X. Wen, C. Cai, and S. Ma (1997), Recent earthquakes and assessment of seismic tendency on the Ganzi-Yushu fault zone, *Seismol. Geol.*, 19, 115–124.
- Zhou, S., X. L. Zhang, and J. H. Liu (2009), The trend of small hydropower development in China, *Renewable Energy*, 34, 1078–1083.
- Ziv, G., E. Baran, S. Nam, I. Rodriguez-Iturbe, and S. Levin (2012), Trading-off fish biodiversity, food security, and hydropower in the Mekong River Basin, *Proc. Natl. Acad. Sci. USA*, 109, 5609–5614.