



Contents lists available at ScienceDirect

# Journal of Computational and Applied Mathematics

journal homepage: [www.elsevier.com/locate/cam](http://www.elsevier.com/locate/cam)

## Controlling eutrophication by means of water recirculation: An optimal control perspective

Francisco J. Fernández<sup>a,\*</sup>, Aurea Martínez<sup>b</sup>, Lino J. Alvarez-Vázquez<sup>b</sup><sup>a</sup> *Universidade de Santiago de Compostela, Instituto de Matemáticas, 15782 Santiago, Spain*<sup>b</sup> *Universidade de Vigo, E.I. Telecomunicación, 36310 Vigo, Spain*

### ARTICLE INFO

#### Article history:

Received 6 July 2021

Received in revised form 14 July 2022

#### MSC:

primary 49J20

65K10

secondary 49M25

#### Keywords:

Optimal control

Numerical optimization

Artificial recirculation

Eutrophication

### ABSTRACT

In this work, the artificial recirculation of water is presented and analyzed, from the perspective of the optimal control of partial differential equations, as a tool to prevent eutrophication effects in large waterbodies. A novel formulation of the environmental problem, based on the coupling of nonlinear models for hydrodynamics, water temperature and concentrations of the different species involved in the eutrophication processes, is introduced. After a complete and rigorous analysis of the existence of optimal solutions, a full numerical algorithm for their computation is proposed. Finally, some numerical results for a realistic scenario are shown, in order to prove the efficiency of our approach.

© 2022 The Author(s). Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

### 1. Introduction: The environmental problem

One of the most important environmental problems related to human activities near large masses of water is Eutrophication. Eutrophication is caused by an excessive supply of nutrients (normally nitrogen and phosphorus) to the water. These nutrients cause undesirable effects like algal blooms that directly affects the concentration of dissolved oxygen in the deeper layers since the processes of remineralization of organic detritus consume oxygen, which can lead to oxygen depletion of the body of water [1]. In Fig. 1 (left) we can find a schematic representation of the problem and its consequences.

Artificial circulation is a management technique that increases the dissolved oxygen concentration in the bottom layers. Water from the well aerated upper layers is taken by means of a set of collectors and injects it into the bottom layers that are poorly oxygenated. Then, oxygen-poor water from the bottom is circulated to the surface, where oxygenation from the atmosphere and photosynthesis can naturally occur [2,3]. In Fig. 1 (right) we can find a representation of the main idea of water artificial circulation.

Although eutrophication has received some attention from the mathematical viewpoint in last decade (see, for instance, the recent publications [4–6] and the references therein), the study of artificial circulation as a eutrophication control tool has remained unaddressed in the mathematical literature up to now, as far as we know. We can only mention two recent papers of the authors [2,3], where a simplified preliminary formulation of the problem is posed and briefly analyzed. The main contribution of this work with respect to [3] is that in this case, we are considering the effect that solar radiation has on the increase in water temperature and, therefore, on the evolution of the different species. The incorporation of

\* Corresponding author.

E-mail addresses: [fjavier.fernandez@usc.es](mailto:fjavier.fernandez@usc.es) (F.J. Fernández), [aurea@dma.uvigo.es](mailto:aurea@dma.uvigo.es) (A. Martínez), [lino@dma.uvigo.es](mailto:lino@dma.uvigo.es) (L.J. Alvarez-Vázquez).

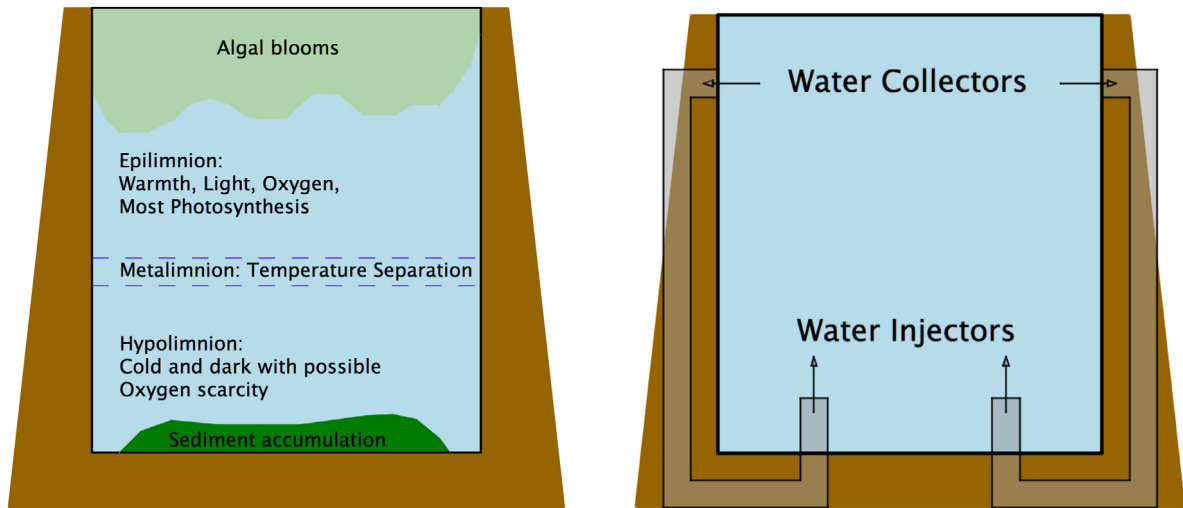


Fig. 1. On the left side, a diagram representing algal blooms caused by eutrophication and its consequences. On the right side, a basic scheme depicting the water artificial circulation process [2].

solar radiation to the model represents a notable increase in complexity in the mathematical analysis of the existence of a solution to the state equations and also in mathematical analysis of the control problem and its numerical resolution. This complexity is revealed in [2], where the authors show that, under certain assumptions about the regularity of the data, it is possible to find a solution to the state equations. We must mention that in this work we will also present a complete algorithm for the numerical resolution of the control problem and we will present results that we have obtained using realistic data.

In next section we present a detailed mathematical formulation of the physical problem as a control/state constrained optimal control problem of nonlinear partial differential equations. Then, we briefly recall the existence results for the state system proved in [2]. Next, in the central part of the paper, we demonstrate in a rigorous way the existence of optimal solutions. Finally, we present the numerical resolution of the problem, introducing a full computational algorithm and a realistic numerical example, showing the efficiency of our approach.

## 2. Mathematical formulation of the control problem

In this section we will formulate the environmental problem in the framework of optimal control of partial differential equations. For a better understanding of this novel mathematical formulation, we will divide this section into five subsections: in the first subsection we will introduce and describe the physical domain; in the second one, the control variables (in our case, the volumetric flow rate for each pump); in the third subsection we will establish the mathematical formulation for the thermo-hydrodynamic model; in the fourth one we will present the eutrophication model that will be used (the core of our model) and, finally, in the fifth subsection we will formulate the optimal control problem.


In order to establish the appropriate framework for mathematically analyzing the control problem, we consider, for a Banach space  $V_1$  and a locally convex space  $V_2$  such that  $V_1 \subset V_2$ , and for  $1 \leq p, q \leq \infty$ , the following Sobolev-Bochner space (cf. Chapter 7 of [7] for further details):

$$W^{1,p,q}(0, T; V_1, V_2) = \left\{ u \in L^p(0, T; V_1) : \frac{du}{dt} \in L^q(0, T; V_2) \right\}, \tag{1}$$

where  $\frac{du}{dt}$  denotes the derivative of  $u$  in the sense of distributions. It is well known that, if both  $V_1$  and  $V_2$  are Banach spaces, then  $W^{1,p,q}(0, T; V_1, V_2)$  is also a Banach space endowed with the norm  $\|u\|_{W^{1,p,q}(0,T;V_1,V_2)} = \|u\|_{L^p(0,T;V_1)} + \left\| \frac{du}{dt} \right\|_{L^q(0,T;V_2)}$ .

### 2.1. The physical domain

We consider a domain  $\Omega \subset \mathbb{R}^3$  corresponding, for instance, to a reservoir. In order to promote the artificial circulation of water inside the domain  $\Omega$ , we suppose the existence of a set of  $N_{CT}$  pairs collector-injector  $\{(C^k, T^k)\}_{k=1}^{N_{CT}} \subset \partial\Omega$  in such a way that each water collector is connected to its corresponding injector by a pipe with a pumping group. We also assume a smooth enough boundary  $\partial\Omega$ , such that it can be split into four disjoint subsets  $\partial\Omega = \Gamma_S \cup \Gamma_C \cup \Gamma_T \cup \Gamma_N$ , where  $\Gamma_C$  corresponds to the part of the boundary where the water collectors are located ( $\Gamma_C = \cup_{k=1}^{N_{CT}} C^k$ ),  $\Gamma_T$  corresponds to the part of the boundary where the water injectors are located ( $\Gamma_T = \cup_{k=1}^{N_{CT}} T^k$ ),  $\Gamma_S$  is the top part of the boundary in contact

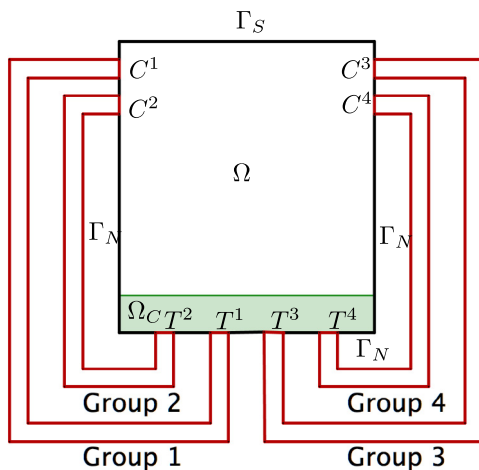

**Fig. 2.** Geometrical configuration of an example domain  $\Omega$  with  $N_{CT} = 4$  collector/injector pairs, showing the different boundary sections:  $\Gamma_S$ ,  $\Gamma_C = \cup_{k=1}^4 C^k$ ,  $\Gamma_T = \cup_{k=1}^4 T^k$  and  $\Gamma_N$ , and also the control domain  $\Omega_C$ .

with air, and  $\Gamma_N = \partial\Omega \setminus (\Gamma_S \cup \Gamma_C \cup \Gamma_T)$  corresponds to the rest of the boundary. In particular, we suppose the boundary  $\partial\Omega$  regular enough to assure the existence of elements  $\varphi^k, \tilde{\varphi}^k \in H^{3/2}(\partial\Omega)$ , for  $k = 1, \dots, N_{CT}$ , satisfying the following assumptions (mainly corresponding to suitable regularizations of the indicator functions of  $T^k$  and  $C^k$ , respectively):

- $\varphi^k(\mathbf{x}), \tilde{\varphi}^k(\mathbf{x}) \geq 0$ , a.e.  $\mathbf{x} \in \partial\Omega$ ,
- $\varphi^k(\mathbf{x}) = 0$ , a.e.  $\mathbf{x} \in \partial\Omega \setminus T^k$ , and  $\int_{T^k} \varphi^k d\gamma = \mu(T^k)$ ,
- $\tilde{\varphi}^k(\mathbf{x}) = 0$ , a.e.  $\mathbf{x} \in \partial\Omega \setminus C^k$ , and  $\int_{C^k} \tilde{\varphi}^k d\gamma = \mu(C^k)$ ,

where  $\mu(S)$  represents the  $(n - 1)$  dimensional measure of a generic set  $S$ , and  $\beta_0 : u \in H^{3/2}(\partial\Omega) \rightarrow \beta_0(u) \in H^2(\Omega)$  denotes a right inverse of the classical trace operator  $\gamma_0$ , i.e.,  $(\gamma_0 \circ \beta_0)(u) = u$  (cf. Theorem 8.3. in Chapter 1 of [8]). Finally, we also consider a subdomain  $\Omega_C \subset \Omega$ , corresponding to the part of the domain where we want to increase the dissolved oxygen concentration (denoted as control domain in Fig. 2).

### 2.2. The control variable

As above commented, our control will be the volumetric flow rate ( $\text{m}^3 \text{s}^{-1}$ ) by pump  $k$  at each time  $t$ ,  $g^k(t) \in H^1(0, T)$ , for  $k = 1, \dots, N_{CT}$ , where  $T$  (s) denotes the length of the time interval. We will suppose that the control acts over the system through a Dirichlet boundary condition on the hydrodynamic model:

$$\mathbf{v} = \boldsymbol{\phi}_g \quad \text{on } \partial\Omega \times (0, T), \tag{2}$$

where  $\mathbf{v}(\mathbf{x}, t)$  will denote the water velocity, and where:

$$\boldsymbol{\phi}_g(\mathbf{x}, t) = \sum_{k=1}^{N_{CT}} g^k(t) \left[ \frac{\varphi^k(\mathbf{x})}{\mu(T^k)} - \frac{\tilde{\varphi}^k(\mathbf{x})}{\mu(C^k)} \right] \mathbf{n}(\mathbf{x}) \tag{3}$$

represents the given Dirichlet condition for the hydrodynamic system. It is immediate that, thanks to the regularity of the control  $\mathbf{g}$  and of the functions  $\{(\varphi^k, \tilde{\varphi}^k)\}_{k=1}^{N_{CT}}$ , we have that  $\boldsymbol{\phi}_g \in W^{1,2,2}(0, T; H^{3/2}(\partial\Omega), H^{3/2}(\partial\Omega))$  (cf. expression (1) for a detailed definition of this Sobolev–Bochner space), and also that

$$\int_{\partial\Omega} \boldsymbol{\phi}_g \cdot \mathbf{n} d\gamma = 0.$$

### 2.3. The thermo-hydrodynamic model

We denote by  $\mathbf{v}(\mathbf{x}, t)$  ( $\text{m s}^{-1}$ ) the solution of the following modified Navier–Stokes system with a Smagorinsky model of turbulence:

$$\begin{cases} \frac{\partial \mathbf{v}}{\partial t} + \nabla \mathbf{v} \mathbf{v} - \text{div}(\mathcal{E}(\mathbf{v})) + \nabla p = \alpha^0(\theta - \theta^0) \mathbf{a}_g & \text{in } \Omega \times (0, T), \\ \nabla \cdot \mathbf{v} = 0 & \text{in } \Omega \times (0, T), \\ \mathbf{v} = \boldsymbol{\phi}_g & \text{on } \partial\Omega \times (0, T), \\ \mathbf{v}(0) = \mathbf{v}^0 & \text{in } \Omega, \end{cases} \tag{4}$$

where  $\mathbf{a}_g$  ( $\text{m s}^{-2}$ ) is the gravity acceleration,  $\alpha^0 = -\frac{1}{\rho} \frac{\partial \rho}{\partial \theta} (K^{-1})$  is the thermic expansion coefficient (see, for instance, section 10.7 of [9]),  $\rho(\theta)$  ( $\text{g m}^{-3}$ ) is the density,  $\mathbf{v}^0$  is the initial velocity, and the boundary field  $\phi_{\mathbf{g}}$  is the element given by (3). The diffusion term  $\mathcal{E}(\mathbf{v})$  is given by:

$$\mathcal{E}(\mathbf{v}) = \left. \frac{\partial D(e)}{\partial e} \right|_{e=e(\mathbf{v})}, \quad \text{with } e(\mathbf{v}) = \frac{1}{2} (\nabla \mathbf{v} + \nabla \mathbf{v}^t), \tag{5}$$

where  $D$  is a potential function (for instance, in the standard case of the classical Navier–Stokes equations,  $D(e) = \nu [e : e]$ , with  $\nu$  ( $\text{m}^2 \text{s}^{-1}$ ) the kinematic viscosity of the water, and, consequently,  $\mathcal{E}(\mathbf{v}) = 2\nu e(\mathbf{v})$ ). However, in our case, the Smagorinsky model, the potential function is defined as in [10]:

$$D(e) = \nu [e : e] + \frac{2}{3} \nu_{tur} [e : e]^{3/2}, \tag{6}$$

so,

$$\begin{aligned} \mathcal{E}(\mathbf{v}) &= \left. \frac{\partial D(\epsilon)}{\partial \epsilon} \right|_{\epsilon=\epsilon(\mathbf{v})} = 2\nu \epsilon(\mathbf{v}) + 2\nu_{tur} [\epsilon(\mathbf{v}) : \epsilon(\mathbf{v})]^{1/2} \epsilon(\mathbf{v}) \\ &= (2\nu + 2\nu_{tur} [\epsilon(\mathbf{v}) : \epsilon(\mathbf{v})]^{1/2}) \epsilon(\mathbf{v}) = \beta(\epsilon(\mathbf{v})) \epsilon(\mathbf{v}), \end{aligned} \tag{7}$$

where  $\beta(\epsilon(\mathbf{v})) = 2\nu + 2\nu_{tur} [\epsilon(\mathbf{v}) : \epsilon(\mathbf{v})]^{1/2}$  and  $\nu_{tur}$  ( $\text{m}^2$ ) is the turbulent viscosity.

Regarding thermic effects, water temperature  $\theta(\mathbf{x}, t)$  (K) is the solution of the following convection–diffusion partial differential equation with nonhomogeneous, nonlinear, mixed boundary conditions:

$$\left\{ \begin{array}{l} \frac{\partial \theta}{\partial t} + \mathbf{v} \cdot \nabla \theta - \nabla \cdot (K \nabla \theta) = 0 \quad \text{in } \Omega \times (0, T), \\ \theta = \phi_\theta \quad \text{on } \Gamma_T \times (0, T), \\ K \frac{\partial \theta}{\partial \mathbf{n}} = 0 \quad \text{on } \Gamma_C \times (0, T), \\ K \frac{\partial \theta}{\partial \mathbf{n}} = b_1^N (\theta_N - \theta) \quad \text{on } \Gamma_N \times (0, T), \\ K \frac{\partial \theta}{\partial \mathbf{n}} = b_1^S (\theta_S - \theta) + b_2^S (T_r^4 - |\theta|^3 \theta) \quad \text{on } \Gamma_S \times (0, T), \\ \theta(0) = \theta^0 \quad \text{in } \Omega, \end{array} \right. \tag{8}$$

where Dirichlet boundary condition  $\phi_\theta$  is given by expression:

$$\phi_\theta(\mathbf{x}, t) = \sum_{k=1}^{N_{CT}} \varphi^k(\mathbf{x}) \int_{-T}^T \rho_\epsilon(t - \epsilon - s) \gamma_\theta^k(s) ds \tag{9}$$

with, for each  $k = 1, \dots, N_{CT}$ ,

$$\gamma_\theta^k(s) = \begin{cases} \frac{1}{\mu(C^k)} \int_{C^k} \theta^0 d\gamma & \text{if } s \leq 0, \\ \frac{1}{\mu(C^k)} \int_{C^k} \theta(s) d\gamma & \text{if } s > 0, \end{cases} \tag{10}$$

representing the mean temperature of water in the collector  $C_k$ , and with the weight function  $\rho_\epsilon$  defined by:

$$\rho_\epsilon(t) = \begin{cases} \frac{c}{\epsilon} \exp\left(-\frac{t^2}{t^2 - \epsilon^2}\right) & \text{if } |t| < \epsilon, \\ 0 & \text{if } |t| \geq \epsilon, \end{cases} \tag{11}$$

for  $c \in \mathbb{R}$  the positive constant satisfying the unitary condition:

$$\int_{\mathbb{R}} \rho_1(t) dt = 1.$$

In other words, we are assuming that the mean temperature of water at each injector  $T_k$  is a weighted average in time of the mean temperatures of water at its corresponding collector  $C_k$ . In order to obtain the mean temperature at each injector, we convolute the mean temperature at the collector with a smooth function with support in  $(t - 2\epsilon, t)$ . In this way, we have that the temperature in the injector only depends on the mean temperatures in the collector along the time interval  $(t - 2\epsilon, t)$ . Parameter  $0 < \epsilon < T$  represents, in a certain sense, the technical characteristics of the pipeline that define the stay time of water in the pipe. We also suppose that there is not heat transfer through the walls of the pipelines (that is, they are isolated).

Moreover, for the other terms appearing in the formulation of problem (8) we have that:

- $\mathbf{n}$  is the unit outward normal vector to the boundary  $\partial\Omega$ .
- $K > 0$  ( $\text{m}^2 \text{s}^{-1}$ ) is the thermal diffusivity of the fluid, that is,  $K = \frac{\alpha}{\rho c_p}$ , where  $\alpha$  ( $\text{W m}^{-1} \text{K}^{-1}$ ) is the thermal conductivity,  $\rho(\theta)$  ( $\text{g m}^{-3}$ ) is the density, and  $c_p$  ( $\text{W s g}^{-1} \text{K}^{-1}$ ) is the specific heat capacity of water.
- $b_1^k \geq 0$  ( $\text{m s}^{-1}$ ), for  $K \in \{N, S\}$ , are the coefficients related to convective heat transfer through the boundaries  $\Gamma_N$  and  $\Gamma_S$ , obtained from the relation  $\rho c_p b_1^k = h^k$ , where  $h^k \geq 0$  ( $\text{W m}^{-2} \text{K}^{-1}$ ) are the convective heat transfer coefficients on each surface.
- $b_2^S > 0$  ( $\text{m s K}^{-3}$ ) is the coefficient related to radiative heat transfer through the boundary  $\Gamma_S$ , given by  $b_2^S = \frac{\sigma_B \varepsilon}{\rho c_p}$ , where  $\sigma_B$  ( $\text{W m}^{-2} \text{K}^{-4}$ ) is the Stefan–Boltzmann constant and  $\varepsilon$  is the emissivity.
- $\theta^0 \geq 0$  (K) represents the initial temperature.
- $\theta_N, \theta_S \geq 0$  (K) are the temperatures related to convection heat transfer on the surfaces  $\Gamma_N$  and  $\Gamma_S$ .
- $T_r \geq 0$  (K) is the radiation temperature on the surface  $\Gamma_S$ , derived from the expression  $\sigma_B \varepsilon T_r^4 = (1 - a)R_{sw,net} + R_{lw,down}$ , where  $a$  is the albedo,  $R_{sw,net}$  ( $\text{W m}^{-2}$ ) denotes the net incident shortwave radiation on the surface  $\Gamma_R$ , and  $R_{lw,down}$  ( $\text{W m}^{-2}$ ) denotes the downwelling longwave radiation.

### 2.4. The eutrophication model

We consider the following system for modeling the eutrophication processes, based in Michaelis–Menten kinetics (further details can be found, for instance, in [11,12] and the references therein), where we consider the concentrations of five different species:  $u^1(\mathbf{x}, t)$  ( $\text{mg l}^{-1}$ ) stands for the nutrient (nitrogen in this case),  $u^2(\mathbf{x}, t)$  ( $\text{mg Cl}^{-1}$ ) for the phytoplankton,  $u^3(\mathbf{x}, t)$  ( $\text{mg Cl}^{-1}$ ) for the zooplankton,  $u^4(\mathbf{x}, t)$  ( $\text{mg Cl}^{-1}$ ) for the organic detritus, and  $u^5(\mathbf{x}, t)$  ( $\text{mg l}^{-1}$ ) for the dissolved oxygen:

$$\begin{cases} \frac{\partial u^i}{\partial t} + \mathbf{v} \cdot \nabla u^i - \nabla \cdot (\mu^i \nabla u^i) = A^i(\mathbf{x}, t, \theta, \mathbf{u}) & \text{in } \Omega \times (0, T), \\ u^i = \phi_{u^i} & \text{on } \Gamma_T \times (0, T), \\ \mu^i \frac{\partial u^i}{\partial \mathbf{n}} = 0 & \text{on } (\Gamma_S \cup \Gamma_N \cup \Gamma_C) \times (0, T), \\ u^i(0) = u^{0,i} & \text{in } \Omega, \quad i = 1, \dots, 5, \end{cases} \tag{12}$$

where, for  $i = 1, \dots, 5$ ,

$$\phi_{u^i}(\mathbf{x}, t) = \sum_{k=1}^{N_{CT}} \varphi^k(\mathbf{x}) \int_{-T}^t \rho_\varepsilon(t - \varepsilon - s) \gamma_{u^i}^k(s) ds, \tag{13}$$

and, for  $k = 1, \dots, N_{CT}$ , and  $i = 1, \dots, 5$ ,

$$\gamma_{u^i}^k(s) = \begin{cases} \frac{1}{\mu(C^k)} \int_{C^k} u^{0,i} d\gamma, & \text{if } s \leq 0, \\ \frac{1}{\mu(C^k)} \int_{C^k} u^i(s) d\gamma, & \text{if } s > 0. \end{cases} \tag{14}$$

Finally, the reaction term  $\mathbf{A} = (A^i) : \Omega \times (0, T) \times \mathbb{R}^6 \rightarrow \mathbb{R}^5$  is defined by the following expression:

$$\mathbf{A}(\mathbf{x}, t, \theta, \mathbf{u}) = \begin{bmatrix} -\frac{C_{nc}L(\mathbf{x}, t, \theta)}{K_N + |u^1|} u^1 u^2 + C_{nc}K_r u^2 + C_{nc}K_{rd}D(\theta)u^4 \\ \frac{L(\mathbf{x}, t, \theta)}{K_N + |u^1|} u^1 u^2 - K_r u^2 - K_{mf} u^2 - \frac{K_z}{K_F + |u^2|} u^2 u^3 \\ \frac{C_{fz}K_z}{K_F + |u^2|} u^2 u^3 - K_{mz} u^3 \\ K_{mf} u^2 + K_{mz} u^3 - K_{rd}D(\theta)u^4 \\ \frac{C_{oc}L(\mathbf{x}, t, \theta)}{K_N + |u^1|} u^1 u^2 - C_{oc}K_r u^2 - C_{oc}K_{rd}D(\theta)u^4 \end{bmatrix} \tag{15}$$

where:

- $C_{oc} \geq 0$  ( $\text{mg mgC}^{-1}$ ) is the oxygen–carbon stoichiometric relation,
- $C_{nc} \geq 0$  ( $\text{mg mgC}^{-1}$ ) is the nitrogen–carbon stoichiometric relation,
- $C_{fz} \geq 0$  is the zooplankton grazing efficiency factor,
- $K_{rd} \geq 0$  ( $\text{s}^{-1}$ ) is the detritus regeneration rate,

- $K_r \geq 0$  ( $s^{-1}$ ) is the phytoplankton endogenous respiration rate,
- $K_{mf} \geq 0$  ( $s^{-1}$ ) is the phytoplankton death rate,
- $K_{mz} \geq 0$  ( $s^{-1}$ ) is the zooplankton death rate (including predation),
- $K_z \geq 0$  ( $s^{-1}$ ) is the zooplankton predation (grazing),
- $K_F > 0$  ( $mgC l^{-1}$ ) is the phytoplankton half-saturation constant,
- $K_N > 0$  ( $mg l^{-1}$ ) is the nitrogen half-saturation constant,
- $\mu^i \geq 0$  ( $m^2 s^{-1}$ ),  $i = 1, \dots, 5$ , are the diffusion coefficients of each species,
- $D$  is the thermic regeneration function for the organic detritus, defined as:

$$D(\theta) = \Theta^{\theta - \theta^0}, \tag{16}$$

with  $\log(\Theta)$  ( $K^{-1}$ ) the thermic regeneration constant for the reference temperature  $\theta^0$ . In order to simplify the mathematical analysis of the state equations we will consider the following linear approximation:

$$D(\theta) = 1 + \log(\Theta)(\theta - \theta^0) \tag{17}$$

if  $\Theta > 0$ , and  $D(\theta) = 1$  if  $\Theta = 0$ .

- $L$  is the luminosity function, given by:

$$L(\mathbf{x}, t, \theta) = \mu C_t^{\theta - \theta^0} \frac{I^0(t)}{I_s} e^{-\varphi_1 x_3}, \tag{18}$$

with  $I^0$  ( $W m^{-2}$ ) the incident light intensity,  $I_s$  ( $W m^{-2}$ ) the light saturation,  $\log(C_t)$  ( $K^{-1}$ ) the phytoplankton growth thermic constant for the reference temperature  $\theta^0$ ,  $\varphi_1$  ( $m^{-1}$ ) the light attenuation due to depth, and  $\mu$  ( $s^{-1}$ ) the maximum phytoplankton growth rate. Again, for the sake of simplicity, we will consider the following linear approximation:

$$L(\mathbf{x}, t, \theta) = \mu (1 + \log(C_t)(\theta - \theta^0)) \frac{I^0(t)}{I_s} e^{-\varphi_1 x_3} \tag{19}$$

if  $C_t > 0$ , and  $L(\mathbf{x}, t, \theta) = \mu \frac{I^0(t)}{I_s} e^{-\varphi_1 x_3}$  if  $C_t = 0$ .

### 2.5. The optimal control problem

Our main objective is to ensure that the concentration of dissolved oxygen in the bottom layer lies within an admissible range of values by means of an optimal artificial circulation of water from the well-aerated upper layer. So, we want to solve the following optimal control problem:

$$(\mathcal{P}) \quad \min\{J(\mathbf{g}) : \mathbf{g} \in \mathcal{U}_{ad}, \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} u^5(t) d\mathbf{x} \in [\lambda^m, \lambda^M]\},$$

where

$$\mathcal{U}_{ad} = \{\mathbf{g} \in [H^1(0, T)]^{N_{CT}} : \mathbf{g}(0) = \mathbf{0}, \|\mathbf{g}^k\|_{H^1(0, T)} \leq c, \forall k = 1, \dots, N_{CT}\} \tag{20}$$

is the admissible set,  $c > 0$  is a constant related to technological limitations of the pumps,  $J(\mathbf{g})$  is the cost function:

$$J(\mathbf{g}) = \frac{1}{2} \sum_{k=1}^{N_{CT}} \int_0^T g^k(t)^2 dt + \frac{1}{2} \sum_{k=1}^{N_{CT}} \int_0^T \frac{dg^k}{dt}(t)^2 dt, \tag{21}$$

and  $\lambda^m, \lambda^M > 0$  represent, respectively, minimum and maximum permissible concentrations in the control domain  $\Omega_C$ . Finally,  $(\mathbf{v}, \theta, \mathbf{u})$  are the solutions of the coupled state systems (4), (8) and (12).

### 3. Mathematical analysis of the state equations

The mathematical analysis of the state equations (4), (8) and (12) have been previously studied by authors in [2]. We briefly recall the main results for convenience of the reader.

For the modified Navier–Stokes system (4) we consider the following spaces:

$$\begin{aligned} \mathbf{X}_1 &= \left\{ \mathbf{v} \in [W^{1,3}(\Omega)]^3 : \nabla \cdot \mathbf{v} = 0, \mathbf{v}|_{\partial\Omega \setminus (\Gamma_C \cup \Gamma_T)} = \mathbf{0} \right\}, \\ \tilde{\mathbf{X}}_1 &= \left\{ \mathbf{v} \in [W^{1,3}(\Omega)]^3 : \nabla \cdot \mathbf{v} = 0, \mathbf{v}|_{\partial\Omega} = \mathbf{0} \right\}. \end{aligned} \tag{22}$$

Then, associated to the previous spaces, we define:

$$\begin{aligned} \mathbf{W}_1 &= W^{1,\infty,2}(0, T; \mathbf{X}_1, [L^2(\Omega)]^3) \cap \mathcal{C}([0, T]; \mathbf{X}_1), \\ \tilde{\mathbf{W}}_1 &= W^{1,\infty,2}(0, T; \tilde{\mathbf{X}}_1, [L^2(\Omega)]^3) \cap \mathcal{C}([0, T]; \tilde{\mathbf{X}}_1). \end{aligned} \tag{23}$$

Now, for the water temperature system (8), we consider the following spaces:

$$\begin{aligned} X_2 &= \{\theta \in H^1(\Omega) : \theta|_{\Gamma_S} \in L^5(\Gamma_S)\}, \\ \tilde{X}_2 &= \{\theta \in X_2 : \theta|_{\Gamma_T} = 0\}. \end{aligned} \tag{24}$$

If we define the following norm associated to above space  $X_2$ :

$$\|\theta\|_{X_2} = \|\theta\|_{H^1(\Omega)} + \|\theta\|_{L^5(\Gamma_S)},$$

we have that  $X_2$  is a reflexive separable Banach space (cf. Lemma 3.1 of [13]), and that  $\tilde{X}_2 \subset L^2(\Omega) \subset \tilde{X}'_2$  is an evolution triple. So, we consider:

$$\begin{aligned} W_2 &= \{\theta \in W^{1,2,5/4}(0, T; X_2, X'_2) : \theta|_{\Gamma_S} \in L^5(0, T; L^5(\Gamma_S))\} \cap L^\infty(0, T; L^2(\Omega)), \\ \tilde{W}_2 &= \{\theta \in W^{1,2,5/4}(0, T; \tilde{X}_2, \tilde{X}'_2) : \theta|_{\Gamma_S} \in L^5(0, T; L^5(\Gamma_S))\} \cap L^\infty(0, T; L^2(\Omega)). \end{aligned} \tag{25}$$

Finally, for the eutrophication system (12), we define:

$$\begin{aligned} \mathbf{X}_3 &= [H^1(\Omega)]^5, \\ \tilde{\mathbf{X}}_3 &= \{\mathbf{u} \in \mathbf{X}_3 : \mathbf{u}|_{\Gamma_T} = \mathbf{0}\}, \end{aligned} \tag{26}$$

and we consider the following spaces associated to them:

$$\begin{aligned} \mathbf{W}_3 &= W^{1,2,2}(0, T; \mathbf{X}_3, \mathbf{X}'_3), \\ \tilde{\mathbf{W}}_3 &= W^{1,2,2}(0, T; \tilde{\mathbf{X}}_3, \tilde{\mathbf{X}}'_3). \end{aligned} \tag{27}$$

From this section we will assume the following hypotheses for coefficients and data in the analytical study of the problem:

- $g^k \in H^1(0, T)$ , with  $g^k(0) = 0, \forall k = 1, \dots, N_{CT}$ ,
- $\mathbf{v}^0 \in [H^2_\sigma(\Omega)]^3 = \{\mathbf{v} \in [H^2(\Omega)]^3 : \nabla \cdot \mathbf{v} = 0, \mathbf{v}|_{\partial\Omega} = \mathbf{0}\} \subset \tilde{\mathbf{X}}_1$ ,
- $\theta_S \in L^2(0, T; L^2(\Gamma_S))$ ,
- $\theta_N \in L^2(0, T; L^2(\Gamma_N))$ ,
- $T_r \in L^5(0, T; L^5(\Gamma_S))$ ,
- $\theta^0 \in X_2$ ,
- $I_0 \in L^\infty(0, T)$ ,
- $\mathbf{u}^0 \in \mathbf{X}_3$ .

Under these hypotheses we will state now two lemmas (whose demonstrations can be found in [14,15], respectively), which will allow us to reformulate the state systems (4), (8) and (12) as homogeneous Dirichlet problems.

**Lemma 1.** *There exists a linear continuous extension:*

$$\begin{aligned} R_{\mathbf{v}} : [H^1(0, T)]^{N_{CT}} &\rightarrow W^{1,2,2}(0, T; [H^2_\sigma(\Omega)]^3, [H^2_\sigma(\Omega)]^3) \\ \mathbf{g} &\rightarrow R_{\mathbf{v}}(\mathbf{g}) = \boldsymbol{\zeta}_{\mathbf{g}} \end{aligned} \tag{28}$$

such that  $\boldsymbol{\zeta}_{\mathbf{g}}|_{\partial\Omega} = \boldsymbol{\phi}_{\mathbf{g}}$ , where  $\boldsymbol{\phi}_{\mathbf{g}}$  is defined by (3), and  $H^2_\sigma(\Omega) = \{\mathbf{u} \in [H^2(\Omega)]^3 : \nabla \cdot \mathbf{u} = 0\}$ .  $\square$

**Remark 1.** It is worthwhile emphasizing here that, thanks to the construction done in the proof of Lemma 1, we have

$$\nu \int_{\Omega} e(\boldsymbol{\zeta}_{\mathbf{g}}) : e(\boldsymbol{\eta}) \, d\mathbf{x} = 0, \quad \forall \boldsymbol{\eta} \in \tilde{\mathbf{X}}_1,$$

and, consequently, this term will not appear in the corresponding variational formulation.  $\square$

**Lemma 2.** *We have that the following operator is compact*

$$\begin{aligned} R_{\mathbf{h}} : [L^2(0, T)]^{N_{CT}} &\rightarrow W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega)) \\ \mathbf{h} &\rightarrow R_{\mathbf{h}}(\mathbf{h}) = \boldsymbol{\zeta}_{\mathbf{h}}, \end{aligned} \tag{29}$$

where:

$$\boldsymbol{\zeta}_{\mathbf{h}}(\mathbf{x}, t) = \sum_{k=1}^{N_{CT}} \beta_0(\varphi^k(\mathbf{x})) \int_{-T}^T \rho_\epsilon(t - \epsilon - s) \gamma_{\mathbf{h}}^k(s) \, ds, \tag{30}$$

with  $\gamma_{\mathbf{h}}^k(s) \in L^2(-T, T)$ , for  $k = 1, \dots, N_{CT}$ , defined by:

$$\gamma_{\mathbf{h}}^k(s) = \begin{cases} \frac{1}{\mu(C^k)} \int_{C^k} \theta^0 \, d\gamma & \text{if } s \leq 0, \\ h^k(s) & \text{if } s > 0, \end{cases} \tag{31}$$

and  $\beta_0 : u \in H^{3/2}(\partial\Omega) \rightarrow \beta_0(u) \in H^2(\Omega)$  the right inverse of the classical trace operator  $\gamma_0$ , i.e., such that  $(\gamma_0 \circ \beta_0)(u) = u$  (cf. Theorem 8.3. of [8]).

We also have the existence of a constant  $C$ , that depends continuously on the space-time computational domain and the initial temperature  $\theta^0$ , such that:

$$\|\zeta_{\mathbf{h}}\|_{W^{1,2,2}(0,T;H^2(\Omega),H^2(\Omega))} \leq C(\theta^0)(1 + \|\mathbf{h}\|_{[L^2(0,T)]^{N_{CT}}}). \quad \square \tag{32}$$

Now, we will establish the following notations, in order to consider the homogeneous Dirichlet systems. So, given elements  $(\mathbf{z}, \xi, \mathbf{w}) \in \tilde{\mathbf{W}}_1 \times \tilde{W}_2 \times \tilde{\mathbf{W}}_3$ , we define  $(\mathbf{v}, \theta, \mathbf{u}) \in \mathbf{W}_1 \times W_2 \times \mathbf{W}_3$  in the following way:

- $\mathbf{v} = \mathbf{z} + \zeta_{\mathbf{g}}$ , with  $\zeta_{\mathbf{g}} \in W^{1,2,2}(0, T; [H^2_\sigma(\Omega)]^3, [H^2_\sigma(\Omega)]^3)$  the extension of control  $\mathbf{g}$  given by Lemma 1.
- $\theta = \xi + \zeta_{\mathbf{h}_\theta}$ , with  $\zeta_{\mathbf{h}_\theta} \in W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega))$  the extension of  $\mathbf{h}_\theta$  obtained from Lemma 2, where:

$$h_\theta^k(s) = \frac{1}{\mu(C^k)} \int_{C^k} \theta(s) d\gamma, \quad k = 1, \dots, N_{CT}. \tag{33}$$

- $u^i = w^i + \zeta_{\mathbf{h}_u^i}$ , with  $\zeta_{\mathbf{h}_u^i} \in W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega))$  the extension of  $\mathbf{h}_u^i$  obtained from Lemma 2 with obvious modifications, where:

$$h_u^{i,k}(s) = \frac{1}{\mu(C^k)} \int_{C^k} u^i(s) d\gamma, \quad k = 1, \dots, N_{CT}, \quad i = 1, \dots, 5. \tag{34}$$

Thus, using above notations, we can reformulate the state systems (4), (8) and (12) in the following way:

$$\left\{ \begin{aligned} & \frac{\partial \mathbf{z}}{\partial t} + \nabla(\zeta_{\mathbf{g}} + \mathbf{z})\mathbf{z} + \nabla \mathbf{z} \zeta_{\mathbf{g}} \\ & - \operatorname{div} \left( 2\nu e(\mathbf{z}) + 2\nu_{tur} \int_{\Omega} [e(\zeta_{\mathbf{g}} + \mathbf{z}) : e(\zeta_{\mathbf{g}} + \mathbf{z})]^{1/2} e(\zeta_{\mathbf{g}} + \mathbf{z}) \right) \\ & + \nabla p = \alpha_0(\theta - \theta^0) \mathbf{a}_g - \frac{\partial \zeta_{\mathbf{g}}}{\partial t} - \nabla \zeta_{\mathbf{g}} \zeta_{\mathbf{g}} + 2\nu \nabla \cdot e(\zeta_{\mathbf{g}}) \quad \text{in } \Omega \times (0, T), \\ & \mathbf{z} = \mathbf{0} \quad \text{on } \partial\Omega \times (0, T), \\ & \mathbf{z}(0) = \mathbf{v}^0 \quad \text{in } \Omega. \end{aligned} \right. \tag{35}$$

$$\left\{ \begin{aligned} & \frac{\partial \xi}{\partial t} + \mathbf{v} \cdot \nabla \xi - \nabla \cdot (K \nabla \xi) \\ & = - \frac{\partial \zeta_{\mathbf{h}_\theta}}{\partial t} - \mathbf{v} \cdot \nabla \zeta_{\mathbf{h}_\theta} + \nabla \cdot (K \nabla \zeta_{\mathbf{h}_\theta}) \quad \text{in } \Omega \times (0, T), \\ & \xi = 0 \quad \text{on } T^k \times (0, T), \quad \text{for } k = 1, \dots, N_{CT}, \\ & K \frac{\partial \xi}{\partial \mathbf{n}} = -K \frac{\partial \zeta_{\mathbf{h}_\theta}}{\partial \mathbf{n}} \quad \text{on } C^k \times (0, T), \quad \text{for } k = 1, \dots, N_{CT}, \\ & K \frac{\partial \xi}{\partial \mathbf{n}} = b_1^N (\theta_N - \zeta_{\mathbf{h}_\theta} - \frac{K}{b_1^N} \frac{\partial \zeta_{\mathbf{h}_\theta}}{\partial \mathbf{n}} - \xi) \quad \text{on } \Gamma_N \times (0, T), \\ & K \frac{\partial \xi}{\partial \mathbf{n}} = b_1^S (\theta_S - \zeta_{\mathbf{h}_\theta} - \frac{K}{b_1^S} \frac{\partial \zeta_{\mathbf{h}_\theta}}{\partial \mathbf{n}} - \xi) \\ & \quad + b_2^S (T_r^4 - |\xi + \zeta_{\mathbf{h}_\theta}|^3 (\xi + \zeta_{\mathbf{h}_\theta})) \quad \text{on } \Gamma_S \times (0, T), \\ & \xi(0) = \theta^0 - \zeta_{\mathbf{h}_\theta}(0) \quad \text{in } \Omega. \end{aligned} \right. \tag{36}$$

$$\left\{ \begin{aligned} & \frac{\partial w^i}{\partial t} + \mathbf{v} \cdot \nabla w^i - \nabla \cdot (\mu^i \nabla w^i) = A^i(\mathbf{x}, t, \theta, \zeta_{\mathbf{h}_u} + \mathbf{w}) \\ & - \frac{\partial \zeta_{\mathbf{h}_u^i}}{\partial t} - \mathbf{v} \cdot \nabla \zeta_{\mathbf{h}_u^i} + \nabla \cdot (\mu^i \nabla \zeta_{\mathbf{h}_u^i}) \quad \text{in } \Omega \times (0, T), \\ & \frac{\partial w^i}{\partial \mathbf{n}} = -\mu^i \frac{\partial \zeta_{\mathbf{h}_u^i}}{\partial \mathbf{n}} \quad \text{on } (\Gamma_S \cup \Gamma_N \cup \Gamma_C) \times (0, T), \\ & w^i = 0 \quad \text{on } T^k \times (0, T), \quad \text{for } k = 1, \dots, N_{CT}, \\ & w^i(0) = u^{0,i} - \zeta_{\mathbf{h}_u^i}(0) \quad \text{in } \Omega, \quad i = 1, \dots, 5. \end{aligned} \right. \tag{37}$$

It is worthwhile noting here that all three previous systems show homogeneous Dirichlet boundary conditions and, consequently, we will be able to define the concept of solution of the original state systems (4), (8) and (12) in terms of the modified state systems (35), (36) and (37). It should be also noted that, in the case of systems (8) and (12), the coupling terms in the Dirichlet boundary conditions are now transferred to the partial differential equations in systems (36) and (37).

**Definition 1** (The Concept of Solution for the State Systems). An element  $(\mathbf{v}, \theta, \mathbf{u}) \in \mathbf{W}_1 \times W_2 \times \mathbf{W}_3$  is a solution for the state systems (4), (8) and (12), if there exists an element  $(\mathbf{z}, \xi, \mathbf{w}) \in \tilde{\mathbf{W}}_1 \times \tilde{W}_2 \times \tilde{\mathbf{W}}_3$  such that:



- $\mathbf{v} = \mathbf{z} + \boldsymbol{\zeta}_g$ , with  $\boldsymbol{\zeta}_g \in W^{1,2,2}(0, T; [H^2_\sigma(\Omega)]^3, [H^2_\sigma(\Omega)]^3)$  as given by Lemma 1,  $\mathbf{z}(0) = \mathbf{v}^0$ , a.e.  $\mathbf{x} \in \Omega$ , and  $\mathbf{z} \in \tilde{\mathbf{W}}_1$  the solution of the following variational formulation:

$$\begin{aligned} \int_{\Omega} \frac{\partial \mathbf{z}}{\partial t} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \nabla(\boldsymbol{\zeta}_g + \mathbf{z}) \mathbf{z} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \nabla \mathbf{z} \boldsymbol{\zeta}_g \cdot \boldsymbol{\eta} \, d\mathbf{x} + 2\nu \int_{\Omega} e(\mathbf{z}) : e(\boldsymbol{\eta}) \, d\mathbf{x} \\ + 2\nu_{tur} \int_{\Omega} [e(\boldsymbol{\zeta}_g + \mathbf{z}) : e(\boldsymbol{\zeta}_g + \mathbf{z})]^{1/2} e(\boldsymbol{\zeta}_g + \mathbf{z}) : e(\boldsymbol{\eta}) \, d\mathbf{x} \\ = \int_{\Omega} \mathbf{H}_g \cdot \boldsymbol{\eta} \, d\mathbf{x}, \quad \text{a.e. } t \in (0, T), \quad \forall \boldsymbol{\eta} \in \tilde{\mathbf{X}}_1, \end{aligned} \tag{38}$$

where:

$$\mathbf{H}_g = \alpha_0(\theta - \theta^0) \mathbf{a}_g - \frac{\partial \boldsymbol{\zeta}_g}{\partial t} - \nabla \boldsymbol{\zeta}_g \boldsymbol{\zeta}_g \in L^2(0, T; [L^2(\Omega)]^3). \tag{39}$$

- $\theta = \xi + \zeta_{h_\theta}$ , with  $\zeta_{h_\theta} \in W^{1,2,2}(0, T; H^2(\underline{\Omega}), H^2(\Omega))$  obtained from Lemma 2 for  $\mathbf{h}_\theta \in [L^2(0, T)]^{N_{CT}}$  defined by (33),  $\xi(0) = \theta^0 - \zeta_{h_\theta}(0)$ , a.e.  $\mathbf{x} \in \Omega$ , and  $\xi \in \tilde{W}_2$  the solution of the following variational formulation:

$$\begin{aligned} \int_{\Omega} \frac{\partial \xi}{\partial t} \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \mathbf{v} \cdot \nabla \xi \boldsymbol{\eta} \, d\mathbf{x} + K \int_{\Omega} \nabla \xi \cdot \nabla \boldsymbol{\eta} \, d\mathbf{x} + b_1^N \int_{\Gamma_N} \xi \boldsymbol{\eta} \, d\boldsymbol{\gamma} \\ + b_1^S \int_{\Gamma_S} \xi \boldsymbol{\eta} \, d\boldsymbol{\gamma} + b_2^S \int_{\Gamma_S} |\xi + \zeta_{h_\theta}|^3 (\xi + \zeta_{h_\theta}) \boldsymbol{\eta} \, d\boldsymbol{\gamma} = \int_{\Omega} H_{h_\theta} \boldsymbol{\eta} \, d\mathbf{x} \\ + \int_{\Gamma_C} \mathbf{g}_{h_\theta}^C \boldsymbol{\eta} \, d\boldsymbol{\gamma} + b_1^N \int_{\Gamma_N} \mathbf{g}_{h_\theta}^N \boldsymbol{\eta} \, d\boldsymbol{\gamma} + b_1^S \int_{\Gamma_S} \mathbf{g}_{h_\theta}^S \boldsymbol{\eta} \, d\boldsymbol{\gamma} \\ + b_2^S \int_{\Gamma_S} T_r^4 \boldsymbol{\eta} \, d\boldsymbol{\gamma}, \quad \text{a.e. } t \in (0, T), \quad \forall \boldsymbol{\eta} \in \tilde{\mathbf{X}}_2, \end{aligned} \tag{40}$$

where:

$$\begin{aligned} H_{h_\theta} &= \frac{\partial \zeta_{h_\theta}}{\partial t} - \mathbf{v} \cdot \nabla \zeta_{h_\theta} + \nabla \cdot (K \nabla \zeta_{h_\theta}) \in L^2(0, T; L^2(\Omega)), \\ \mathbf{g}_{h_\theta}^C &= -K \frac{\partial \zeta_{h_\theta}}{\partial \mathbf{n}} \in L^2(0, T; L^2(\Gamma_C)), \\ \mathbf{g}_{h_\theta}^N &= \theta_N - \zeta_{h_\theta} - \frac{K}{b_1^N} \frac{\partial \zeta_{h_\theta}}{\partial \mathbf{n}} \in L^2(0, T; L^2(\Gamma_N)), \\ \mathbf{g}_{h_\theta}^S &= \theta_S - \zeta_{h_\theta} - \frac{K}{b_1^S} \frac{\partial \zeta_{h_\theta}}{\partial \mathbf{n}} \in L^2(0, T; L^2(\Gamma_S)). \end{aligned} \tag{41}$$

- $u^i = w^i + \zeta_{h_u^i}$ , with  $\zeta_{h_u^i} \in W^{1,2,2}(0, T; H^2(\underline{\Omega}), H^2(\Omega))$  obtained from Lemma 2 for  $\mathbf{h}_u^i \in [L^2(0, T)]^{N_{CT}}$  defined by (34),  $\mathbf{w}(0) = \mathbf{u}_0 - \zeta_{h_u^i}(0)$ , a.e.  $\mathbf{x} \in \Omega$ , and  $\mathbf{w} \in \tilde{\mathbf{W}}_3$  the solution of the following variational formulation:

$$\begin{aligned} \int_{\Omega} \frac{\partial \mathbf{w}}{\partial t} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \nabla \mathbf{w} \mathbf{w} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \Lambda_\mu \int_{\Omega} \nabla \mathbf{w} : \nabla \boldsymbol{\eta} \, d\mathbf{x} \\ = \int_{\Omega} \mathbf{A}(\theta, \zeta_{h_u} + \mathbf{w}) \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \mathbf{H}_u \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ + \int_{\Gamma_S \cup \Gamma_N \cup \Gamma_C} \mathbf{g}_u \cdot \boldsymbol{\eta} \, d\boldsymbol{\gamma}, \quad \text{a.e. } t \in (0, T), \quad \forall \boldsymbol{\eta} \in \tilde{\mathbf{X}}_3, \end{aligned} \tag{42}$$

where  $\Lambda_\mu = \text{diag}(\mu^1, \dots, \mu^5) \in M_{5 \times 5}(\mathbb{R})$  is a diagonal matrix with diffusion coefficients, and:

$$\begin{aligned} H_u^i &= -\frac{\partial \zeta_{h_u^i}}{\partial t} - \mathbf{v} \cdot \nabla \zeta_{h_u^i} + \nabla \cdot (\mu^i \nabla \zeta_{h_u^i}) \in L^2(0, T; L^2(\Omega)), \\ \mathbf{g}_u^i &= -\mu^i \frac{\partial \zeta_{h_u^i}}{\partial \mathbf{n}} \in L^2(0, T; L^2(\Gamma_S \cup \Gamma_N \cup \Gamma_C)), \quad i = 1, \dots, 5. \end{aligned} \tag{43}$$

**Remark 2.** We have the following dependence scheme between the elements of state system:

$$\mathbf{g} \rightarrow (\mathbf{v} \longleftrightarrow \theta) \rightarrow \mathbf{u}.$$

Therefore, we can separate the mathematical analysis of systems (4)–(8) from system (12). The coupled system (4)–(8) has been fully analyzed by the authors in [14,15]. Thus, following the results there, we can assure that, for each control  $\mathbf{g} \in [H^1(0, T)]^{N_{CT}}$ , there exists a solution  $(\mathbf{v}, \theta) \in \tilde{\mathbf{W}}_1 \times \tilde{W}_2$  of the thermo-hydrodynamic system (4)–(8). We must remark here that, due to the complexity of this nonlinear system, we cannot obtain a uniqueness result for the thermo-hydrodynamic solution  $(\mathbf{v}, \theta)$  under our general hypotheses. However, this property will not be necessary in our approach, and previous existence result will be sufficient for our argumentation. So, we can focus now all our attention

in analyzing the solution  $\mathbf{u}$  of the eutrophication system (12) or, equivalently, in studying the solution  $\mathbf{w}$  of the modified system (37).  $\square$

Thus, in order to analyze the existence of a solution  $\mathbf{u}$  by means of a fixed point technique, we consider the operator:

$$\begin{aligned} \mathbf{M}_{\mathbf{u}} : (\mathbf{u}^*, \mathbf{h}_{\mathbf{u}}^*) &\in [L^2(0, T; L^2(\Omega))]^5 \times [L^2(0, T)]^{5 \times N_{CT}} \longrightarrow \\ \mathbf{M}_{\mathbf{u}}(\mathbf{u}^*, \mathbf{h}_{\mathbf{u}}^*) &= (\mathbf{u}, \mathbf{h}_{\mathbf{u}}) \in [L^2(0, T; L^2(\Omega))]^5 \times [L^2(0, T)]^{5 \times N_{CT}}, \end{aligned} \tag{44}$$

where  $\mathbf{u}^* = (u^{1*}, \dots, u^{5*})$ , with  $u^{i*} \in L^2(0, T; L^2(\Omega))$ , for  $i = 1, \dots, 5$ ,  $\mathbf{h}_{\mathbf{u}}^* = (\mathbf{h}_{\mathbf{u}}^{1*}, \dots, \mathbf{h}_{\mathbf{u}}^{5*})$ , with  $\mathbf{h}_{\mathbf{u}}^{i*} \in [L^2(0, T)]^{N_{CT}}$ , for  $i = 1, \dots, 5$ ,  $\mathbf{u} = (u^1, \dots, u^5) \in \mathbf{W}_3$ ,  $\mathbf{h}_{\mathbf{u}} = (\mathbf{h}_{\mathbf{u}}^1, \dots, \mathbf{h}_{\mathbf{u}}^5) \in [L^2(0, T)]^{5 \times N_{CT}}$ , such that:

- $\zeta_{\mathbf{h}_{\mathbf{u}}^{i*}} \in W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega))$ , for  $i = 1, \dots, 5$ , is defined by Lemma 2.
- $\mathbf{u} \in \mathbf{W}_3$  is the solution, in the sense of Definition 1 with the obvious modifications, of the following decoupled problem with resolution order  $i = 3 \rightarrow 2 \rightarrow 4 \rightarrow 1 \rightarrow 5$ :

$$\begin{cases} \frac{\partial u^i}{\partial t} + \mathbf{v} \cdot \nabla u^i - \nabla \cdot (\mu^i \nabla u^i) = \widehat{A}^i(\mathbf{x}, t, \theta, \mathbf{u}^*, \mathbf{u}) & \text{in } \Omega \times (0, T), \\ u^i = \zeta_{\mathbf{h}_{\mathbf{u}}^{i*}} & \text{on } \Gamma_T \times (0, T), \\ \mu^i \frac{\partial u^i}{\partial \mathbf{n}} = 0 & \text{on } (\Gamma_S \cup \Gamma_N \cup \Gamma_C) \times (0, T), \\ u^i(0) = u^{0,i} & \text{in } \Omega, \quad i = 1, \dots, 5, \end{cases} \tag{45}$$

where the Caratheodory function  $\widehat{\mathbf{A}} = (\widehat{A}^i) : \Omega \times (0, T) \times \mathbb{R}^6 \times \mathbb{R}^6 \rightarrow \mathbb{R}^5$  is defined by:

$$\widehat{\mathbf{A}}(\mathbf{x}, t, \theta, \mathbf{u}^*, \mathbf{u}) = \begin{bmatrix} -C_{nc}L(\mathbf{x}, t, \theta) \frac{u^{1*}}{K_N + |u^{1*}|} u^2 + C_{nc}K_r u^2 + C_{nc}K_{rd}D(\theta)u^4 \\ L(\mathbf{x}, t, \theta) \frac{u^{1*}}{K_N + |u^{1*}|} u^2 - K_r u^2 - K_{mf} u^2 - K_z \frac{u^{2*}}{K_F + |u^{2*}|} u^3 \\ C_{fz}K_z \frac{u^{2*}}{K_F + |u^{2*}|} u^3 - K_{mz} u^3 \\ K_{mf} u^2 + K_{mz} u^3 - K_{rd}D(\theta)u^4 \\ C_{oc}L(\mathbf{x}, t, \theta) \frac{u^{1*}}{K_N + |u^{1*}|} u^2 - C_{oc}K_r u^2 - C_{oc}K_{rd}D(\theta)u^4 \end{bmatrix}$$

- $\mathbf{h}_{\mathbf{u}}^i \in [L^2(0, T)]^{N_{CT}}$ , for  $i = 1, \dots, 5$ , is such that:

$$h_{\mathbf{u}}^{i,k}(s) = \frac{1}{\mu(C^k)} \int_{C^k} u^i(s) d\gamma, \quad k = 1, 2, \dots, N_{CT}. \tag{46}$$

We have the following lemma whose proof can be found in [2]. This lemma will be used later in the mathematical analysis of the control problem.

**Lemma 3.** A solution  $\mathbf{u}$  of the uncoupled system (45) verifies the following:

- Estimates for  $u^3$  and  $\mathbf{h}_{\mathbf{u}}^3$ :

$$\|u^3\|_{W^{1,2,2}(0,T;H^1(\Omega),H^1(\Omega\gamma))} \leq C_3(\|\mathbf{v}\|_{\mathbf{W}_1}) \left[ 1 + \|\mathbf{h}_{\mathbf{u}}^{3*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{47}$$

$$\|\mathbf{h}_{\mathbf{u}}^3\|_{[L^2(0,T)]^{N_{CT}}} \leq C_8(\|\mathbf{v}\|_{\mathbf{W}_1}) \left[ 1 + \|\mathbf{h}_{\mathbf{u}}^{3*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{48}$$

where the constants  $C_3$  and  $C_8$  also depend on the initial condition  $\|u^{0,3}\|_{H^1(\Omega)}$ .

- Estimates for  $u^2$  and  $\mathbf{h}_{\mathbf{u}}^2$ :

$$\begin{aligned} \|u^2\|_{W^{1,2,2}(0,T;H^1(\Omega),H^1(\Omega\gamma))} &\leq C_2(\|\mathbf{v}\|_{\mathbf{W}_1}, \|\theta\|_{W_2}) \\ &\times \left[ 1 + \|\mathbf{h}_{\mathbf{u}}^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_{\mathbf{u}}^{3*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \end{aligned} \tag{49}$$

$$\begin{aligned} \|\mathbf{h}_{\mathbf{u}}^2\|_{[L^2(0,T)]^{N_{CT}}} &\leq C_7(\|\mathbf{v}\|_{\mathbf{W}_1}, \|\theta\|_{W_2}) \\ &\times \left[ 1 + \|\mathbf{h}_{\mathbf{u}}^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_{\mathbf{u}}^{3*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \end{aligned} \tag{50}$$

where constants  $C_2$  and  $C_7$  also depend on the initial conditions  $\|u^{0,2}\|_{H^1(\Omega)}$  and  $\|u^{0,3}\|_{H^1(\Omega)}$ .

- Estimates for  $u^4$  and  $\mathbf{h}_u^4$ :

$$\|u^4\|_{W^{1,2,2}(0,T;H^1(\Omega),H^1(\Omega)')} \leq C_4(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \times \left[ 1 + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{51}$$

$$\|\mathbf{h}_u^4\|_{[L^2(0,T)]^{N_{CT}}} \leq C_9(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \times \left[ 1 + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{52}$$

where the constants  $C_4$  and  $C_9$  also depend on the initial conditions  $\|u^{0,2}\|_{H^1(\Omega)}$ ,  $\|u^{0,3}\|_{H^1(\Omega)}$  and  $\|u^{0,4}\|_{H^1(\Omega)}$ .

- Estimates for  $u^1$  and  $\mathbf{h}_u^1$ :

$$\|u^1\|_{W^{1,2,2}(0,T;H^1(\Omega),H^1(\Omega)')} \leq C_1(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \left[ 1 + \|\mathbf{h}_u^{1*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{53}$$

$$\|\mathbf{h}_u^1\|_{[L^2(0,T)]^{N_{CT}}} \leq C_6(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \left[ 1 + \|\mathbf{h}_u^{1*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{54}$$

where constants  $C_1$  and  $C_6$  also depend on the initial conditions  $\|u^{0,1}\|_{H^1(\Omega)}$ ,  $\|u^{0,2}\|_{H^1(\Omega)}$ ,  $\|u^{0,3}\|_{H^1(\Omega)}$  and  $\|u^{0,4}\|_{H^1(\Omega)}$ .

- Estimates for  $u^5$  and  $\mathbf{h}_u^5$ :

$$\|u^5\|_{W^{1,2,2}(0,T;H^1(\Omega),H^1(\Omega)')} \leq C_5(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \left[ 1 + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{5*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{55}$$

$$\|\mathbf{h}_u^5\|_{[L^2(0,T)]^{N_{CT}}} \leq C_{10}(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) \left[ 1 + \|\mathbf{h}_u^{2*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{3*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{4*}\|_{[L^2(0,T)]^{N_{CT}}} + \|\mathbf{h}_u^{5*}\|_{[L^2(0,T)]^{N_{CT}}} \right], \tag{56}$$

where the constants  $C_5$  and  $C_{10}$  also depend on the initial conditions  $\|u^{0,2}\|_{H^1(\Omega)}$ ,  $\|u^{0,3}\|_{H^1(\Omega)}$ ,  $\|u^{0,4}\|_{H^1(\Omega)}$  and  $\|u^{0,5}\|_{H^1(\Omega)}$ .  $\square$

**Remark 3.** We must to note here that all above estimates do not depend on the variable  $\mathbf{u}^*$ , since the dependence on  $\mathbf{u}^*$  appears within terms of the form:

$$\frac{u^{k*}}{K + |u^{k*}|},$$

with  $K > 0$ , and those terms are bounded a.e.  $(\mathbf{x}, t) \in \Omega \times (0, T)$  by a constant independent on  $\mathbf{u}^*$ .  $\square$

Finally, we have the following existence result for the system (4), (8) and (12) (see Theorem 2 of [2]).

**Theorem 4** (Existence of Solution for the Eutrophication System). *If there exist coefficients and data such that:*

$$\begin{aligned} C_6(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) &< 1, \\ C_7(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) &< 1, \\ C_8(\|\mathbf{v}\|_{\mathbf{w}_1}) &< 1, \\ C_9(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) &< 1, \\ C_{10}(\|\mathbf{v}\|_{\mathbf{w}_1}, \|\theta\|_{W_2}) &< 1, \end{aligned} \tag{57}$$

for all  $\mathbf{g} \in \mathcal{U}_{ad}$ , then there will exist positive constants  $\tilde{C}_i$ ,  $i = 1, \dots, 10$ , such that the operator  $M_{\mathbf{u}} : \mathbf{B}_{\mathbf{u}} \rightarrow \mathbf{B}_{\mathbf{u}}$  defined by (44) has a fixed point, which is solution of the state system (4), (8) and (12) in the sense of Definition 1, where:

$$\begin{aligned} \mathbf{B}_{\mathbf{u}} &= \left\{ (\mathbf{u}, \mathbf{h}_{\mathbf{u}}) \in [L^2(0, T; L^2(\Omega))]^5 \times [L^2(0, T)]^{5 \times N_{CT}} : \right. \\ &\quad \left. \|u^i\|_{L^2(0,T;L^2(\Omega))} \leq \tilde{C}_i, \forall i = 1, \dots, 5, \right. \\ &\quad \left. \|\mathbf{h}_{\mathbf{u}}^i\|_{[L^2(0,T)]^{N_{CT}}} \leq \tilde{C}_{5+i}, \forall i = 1, \dots, 5 \right\}. \end{aligned} \tag{58}$$

#### 4. Mathematical analysis of the optimal control problem

In this section we will prove the existence of solution for the optimal control problem ( $\mathcal{P}$ ). It is important to remark here that, since we have not demonstrated the uniqueness of solution for the state systems (4), (8) and (12), we will treat the problem as a multistate control problem (cf. [16]). Thus, we define the set:

$$\mathcal{U} = \left\{ (\mathbf{v}, \theta, \mathbf{u}, \mathbf{g}) \in L^3(0, T; \mathbf{X}_1) \times L^2(0, T; X_2) \times L^2(0, T; \mathbf{X}_3) \times \mathcal{U}_{ad} : \right. \\ \left. (\mathbf{v}, \theta, \mathbf{u}) \text{ is a solution of (4), (8) and (12) associated to } \mathbf{g}, \right. \\ \left. \text{verifying } \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} u^5(t) \, d\mathbf{x} \in [\lambda^m, \lambda^M], \forall t \in [0, T] \right\}, \tag{59}$$

where the set of admissible controls  $\mathcal{U}_{ad}$  is bounded, convex and closed (in particular,  $\mathcal{U}_{ad}$  is weakly closed). We observe that the constraints in the sets  $\mathcal{U}$  and  $\mathcal{U}_{ad}$  are well defined since  $g^k \in H^1(0, T) \subset C([0, T])$ ,  $k = 1, \dots, N_{CT}$ , and  $u^i \in C([0, T]; L^2(\Omega))$ ,  $i = 1, \dots, 5$ . Then, we prove the following property for the set  $\mathcal{U}$ .

**Lemma 5.** *The set  $\mathcal{U}$  is weakly closed.*

**Proof.** Let us consider a sequence of elements  $\{(\mathbf{v}_n, \theta_n, \mathbf{u}_n, \mathbf{g}_n)\}_{n \in \mathbb{N}} \subset \mathcal{U}$  such that  $(\mathbf{v}_n, \theta_n, \mathbf{u}_n, \mathbf{g}_n) \rightharpoonup (\mathbf{v}, \theta, \mathbf{u}, \mathbf{g})$  in  $L^3(0, T; \mathbf{X}_1) \times L^2(0, T; X_2) \times L^2(0, T; \mathbf{X}_3) \times \mathcal{U}_{ad}$ . In particular, the sequence  $\{\mathbf{g}_n\}_{n \in \mathbb{N}}$  is bounded in  $[H^1(0, T)]^{N_{CT}}$  and then, thanks to the estimates obtained in Lemma 7 of [14], in Theorem 9 of [15], and in Lemmas 1–3, we have that the sequence  $\{(\mathbf{z}_n, \zeta_{\mathbf{g}_n}, \xi_n, \zeta_{\mathbf{h}_{\theta_n}}, \mathbf{w}_n, \zeta_{\mathbf{h}_{\mathbf{u}_n}})\}_{n \in \mathbb{N}} \subset \tilde{\mathbf{W}}_1 \times W^{1,2,2}(0, T; [H^2_\sigma(\Omega)]^3, [H^2_\sigma(\Omega)]^3) \times \tilde{\mathbf{W}}_2 \times W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega)) \times \tilde{\mathbf{W}}_3 \times W^{1,2,2}(0, T; [H^2(\Omega)]^5, [H^2(\Omega)]^5)$  induced by Definition 1 is bounded, where, for all  $n \in \mathbb{N}$ ,  $\mathbf{v}_n = \mathbf{w}_n + \zeta_{\mathbf{g}_n}$ ,  $\theta_n = \xi_n + \zeta_{\mathbf{h}_{\theta_n}}$  and  $\mathbf{u}_n = \mathbf{w}_n + \zeta_{\mathbf{h}_{\mathbf{u}_n}}$ .

Now, if we denote by  $\mathbf{w} = \mathbf{v} - \zeta_{\mathbf{g}}$ ,  $\xi = \theta - \zeta_{\mathbf{h}_\theta}$  and  $\mathbf{w} = \mathbf{u} - \zeta_{\mathbf{h}_\mathbf{u}}$ , we have (taking subsequences if necessary) the following convergences for the elements associated to the sequence of controls:

- $g_n(t) \rightarrow g(t)$  strongly for all  $t \in [0, T]$  (so, in particular,  $g_n(0) \rightarrow g(0)$  and, consequently,  $g(0) = 0$ ),
- $\zeta_{\mathbf{g}_n} \rightharpoonup \zeta_{\mathbf{g}}$  weakly in  $W^{1,2,2}(0, T; [H^2_\sigma(\Omega)]^3, [H^2_\sigma(\Omega)]^3)$ ,
- $\zeta_{\mathbf{h}_{\theta_n}} \rightarrow \zeta_{\mathbf{h}_\theta}$  strongly in  $W^{1,2,2}(0, T; H^2(\Omega), H^2(\Omega))$ ,
- $\zeta_{\mathbf{h}_{\mathbf{u}_n}} \rightarrow \zeta_{\mathbf{h}_\mathbf{u}}$  strongly in  $W^{1,2,2}(0, T; [H^2(\Omega)]^5, [H^2(\Omega)]^5)$ ,

where the first convergence is a direct consequence of compactness of  $H^1(0, T)$  in  $C([0, T])$  and the two last convergences are consequence of Lemma 2. In a similar way we also have, for the sequence  $\{\mathbf{z}_n\}_{n \in \mathbb{N}}$ , the following convergences:

- $\mathbf{z}_n \rightarrow \mathbf{z}$  strongly in  $L^p(0, T; [L^q(\Omega)]^3)$  for all  $1 < p < \infty$  and  $2 \leq q < \infty$ ,
- $\mathbf{z}_n \rightharpoonup \mathbf{z}$  weakly in  $L^3(0, T; \mathbf{X}_1)$ ,
- $\frac{dz_n}{dt} \rightharpoonup \frac{dz}{dt}$  weakly in  $L^2(0, T; [L^2(\Omega)]^3)$ ,
- $\nabla \mathbf{z}_n \rightharpoonup^* \nabla \mathbf{z}$  weakly-\* in  $L^\infty(0, T; [L^3(\Omega)]^3)$ ,
- $\beta(e(\zeta_{\mathbf{g}_n} + \mathbf{z}_n))e(\zeta_{\mathbf{g}_n} + \mathbf{z}_n) \rightharpoonup \tilde{\beta}$ , weakly in  $L^{3/2}(0, T; \tilde{\mathbf{X}}_1)$ .

Moreover, for the sequence  $\{\xi_n\}_{n \in \mathbb{N}}$  we have:

- $\xi_n \rightharpoonup \xi$  in  $L^2(0, T; \tilde{X}_2)$ ,
- $\xi_n \rightharpoonup^* \xi$  in  $L^\infty(0, T; L^2(\Omega))$ ,
- $\xi_n \rightarrow \xi$  in  $L^{10/3-\epsilon}(0, T; L^{10/3-\epsilon}(\Omega))$ , for all  $\epsilon > 0$  small enough,
- $\xi_n \rightarrow \xi$  in  $L^2(0, T; L^2(\Gamma_C))$ ,
- $\xi_n \rightarrow \xi$  in  $L^4(0, T; L^4(\Gamma_S))$ .

Finally, for the sequence  $\{\mathbf{w}_n\}_{n \in \mathbb{N}}$ , we have the following convergences:

- $\mathbf{w}_n \rightharpoonup \mathbf{w}$  weakly in  $L^2(0, T; \tilde{\mathbf{X}}_3)$ ,
- $\frac{d\mathbf{w}_n}{dt} \rightharpoonup \frac{d\mathbf{w}}{dt}$  weakly in  $L^2(0, T; \mathbf{X}'_3)$ ,
- $\mathbf{w}_n \rightarrow \mathbf{w}$  strongly in  $[L^{10/3-\epsilon}(0, T; L^{10/3-\epsilon}(\Omega))]^5$ , for all  $\epsilon > 0$  small enough,
- $\mathbf{w}_n \rightarrow \mathbf{w}$  strongly in  $[L^2(0, T; L^2(\Gamma_C))]^5$ .

So, we are able to pass to the limit in the corresponding variational formulations using the same arguments that we have employed for proving the compactness of operator  $\mathbf{M}_u$ , and in the Galerkin approximations for systems (4) and (8) (cf. [2,14,15]). The only difficulty here is to prove that

$$\int_{\Omega} \tilde{\beta} : e(\eta) \, d\mathbf{x} = \int_{\Omega} \beta(e(\zeta_{\mathbf{g}} + \mathbf{z}))e(\zeta_{\mathbf{g}} + \mathbf{z}) : e(\eta) \, d\mathbf{x}, \quad \text{a.e. } t \in (0, T), \quad \forall \eta \in \tilde{\mathbf{X}}_1.$$

The proof is based on arguments that can be found in the corresponding proof of Theorem 6.7, Chapter V of [10]. Indeed, on the one hand, by Lemma 8 of [14] we have that

$$\int_{\Omega} [\beta(e(\zeta_{\mathbf{g}} + \mathbf{z}_1))e(\zeta_{\mathbf{g}} + \mathbf{z}_1) - \beta(e(\zeta_{\mathbf{g}} + \mathbf{z}_2))e(\zeta_{\mathbf{g}} + \mathbf{z}_2)] : e(\mathbf{z}_1 - \mathbf{z}_2) \, d\mathbf{x} \, dt \geq C \int_{\Omega} \|\nabla(\mathbf{z}_1 - \mathbf{z}_2)\|_{[L^2(\Omega)]^{3 \times 3}}^2 \, d\mathbf{x} \, dt,$$

for all  $\mathbf{z}_1, \mathbf{z}_2 \in \tilde{\mathbf{X}}_1$  and for all  $\mathbf{g} \in [H^1(0, T)]^{N_{CT}}$ . In particular, taking  $\mathbf{g} = \mathbf{g}_n, \mathbf{z}_1 = \mathbf{z}_n(t)$  and  $\mathbf{z}_2 = \boldsymbol{\eta}(t)$  and integrating over the interval  $(0, T)$ ,

$$\int_0^T \int_{\Omega} [\beta(e(\zeta_{\mathbf{g}_n} + \mathbf{z}_n))e(\zeta_{\mathbf{g}_n} + \mathbf{z}_n) - \beta(e(\zeta_{\mathbf{g}_n} + \boldsymbol{\eta}))e(\zeta_{\mathbf{g}_n} + \boldsymbol{\eta})] : e(\mathbf{z}_n - \boldsymbol{\eta}) \, d\mathbf{x} \, dt \geq \int_0^T \int_{\Omega} \|\mathbf{z}_n - \boldsymbol{\eta}\|_{[L^2(\Omega)]^{3 \times 3}}^2 \, d\mathbf{x} \, dt \geq 0,$$

for all  $\boldsymbol{\eta} \in L^3(0, T; \tilde{\mathbf{X}}_1)$ , and then, using similar techniques that we can find in the proof of Theorem 9 of [14] when we take limits in the Galerkin approximation, we can prove that

$$\int_0^T \int_{\Omega} [\hat{\beta} - \beta(e(\zeta_{\mathbf{g}} + \boldsymbol{\eta}))e(\zeta_{\mathbf{g}} + \boldsymbol{\eta})] : e(\mathbf{z} - \boldsymbol{\eta}) \, d\mathbf{x} \, dt \geq 0,$$

for all  $\boldsymbol{\eta} \in L^3(0, T; \tilde{\mathbf{X}}_1)$ . Finally, choosing  $\boldsymbol{\eta} = \mathbf{z} \pm \lambda\boldsymbol{\zeta}$ , with  $\boldsymbol{\zeta} \in L^3(0, T; \tilde{\mathbf{X}}_1)$  and  $\lambda$  an arbitrary positive number, and multiplying both sides of the inequality by  $\lambda^{-1}$ , we obtain

$$\int_0^T \int_{\Omega} [\hat{\beta} - \beta(e(\zeta_{\mathbf{g}} + \mathbf{z} + \lambda\boldsymbol{\zeta}))e(\zeta_{\mathbf{g}} + \mathbf{z} + \lambda\boldsymbol{\zeta})] : e(\boldsymbol{\zeta}) \, d\mathbf{x} \, dt \leq 0$$

$$\int_0^T \int_{\Omega} [\hat{\beta} - \beta(e(\zeta_{\mathbf{g}} + \mathbf{z} - \lambda\boldsymbol{\zeta}))e(\zeta_{\mathbf{g}} + \mathbf{z} - \lambda\boldsymbol{\zeta})] : e(\boldsymbol{\zeta}) \, d\mathbf{x} \, dt \geq 0.$$

Now, letting  $\lambda$  tend to zero, we deduce that, for all  $\boldsymbol{\zeta} \in L^3(0, T; \tilde{\mathbf{X}}_1)$ :

$$\int_0^T \int_{\Omega} [\hat{\beta} - \beta(e(\zeta_{\mathbf{g}} + \mathbf{z}))e(\zeta_{\mathbf{g}} + \mathbf{z})] : e(\boldsymbol{\zeta}) \, d\mathbf{x} \, dt = 0. \tag{60}$$

In particular, taking  $\boldsymbol{\zeta} = \varphi \otimes \boldsymbol{\eta} \in L^3(0, T; \tilde{\mathbf{X}}_1)$ , with  $\varphi \in \mathcal{D}(0, T)$  and  $\boldsymbol{\eta} \in \tilde{\mathbf{X}}_1$ , we obtain the desired result.

Finally, by the strong convergence of  $\{\mathbf{u}_n\}_{n \in \mathbb{N}}$  in  $[L^2(0, T; L^2(\Gamma_C))]^5$ , we have

$$\frac{1}{\mu(\Omega_C)} \int_{\Omega_C} u^5(t) \, d\mathbf{x} \in [\lambda^m, \lambda^M], \quad \forall t \in [0, T], \tag{61}$$

and, consequently, the element  $(\mathbf{v}, \theta, \mathbf{u}, \mathbf{g}) \in \mathcal{U}$ .

**Theorem 6** (Existence of Optimal Solution). *The optimal control problem  $(\mathcal{P})$  has, at least, a solution.*

**Proof.** Let us consider a minimizing sequence  $\{(\mathbf{v}_n, \theta_n, \mathbf{u}_n, \mathbf{g}_n)\}_{n \in \mathbb{N}} \subset \mathcal{U}$ . Then,  $\{\mathbf{g}_n\}_{n \in \mathbb{N}}$  is bounded in  $[H^1(0, T)]^{N_{CT}}$ , which implies, thanks to the estimates (53), (49), (47) and (51), and to the Hypotheses of Theorem 4, that the sequence  $\{\mathbf{u}_n\}_{n \in \mathbb{N}}$  is bounded in  $\mathbf{W}_3$ . We also have, thanks to estimates obtained in [14,15] that the sequence  $\{(\mathbf{v}_n, \theta_n)\}_{n \in \mathbb{N}}$  is also bounded in  $\mathbf{W}_1 \times W_2$ . Thus, we can take a subsequence of  $\{(\mathbf{v}_n, \theta_n, \mathbf{u}_n, \mathbf{g}_n)\}_{n \in \mathbb{N}} \subset \mathcal{U}$ , still denoted in the same way, such that  $(\mathbf{v}_n, \theta_n, \mathbf{u}_n, \mathbf{g}_n) \rightharpoonup (\tilde{\mathbf{v}}, \tilde{\theta}, \tilde{\mathbf{u}}, \tilde{\mathbf{g}})$  in  $L^3(0, T; \mathbf{X}_1) \times L^2(0, T; X_2) \times L^2(0, T; \mathbf{X}_3) \times \mathcal{U}_{ad}$ . Moreover, from previous Lemma, we have that  $(\tilde{\mathbf{v}}, \tilde{\theta}, \tilde{\mathbf{u}}, \tilde{\mathbf{g}}) \in \mathcal{U}$ .

Finally, due to the continuity and the convexity of the cost functional  $J$  (in particular,  $J$  is weakly lower semicontinuous), we deduce that:

$$J(\tilde{\mathbf{g}}) \leq \liminf_{n \rightarrow \infty} J(\mathbf{g}_n) = \inf_{(\mathbf{v}, \theta, \mathbf{u}, \mathbf{g}) \in \mathcal{U}} J(\mathbf{g}) \leq J(\tilde{\mathbf{g}}).$$

Thus,  $\tilde{\mathbf{g}} \in \mathcal{U}_{ad}$  is a solution of the optimal control problem  $(\mathcal{P})$ .

**Remark 4.** It is worthwhile remarking here that, using standard techniques in the spirit of those presented in below section, it is possible to obtain a formal optimality system for the characterization of the optimal solutions of the control problem  $(\mathcal{P})$ . However, since this is not the main aim of this paper, and for the sake of brevity, we will not present here this optimality system, focusing our attention on the numerical computation of these optimal solutions.  $\square$

### 5. Numerical resolution of the control problem

In this section we will present a numerical approximation for the optimal control problem ( $\mathcal{P}$ ). So, we will discretize the state systems (4), (8) and (12) using a standard finite element method, and we will compute the numerical approximation of the resulting nonlinear optimization problem (that appears after the full space-time discretization of the control problem) using an interior point algorithm. In this particular case, due to the specific relations between the dimensions of the control and the constraint variables, the numerical approximation of the Jacobian matrix of the constraints will be performed using the discretized adjoint system (row by row) instead of the linearized systems (column by column). In addition, the computation of each row of the Jacobian matrix will be parallelized.

#### 5.1. Space-time discretization

Let us consider a regular partition  $0 = t_0 < t_1 < \dots < t_N = T$  of the time interval  $[0, T]$  such that  $t_{n+1} - t_n = \Delta t = \frac{1}{\alpha}$ ,  $\forall n = 0, \dots, N - 1$ , and recall the material derivative of a generic scalar field  $\phi$  defined as:

$$\frac{D\phi}{Dt}(\mathbf{x}, t) = \frac{\partial}{\partial t}\phi(\mathbf{X}(\mathbf{x}, t), t) = \frac{\partial\phi}{\partial t}(\mathbf{x}, t) + \mathbf{v}(\mathbf{x}, t) \cdot \nabla\phi(\mathbf{x}, t), \tag{62}$$

where  $\mathbf{X}$  represents the characteristic line, that is, verifies the equation:

$$\frac{\partial\mathbf{X}}{\partial t}(\mathbf{x}, t) = \mathbf{v}(\mathbf{x}, t). \tag{63}$$

So, we can approximate the material derivative in the following way:

$$\frac{D\phi}{Dt}(t_{n+1}) \simeq \alpha (\phi^{n+1} - \phi^n \circ \mathbf{X}_-^n), \tag{64}$$

where  $\phi^n$  represents an approximation to  $\phi(t_n)$ , and  $\mathbf{X}_-^n(\mathbf{x}) = \mathbf{X}(\mathbf{x}, t_{n+1}; t_n)$  (i.e., the position at time  $t_n$  of a particle that at time  $t_{n+1}$  was located at point  $\mathbf{x}$ ) is the solution of the following trajectory equation:

$$\begin{cases} \frac{d\mathbf{X}}{d\tau} = \mathbf{v}(\mathbf{X}(\mathbf{x}, t; \tau), \tau), \\ \mathbf{X}(\mathbf{x}, t; t) = \mathbf{x}, \end{cases} \tag{65}$$

approached by the Euler scheme, that is, we consider the following approximation (see further details, for instance, in [17,18]):

$$(\phi^n \circ \mathbf{X}_-^n)(\mathbf{x}) \simeq \phi^n(\mathbf{x} - \Delta t \mathbf{v}^n(\mathbf{x})). \tag{66}$$

For the space discretization, we take a family of meshes  $\tau_h$  for the domain  $\Omega$  with characteristic size  $h$  and, associated to this family of meshes, we define the following finite element spaces (cf. Section 4.1 of [19]):

- $\mathbf{V}_h$  ( $\mathbb{P}_{1b}$  FEM space) for the water velocity  $\mathbf{v}$ :

$$\mathbf{V}_h = \{\mathbf{v} \in [C(\overline{\Omega})]^3 : \mathbf{v}_\tau \in [\mathbb{P}_{1b}(\tau)]^3, \forall \tau \in \tau_h, \mathbf{v}|_{\partial\Omega \setminus (\Gamma_T \cup \Gamma_C)} = \mathbf{0}\}, \tag{67}$$

and, for the test functions and the adjoint state, the subspace:

$$\mathbf{W}_h = \{\mathbf{w} \in \mathbf{V}_h : \mathbf{w}|_{\Gamma_T} = \mathbf{0}\}. \tag{68}$$

- $M_h$  ( $\mathbb{P}_1$  FEM space) for the water pressure  $p$ :

$$M_h = \{p \in C(\overline{\Omega}) : p|_\tau \in \mathbb{P}_1(\tau), \forall \tau \in \tau_h\}. \tag{69}$$

- $K_h$  ( $\mathbb{P}_1$  FEM space) for the water temperature  $\theta$ :

$$K_h = \{\theta \in C(\overline{\Omega}) : \theta|_\tau \in \mathbb{P}_1(\tau), \forall \tau \in \tau_h\}, \tag{70}$$

and, for the test functions and the adjoint state, the subspace:

$$H_h = \{\theta \in K_h : \theta|_{\Gamma_T} = 0\}. \tag{71}$$

- $\mathbf{X}_h$  ( $\mathbb{P}_1$  FEM space) for the concentration  $\mathbf{u}$  of the species involved in eutrophication process:

$$\mathbf{X}_h = \{\mathbf{u} \in [C(\overline{\Omega})]^5 : \mathbf{u}|_\tau \in [\mathbb{P}_1(\tau)]^5, \forall \tau \in \tau_h\}, \tag{72}$$

and, for the test functions and the adjoint state, the subspace:

$$\mathbf{Z}_h = \{\mathbf{u} \in \mathbf{X}_h : \mathbf{u}|_{\Gamma_T} = \mathbf{0}\}. \tag{73}$$

With respect to the computational treatment of the problem, we have used the open code FreeFem++ [20] for the space–time discretizations of the problem. We have also employed a penalty method (cf. Section 4.3 of [19]) for computing the solution of the Stokes problems that appear after discretization. Finally, in order to reduce the CPU time necessary for computing the solution of the state systems, we have applied an explicit scheme (evaluations in previous time step) for the nonlinearities and the coupled terms of the discretized problem.

So, we consider the following space–time discretization for the optimal control problem ( $\mathcal{P}$ ) where, for the sake of simplicity, we will use the same notations for the discrete problem as in the case of the continuous one:

1. Coupling of temperature/species in collectors and injectors:

We denote by  $\theta^n \in K_h$  and  $\mathbf{u}^n \in \mathbf{X}_h$ , respectively, the water temperature and the species concentration at time step  $n = 0, \dots, N$ . Then, we consider the following approximation for functions  $\gamma_\theta^k$ ,  $k = 1, \dots, N_{CT}$ , defined in (10), (analogously for functions  $\gamma_{u^i}^k$ ,  $k = 1, \dots, N_{CT}$ ,  $i = 1, \dots, 5$ , defined in (14)):

$$\gamma_\theta^k(t) = \frac{1}{\mu(C^k)} \left[ \chi_{(-\infty, t_0)} \int_{C^k} \theta^0 d\gamma + \sum_{n=1}^N \chi_{[t_{n-1}, t_n)} \int_{C^k} \theta^{n-1} d\gamma + \chi_{[t_N, \infty)} \int_{C^k} \theta^N d\gamma \right]$$

Moreover, if we assume the value  $\epsilon = \frac{\Delta t}{2}$  in the definition (11) of function  $\rho_\epsilon$  we have that the support of  $\rho_{\Delta t/2}(t^n - \frac{\Delta t}{2} - s)$  is contained in  $(t^n - \Delta t, t^n) = (t^{n-1}, t^n)$ , for all  $n = 1, \dots, N$ , and then:

$$\begin{aligned} \phi_\theta^n(\mathbf{x}) &= \sum_{k=1}^{N_{CT}} \varphi^k(\mathbf{x}) \int_{-T}^T \rho_{\Delta t/2}(t^n - \frac{\Delta t}{2} - s) \gamma_\theta^k(s) ds \\ &= \sum_{k=1}^{N_{CT}} \varphi^k(\mathbf{x}) \int_{t_{n-1}}^{t_n} \rho_{\Delta t/2}(t^n - \frac{\Delta t}{2} - s) \left[ \frac{1}{\mu(C^k)} \int_{C^k} \theta^{n-1} d\gamma \right] ds \\ &= \sum_{k=1}^{N_{CT}} \varphi^k(\mathbf{x}) \frac{1}{\mu(C^k)} \int_{C^k} \theta^{n-1} d\gamma. \end{aligned}$$

Finally, we approximate each element  $\varphi^k$  by the indicator function of the injector  $T^k$ ,  $k = 1, \dots, N_{CT}$ , and each element  $\tilde{\varphi}^k$  by the indicator function of the collector  $C^k$ ,  $k = 1, \dots, N_{CT}$ . Thus, the temperature in each injector at time step  $t_n$  is the mean temperature in the corresponding collector at time step  $t_{n-1}$  (analogously for the species of the eutrophication model).

2. Discretized control:

We consider the following discretization of the admissible set (20) (we will still denote by  $\mathcal{U}_{ad}$  the set of admissible discrete controls):

$$\begin{aligned} \mathcal{U}_{ad} &= \{ \mathbf{g} \in [C([0, T])]^{N_{CT}} : \mathbf{g}(0) = \mathbf{0}, \\ &\quad \mathbf{g}|_{[t_n, t_{n+1}]} \in [\mathbb{P}_1([t_n, t_{n+1}])]^{N_{CT}}, \forall n = 0, \dots, N-1, \text{ and} \\ &\quad \mathbf{g}^{n,k} = g^k(t_n) \in [c_1, c_2], \forall k = 1, \dots, N_{CT}, \forall n = 1, \dots, N \}, \end{aligned}$$

where  $c_1, c_2 > 0$  are technological bounds related to mechanical characteristics of pumps, and they are chosen so that  $\|g^k\|_{H^1(0,T)} \leq c$ ,  $\forall k = 1, \dots, N_{CT}$ . So, if we consider the standard basis for the previous finite element space, we can consider the following discrete control:

$$\mathbf{g} = \underbrace{(g^{1,1}, g^{1,2}, \dots, g^{1,N_{CT}})}_{\mathbf{g}^1}, \dots, \underbrace{(g^{N,1}, g^{N,2}, \dots, g^{N,N_{CT}})}_{\mathbf{g}^N} \in \mathbb{R}^{N \times N_{CT}}. \tag{74}$$

3. Discretized cost functional:

In order to simplify the numerical resolution of the control problem, we will consider the following expression of the cost functional in terms of the previous admissible set:

$$J(\mathbf{g}) = \frac{\sigma_1}{2} \sum_{n=1}^N \sum_{k=1}^{N_{CT}} (g^{n,k})^2 + \frac{\sigma_2}{2} \sum_{n=1}^{N-1} \sum_{k=1}^{N_{CT}} (g^{n+1,k} - g^{n,k})^2, \tag{75}$$

where  $\sigma_1$  and  $\sigma_2$  are positive weights that we will take into account in the numerical tests.

4. Discretized state constraints:

We consider the function:

$$\mathbf{G} : \mathbf{g} \in \mathcal{U}_{ad} \longrightarrow \mathbf{G}(\mathbf{g}) = (G^1(\mathbf{g}), \dots, G^N(\mathbf{g})) \in \mathbb{R}^N, \tag{76}$$

where, for each  $n = 1, \dots, N$ ,

$$G^n(\mathbf{g}) = \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} u^{n+1,5} d\mathbf{x}, \tag{77}$$

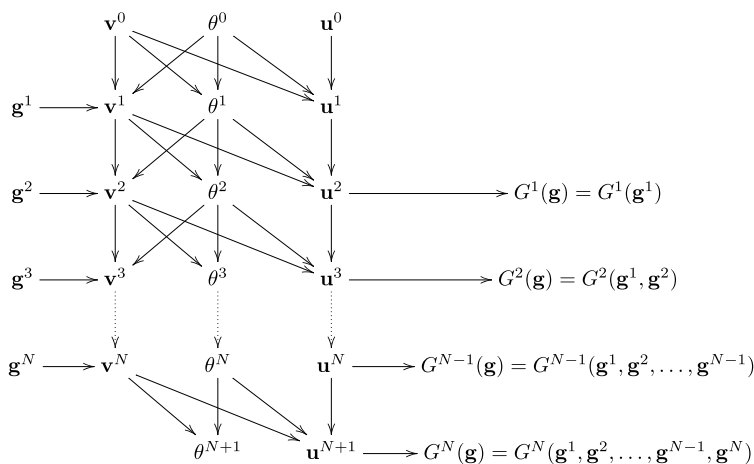


Fig. 3. Dependence scheme for the discretized variables.

with  $\mathbf{u}^{n+1} \in \mathbf{Z}_h$  the solution of the discretized eutrophication model. Thus, we can express:

$$\mathcal{U} = \{\mathbf{g} \in \mathcal{U}_{ad} : G^n(\mathbf{g}) \in [\lambda^m, \lambda^M], \forall n = 1, \dots, N\}. \tag{78}$$

It is worthwhile remarking here that, due the type of time discretization considered for the material derivatives (64), the control  $\mathbf{g}^N$  acts over the species and the temperature at time  $t_{N+1}$ . So, it will be necessary to compute one additional time step in the case of temperature and species in order to take into account this control. This fact can be more clearly noticed in the dependence scheme shown in Fig. 3.

5. Water velocity and pressure:

Given  $\mathbf{v}^0 \in \mathbf{W}_h$ , the pair velocity/pressure  $(\mathbf{v}^{n+1}, p^{n+1}) \in \mathbf{V}_h \times M_h$ , for each  $n = 0, 1, \dots, N - 1$ , with:

$$\mathbf{v}_{|T^k}^{n+1} = -\frac{\mathbf{g}^{n+1,k}}{\mu(T^k)} \mathbf{n}, \quad \mathbf{v}_{|C^k}^{n+1} = \frac{\mathbf{g}^{n+1,k}}{\mu(C^k)} \mathbf{n}, \quad \forall k = 1, \dots, N_{CT}, \tag{79}$$

is the solution of the fully discretized system:

$$\begin{aligned} & \alpha \int_{\Omega} \mathbf{v}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \beta(\mathbf{v}^n) e(\mathbf{v}^{n+1}) : e(\boldsymbol{\eta}) \, d\mathbf{x} - \int_{\Omega} p^{n+1} \nabla \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ & - \int_{\Omega} \nabla \cdot \mathbf{v}^{n+1} q \, d\mathbf{x} - \lambda \int_{\Omega} p^{n+1} q \, d\mathbf{x} = \alpha \int_{\Omega} (\mathbf{v}^n \circ X_-^n) \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ & + \int_{\Omega} \alpha_0(\theta^n - \theta^0) \mathbf{a}_g \cdot \boldsymbol{\eta} \, d\mathbf{x}, \quad \forall \boldsymbol{\eta} \in \mathbf{W}_h, \forall q \in M_h, \end{aligned} \tag{80}$$

where  $\lambda > 0$  is the penalty parameter and  $\beta(\mathbf{v}^n) = 2\nu + 2\nu_{tur}[e(\mathbf{v}^n) : e(\mathbf{v}^n)]^{1/2}$ .

6. Water temperature: Given  $\theta^0 \in K_h$ , the temperature  $\theta^{n+1} \in K_h$ , for each  $n = 0, \dots, N$ , with

$$\theta_{|T^k}^{n+1} = \frac{1}{\mu(C^k)} \int_{C^k} \theta^n \, d\gamma, \quad \forall k = 1, \dots, N_{CT}, \tag{81}$$

is the solution of the fully discretized system:

$$\begin{aligned} & \alpha \int_{\Omega} \theta^{n+1} \boldsymbol{\eta} \, d\mathbf{x} + K \int_{\Omega} \nabla \theta^{n+1} \cdot \nabla \boldsymbol{\eta} \, d\mathbf{x} + b_1^N \int_{\Gamma_N} \theta^{n+1} \boldsymbol{\eta} \, d\gamma \\ & + b_1^S \int_{\Gamma_S} \theta^{n+1} \boldsymbol{\eta} \, d\gamma = \alpha \int_{\Omega} (\theta^n \circ X_-^n) \boldsymbol{\eta} \, d\mathbf{x} + b_1^N \int_{\Gamma_N} \theta_N^{n+1} \boldsymbol{\eta} \, d\gamma \\ & + b_1^S \int_{\Gamma_S} \theta_S^{n+1} \boldsymbol{\eta} \, d\gamma + b_2^S \int_{\Gamma_S} (T_r^4 - |\theta^n|^3 \theta^n) \boldsymbol{\eta} \, d\gamma, \quad \forall \boldsymbol{\eta} \in H_h. \end{aligned} \tag{82}$$

7. Eutrophication species concentration:

Given  $\mathbf{u}^0 \in \mathbf{X}_h$ , the species concentration  $\mathbf{u}^{n+1} \in \mathbf{X}_h$ , for each  $n = 0, \dots, N$ , with:

$$\mathbf{u}_{|T^k}^{n+1} = \frac{1}{\mu(C^k)} \int_{C^k} \mathbf{u}^n \, d\gamma, \quad \forall k = 1, \dots, N_{CT}, \tag{83}$$



is the solution of the fully discretized system:

$$\begin{aligned} \alpha \int_{\Omega} \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \Lambda_{\mu} \nabla \mathbf{u}^{n+1} : \nabla \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \mathbf{A}^n(\theta^n, \mathbf{u}^n) \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ = \alpha \int_{\Omega} (\mathbf{u}^n \circ X_{-}^n) \cdot \boldsymbol{\eta} \, d\mathbf{x}, \quad \forall \boldsymbol{\eta} \in \mathbf{Z}_h, \end{aligned} \tag{84}$$

where  $\mathbf{A}^n(\theta^n, \mathbf{u}^n) \in \mathbb{R}^{5 \times 5}$  is the following matrix:

$$\begin{bmatrix} 0 & \frac{C_{nc} L^n(\theta^n) u^{n,1}}{K_N + |u^{n,1}|} - C_{nc} K_r & 0 & 0 & -C_{nc} K_{rd} D(\theta^n) \\ 0 & K_r - \frac{L^n(\theta^n) u^{n,1}}{K_N + |u^{n,1}|} + K_{mf} & \frac{K_z u^{n,2}}{K_F + |u^{n,2}|} & 0 & 0 \\ 0 & 0 & -\frac{C_{\bar{z}} K_z u^{n,2}}{K_F + |u^{n,2}|} + K_{mz} & 0 & 0 \\ 0 & -K_{mf} & -K_{mz} & 0 & K_{rd} D(\theta^n) \\ 0 & C_{oc} K_r - \frac{C_{oc} L(\theta^n) u^{n,1}}{K_N + |u^{n,1}|} & 0 & 0 & C_{oc} K_{rd} D(\theta^n) \end{bmatrix}.$$

### 5.2. Numerical resolution of the optimization problem

Once developed above space-time discretization, as introduced in previous section, we obtain the following discrete optimization problem:

$$(\mathcal{P}) \quad \min\{J(\mathbf{g}) : \mathbf{g} \in \mathcal{U}\}$$

In order to solve this nonlinear optimization problem, we will use the interior point algorithm IPOPT [21] interfaced with the FreeFem++ code that we have developed. One of the requirements for using previous algorithm is the knowledge of functions that compute the gradient of the cost functional and the Jacobian matrix of the constraints.

In the case of the cost functional, we have that its differential  $\delta_{\mathbf{g}} J(\mathbf{g}) \in \mathcal{L}(\mathbb{R}^{N \times N_{CT}}, \mathbb{R})$  is such that, for any  $\delta \mathbf{g} = (\delta \mathbf{g}^1, \dots, \delta \mathbf{g}^N) \in \mathbb{R}^{N \times N_{CT}}$ :

$$\begin{aligned} \delta_{\mathbf{g}} J(\mathbf{g})(\delta \mathbf{g}) &= \sigma_1 \sum_{n=1}^N \sum_{k=1}^{N_{CT}} g^{n,k} \delta g^{n,k} \\ &+ \sigma_2 \sum_{n=1}^{N-1} \sum_{k=1}^{N_{CT}} (g^{n+1,n} - g^{n,k})(\delta g^{n+1,n} - \delta g^{n,k}). \end{aligned} \tag{85}$$

Therefore,  $[\nabla_{\mathbf{g}} J(\mathbf{g})]_i = \delta_{\mathbf{g}} J(\mathbf{g})(\mathbf{e}_i)$ , where  $\mathbf{e}_i, i = 1, \dots, N \times N_{CT}$ , is the  $i$ th vector of the canonical basis in  $\mathbb{R}^{N \times N_{CT}}$ .

In the case of the Jacobian matrix of the constraints, we know that the differential associated to the application  $\mathbf{G} : \mathcal{U}_{ad} \subset \mathbb{R}^{N \times N_{CT}} \rightarrow \mathbb{R}^N$  is such that  $\delta_{\mathbf{g}} \mathbf{G}(\mathbf{g}) \in \mathcal{L}(\mathbb{R}^{N \times N_{CT}}, \mathbb{R}^N)$ . So, given any element  $\delta \mathbf{g} \in \mathbb{R}^{N \times N_{CT}}$ , we have that  $\delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\delta \mathbf{g}) \in \mathbb{R}^N$ , and the Jacobian matrix  $J_{\mathbf{g}} \mathbf{G}(\mathbf{g}) \in \mathcal{M}_{N \times (N_{CT} \times N)}$  is such that  $[J_{\mathbf{g}} \mathbf{G}(\mathbf{g})]_{j,i} = \langle \delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_i), \tilde{\mathbf{e}}_j \rangle$ , where  $\tilde{\mathbf{e}}_j, j = 1, \dots, N$ , is the  $j$ th vector of the canonical basis in  $\mathbb{R}^N$ . As above commented, for computing previous matrix we can use either the linearized state systems or the adjoint state systems. The choice of one method or another depends on the relation between the dimension of the space of controls ( $N \times N_{CT}$ ) and the dimension of the space where the application  $\mathbf{G}$  takes values ( $N$ ).

- When using the linearized systems, we would have to solve  $N_{CT} \times N$  times these systems (in this case, we would compute the Jacobian matrix column by column):

$$J_{\mathbf{g}} \mathbf{G}(\mathbf{g}) = \left( \delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_1) \mid \delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_2) \mid \dots \mid \delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_{N_{CT}-1}) \mid \delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_{N_{CT}}) \right),$$

where  $\delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\mathbf{e}_k) \in \mathcal{M}_{N \times 1}(\mathbb{R})$ , for  $k = 1, \dots, N_{CT}$ .

- When employing the adjoint state systems, we would have to solve  $N$  times these systems (now, we would compute the Jacobian row by row):

$$J_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\delta \mathbf{g}) = \begin{pmatrix} \frac{\nabla_{\mathbf{g}} G^1(\mathbf{g})}{\nabla_{\mathbf{g}} G^2(\mathbf{g})} \\ \vdots \\ \frac{\nabla_{\mathbf{g}} G^{N-1}(\mathbf{g})}{\nabla_{\mathbf{g}} G^N(\mathbf{g})} \end{pmatrix},$$

where  $\nabla_{\mathbf{g}} G^j(\mathbf{g}) \in \mathbb{R}^{N_{CT}}$  is such that  $[\nabla_{\mathbf{g}} G^j(\mathbf{g})]_i = \delta_{\mathbf{g}} G^j(\mathbf{g})(\mathbf{e}_i), j = 1, \dots, N, i = 1, \dots, N \times N_{CT}$ .

In our case,  $N_{CT} > 1$ . So, it is more advantageous to employ the adjoint state systems and computing the Jacobian matrix row by row ( $j = 1, \dots, N$ ). However, in order to obtain a computational expression for the Jacobian matrix using the adjoint systems it will be necessary deriving first a theoretical expression using the linearized systems and then applying a transposition procedure.

**Lemma 7** (Computing the Jacobian Matrix Using Linearized Systems). *Within the framework introduced in this Section, we have the following expression for the Jacobian matrix of the constraints using the linearized equations: Given an element  $\delta \mathbf{g} \in \mathbb{R}^{N \times N_{CT}}$ , then*

$$\delta_{\mathbf{g}} \mathbf{G}(\mathbf{g})(\delta \mathbf{g}) = \begin{pmatrix} \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} \delta u^{2,5} \, d\mathbf{x} \\ \vdots \\ \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} \delta u^{N+1,5} \, d\mathbf{x} \end{pmatrix},$$

where  $\{(\delta \mathbf{v}^n, \delta p^n)\}_{n=0}^{N-1} \subset \mathbf{V}_h \times M_h$ ,  $\{\delta \theta^n\}_{n=0}^{N-1} \subset K_h$  and  $\{\delta \mathbf{u}^n\}_{n=0}^{N-1} \subset \mathbf{X}_h$  are, respectively, the solutions of the linearized hydrodynamic model, the linearized thermic model and the linearized eutrophication model, defined as:

- Linearized system for water velocity and pressure: Given  $(\delta \mathbf{v}^0, \delta p^0) = (\mathbf{0}, 0)$ , for each  $n = 0, \dots, N - 1$ ,  $(\delta \mathbf{v}^n, \delta p^n) \in \mathbf{V}_h \times M_h$ , with

$$\delta \mathbf{v}_{|T^k}^{n+1} = -\frac{\delta \mathbf{g}^{n+1,k}}{\mu(T^k)} \mathbf{n}, \quad \delta p_{|C^k}^{n+1} = \frac{\delta \mathbf{g}^{n+1,k}}{\mu(C^k)} \mathbf{n}, \quad \forall k = 1, \dots, N_{CT}, \tag{86}$$

is the solution of:

$$\begin{aligned} \alpha \int_{\Omega} \delta \mathbf{v}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \beta(\mathbf{v}^n) e(\delta \mathbf{v}^{n+1}) : e(\boldsymbol{\eta}) \, d\mathbf{x} - \int_{\Omega} \delta p^{n+1} \nabla \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ - \int_{\Omega} \nabla \cdot \delta \mathbf{v}^{n+1} q \, d\mathbf{x} - \lambda \int_{\Omega} \delta p^{n+1} q \, d\mathbf{x} = \alpha \int_{\Omega} (\delta \mathbf{v}^n \circ X_-^n) \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ - \int_{\Omega} (\nabla \mathbf{v}^n \circ X_-^n) \delta \mathbf{v}^n \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \alpha_0 \delta \theta^n \mathbf{a}_g \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ - \int_{\Omega} \gamma(\mathbf{v}^n) e(\mathbf{v}^n) : e(\delta \mathbf{v}^n) e(\mathbf{v}^{n+1}) : e(\boldsymbol{\eta}) \, d\mathbf{x}, \quad \forall \boldsymbol{\eta} \in \mathbf{W}_h, \quad \forall q \in M_h, \end{aligned} \tag{87}$$

where  $\gamma(\mathbf{v}^n) = 2\nu_{tur}[e(\mathbf{v}^n) : e(\mathbf{v}^n)]^{-1/2}$ .

- Linearized system for water temperature: Given  $\delta \theta^0 = 0$ , for each  $n = 0, \dots, N$ ,  $\delta \theta^{n+1} \in K_h$ , with:

$$\delta \theta_{|T^k}^{n+1} = \frac{1}{\mu(C^k)} \int_{C^k} \delta \theta^n \, d\gamma, \quad \forall k = 1, \dots, N_{CT}, \tag{88}$$

is the solution of:

$$\begin{aligned} \alpha \int_{\Omega} \delta \theta^{n+1} \eta \, d\mathbf{x} + K \int_{\Omega} \nabla \delta \theta^{n+1} \cdot \nabla \eta \, d\mathbf{x} + b_1^N \int_{\Gamma_N} \delta \theta^{n+1} \eta \, d\gamma \\ + b_1^S \int_{\Gamma_S} \delta \theta^{n+1} \eta \, d\gamma = \alpha \int_{\Omega} (\delta \theta^n \circ X_-^n) \eta \, d\mathbf{x} \\ - \int_{\Omega} (\nabla \theta^n \circ X_-^n) \cdot \delta \mathbf{v}^n \eta \, d\mathbf{x} - 4b_2^S \int_{\Gamma_S} |\theta^n|^3 \delta \theta^n \eta \, d\gamma, \quad \forall \eta \in H_h. \end{aligned} \tag{89}$$

- Linearized system for eutrophication model: Given  $\delta \mathbf{u}^0 = \mathbf{0}$ , for each  $n = 0, \dots, N$ ,  $\delta \mathbf{u}^{n+1} \in \mathbf{X}_h$ , with:

$$\delta \mathbf{u}_{|T^k}^{n+1} = \frac{1}{\mu(C^k)} \int_{C^k} \delta \mathbf{u}^n \, d\gamma, \quad \forall k = 1, \dots, N_{CT}, \tag{90}$$

is the solution of:

$$\begin{aligned} \alpha \int_{\Omega} \delta \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} + \int_{\Omega} \Lambda_{\mu} \nabla \delta \mathbf{u}^{n+1} : \nabla \boldsymbol{\eta} \, d\mathbf{x} \\ + \int_{\Omega} \mathbf{A}^n(\theta^n, \mathbf{u}^n) \delta \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} = \alpha \int_{\Omega} (\delta \mathbf{u}^n \circ X_-^n) \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ - \int_{\Omega} (\nabla \mathbf{u}^n \circ X_-^n) \delta \mathbf{v}^n \cdot \boldsymbol{\eta} \, d\mathbf{x} - \int_{\Omega} \delta_{\theta} \mathbf{A}^n(\theta^n, \mathbf{u}^n) (\delta \theta^n) \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x} \\ - \int_{\Omega} \delta_{\mathbf{u}} \mathbf{A}^n(\theta^n, \mathbf{u}^n) (\delta \mathbf{u}^n) \mathbf{u}^{n+1} \cdot \boldsymbol{\eta} \, d\mathbf{x}, \quad \forall \boldsymbol{\eta} \in \mathbf{Z}_h. \end{aligned} \tag{91}$$

**Proof.** The proof is straightforward, where the only drawback is related to the computation of terms of the type  $\delta_{\mathbf{g}}(\varphi(\mathbf{g}, \mathbf{x} - \Delta t \mathbf{v}(\mathbf{g}, \mathbf{x})))(\delta \mathbf{g})$ , where  $\varphi(\mathbf{g}, \mathbf{x})$  and  $\mathbf{v}(\mathbf{g}, \mathbf{x})$  are vector functions smooth enough (the scalar case would be analogous). Nevertheless, using the chain rule, we can easily obtain that:

$$\begin{aligned} \delta_{\mathbf{g}}(\varphi(\mathbf{g}, \mathbf{x} - \Delta t \mathbf{v}(\mathbf{g}, \mathbf{x})))(\delta \mathbf{g}) &= \delta_{\mathbf{g}}\varphi(\mathbf{g}, \mathbf{x} - \Delta t \mathbf{v}(\mathbf{g}, \mathbf{x}))(\delta \mathbf{g}) - \Delta t \delta_{\mathbf{x}}\varphi(\mathbf{g}, \mathbf{x} - \Delta t \mathbf{v}(\mathbf{g}, \mathbf{x}))(\delta_{\mathbf{g}}\mathbf{v}(\mathbf{g}, \mathbf{x}))(\delta \mathbf{g}) \\ &\equiv (\delta\varphi \circ X_-) - \Delta t (\nabla\varphi \circ X_-)\delta\mathbf{v}. \end{aligned}$$

(we must note here that, in our specific formulation, we deal with the function  $b : x \in \mathbb{R} \rightarrow b(x) = x|x|^3$ , that is differentiable in  $\mathbb{R}$ , with  $b'(x) = 4|x|^3$ ).

**Lemma 8** (Computing the Jacobian Matrix Using the Adjoint Equations). *Within the framework introduced in this Section, we have the following expression for the Jacobian matrix of the constraints using the adjoint systems: For each row  $k = 1, \dots, N$ , the matrices  $\{\nabla_{\mathbf{g}^n} G^k(\mathbf{g})\}_{n=1}^k \subset \mathcal{M}_{1 \times N_{CT}}(\mathbb{R})$  can be computed using the following expressions:*

- If  $n \in \{1, \dots, k\} \setminus \{N\}$ ,

$$\begin{aligned} \delta_{\mathbf{g}^n} G^k(\mathbf{g})(\delta \mathbf{g}^n) &= \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(T^i)} \int_{T^i} \beta(\mathbf{v}^{n-1})e(\mathbf{w}^{n-1})\mathbf{n} \cdot \mathbf{n} - q^{n-1} d\gamma \\ &+ \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(C^i)} \int_{C^i} q^{n-1} - \beta(\mathbf{v}^{n-1})e(\mathbf{w}^{n-1})\mathbf{n} \cdot \mathbf{n} d\gamma \\ &+ \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(T^i)} \int_{T^i} \gamma(\mathbf{v}^n)e(\mathbf{v}^{n+1}) : e(\mathbf{w}^n)e(\mathbf{v}^n)\mathbf{n} \cdot \mathbf{n} d\gamma \\ &- \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(C^i)} \int_{C^i} \gamma(\mathbf{v}^n)e(\mathbf{v}^{n+1}) : e(\mathbf{w}^n)e(\mathbf{v}^n)\mathbf{n} \cdot \mathbf{n} d\gamma. \end{aligned}$$

- If  $n = N$ ,

$$\begin{aligned} \delta_{\mathbf{g}^n} G^k(\mathbf{g})(\delta \mathbf{g}^n) &= \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(T^i)} \int_{T^i} \beta(\mathbf{v}^{n-1})e(\mathbf{w}^{n-1})\mathbf{n} \cdot \mathbf{n} - q^{n-1} d\gamma \\ &+ \sum_{i=1}^{N_{CT}} \frac{\delta g^{n,i}}{\mu(C^i)} \int_{C^i} q^{n-1} - \beta(\mathbf{v}^{n-1})e(\mathbf{w}^{n-1})\mathbf{n} \cdot \mathbf{n} d\gamma, \end{aligned}$$

where if we introduce, for each row  $k = 1, \dots, N$ , the following vector (defined from the usual Kronecker delta  $\delta_{ij}$  and the indicator function of subset  $\Omega_C$ ):

$$\mathbf{H}_k^{n+1} = \left( 0, 0, 0, 0, \frac{1}{\mu(\Omega_C)} \chi_{\Omega_C} \delta_{kn} \right) \in \mathcal{M}_{1 \times 5}(\mathbb{R}), \quad n = 0, \dots, N,$$

then the adjoint states associated to the eutrophication system  $\{\mathbf{z}^n\}_{n=0}^{N+1} \subset \mathbf{Z}_h$ , to the hydrodynamic system  $\{(\mathbf{w}^n, q^n)\}_{n=0}^N \subset \mathbf{W}_h \times M_h$ , and to the temperature system  $\{\xi^n\}_{n=0}^{N+1} \subset H_h$  are, respectively, the solution of the following systems:

- Adjoint system for eutrophication model:

- For  $n = N + 1$ ,  $\mathbf{z}^n = \mathbf{0}$ .
- For  $n = N$ ,  $\mathbf{z}^n \in \mathbf{Z}_h$  is such that:

$$\begin{cases} \alpha \mathbf{z}^n - \nabla \cdot (\Lambda_\mu \nabla \mathbf{z}^n) + \mathbf{A}^n(\theta^n, \mathbf{u}^n)^T \mathbf{z}^n = \alpha(\mathbf{z}^{n+1} \circ \mathbf{X}_+^{n+1}) + \mathbf{H}_k^{n+1} \text{ in } \Omega, \\ \mathbf{z}^n = \mathbf{0} \text{ on } \Gamma_T, \\ \Lambda_\mu \nabla \mathbf{z}^n \mathbf{n} = \mathbf{0} \text{ on } \partial\Omega \setminus (\Gamma_T \cup \Gamma_C) \\ \Lambda_\mu \nabla \mathbf{z}^n \mathbf{n} = -\frac{1}{\mu(C^k)} \int_{T^k} \Lambda_\mu \nabla \mathbf{z}^{n+1} \mathbf{n} d\gamma' \text{ on } C^k, k = 1, \dots, N_{CT}, \end{cases} \tag{92}$$

where  $\mathbf{X}_+^{n+1}(\mathbf{x}) = \mathbf{x} + \Delta t \mathbf{v}^{n+1}$ .

– For  $n = N - 1, \dots, 0$ ,  $\mathbf{z}^n \in \mathbf{Z}_h$  is such that:

$$\left\{ \begin{array}{l} \alpha \mathbf{z}^n - \nabla \cdot (\Lambda_\mu \nabla \mathbf{z}^n) + \mathbf{A}^n(\theta^n, \mathbf{u}^n)^T \mathbf{z}^n = \alpha(\mathbf{z}^{n+1} \circ \mathbf{X}_+^{n+1}) + \mathbf{H}_k^{n+1} \\ - \sum_{l=1}^5 [\nabla_{\mathbf{u}} \mathbf{A}_l^{n+1}(\theta^{n+1}, \mathbf{u}^{n+1})]^T \mathbf{u}^{n+2} \mathbf{z}^{n+1,l} \quad \text{in } \Omega, \\ \mathbf{z}^n = \mathbf{0} \quad \text{on } \Gamma_T, \\ \Lambda_\mu \nabla \mathbf{z}^n \cdot \mathbf{n} = \mathbf{0} \quad \text{on } \partial\Omega \setminus (\Gamma_T \cup \Gamma_C), \\ \Lambda_\mu \nabla \mathbf{z}^n \cdot \mathbf{n} = -\frac{1}{\mu(C^k)} \int_{T^k} \Lambda_\mu \nabla \mathbf{z}^{n+1} \cdot \mathbf{n} \, d\gamma' \quad \text{on } C^k, \quad k = 1, \dots, N_{CT}, \end{array} \right. \tag{93}$$

• Adjoint system for water temperature:

– For  $n = N + 1$ ,  $\xi^n = 0$ .

– For  $n = N$ ,  $\xi^n \in H_h$  is such that:

$$\left\{ \begin{array}{l} \alpha \xi^n - \nabla \cdot (K \nabla \xi^n) = \alpha(\xi^{n+1} \circ X_+^{n+1}) \quad \text{in } \Omega, \\ \xi^n = 0 \quad \text{on } \Gamma_T, \\ K \nabla \xi^n \cdot \mathbf{n} = -b_1^S \xi^n - 4b_2^S |\theta^{n+1}|^3 \xi^{n+1} \quad \text{on } \Gamma_S, \\ K \nabla \xi^n \cdot \mathbf{n} = -b_1^N \xi^n \quad \text{on } \Gamma_N, \\ K \nabla \xi^n \cdot \mathbf{n} = -\frac{K}{\mu(C^k)} \int_{T^k} \nabla \xi^{n+1} \cdot \mathbf{n} \, d\gamma' \quad \text{on } C^k, \quad k = 1, \dots, N_{CT}. \end{array} \right. \tag{94}$$

– For  $n = N - 1, \dots, 0$ ,  $\xi^n \in H_h$  is such that:

$$\left\{ \begin{array}{l} \alpha \xi^n - \nabla \cdot (K \nabla \xi^n) = \alpha(\xi^{n+1} \circ X_+^{n+1}) \\ - \frac{d}{d\theta} \mathbf{A}^{n+1}(\theta^{n+1}, \mathbf{u}^{n+1}) \mathbf{u}^{n+2} \cdot \mathbf{z}^{n+1} + \alpha_0 \mathbf{a}_g \cdot \mathbf{w}^{n+1} \quad \text{in } \Omega, \\ \xi^n = 0 \quad \text{on } \Gamma_T, \\ K \nabla \xi^n \cdot \mathbf{n} = -b_1^S \xi^n - 4b_2^S |\theta^{n+1}|^3 \xi^{n+1} \quad \text{on } \Gamma_S, \\ K \nabla \xi^n \cdot \mathbf{n} = -b_1^N \xi^n \quad \text{on } \Gamma_N, \\ K \nabla \xi^n \cdot \mathbf{n} = -\frac{K}{\mu(C^k)} \int_{T^k} \nabla \xi^{n+1} \cdot \mathbf{n} \, d\gamma' \quad \text{on } C^k, \quad k = 1, \dots, N_{CT}. \end{array} \right. \tag{95}$$

• Adjoint system for water velocity and pressure:

– For  $n = N$ ,  $(\mathbf{w}^n, q^0) = (\mathbf{0}, 0)$ .

– For  $n = N - 1$ ,  $(\mathbf{w}^n, q^n) \in \mathbf{W}_h \times M_h$  is such that:

$$\left\{ \begin{array}{l} \alpha \mathbf{w}^n - \text{div}(\beta(\mathbf{v}^n) e(\mathbf{w}^n)) + \nabla q^n = \alpha(\mathbf{w}^{n+1} \circ X_+^{n+1}) \\ - (\nabla \mathbf{v}^{n+1} \circ X_-^{n+1})^T \mathbf{w}^{n+1} - (\nabla \mathbf{u}^{n+1} \circ X_-^{n+1})^T \mathbf{z}^{n+1} \\ - (\nabla \theta^{n+1} \circ X_-^{n+1})^T \xi^{n+1} \quad \text{in } \Omega, \\ \nabla \cdot \mathbf{w}^n + \lambda q^n = 0 \quad \text{in } \Omega, \\ \mathbf{w}^n = 0 \quad \text{on } \partial\Omega. \end{array} \right. \tag{96}$$

– For  $n = N - 2, \dots, 0$ ,  $(\mathbf{w}^n, q^n) \in \mathbf{W}_h \times M_h$  is such that:

$$\left\{ \begin{array}{l} \alpha \mathbf{w}^n - \text{div}(\beta(\mathbf{v}^n) e(\mathbf{w}^n)) + \nabla q^n \\ = \alpha(\mathbf{w}^{n+1} \circ X_+^{n+1}) - (\nabla \mathbf{v}^{n+1} \circ X_-^{n+1})^T \mathbf{w}^{n+1} \\ - (\nabla \mathbf{u}^{n+1} \circ X_-^{n+1})^T \mathbf{z}^{n+1} - (\nabla \theta^{n+1} \circ X_-^{n+1})^T \xi^{n+1} \\ + \nabla \cdot (\gamma(\mathbf{v}^{n+1}) e(\mathbf{v}^{n+2}); e(\mathbf{w}^{n+1}) e(\mathbf{v}^{n+1})) \quad \text{in } \Omega, \\ \nabla \cdot \mathbf{w}^n + \lambda q^n = 0 \quad \text{in } \Omega, \\ \mathbf{w}^n = 0 \quad \text{on } \partial\Omega. \end{array} \right. \tag{97}$$

**Remark 5.** In order to simplify the proof of above Lemma, we have established the adjoint systems (96)–(97), (94)–(92) and (95)–(93) in a strong formulation (contrary to the case of the linearized systems (87), (89) and (91), where we have proposed a variational formulation). It is also clear that these adjoint systems easily admit a variational formulation, but we have chosen to formulate them in a strong form for a better understanding of the demonstration.  $\square$

**Proof.** Let us consider as a test functions in the linearized systems (87), (89) and (91), respectively, the  $n$ th component of the sequences  $\{(\mathbf{w}^n, q^n)\}_{n=0}^N \subset \mathbf{W}_h \times M_h$ ,  $\{\xi^n\}_{n=0}^{N+1} \subset H_h$  and  $\{\mathbf{z}^n\}_{n=0}^N \subset \mathbf{Z}_h$ , such that  $\mathbf{w}^N = \mathbf{0}$ ,  $q^N = 0$ ,  $\xi^{N+1} = 0$  and  $\mathbf{z}^{N+1} = \mathbf{0}$ , and let us sum in  $n$  from 0 to  $N$ . Then, after some straightforward computations, taking into account the final conditions for the adjoint systems and the initial conditions for the linearized ones, we have:

- For eutrophication model:

$$\begin{aligned}
 & \sum_{n=0}^N \left[ \alpha \int_{\Omega} \mathbf{z}^n \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} - \int_{\Omega} \nabla \cdot (\Lambda_{\mu} \nabla \mathbf{z}^n) \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} \right. \\
 & \left. + \int_{\Omega} \mathbf{A}^n(\theta^n, \mathbf{u}^n)^T \mathbf{z}^n \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} \right] = \sum_{n=0}^N \left[ \alpha \int_{\Omega} (\mathbf{z}^{n+1} \circ X_+^{n+1}) \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \int_{\Omega} (\nabla \mathbf{u}^{n+1} \circ X_-^{n+1})^T \mathbf{z}^{n+1} \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \sum_{k=1}^{N_{CT}} \int_{C^k} \left( \Lambda_{\mu} \nabla \mathbf{z}^n \mathbf{n} + \frac{1}{\mu(C^k)} \int_{T^k} \Lambda_{\mu} \nabla \mathbf{z}^{n+1} \mathbf{n} \, d\gamma' \right) \cdot \delta \mathbf{u}^{n+1} \, d\gamma \right] \\
 & \left. - \sum_{n=0}^{N-1} \left[ \int_{\Omega} \left( \frac{d}{d\theta} \mathbf{A}^{n+1}(\theta^{n+1}, \mathbf{u}^{n+1}) \mathbf{u}^{n+2} \cdot \mathbf{z}^{n+1} \right) \delta \theta^{n+1} \, d\mathbf{x} \right. \right. \\
 & \left. \left. + \int_{\Omega} \left( \sum_{l=1}^5 [\nabla_{\mathbf{u}} \mathbf{A}_l^{n+1}(\theta^{n+1}, \mathbf{u}^{n+1})]^T \mathbf{u}^{n+2} \mathbf{z}^{n+1, l} \right) \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} \right], \tag{98}
 \end{aligned}$$

with  $\mathbf{X}_+^{n+1}(\mathbf{x}) = \mathbf{x} + \Delta t \mathbf{v}^{n+1}$ , and where we are assuming  $\delta \mathbf{v}^{N+1} = \mathbf{0}$  in order to simplify the notation.

- For water temperature:

$$\begin{aligned}
 & \sum_{n=0}^N \left[ \alpha \int_{\Omega} \xi^n \delta \theta^{n+1} \, d\mathbf{x} - \int_{\Omega} \nabla \cdot (K \nabla \xi^n) \delta \theta^{n+1} \, d\mathbf{x} \right. \\
 & \left. + \int_{\Gamma_N} (b_1^N \xi^n + K \nabla \xi^n \cdot \mathbf{n}) \delta \theta^{n+1} \, d\gamma \right. \\
 & \left. + \int_{\Gamma_S} (b_1^S \xi^n + 4b_2^S |\theta^{n+1}|^3 \xi^{n+1} + K \nabla \xi^n \cdot \mathbf{n}) \delta \theta^{n+1} \, d\gamma \right] \\
 & = \sum_{n=0}^N \left[ \alpha \int_{\Omega} (\xi^{n+1} \circ X_+^{n+1}) \delta \theta^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \int_{\Omega} (\nabla \theta^{n+1} \circ X_-^{n+1})^T \xi^{n+1} \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \sum_{k=1}^{N_{CT}} \int_{C^k} \left( K \nabla \xi^n \cdot \mathbf{n} + \frac{1}{\mu(C^k)} \int_{T^k} K \nabla \xi^{n+1} \cdot \mathbf{n} \, d\gamma' \right) \delta \theta^{n+1} \, d\gamma \right], \tag{99}
 \end{aligned}$$

where, for the sake of simplicity, we have also assumed  $\delta \mathbf{v}^{N+1} = \mathbf{0}$ .

- For water velocity:

$$\begin{aligned}
 & \sum_{n=0}^{N-1} \left[ \alpha \int_{\Omega} \mathbf{w}^n \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} - \int_{\Omega} \operatorname{div} (\beta(\mathbf{v}^n) e(\mathbf{w}^n)) \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \int_{\Omega} \nabla \cdot \mathbf{w}^n \delta p^{n+1} \, d\mathbf{x} + \int_{\Omega} \nabla q^n \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} - \lambda \int_{\Omega} q^n \delta p^{n+1} \, d\mathbf{x} \right] \\
 & = \sum_{n=0}^N \left[ \int_{\Omega} \alpha_0 \mathbf{a}_g \mathbf{w}^{n+1} \delta \theta^{n+1} \, d\mathbf{x} \right] + \sum_{n=0}^{N-1} \left[ \alpha \int_{\Omega} (\mathbf{w}^{n+1} \circ X_+^{n+1}) \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right. \\
 & \left. - \int_{\Omega} (\nabla \mathbf{v}^{n+1} \circ X_-^{n+1})^T \mathbf{w}^{n+1} \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right] \\
 & + \sum_{n=0}^{N-2} \left[ \int_{\Omega} \operatorname{div} (\gamma(\mathbf{v}^{n+1}) e(\mathbf{v}^{n+2}) : e(\mathbf{w}^{n+1}) e(\mathbf{v}^{n+1})) \cdot \delta \mathbf{v}^{n+1} \, d\mathbf{x} \right] \\
 & + \sum_{n=0}^{N-1} \sum_{k=1}^{N_{CT}} \delta g^{n+1, k} \left[ \frac{1}{\mu(T^k)} \int_{T^k} (\beta(\mathbf{v}^n) e(\mathbf{w}^n) \mathbf{n} \cdot \mathbf{n} - q^n) \, d\gamma \right. \\
 & \left. - \frac{1}{\mu(C^k)} \int_{C^k} (\beta(\mathbf{v}^n) e(\mathbf{w}^n) \mathbf{n} \cdot \mathbf{n} - q^n) \, d\gamma \right]
 \end{aligned}$$

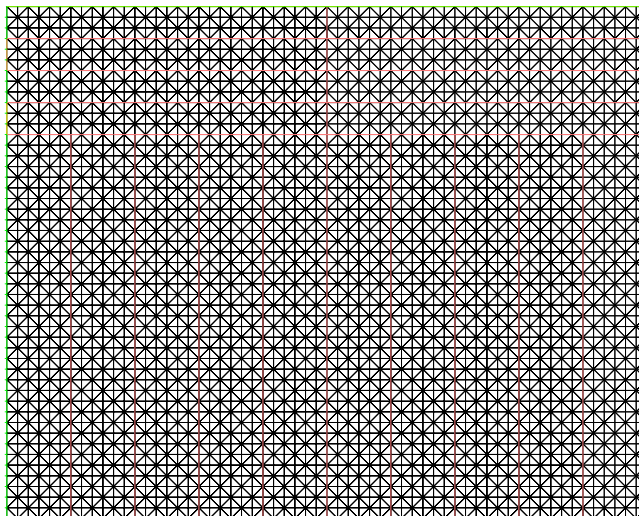


Fig. 4. Triangular mesh of the domain  $\Omega$  for the numerical tests.

$$\begin{aligned}
 & + \sum_{n=0}^{N-2} \sum_{k=1}^{N_{CT}} \delta g^{n+1,k} \left[ \frac{1}{\mu(T^k)} \int_{T^k} \gamma(\mathbf{v}^{n+1})e(\mathbf{v}^{n+2}) : e(\mathbf{w}^{n+1})e(\mathbf{v}^{n+1})\mathbf{n} \cdot \mathbf{n} \, d\gamma \right. \\
 & \left. - \frac{1}{\mu(C^k)} \int_{C^k} \gamma(\mathbf{v}^{n+1})e(\mathbf{v}^{n+2}) : e(\mathbf{w}^{n+1})e(\mathbf{v}^{n+1})\mathbf{n} \cdot \mathbf{n} \, d\gamma \right], \tag{100}
 \end{aligned}$$

where we have assumed  $\mathbf{w}^{N+1} = \mathbf{0}$ .

Thus, if we define  $\{(\mathbf{w}^n, q^n)\}_{n=0}^N \subset \mathbf{W}_h \times M_h$ ,  $\{\xi^n\}_{n=0}^{N+1} \subset H_h$  and  $\{\mathbf{z}^n\}_{n=0}^{N+1} \subset \mathbf{Z}_h$ , such that  $\mathbf{w}^N = \mathbf{0}$ ,  $q^N = 0$ ,  $\xi^{N+1} = 0$  and  $\mathbf{z}^{N+1} = \mathbf{0}$ , as the solutions of the adjoint system (96)–(97), (94)–(92) and (95)–(93), respectively, we obtain, after summing above expressions (98), (99) and (100), that:

$$\begin{aligned}
 \sum_{n=0}^N \int_{\Omega} \mathbf{H}_k^{n+1} \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} & = \sum_{n=0}^{N-1} \sum_{k=1}^{N_{CT}} \delta g^{n+1,k} \left[ \frac{1}{\mu(T^k)} \int_{T^k} (\beta(\mathbf{v}^n)e(\mathbf{w}^n)\mathbf{n} \cdot \mathbf{n} - q^n) \, d\gamma \right. \\
 & \left. - \frac{1}{\mu(C^k)} \int_{C^k} (\beta(\mathbf{v}^n)e(\mathbf{w}^n)\mathbf{n} \cdot \mathbf{n} - q^n) \, d\gamma \right] \\
 & + \sum_{n=0}^{N-2} \sum_{k=1}^{N_{CT}} \delta g^{n+1,k} \left[ \frac{1}{\mu(T^k)} \int_{T^k} \gamma(\mathbf{v}^{n+1})e(\mathbf{v}^{n+2}) : e(\mathbf{w}^{n+1})e(\mathbf{v}^{n+1})\mathbf{n} \cdot \mathbf{n} \, d\gamma \right. \\
 & \left. - \frac{1}{\mu(C^k)} \int_{C^k} \gamma(\mathbf{v}^{n+1})e(\mathbf{v}^{n+2}) : e(\mathbf{w}^{n+1})e(\mathbf{v}^{n+1})\mathbf{n} \cdot \mathbf{n} \, d\gamma \right].
 \end{aligned}$$

And, finally, from the definition:

$$\sum_{n=0}^N \int_{\Omega} \mathbf{H}_k^{n+1} \cdot \delta \mathbf{u}^{n+1} \, d\mathbf{x} = \frac{1}{\mu(\Omega_C)} \int_{\Omega_C} \delta u^{k+1.5} \, d\mathbf{x}. \tag{101}$$

### 5.3. Numerical results

In order to simplify the graphical representation of the computational results for the numerical tests developed in this study, we will present here only the case of a two dimensional domain  $\Omega$ . So, we consider a space configuration similar to that presented in Fig. 1, with  $N_{CT} = 4$  collector/injector pairs, in a rectangular domain of  $20 \text{ m} \times 16 \text{ m}$ . We suppose that the diameter of each collector is  $1 \text{ m}$  and the diameter of each injector is  $2 \text{ m}$ . For the coefficients of the eutrophication model (12), we have used the same values as those appearing in [12], and for the thermo-hydrodynamic system (4), (8) we have employed the same values as in [15]. For the space discretization we have generated a regular mesh of 2989 vertices, as shown in Fig. 4.

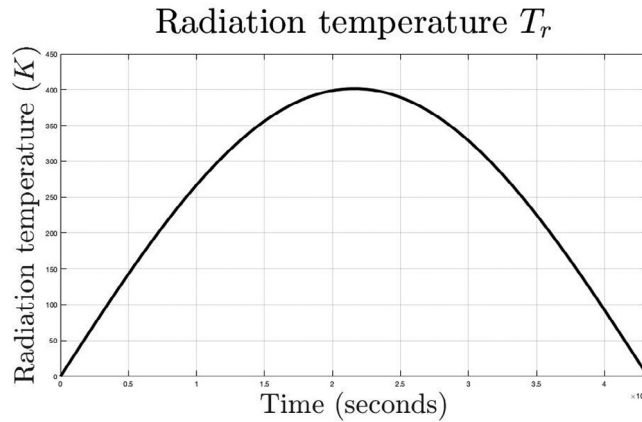


Fig. 5. Standard profile for radiation temperature  $T_r$ .

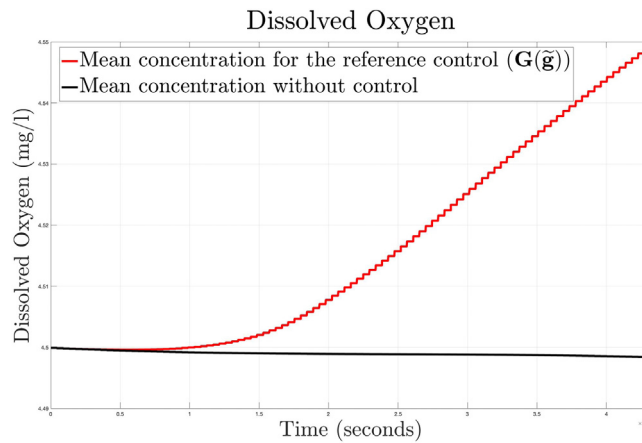


Fig. 6. Comparison of the mean concentrations of dissolved oxygen in  $\Omega_C$ , taking a time step length  $\Delta t = 450$  s, for a constant flow rate of  $1.0 \times 10^{-4} \text{ m}^3 \text{ s}^{-1}$  in all the pumps, and for the case without pumping.

The control domain  $\Omega_C$  corresponds to a 3 m strip at the bottom of the domain, and all the numerical tests have been performed in a temporal horizon of 12 h ( $T = 43200$  s). Finally, in order to simulate the effects of solar radiation for the heat Eq. (8), we consider the standard function  $T_r$  depicted in Fig. 5.

We must remark that our main goal in this first approximation to the numerical resolution of the problem is trying to understand if we can improve the management of the pumps with respect to a constant operating regime. So, given a constant reference control  $\tilde{\mathbf{g}}$ , with  $\tilde{g}^{n,k} = C$  (constant), for  $n = 1, \dots, N, k = 1, \dots, N_{CT}$ , we will solve the following modification of the original optimization problem ( $\mathcal{P}$ ):

$$(\hat{\mathcal{P}}) \quad \min\{J(\mathbf{g}) : \mathbf{g} \in \mathcal{U}_{ad}, \mathbf{G}(\mathbf{g}) \geq \mathbf{G}(\tilde{\mathbf{g}})\}.$$

In other words, we want to find an optimal control  $\hat{\mathbf{g}} \in \mathcal{U}_{ad}$  that supplies us with a higher concentration of dissolved oxygen than that obtained with the constant control  $\tilde{\mathbf{g}}$ , and that minimizes the energy cost functional  $J$ . As an illustration to this behavior, in Fig. 6 we can see the evolution of the mean concentration of dissolved oxygen in the control domain  $\Omega_C$  considering a constant reference control  $\tilde{g}^{n,k} = 1.0 \times 10^{-4} \text{ m}^3 \text{ s}^{-1}, \forall n = 1, \dots, N, \forall k = 1, \dots, N_{CT}$ , compared to the mean concentration assuming that all the pumps are out of service (that is,  $\tilde{g}^{n,k} = 0.0 \text{ m}^3 \text{ s}^{-1}, \forall n = 1, \dots, N, \forall k = 1, \dots, N_{CT}$ ). We observe how, if the pumps are out of service, the mean concentration of dissolved oxygen in the control domain decays gradually but, nevertheless, if we consider a constant flow rate (not necessarily large), this mean concentration of dissolved oxygen increases in a significant way.

In this final part of the Section we present several numerical results that we have obtained using different choices of the time step length  $\Delta t$ . We must mention that in the numerous numerical tests developed, we have always obtained that  $\mathbf{G}(\hat{\mathbf{g}}) = \mathbf{G}(\tilde{\mathbf{g}})$ , and also a reduction in the value of the cost functional  $J(\hat{\mathbf{g}}) < J(\tilde{\mathbf{g}})$ . So, in Fig. 7 we can see the optimal control that we have obtained taking  $\sigma_1 = 0.5$  and  $\sigma_2 = 1 - \sigma_1 = 0.5$ , for time steps of  $\Delta t = 3600$  s and  $\Delta t = 1800$  s (corresponding to  $N = 12$  and  $N = 24$ , respectively). In Fig. 8 we can find the optimal control corresponding to time steps of  $\Delta t = 900$  s and  $\Delta t = 450$  s ( $N = 48$  and  $N = 96$ , respectively), showing the robustness of our methodology.

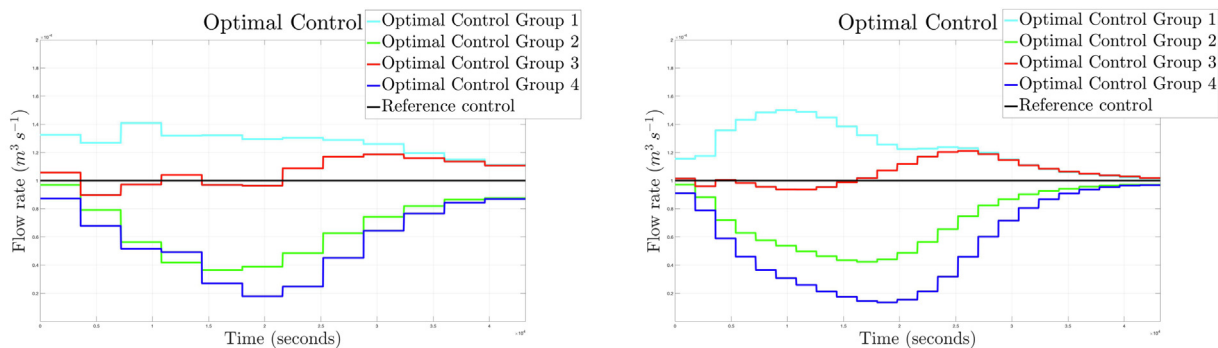


Fig. 7. Evolution of the optimal flow rates for the four pumps taking weights  $\sigma_1 = \sigma_2 = 0.5$ , and  $\Delta t = 3600$  s (left) or  $\Delta t = 1800$  s (right).

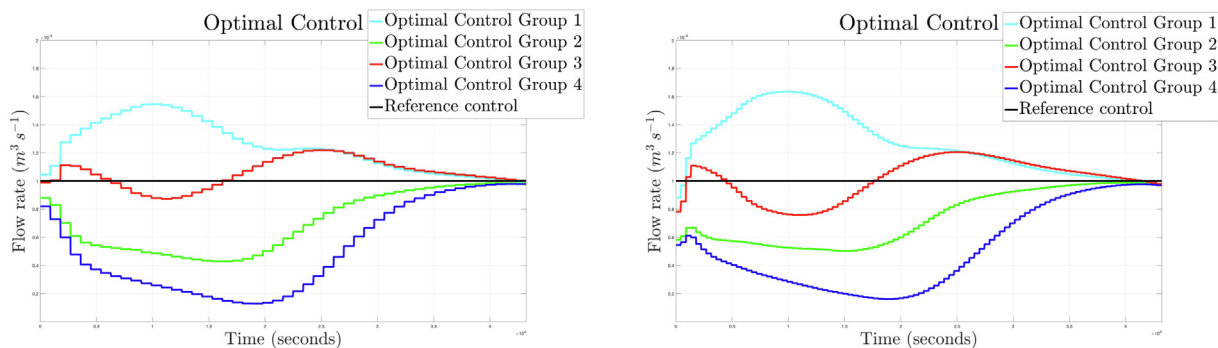


Fig. 8. Evolution of the optimal flow rates for the four pumps taking  $\sigma_1 = \sigma_2 = 0.5$ , and  $\Delta t = 900$  s (left) or  $\Delta t = 450$  s (right).

Table 1

Functional cost evaluated in the reference control ( $\tilde{\mathbf{g}}$ ) vs. optimal control ( $\hat{\mathbf{g}}$ ).

	$\Delta t = 3600$ s	$\Delta t = 1800$ s	$\Delta t = 900$ s	$\Delta t = 450$ s
$J(\tilde{\mathbf{g}})$	$1.2000 \times 10^{-7}$	$2.4000 \times 10^{-7}$	$4.8000 \times 10^{-7}$	$9.6000 \times 10^{-7}$
$J(\hat{\mathbf{g}})$	$1.0973 \times 10^{-7}$	$2.1865 \times 10^{-7}$	$4.3195 \times 10^{-7}$	$8.7104 \times 10^{-7}$

We observe that the flow rates associated to the two upper collectors ( $g^1$  and  $g^3$ ) are significantly higher than the corresponding to lower collectors ( $g^2$  and  $g^4$ ). This is caused by the fact that the photosynthesis is more intense in the superficial layers and, consequently, the presence of dissolved oxygen is higher there.

In Table 1 we can see the comparison between the functional cost evaluated in the reference control and in the optimal control. We can observe that, as we decrease the time step, the difference between the reference cost and the optimal cost increases. As it seems obvious, this is a straightforward consequence of the fact that, as we decrease the time step, we can act in a more precise way over the system and achieve better results.

In Fig. 9 we can see the evolution of the constraints for the choice of the time step length  $\Delta t = 450$  s. We can verify there that the optimal constraint  $\mathbf{G}(\hat{\mathbf{g}})$  and the reference constraint  $\mathbf{G}(\tilde{\mathbf{g}})$  are virtually indistinguishable, that is, with optimal strategy  $\tilde{\mathbf{g}}$  we obtain the same water quality in the control region as with the constant reference flow rate  $\tilde{\mathbf{g}}$ , but with a significative decrease in energy cost.

Finally, in Fig. 10 we show the concentration of dissolved oxygen in the whole domain  $\Omega$  associated to the optimal control solution for  $\Delta t = 450$  s (left), and the concentration of dissolved oxygen when all the pumps are off (right), both in the last time step (corresponding to  $N = 96$ ). We can easily notice here the pumping effects associated to the optimal control in the bottom layer, with an evident improvement of water quality in the region.



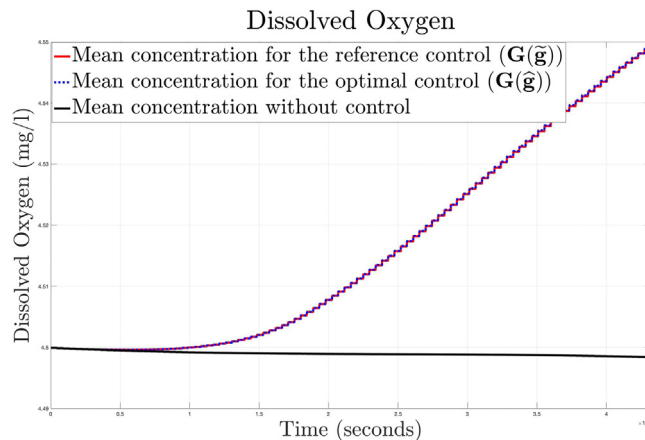


Fig. 9. Evolution of the constraints, for  $\Delta t = 450$  s, in the controlled and uncontrolled cases.

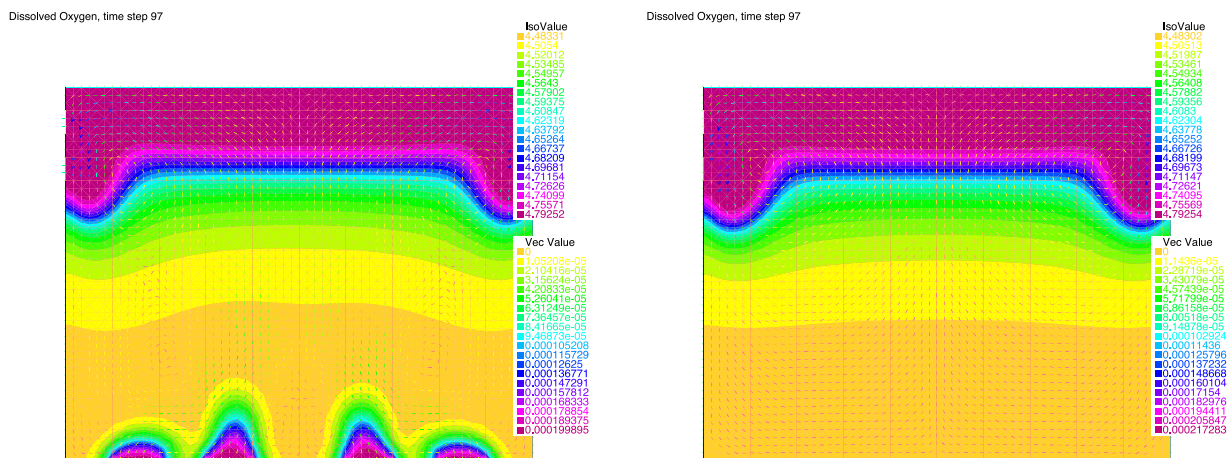


Fig. 10. Concentration of dissolved oxygen in the last time step corresponding to the optimal solution (left), and without control (right).

**Data availability**

No data was used for the research described in the article.

**Acknowledgments**

The authors would like to thank the anonymous referees for their interesting comments, suggestions and corrections, as they have greatly contributed to improve the quality of the manuscript. The authors were partially supported by Xunta de Galicia, Spain, project ED431C 2019/02, and by the Agencia Estatal de Investigación (AEI) of Spain under grant MTM2016-75140-P, co-financed by the European Community fund FEDER.

**References**

- [1] L.J. Alvarez-Vázquez, F.J. Fernández, A. Martínez, Optimal control of eutrophication processes in a moving domain, *J. Franklin Inst.* 351 (2014) 4142–4182.
- [2] F.J. Fernández, A. Martínez, L.J. Alvarez-Vázquez, A nonlinear problem related to artificial circulation in a lake, in: *Nonlinear Analysis and Boundary Value Problems. NABVP 2018*, Vol. 292, Springer Proceedings in Mathematics & Statistics, 2019.
- [3] A. Martínez, L.J. Alvarez-Vázquez, F.J. Fernández, Water artificial circulation for eutrophication control, *Math. Control Relat. Fields* 8 (2018) 277–313.
- [4] T.-S. Yeh, Bifurcation curves of positive steady-state solutions for a reaction–diffusion problem of lake eutrophication, *J. Math. Anal. Appl.* 449 (2017) 1708–1724.
- [5] B. Wang, Q. Qi, Modeling the lake eutrophication stochastic ecosystem and the research of its stability, *Math. Biosci.* 300 (2018) 102–114.
- [6] J. Jiao, P. Li, D. Feng, Dynamics of water eutrophication model with control, *Adv. Diff. Equ. Pap.* (383) (2018).
- [7] T. Roubíček, *Nonlinear Partial Differential Equations with Application*, Birkhäuser, Basel, 2013.

- [8] J.-L. Lions, E. Magenes, Non-Homogeneous Boundary Value Problems and Applications. I, Springer-Verlag, New York-Heidelberg, 1972.
- [9] Alfredo Bermúdez de Castro, Continuum Thermomechanics, Birkhäuser Verlag, Berlin, 2000.
- [10] O.A. Ladyženskaja, V.A. Solonnikov, N.N. Ural'ceva, Linear and Quasilinear Equations of Parabolic Type, American Mathematical Society, Providence, 1968.
- [11] L.J. Alvarez-Vázquez, F.J. Fernández, R. Muñoz-Sola, Mathematical analysis of a three-dimensional eutrophication model, *J. Math. Anal. Appl.* 349 (2009) 135–155.
- [12] M. Drago, B. Cescon, L. Iovenitti, A three-dimensional numerical model for eutrophication and pollutant transport, *Ecol. Model.* 145 (2001) 17–34.
- [13] M.C. Delfour, G. Payre, J.-P. Zolesio, Approximation of nonlinear problems associated with radiating bodies in space, *SIAM J. Numer. Anal.* 24 (1987) 1077–1094.
- [14] F.J. Fernández, L.J. Alvarez-Vázquez, A. Martínez, On the existence and uniqueness of solution of a hydrodynamic problem related to water artificial circulation in a lake, *Indagat. Math.* 31 (2020) 235–250.
- [15] F.J. Fernández, L.J. Alvarez-Vázquez, A. Martínez, Mathematical analysis and numerical resolution of a heat transfer problem arising in water recirculation, *J. Comput. Appl. Math.* 366 (2020) 112402, Corrigendum in: 375, 112859, 2020.
- [16] L.J. Alvarez-Vázquez, F.J. Fernández, R. Muñoz-Sola, Analysis of a multistate control problem related to food technology, *J. Differential Equations* 245 (2008) 130–153.
- [17] L.J. Alvarez-Vázquez, N. García-Chan, A. Martínez, M.E. Vázquez-Méndez, Multi-objective Pareto-optimal control: An application to wastewater management, *Comput. Optim. Appl.* 46 (2010) 135–157.
- [18] L.J. Alvarez-Vázquez, A. Martínez, C. Rodríguez, M.E. Vázquez-Méndez, Numerical optimization for the location of wastewater outfalls, *Comput. Optim. Appl.* 22 (2002) 399–417.
- [19] V. Girault, P.-A. Raviart, Finite Element Methods for Navier–Stokes Equations, Springer-Verlag, Berlin, 1986.
- [20] F. Hecht, New development in FreeFem++, *J. Numer. Math.* 20 (2012) 251–265.
- [21] A. Wächter, L.T. Biegler, On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming, *Math. Program.* 106 (2006) 25–57.