

VTT Technical Research Centre of Finland

Industrial CO₂ supply pathways for CCU-based electrofuel production in Finland

Linjala, Onni; Kajolinna, Tuula

Published: 06/03/2023

Document Version
Publisher's final version

[Link to publication](#)

Please cite the original version:
Linjala, O., & Kajolinna, T. (2023). *Industrial CO₂ supply pathways for CCU-based electrofuel production in Finland: E-Fuel WP2 Task 2.1 Deliverable.*



VTT
<http://www.vtt.fi>
P.O. box 1000FI-02044 VTT
Finland

By using VTT's Research Information Portal you are bound by the following Terms & Conditions.

I have read and I understand the following statement:

This document is protected by copyright and other intellectual property rights, and duplication or sale of all or part of any of this document is not permitted, except duplication for research use or educational purposes in electronic or print form. You must obtain permission for any other use. Electronic or print copies may not be offered for sale.



Industrial CO₂ supply pathways for CCU-based electrofuel production in Finland

E-Fuel WP2 Task 2.1 Deliverable

Linjala, Onni & Kajolinna, Tuula
VTT Technical Research Centre of Finland
6.3.2023

ABSTRACT

This work evaluates potential industrial CO₂ supply pathways for CCU-based electrofuel production in Finland. We examine the common stages and costs of CCUS, mature and emerging carbon capture technologies, and carbon capture potential of Finnish industries. CCUS costs range around 42–161 €/tCO₂, deriving from several case-specific stages that vary depending on source stream properties, capture technology, location, logistics, and end-use of CO₂. Various technologies are in development for carbon capture. Post-combustion capture is appealing for industrial applications due to retrofittable nature and wide applicability of the technologies. In post-combustion capture, amine absorbents are a low-risk technology choice with commercial maturity and high capture performance, although suffering from toxic degradation products and high regeneration energy requirement. Carbonate salt absorbents (e.g., hot potassium carbonate and enzyme-enhanced K₂CO₃) have emerged as viable, eco-friendly options to consider at commercial level alongside amines. Also, technologies like membranes and solid sorbent processes are on the brink of commercialization. In Finland, pulp mills are the most appealing targets for carbon capture with high quantity of biogenic CO₂ available and suitable preconditions for CCUS implementation. Processes with a high CO₂ concentration exhaust stream (e.g., ethanol fermentation and HVO) are a low hanging fruit regarding capture cost but with low quantitative capture potential. To evaluate techno-economic feasibility of carbon capture in a certain application in more detail, a specified case study with process modelling is required.

Keywords: carbon dioxide, CO₂ capture, carbon capture and utilization, CCU, post-combustion capture, point source capture, industrial emissions, forest industry, petroleum refining, biorefining, power-to-X, electrofuels, drop-in fuels, Fischer-Tropsch, SOEC, RWGS, CPOX

TABLE OF CONTENTS

ABSTRACT

TABLE OF CONTENTS

SYMBOLS AND ABBREVIATIONS

1	INTRODUCTION	5
1.1	Electrofuels as a green alternative for fossil fuels in transportation.....	5
1.2	Carbon capture as a CO ₂ supply for P2X	6
1.3	E-Fuel project overview	8
1.4	Desired CO ₂ properties in E-Fuel.....	9
1.4.1	SOEC	9
1.4.2	RWGS/CPOX	10
1.4.3	Fischer-Tropsch synthesis.....	10
1.5	Objectives of this work.....	11
2	TECHNICAL REQUIREMENTS AND COSTS OF CCUS STAGES	12
2.1	Source characterization	12
2.2	Capture	15
2.3	Purification	18
2.4	Compression and liquefaction	21
2.5	Interim storage.....	25
2.6	Transportation.....	26
2.6.1	Pipeline transportation	26
2.6.2	Ship transportation	27
2.6.3	Road and railway transportation	28
2.7	Utilization and storage.....	29
2.8	Summary and cost breakdown of CCUS stages	30
3	REVIEW ON CARBON CAPTURE TECHNOLOGIES	34
3.1	Liquid solvents	35
3.1.1	Amines	35
3.1.2	Carbonate salts	38
3.1.3	Phase-separating solvents	42
3.1.1	Physical solvents	43
3.2	Solid sorbents	44
3.3	Membranes	46
3.4	Calcium looping	48
3.5	Cryogenic separation	48
3.6	Electrochemical separation.....	52
3.7	Inherent capture and purification.....	56
3.8	Summary of the reviewed carbon capture technologies.....	58
4	CARBON CAPTURE POTENTIAL OF FOREST INDUSTRY, PETROLEUM REFINERIES AND BIOREFINERIES IN FINLAND.....	61
4.1	Industrial CO ₂ emissions in Finland.....	62

4.2 Carbon capture potential of forest industry, petroleum refineries and biorefineries in Finland	63
4.2.1 Pulp and paper mills.....	63
4.2.2 Petroleum refineries and steam methane reforming	66
4.2.3 Ethanol fermentation.....	68
4.2.4 Hydrotreated vegetable oils	69
4.3 Industrial CO ₂ sources with high carbon capture potential in Finland.....	71
5 CONCLUSIONS.....	74
REFERENCES	77

SYMBOLS AND ABBREVIATIONS

AMP	amino-2-methyl-1-propanol
BP MED	bipolar membrane electro dialysis
CAP	chilled ammonia process
CaL	calcium looping
CPOX	catalytic partial oxidation
CCUS	carbon capture, utilization, and storage
DAC	direct air capture
FGD	flue gas desulfurization
FT	Fischer-Tropsch synthesis
GHG	greenhouse gas
HTCE	high-temperature co-electrolysis
HTE	high-temperature electrolysis
HVO	hydrotreated vegetable oil
KPI	key performance indicator
MCFC	molten carbonate fuel cell
MEA	monoethanolamine
P2X	power-to-X
PCET	proton coupled electron transfer
PSA	pressure-swing adsorption
PZ	piperazine
RWGS	reverse water-gas shift
SCR	selective catalytic reducer
SMR	steam methane reforming
SOEC	solid-oxide electrolyser cell
t	tonne
toe	tonnes oil equivalent
tpa	tonnes per annum
tpd	tonnes per day
TRL	technology readiness level
TSA	temperature-swing adsorption
VSA	vacuum-swing adsorption

1 INTRODUCTION

Pursuit towards carbon-neutral society necessitates major reforms in transportation, a sector highly dependent on fossil fuels. Transportation generates around 8 Gt of greenhouse gas (GHG) emissions annually, accounting for a 16 % share of the global GHG emissions (Ritchie & Roser, 2020). Emissions of transportation divide roughly in half between light-duty transportation (i.e., passenger vehicles) and heavy-duty transportation (i.e., shipping, aviation, and haulage) (IEA, 2021). Direct electrification with renewable energy is a potential solution to decarbonize light-duty transportation but inadequate for heavy-duty transportation due to inefficiency of current battery technologies. Heavy-duty transportation depends on fuels with high energy densities and specific energies to ensure efficient logistics for the long transport distances and heavy working loads. Therefore, replacing conventional fossil fuels with carbon-neutral fuels like hydrogen, ammonia, biofuels, or synthetic hydrocarbons provides a more potential decarbonization pathway for the hard-to-abate sectors of transportation (Gray et al., 2021).

1.1 Electrofuels as a green alternative for fossil fuels in transportation

The ongoing transition towards energy system electrification and hydrogen economy has emerged electrofuels (e-fuels) as a potential complementary solution to decarbonize transportation. E-fuels offer a way for indirect electrification of transportation by converting electricity into fuel forms via power-to-X (P2X) technologies. Initially, green hydrogen is produced by decomposing water with renewable electricity via water electrolysis. Hydrogen can be used directly as a fuel or synthesized with CO₂ or N₂ to produce fuels like ammonia, methanol, or hydrocarbon chains. It is unlikely for hydrogen to become a relevant transport fuel soon as hydrogen infrastructure is at an early development stage in most areas and as it would require renewing the transport fleet to hydrogen-powered using fuel cells or hydrogen combustion engines for which the market is still limited. Therefore, carbon-neutral fuels directly applicable to the existing infrastructure, referred to as drop-in fuels, currently offer a more attracting option to decarbonize heavy-duty transportation. As direct alternatives to conventional fuels drop-in fuels have potential for rapid commercial deployment if proven techno-economically feasible. Technologies used in production of drop-in e-fuels are proven technically feasible but commercial breakthrough is yet to happen due to weak cost-competitiveness against conventional fuels. A major challenge of e-fuels is the weak electricity-to-

useful-energy efficiency that typically ranges around 10–35 % (Ueckerdt et al., 2021), leading to high electricity demand and production cost.

Fischer-Tropsch synthesis (FT) is a relevant technology for drop-in e-fuel production. It can be used to produce synthetic alternatives to conventional fuels like gasoline, diesel, and jet fuel. A mixture of hydrogen and carbon monoxide known as synthesis gas (or syngas) is converted into liquid hydrocarbons using a catalyst and elevated temperature and pressure. Syngas is conventionally produced via coal or biomass gasification or steam methane reforming of natural gas, but in P2X routes, alternative technologies powered with renewable energy are used, e.g., co-electrolysis of water and CO₂ or reverse water-gas shift reaction (RWGS). According to IEAGHG (2021), lifecycle emissions of drop-in FT fuels produced with renewable electricity are 68–87 % lower than their fossil-based counterparts. However, production of FT fuels is currently significantly more expensive compared to conventional fuels, mainly due to the high price of green hydrogen. Zang et al. (2021) calculated that with a hydrogen price of \$5.0/kg (from water electrolysis) and a CO₂ price of \$17.3/ton (from ethanol fermentation), the minimum fuel selling price of FT fuel is 10.8–12.3 USD/gal (\approx 2.4–2.8 €/l). With a hydrogen price of \$2/kg the price of FT fuel decreases significantly to 5.8–6.3 USD/gal (\approx 1.3–1.4 €/l).

Globally, there are some projects underway aiming for commercial deployment of drop-in electrofuels. The Norsk e-Fuel project aims for production of 12.5 million liters of aviation electrofuels by the end of 2024 and 25 million liters by 2026 at Mosjøen, Norway, based on which a plant with 100-million-liter capacity is built by 2029 (Norsk e-Fuel, 2022). At Herøya, Norway, Nordic Electrofuel AS is constructing an electrofuel plant with a 10-million-liter capacity of jet fuel, aiming to start production in 2024. In project Reuze, ENGIE and Infinum have partnered up to develop production of synthetic fuels at ArcelorMittal's Dunkirk factory in France, aiming for production capacity of 100 tonnes of electrofuels and naphtha by 2026 (Reuze, 2022).

1.2 Carbon capture as a CO₂ supply for P2X

Carbon capture refers to capturing CO₂ from emission point sources or directly from the atmosphere. It is an essential technology for P2X value chains where carbonaceous products

such as synthetic hydrocarbons are manufactured. Majority of research on carbon capture has focused on carbon capture and storage (CCS) where the captured CO₂ is stored into geological formations preventing it from returning to the atmosphere to avoid greenhouse effect. Concepts where CO₂ is utilized as feedstock for processes or value-added products is referred to as carbon capture and utilization (CCU). In addition to generating value, CCU can provide positive climate impact if used to replace unsustainable production based on fossil sources. Although this work focuses on electrofuel production, which is a CCU value chain, also CCS activities are examined as same methods and technologies are used in both concepts to capture, condition, and transport the CO₂.

Regarding economics, capturing CO₂ from emission point sources like flue gas or other industrial exhaust streams is often preferred over direct air capture (DAC) where the CO₂ is captured from ambient air. Generally, significantly lower capture costs can be achieved with point source capture compared to DAC as CO₂ concentration of emission point sources that often ranges around 3–25 vol-% is significantly higher than in ambient air (0.041 vol-%). Post-combustion capture, i.e., capturing CO₂ from flue gas and process exhaust streams using end-of-pipe technologies, is often the primary method of point source capture due to retrofitable nature and high maturity compared to alternative methods of carbon capture.

Numerous technologies have been developed to capture CO₂ from various types of gas streams, utilizing chemical and physical phenomena like absorption, adsorption, membranes, electrochemical reactions, and cryogenics. In post-combustion capture, absorption via amine-based liquid solvents currently represents the state-of-the-art technology. Amines yield high CO₂ capture performance and have high maturity having been used in industrial gas purification applications for decades. There are several vendors on the market offering commercial amine-based technologies. However, there is interest for alternative technologies as amines face challenges such as energy-intensive regeneration, volatility, toxicity and corrosivity, although these challenges have been reduced with advanced solvents and novel process configurations (Rochelle, 2016). Several novel technologies are currently emerging such as alternative liquid absorbents, solid sorbents, membranes, fuel cell-based capture, and various hybrid systems. Many of the emerging technologies are on the brink of commercialization, having reached the level of industrial demonstration. Therefore, it has become

reasonable to consider alternative technology options alongside amines when evaluating technology options for a new carbon capture project. As characteristics of different capture technologies and emission point sources vary, identifying suitable technology options for a carbon capture project is a case-by-case matter determined by the operating environment, characteristics of the feed gas stream, and the desired capture performance.

1.3 E-Fuel project overview

In project E-Fuel, VTT Technical Research Centre of Finland has teamed up with industrial and academic partners to plow the way for commercial production of electrofuels. The public, three-year research project is jointly funded by Business Finland, VTT, and the company partners. In E-Fuel, we examine a novel P2X/CCU value chain for production of paraffinic drop-in e-fuels from green hydrogen and sequestered CO₂. High-temperature co-electrolysis (HTCE) of water and CO₂ using solid oxide electrolyser cells (SOEC) is examined for production of synthesis gas that is then converted to liquid hydrocarbons via Fischer-Tropsch synthesis. Additionally, an alternative route using high temperature electrolysis (HTE) followed by combined reverse water-gas shift reaction (RWGS) and catalytic partial oxidation (CPOX) is studied for synthesis gas production. Figure 1 illustrates the two routes for e-fuel production that are studied in project E-Fuel.

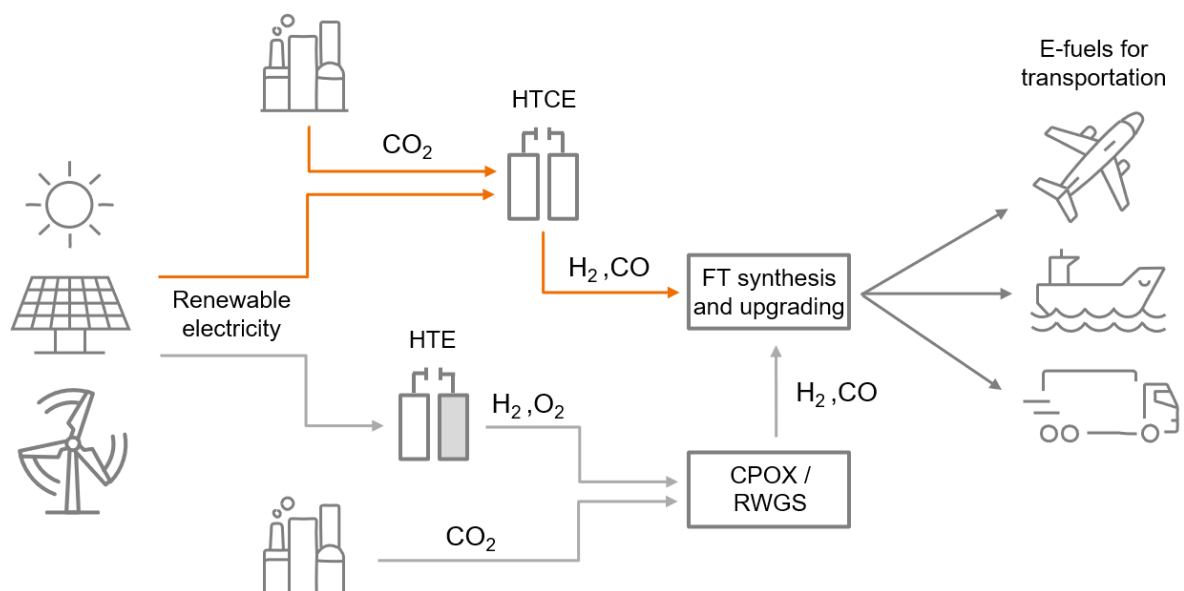


Figure 1. Two routes for electrofuel production are studied in project E-Fuel: Fischer-Tropsch synthesis preceded by (1) high-temperature co-electrolysis of water and CO₂, and (2) high-temperature electrolysis followed by combined reverse water-gas shift reaction and catalytic partial oxidation.

In project E-Fuel, we are developing key technologies of the concept and evaluating techno-economic feasibility and environmental impact of the value chain based on data collected in the project. Furthermore, we aim to validate the concept at VTT's Bioruukki piloting centre in a long-term (>1000 h) bench-scale test campaign by integrating carbon capture and green hydrogen production to a mobile synthesis unit for continuous production of paraffinic drop-in fuels. Additionally, we develop readiness to scale-up the concept to industrial level upon project completion.

1.4 Desired CO₂ properties in E-Fuel

CO₂ collected via carbon capture may contain impurities that can negatively affect logistics or utilization processes. Therefore, identifying the desired CO₂ properties facilitates selection of suitable CO₂ supply pathways. Table 1 presents the desired properties of CO₂ utilized via the E-Fuel concept.

Table 1. Desired quality and properties of CO₂ in E-Fuel concept.

	HTCE SOEC	RWGS/CPOX	FT, cobalt catalyst
Pressure	1 atm	Determined by FT	20–30 bar
H ₂ O		Tolerates well	<0.4 vol-%
SO _x , H ₂ S, COS	<0.01 ppm	Determined by FT	<0.01 ppm
NO _x , NH ₃ , HCN	NH ₃ <100 ppm	Determined by FT	<0.02 ppm
Siloxanes	<1 ppb	Determined by FT	
Halides and alkalis		Determined by FT	<0.01 ppm
O ₂	<0.1 vol-%	<0.1 vol-%	<0.1 vol-%

1.4.1 SOEC

Effect of impurities on SOEC's used in high temperature co-electrolysis influence stack operations negatively, but due to low maturity long-term experience at industrial scale is lacking. According to various sources, especially sulphur compounds and siloxanes (organic silicon compounds) cause masking and degradation of the catalysts, but there are no exact limit

values available due to variations of manufacturers and in stack chemistry. Also, the odorant in natural gas must be removed. Ammonia has a corrosive influence on interconnect plates inside the stacks, thus high concentrations of ammonia must be avoided. Presence of oxygen causes fuel electrode (cathode) nickel catalyst oxidation and reduces stack efficiency.

1.4.2 RWGS/CPOX

Pressure used in RWGS/CPOX step is determined by operating pressure of the following FT reaction. For CPOX low sulfur content (<50 ppm) in feed gas is required to avoid catalyst poisoning (Vozniuk et al., 2019) that deactivates the catalyst, thus weakening conversion efficiency and H₂ selectivity (Bitsch-Larsen et al., 2008). Based on experience with VTT's RWGS equipment moisture is well tolerated but presence of oxygen increases temperature and thus oxygen concentration is typically adjusted to be around 0.1 vol-%. Other impurities influence catalyst degradation, affecting replacement schedule of the catalyst and therefore cost. Often gas quality requirements of RWGS are similar with the following FT synthesis.

1.4.3 Fischer-Tropsch synthesis

Fischer-Tropsch synthesis (FT) refers to a catalytic chemical reaction used to produce liquid hydrocarbons from syngas. We examine cobalt-based catalysts, which are commercially mature and have high syngas conversion efficiency and paraffin selectivity, and low water gas shift (WGS) activity. In the E-Fuel concept, FT is operated at a pressure level of 20–30 bar, which results in a desirable hydrocarbon yield regarding paraffinic drop-in fuels.

Effects of impurities on performance and lifetime of FT catalysts have been reported in several studies. The primary impurities related to catalyst poisoning are sulphur- and nitrogen-based compounds. Also, other species like alkali metals, carbon or metal carbonyls may be responsible for catalyst poisoning (Tsakoumis et al., 2010). Catalyst choice and operating conditions are important factors affecting the magnitude of impurity-related poisoning. Catalyst poisoning via sulphurous compounds is perhaps best known and it is reported that H₂S adsorbs more rapidly to the surfaces and forms metal sulfides than COS and organic sulphurs. Sulphur level below 0.02 mg/m³ is recommended for Co- and Fe-based catalysts to avoid poisoning (Dry, 2002). Nitrogen compounds (e.g., NO_x, NH₃, HCN) have also been reported to have a poisoning effect on cobalt catalysts, although appearing to be of reversible nature.

1.5 Objectives of this work

This work aims to identify potential CO₂ supply options in Finland for the E-Fuel concept, which is a novel P2X/CCU value chain for production of paraffinic drop-in fuels from green hydrogen and sequestered CO₂. A review on common stages of CCUS is conducted to obtain a holistic understanding on technical requirements and economics of CCUS. Status, performance, and future projections of mature and emerging carbon capture technologies are reviewed to map potential technology options for carbon capture. We examine capturing CO₂ from emission streams of forest industry, petroleum refineries and biorefineries, which have been recognized as potential industrial CO₂ sources for CCUS in Finland. Processes of these industries are examined to identify emission point sources with high techno-economic potential for carbon capture implementation. Based on the technology and emission source reviews, we evaluate potential CO₂ supply pathways for the E-Fuel concept.

2 TECHNICAL REQUIREMENTS AND COSTS OF CCUS STAGES

Carbon capture, utilization, and storage (CCUS) consists of several stages, which can be generally divided into source characterization, capture or separation, purification, compression or liquefaction, transportation, and utilization or storage (Pieri et al., 2018). Additionally, interim storage is essential if transportation or end-use of CO₂ is done in batches as, for instance, in ship transportation. Figure 2 illustrates the common stages of CCUS and the order of these stages in the value chain.

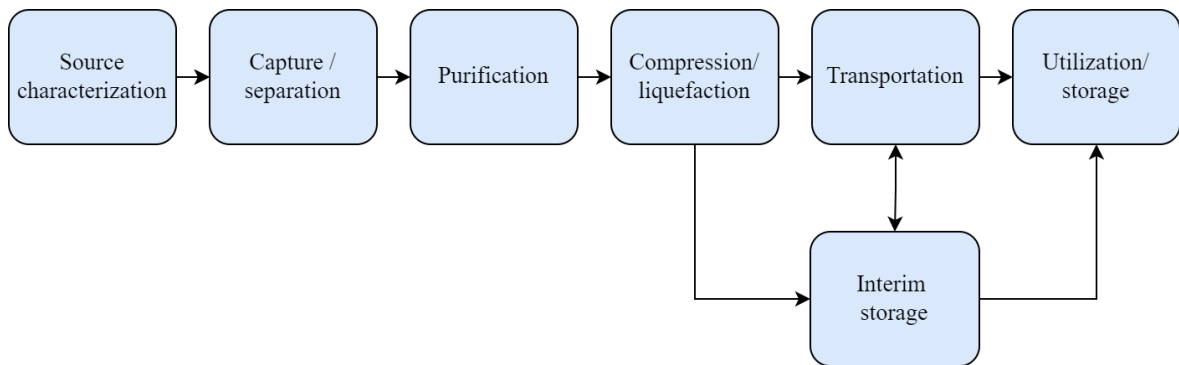


Figure 2. The common stages of CCUS.

Stages required in CCUS are case-specific and may vary. For instance, transportation may not be required if the CO₂ is utilized or stored in-situ, whereas purification required for the feed gas and/or the captured CO₂ depends on characteristics of the emission point source and the carbon capture technology in use. The common CCUS stages are reviewed in more detail below with an objective to identify technical requirements and costs of each stage.

2.1 Source characterization

Source characterization refers to assessing properties of the emission source and operating environment to identify suitable pathways for carbon capture implementation and to evaluate economics of carbon capture for the case in question. Relevant factors regarding source stream properties, desired capture performance, and the operating environment are presented in more detail in Table 2.

Table 2. Relevant factors based on which suitable pathways for CO₂ capture implementation can be identified.

Factor	Relevance
Source stream properties	
Mass flow / scale	Affects the capture technology choice due to differences in scalability. For instance, liquid absorbent processes generally scale well to large-scale, whereas modular technologies like membranes may grow too capital-intensive.
CO ₂ concentration	The most relevant factor affecting capture technology choice and capture cost. At low CO ₂ concentrations more selective and energy-intensive technologies are required, yielding higher capture cost compared to high CO ₂ concentration sources.
Present impurities	Impurities may negatively affect the capture process, e.g., via degradation of the capture substance. Purification may be needed depending on the present impurities and the capture technology in use.
Temperature and pressure	Affects the required feed gas conditioning and the capture technology choice. Feed gas cooling may be required to avoid thermal degradation or weakening of reaction kinetics. On the other hand, some technologies benefit from high temperature and pressure, e.g., Hot Potassium Carbonate (see Chapter 3.1.2).
Natural origin of CO ₂	Affects the climate impact of CCUS. Fossil-CCUS is carbon neutral at best, whereas bio-CCUS ranges from carbon neutral to carbon negative, depending on end-use application of the CO ₂ .
Desired capture performance	
Product CO ₂ purity	Affects the capture technology choice and the required conditioning after capture. The desired purity is determined by logistics and the end-use application.
Capture rate	Affects the capture technology choice and optimization of the capture process. For instance, in fossil-CCUS a high capture rate is desired as all excess CO ₂ that is not captured increases the net amount of carbon in the atmosphere, whereas in bio-CCUS capture rate may not be as relevant as the CO ₂ is considered carbon neutral, and focus can be placed on optimizing the capture process for the lowest capture cost possible rather than for high capture rate.
Operating environment	
Utilizable energy supply	Affects feasibility of carbon capture implementation, the capture technology choice, and external energy needs. Many capture technologies require low-pressure steam in addition to electricity, whereas some can be operated using low-grade heat or solely electricity. Cooling demands should be also considered.
Site restrictions	Affects the capture technology choice as the site may set restrictions for the capture system, e.g., regarding equipment footprint.
Location and readiness for CO ₂ logistics	Affects feasibility of the value chain and economics of CO ₂ logistics. Logistics is often more favorable near harbors and industrial hubs, where ships and pipelines can be utilized for cost-efficient transport.
Utility demands	Affects feasibility of carbon capture implementation and the capture technology choice. Utilities like feed gas or product CO ₂ conditioning, emission control systems, or feedwater supply may be required depending on the emission source and the capture technology in use.
Stability and flexibility of operation	Affects the capture technology choice, CO ₂ yield, and capture performance as the number and duration of shutdowns and start-ups affect capture operation.

CO₂ concentration of the feed gas is a relevant factor affecting economics of the capture process. Capture from high CO₂ concentration sources is simpler and less expensive compared to low CO₂ concentration sources, where energy-intensive capture technologies with high CO₂ selectivity are required to reach high capture performance. Several categories for source classification by CO₂ concentration have been suggested in literature (Pieri et al., 2018), generally including three to four categories for different CO₂ purity levels, e.g., low <20 %, moderate 20–90%, and high >90 %. Although high CO₂ concentration sources are the most appealing options regarding economics, majority of emission point sources, many of which are based on combustion processes, fall under the category of low CO₂ concentration sources. Also, most of the work related to carbon capture focuses on low CO₂ concentration sources.

Natural origin of the captured CO₂ affects how climate impact of CCUS is evaluated on a policy level. CO₂ of biogenic origin is part of the natural carbon cycle and therefore considered carbon neutral, whereas CO₂ originating from fossil sources adversely increases the net amount of carbon in the atmosphere. In CCU, the CO₂ is often released at the end of the product's lifecycle. Therefore, direct impact of CCU is carbon-neutral at best when utilizing biogenic CO₂, whereas fossil-CCU yields net-positive carbon emissions. However, regardless of natural origin of CO₂, CCU can provide indirect emission reductions by replacing unsustainable fossil-based production, e.g., by replacing conventional fossil fuels with sustainable alternative fuels produced via CCU. In CCS, the CO₂ is stored permanently into geological formations, preventing it from returning into the atmosphere to avoid greenhouse effect. Therefore, bio-CCS results in negative emissions as CO₂ is permanently removed from the natural carbon cycle. Fossil-CCS can reach carbon-neutrality at best, although it often results in net-positive emissions as all CO₂ emissions are not generally captured and as additional emissions may be generated in the value chain, e.g., during transportation.

Implementation of carbon capture into various industrial processes has been extensively studied in literature, based on which preliminary screening of carbon capture potential can be done to identify potential emission sources for implementation and to evaluate economics of various carbon capture pathways. In a carbon capture project, a detailed source characterization is conducted as part of the front-end engineering design (FEED) studies together with

process modelling and possibly pilot/demonstration campaigns to evaluate feasibility and techno-economic performance of the concept prior to the final investment decision.

2.2 Capture

Capture is the most widely studied stage of CCUS and generally the stage with highest impact on economics of the value chain. Capture refers to separating CO₂ from other components of the feed gas to produce a concentrated CO₂ stream. CO₂ can be captured from emission point sources or directly from the atmosphere via direct air capture (DAC). Although DAC is expected to have a significant role in climate change mitigation, point source capture is currently preferred in CCUS due to higher technological maturity and more favorable economics. In E-Fuel, we also focus on point source capture as there are several industries with potential for point source capture implementation in Finland. Figure 3 illustrates the main pathways of point source capture that are post-combustion capture, pre-combustion capture, oxy-combustion, and inherent capture.

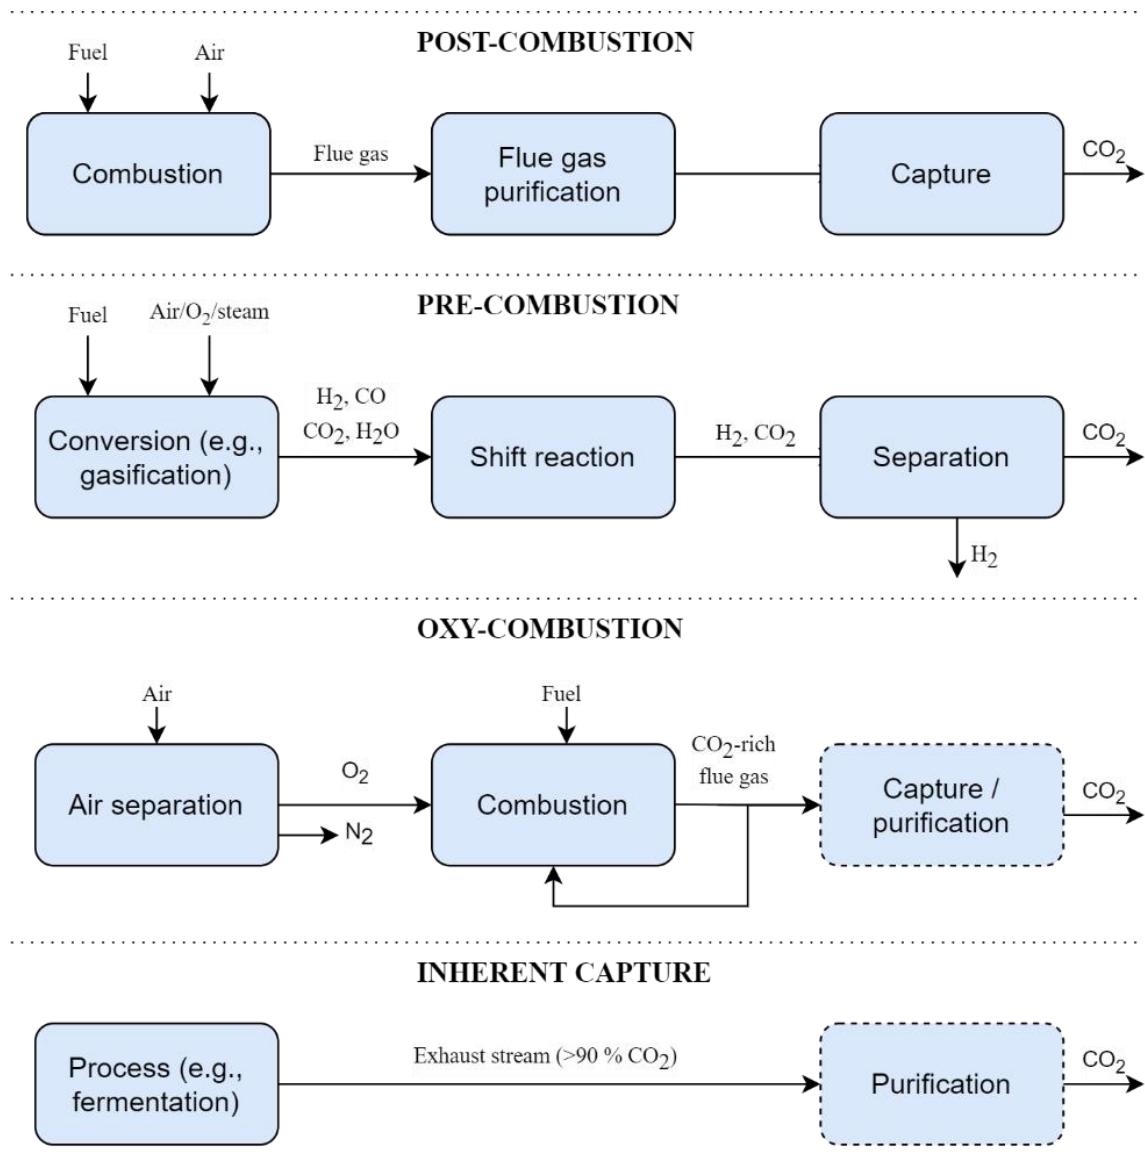


Figure 3. The main pathways of point source carbon capture. Dashed line illustrates stages that are necessarily not required.

Post-combustion capture is the most common method of point source carbon capture. It refers to capturing CO₂ from combustion flue gas or other similar exhaust streams typically with low CO₂ concentration (<20 %) and near-atmospheric pressure. Generally, post-combustion capture technologies are end-of-pipe technologies that can be retrofitted into existing processes without major modifications on the original process.

Pre-combustion capture refers to separating CO₂ prior to combustion or other utilization, e.g., by capturing CO₂ from syngas produced via natural gas reforming or gasification of

carbonaceous matter. Pre-combustion capture is a less studied subject than post-combustion capture as suitable applications for it are more limited.

In oxy-combustion, oxygen-enriched combustion conditions and flue gas recirculation are used to obtain flue gas with high CO₂ concentration, which depending on the level of oxygen enrichment can make the capture process significantly easier or enable direct capture of CO₂. However, low maturity, weak retrofittability, and high capture costs have made oxy-combustion technologies marginal in the portfolio of carbon capture technologies.

Inherent capture refers to applications, where initial CO₂ concentration of the feed gas is so high that only some gas conditioning, if any, is required to obtain CO₂ applicable for utilization or storage. There are two pathways for inherent capture: (1) processes that naturally produce exhaust streams with high CO₂ purity, e.g., ethanol fermentation, and (2) processes purposefully designed to produce pure CO₂ for direct capture, e.g., chemical looping and oxyfuel combustion. The natural pathways of inherent capture often yield the lowest capture cost of all carbon capture pathways. However, the quantitative CO₂ capture potential of such sources is low, as only few emission point sources are of such nature.

Several technologies have been developed for the different pathways of carbon capture. The technologies are based on various physical and chemical phenomena such as absorption, adsorption, membranes, electrochemical reactions, and cryogenics. Mature and emerging technology options for carbon capture are reviewed extensively in Chapter 3.

Capture is generally the most relevant stage regarding economics of CCUS. In CCS, capture costs account on average for 50–70 % of the costs deriving from capture, transport, and storage (Mazzetti et al., 2014). IEA (2019) estimates capture costs of 15–35 USD/tCO₂ (incl. compression) for high CO₂ purity streams (e.g., natural gas processing and ethanol fermentation) and 40–120 USD/tCO₂ (incl. compression) for dilute streams like combustion flue gases. However, capture costs are case-specific and depend on properties of the emission source, operating environment, and the capture technology in use. Especially CO₂ concentration of the feed gas and scale are relevant factors affecting capture cost as Figure 4 illustrates. Capture technologies suitable for fully electric operation can offer simple energy

integration, although not necessarily being the most energy- or cost-efficient option as electricity is generally more expensive than heat/steam. Technologies able to utilize low-temperature heat yield potential by allowing to cover the energy demand with waste heat.

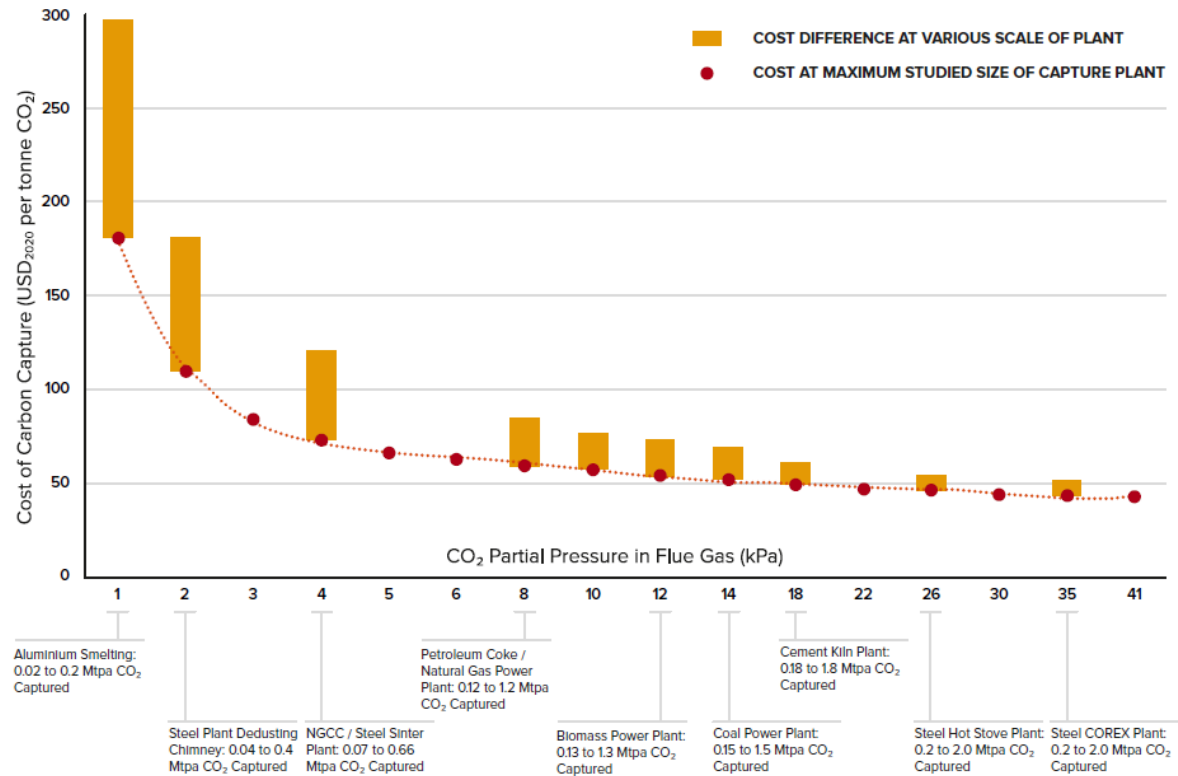


Figure 4. Impact of CO₂ partial pressure and scale on capture cost for a capture process using a 30 % MEA solvent. (Siemski, 2021).

From Figure 4 by the Global CCS Institute (Siemski, 2021) it can be observed that capture costs decrease as CO₂ partial pressure increases. With partial pressure of 1 kPa (~1 % CO₂) the capture costs range around 170–300 USD/tCO₂, falling significantly to around 70 USD/tCO₂ at 5 kPa. The capture cost decrease is not as radical at CO₂ partial pressures over 5 kPa, with the capture cost falling to 50 USD/tCO₂ at >20 kPa. Another observation is that for low CO₂ concentration sources increasing the capacity decreases the costs significantly, but with higher CO₂ concentrations the effect of the capacity is not as significant.

2.3 Purification

After capture some impurities may occur in the product CO₂. In purification, the CO₂ is conditioned to a desired purity regarding technical safety and health hazards. The desired

purity is determined by latter stages of the value chain, e.g., the transport method and the end-use application. Purification is not required if desired purity is achieved directly after capture. Nature and quantity of the impurities present in the product CO₂ depends on properties of the emission source and the capture technology in use as Table 3 shows.

Table 3. Typical composition of product CO₂ streams obtained from various carbon capture pathways. Units in ppm if not labeled otherwise. (Modified from SINTEF, 2019).

Source	Coal-fired power plant	Coal-fired power plant	Coal-fired power plant	Coal-fired power plant	Natural gas processing	Syngas processing
Technology	Amine-based absorption	Ammonia-based absorption	Selexol-based absorption	Oxyfuel combustion	Amine-based absorption	Rectisol-based absorption
CO ₂	99.8 %	99.8 %	98.2 %	95.3 %	95.0 %	96.7 %
N ₂	2000	2000	6000	2.5 %	5000	30
O ₂	200	200	1	1.6 %		5
Ar	100	100	500	6000		
NO _x	50	50		100		
SO _x	10	10		100		
CO	10	10	400	50		1000
H ₂ S			100		200	9000
H ₂			1.0 %			500
CH ₄			1000		4.0 %	7000
C ₂₊					5000	1.5 %
NH ₃	1	100				
Amine	1					

The captured CO₂ generally contains moisture and some non-condensable and inert gases (e.g., N₂, O₂, H₂, Ar). Also, pollutants originating from the emission source (e.g., SO_x, H₂S, NO_x) or the capture process (e.g., absorbent traces) may be present. Generally, the purification stage consists of moisture removal (dehydration) and removal of sulfurous compounds (desulfurization) if such compounds are present. Removal on non-condensable and inert gases may also be desirable as these compounds affect CO₂ properties, altering the design conditions of equipment like compressors and increasing compression and transport costs.

Presence of moisture causes a risk of corrosive carbonic acid formation, hydrate formation and ice formation in low temperatures, making dehydration essential to avoid damage to fluid machinery, pipelines, and storage containers. Moisture level of 500 ppm is commonly recommended for pipeline transportation of CO₂ (de Visser et al., 2008), whereas 10–50 ppm

is recommended for ship transportation (al Baroudi et al., 2021). In Northern Lights, which is a trailblazer project aiming to develop full-scale CCS infrastructure in the Nordics, a maximum moisture content of 30 ppm is used as design basis to avoid presence of free water and hydrate formation in pipelines and subsea systems (Equinor, 2019). Several methods can be used for CO₂ dehydration. Compression and interstage cooling with vapor-liquid separators is a common and simple method to remove bulk moisture to around 400–500 ppm, while also removing components with high solubility to water and components with higher boiling point than CO₂ (Aspelund & Jordal, 2007). More effective dehydration can be achieved using liquid desiccants like triethylene glycol (TEG) or solid desiccants like molecular sieves, silica gel, or activated alumina (IEAGHG, 2014). Liquid desiccants can reach moisture levels of 30–150 ppm, whereas solid desiccants can reach levels of 0.1–10 ppm. Dehydration systems can be used in series to offload the latter, more complex and expensive systems.

Presence of sulphur oxides (SO_x), hydrogen sulfide (H₂S), and nitrous oxides (NO_x) cause technical challenges and health hazards as these compounds are toxic and form corrosive acids in the presence of moisture. Regarding health and safety, a limit of 100 ppm is recommended for SO₂, 100–200 ppm for H₂S, and 100 ppm for NO_x (de Visser et al., 2008; Shirley & Myles, 2019). Often majority of these impurities are removed prior to CO₂ capture in emission control systems of the facility. Therefore, the level of these impurities in the product CO₂ are often within recommended limits, as also seen in Table 3. However, especially in CCU pathways, stricter limits may be desired, e.g., due to risk of catalyst poisoning in synthesis processes. If selective removal of sulphurous compounds from CO₂ is required, it can be done using solvents like Rectisol and Selexol or adsorbent guard beds (IEAGHG, 2014). H₂S can also be removed via selective catalytic oxidation using metal oxides (Bilskak, 2009).

Non-condensable and inert gases (e.g., N₂, H₂, O₂, Ar) do not cause safety or health hazards at moderate levels but removal may be desirable as these compounds affect critical point and density of the CO₂. These compounds alter design conditions of equipment like compressors and result in higher compression and transportation costs. Therefore, especially at large CO₂ volumes removal may be economically beneficial even if quality recommendations are otherwise met. Also in sensitive applications, such as the food and beverage industry or the

pharmaceutical industry, removal is often required to avoid deteriorative reactions and contamination. In pipeline transportation of CO₂, a limit of <4 vol-% is recommended for all non-condensable gases (de Visser et al., 2008). Removal of non-condensable and inert gases can be done using distillation or flash evaporation (Bilbak, 2009).

Cost of purification depends on the level of purification required, which is determined by purity of the CO₂ stream after capture and the desired purity regarding logistics and end-use. CO₂ conditioning costs (purification and compression) are often included to capture costs. The Global CCS Institute (Sieminski, 2021) assumes a cost range of 0–10 USD/tCO₂ for conditioning of CO₂ captured from high concentration sources, e.g., ethanol fermentation or natural gas processing.

2.4 Compression and liquefaction

CO₂ is often compressed or liquefied to obtain more efficient logistics. Processing the CO₂ into a denser phase makes handling easier and decrease the costs of interim storage and transport. Figure 5 presents the dependency of CO₂ phase on pressure and temperature. Compression and liquefaction are energy intensive processes and form a significant cost component in CCUS value chains.

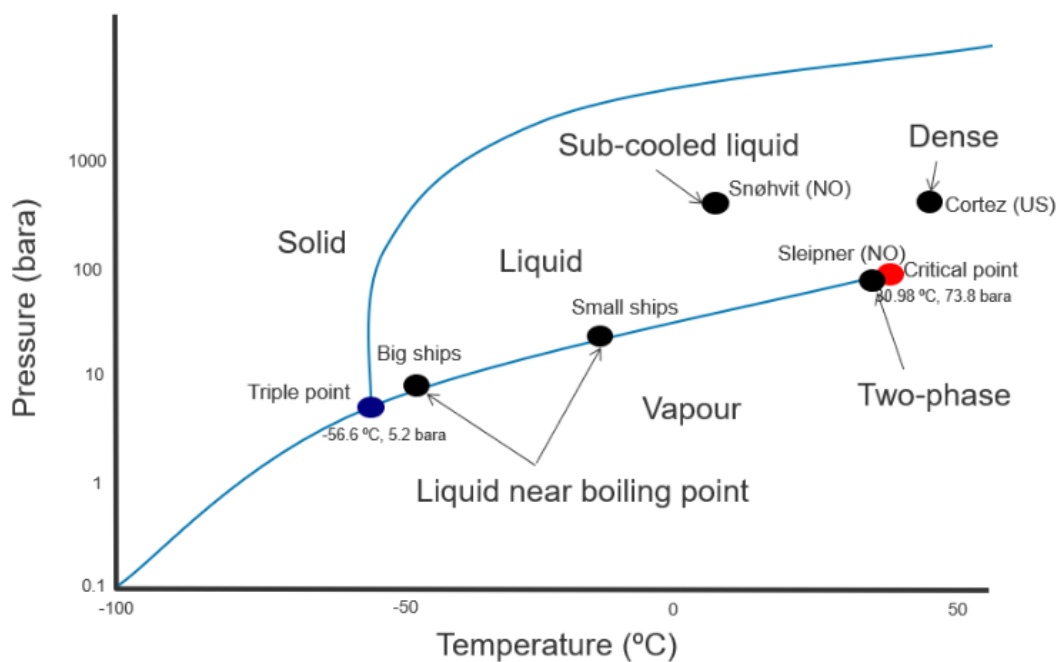


Figure 5. Phase diagram of CO₂. (EQUINOR, 2019)

There are three common conditions to store and transport CO₂ that are (1) compressed gas, (2) compressed-to-liquid, and (3) cryogenic liquid. These conditions can be achieved with several techniques depending on factors like present impurities, flow rates, available energy utilities, and the required CO₂ quality. Figure 6 presents the common pathways of CO₂ conditioning.

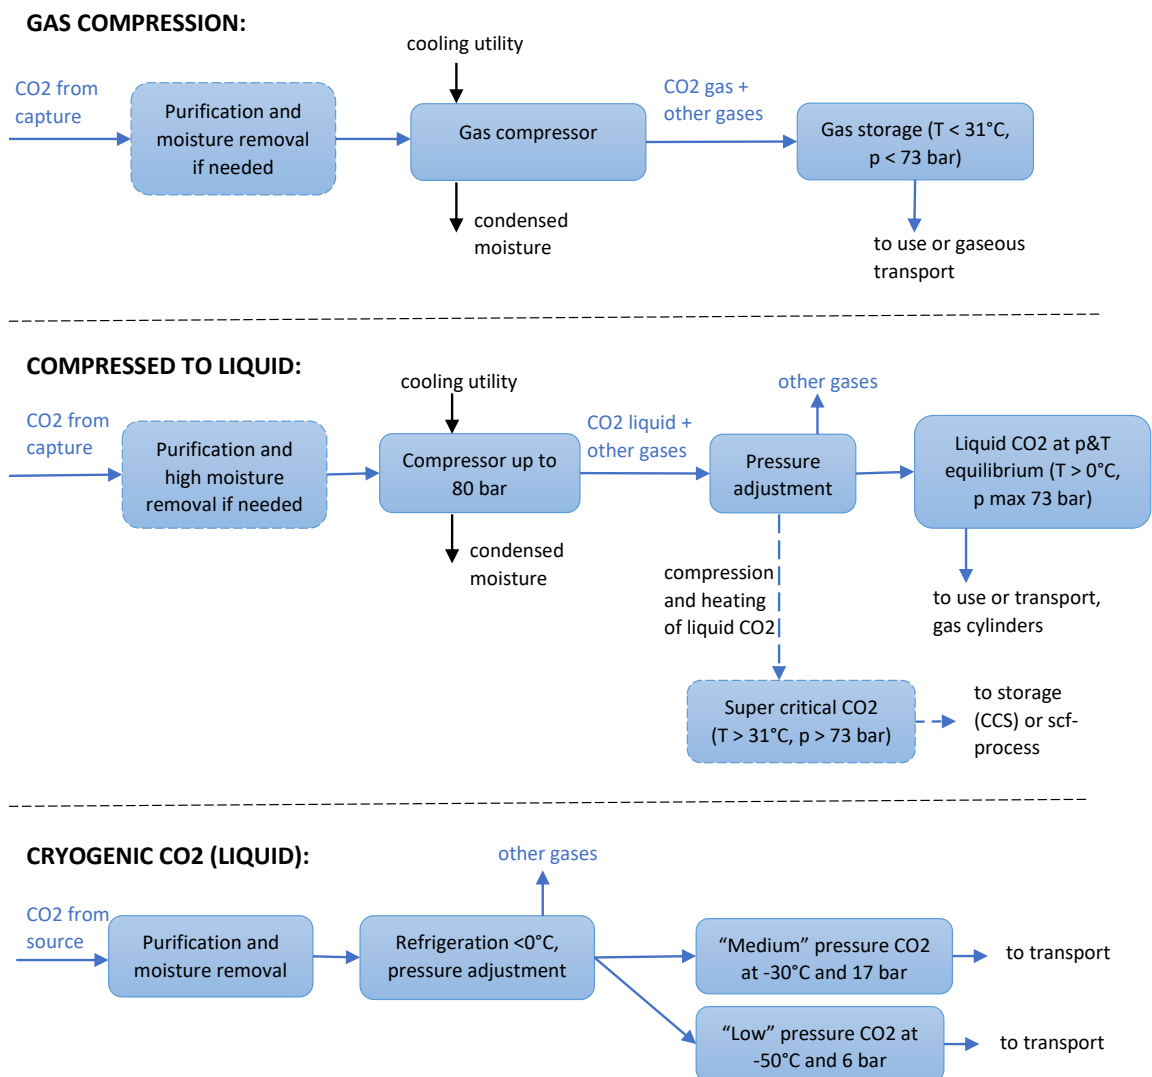


Figure 6. The common pathways of CO₂ conditioning.

In gas compression the CO₂ is kept in a gaseous phase and compressed into a denser state by increasing pressure. Other non-condensable gases (e.g., N₂, O₂, CH₄) remain in the gas, but some water-soluble impurities may be removed alongside moisture removal. Liquefaction via compression refers to liquefying the CO₂ without refrigeration systems by compressing the CO₂ to around 70–80 bar while remaining below the critical point. Compression of CO₂ to liquid is typically used in small or medium scale storages where the CO₂ is stored at an ambient temperature. By compressing and heating the CO₂ above its critical point it can be processed into a supercritical fluid (also known as dense fluid). In cryogenic liquefaction the CO₂ is liquified using refrigeration systems and some compression. Prior to refrigeration thorough pre-removal of the impurities and moisture is required.

Multi-stage centrifugal compressors with inter-stage cooling are commonly used for CO₂ compression at large volumes. Energy consumption of CO₂ compression is generally around 90–120 kWh/tCO₂ (Aspelund & Jordal, 2007). The Global CCS Institute (Sieminski, 2021) assume that compression of CO₂ to 150 bar and dehydration to 200 ppm yields costs ranging from 13 to 23 USD/tCO₂ for respective capacities of 5 to 0.4 MtpaCO₂. Often, compression costs are included to capture costs.

Cryogenic liquefaction consists of compression, refrigeration, and purification if needed. The CO₂ is compressed to transport or storage pressure, commonly to 7–20 bar, and liquified at -30°C to -50°C using an external or integrated refrigeration cycle. Cryogenic technology (see Chapter 3.5) is costly and energy intensive as generation of very low temperatures and effective insulations are required. Therefore, it is mainly used for large-scale overseas transportation at long distances. Before liquefaction, moisture content is reduced below 50 ppm to avoid freeze-out in heat exchangers, and impurities (e.g., N₂, O₂, H₂, Ar, CH₄) are removed to avoid dry ice formation and higher liquefaction costs (Aspelund, 2010). Energy consumption of liquefaction processes are around 98–106 kWh/tCO₂ (Lee et al., 2012). According to Deng et al. (2019) liquefaction at 1 MtpaCO₂ capacity yields costs of 13–20 €/tCO₂, depending on delivery pressure and CO₂ stream composition as illustrated in Figure 7.

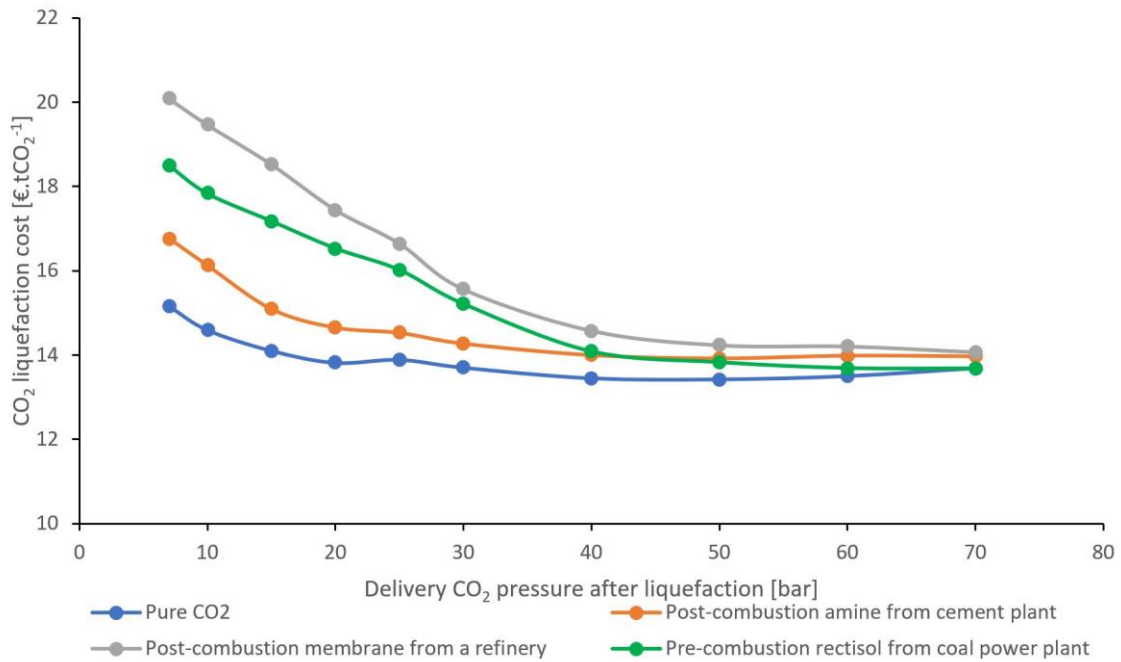


Figure 7. Liquefaction cost (€/tCO₂) of CO₂ captured from various pathways as a function of delivery pressure. (Deng et al., 2019)

From Figure 7 it can be observed that liquefaction cost (€/tCO₂) is affected by CO₂ purity and delivery pressure after liquefaction. High purity CO₂ and high delivery pressure results in lower liquefaction cost. At delivery pressure of 10–30 bar the effect of CO₂ purity on liquefaction cost is significantly higher than at 40–70 bar. With pure CO₂, the effect of delivery pressure on liquefaction cost decreases.

Chen and Morosuk (2021) evaluated four promising CO₂ liquefaction processes that can be used for port-to-port and port-offshore CO₂ ship transportation. The examined processes were three-stage vapor-compression as closed systems with propane-R290, ammonia-R717, and R134a as the working fluid, and the precooled Linde–Hampson process with R717 as an open system. Liquefaction pressure was set to 15 bar (at -30°C), which corresponds to the design of the existing CO₂ carriers. Liquefaction at a rate of 395 tCO₂/h (equivalent to 9.5 ktCO₂/d) available at 2 bar. The results showed that three-stage vapor-compression process R290 had the lowest energy consumption with CO₂ liquefaction cost 21.3 USD/tCO₂ and the cost of precooled Linde-Hampson process was 21.13 USD/tCO₂. The highest cost was using vapor-compression with ammonia-R717, 23.2 USD/tCO₂, mainly due to high capital costs.

SINTEF (Deng et al., 2019) studied high-capacity CO₂ liquefaction with ammonia refrigeration cycle to estimate the feasible CO₂ conditions in ship transport. Liquefaction was studied for a pure CO₂ stream and three CO₂ streams with impurities at a rate of 37.31 kg/s (equivalent to 1 MtCO₂/a) available at 1 bar and 40 °C. To identify the impact of CO₂ delivery pressure, technical-economic performance of the liquefaction processes was assessed for different delivery pressures post-CO₂ liquefaction (7, 10, 15, 20, 25, 30, 40, 50, 60, 70 bar). Three cases with different types and levels of impurities were also studied: (1) Amine-based post-combustion CO₂ capture from a cement plant (H₂O 3 %, N₂ 0.11 %, O₂ 0.03 and Ar 0.0003), (2) Membrane-based post-combustion CO₂ capture from a refinery (H₂O 1 %, N₂ 2 %), and (3) Rectisol-based pre-combustion CO₂ capture from a coal power plant (N₂ 0.44 %, Ar 0.09, MeOH 0.57 %, H₂ 0.45 %, CO 0.03 %, and H₂S 0.0005 %). The results showed the liquefaction cost of pure CO₂ is between 13.4 and 15.2 €/tCO₂, depending on the pressure, while a minimum lies around 40–50 bar and maximum on 7 bar. The pure CO₂ case evaluation demonstrated that at 15 bar a liquefaction cost is almost 7% lower than at 7 bar. The results also showed that the membrane-based case costs were the most affected (+3–34 %), followed by the Rectisol-based case (+0–14 %), and finally the amine-based case (+2–11 %). It was mentioned that differences between cases underline the fact that both the type and level of impurities have a significant impact on the liquefaction costs. Results showed that water impurity had less impact on the liquefaction process cost as it is condensed during the compression train and dried before the refrigeration cycle. Impurities of N₂ and Ar were more difficult to separate and those increased the energy consumption in refrigeration cycle.

2.5 Interim storage

Captured CO₂ may require interim storage before transportation, utilization, or geological storage. Common methods for interim storage of CO₂ are (1) compressed gas, (2) liquefaction via compression at >0 °C above the critical pressure of 73.8 bar, and (3) cryogenic liquefaction below 0 °C with low pressure. The suitable method of interim storage is chosen based on required storage capacity, transport method, and delivery pressure required in further stages. Generally, the most common method of interim storage is liquefaction via compression. If CO₂ is transported in large transportation capacities e.g., in ships, cryogenic liquefaction may be used already in the interim storing. With cryogenic liquid small amounts

of boil-off gases occur, which are typically cooled and liquefied back to liquid. In some cases, the cryogenic cooling uses CO₂ also as a refrigerant.

2.6 Transportation

Transportation is often needed to deliver the CO₂ to a suitable location of storage or utilization. Pipelines and ships are the primary options for large-scale transportation of CO₂, whereas road and railway transport are viable options for distribution at lower volumes. If carbon capture capacity will increase significantly, it is likely that the CO₂ transportation infrastructure will come to consist of hubs located in key areas where CO₂ captured from various sites is collected before being transported to storage or utilization sites.

2.6.1 Pipeline transportation

CO₂ is transported in pipelines as a supercritical fluid at pressure around 80–150 bar. Pipeline transportation of CO₂ is a mature technology with majority of the operational pipeline networks located in the US. The Global CCS Institute (Sieminski, 2021) estimates transport costs of 3–25 USD/tCO₂ for onshore pipelines, with the lowest cost estimated for 20 Mtpa capacity and 180 km distance and the highest cost estimated for 1 Mtpa and 300 km. Regarding economics, pipeline transportation benefits from large scale operation, i.e., large mass flows transported, as Figure 8 illustrates.

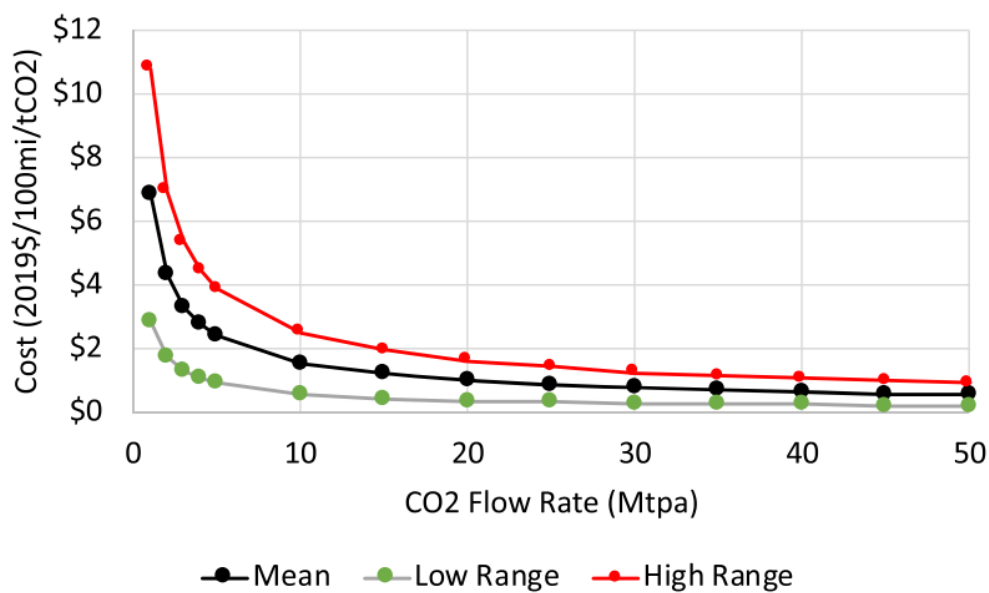


Figure 8. Cost of onshore pipeline transportation (USD/tCO₂) per a 100-mile distance as a function of CO₂ mass flow rate (Mtpa). (E. Smith et al., 2021)

From Figure 8 it can be observed that pipeline transport cost decreases as CO₂ flow rate increases. This is because pipelines are highly capital-intensive with CAPEX generally consisting of over 90 % of the pipeline costs (Global CCS Institute, 2011). Highest relative cost differences occur at low flow rates; between capacities of 1 Mtpa to 5 Mtpa the mean cost drops from \$7/tCO₂ to around \$2.5/tCO₂.

2.6.2 Ship transportation

In ship transportation CO₂ is transported at a liquid phase at pressure around 7–20 bar and temperature ranging from -50°C to -20°C. The working group of ZEP and CCSA (2022) report two primary conditions that are economically relevant to liquid CO₂ transport; a) “medium” pressure operated at conditions of 15–18 bar and -30°C and, b) “low” pressure operated at 5.5–7 bar and -50°C. So far CO₂ shipping has been done at small-scale with capacities up to 1000 m³, but infrastructure for large-scale ship transportation is currently being developed, e.g., in the Northern Lights project. Ship transportation of CO₂ has similarities to liquefied petroleum gas shipping, which is well-established and mature technology. The International Organisation for Standardization has convened a working group ISO/TC265/WG7 on the transport of CO₂ by ship in order to better understand the technical requirements for a future CO₂ shipping standard.

Costs of ship transport depends on transport capacity and distance, ranging commonly around 10–17 €/tCO₂ (Olsson et al., 2020). As shipping is not as capital-intensive compared to pipeline transportation, transport distance has lower effect on ship transport cost as Figure 9 also shows.

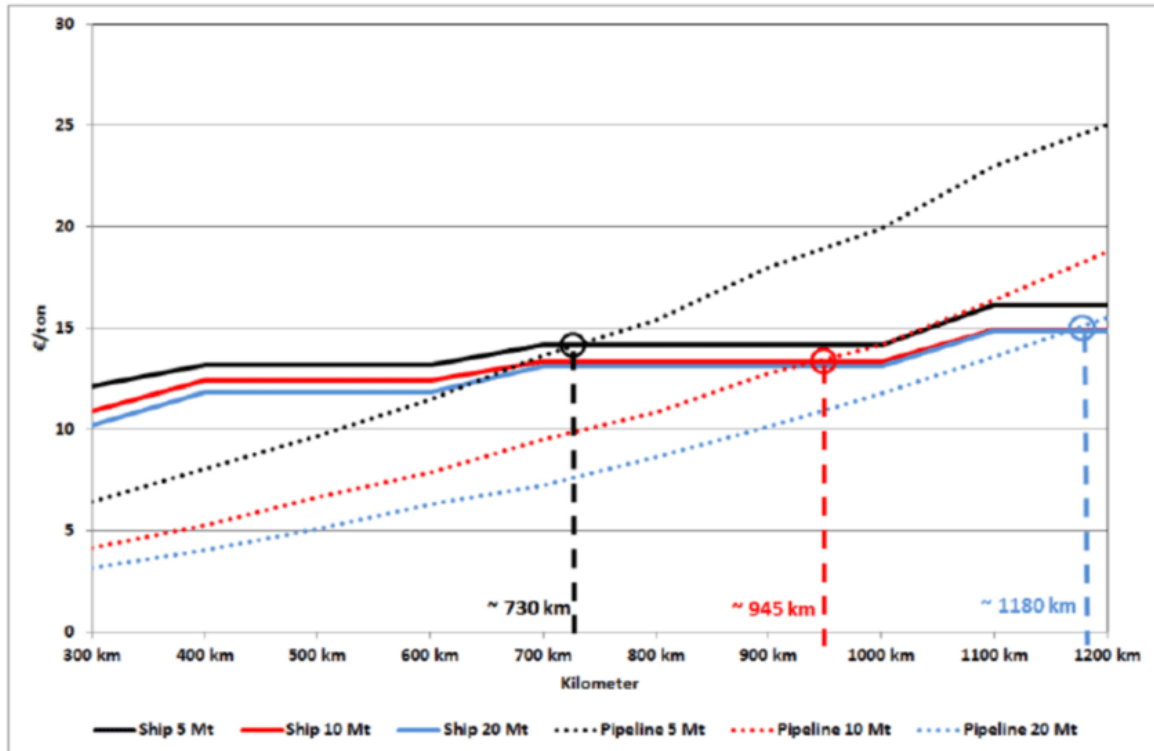


Figure 9. Cost of ship and pipeline transport (€/tCO₂) at various capacities (5/10/20 Mt) as a function of transport distance (km). The vertical dashed line represents the distance from which onwards ship transport cost is lower than pipeline transport cost. (Olsson et al., 2020)

From Figure 9 it can be observed that regarding cost, pipeline transportation is more feasible at lower distances and higher capacities, whereas ship transportation prospers at long transport distances with capacity having less effect on transport cost.

2.6.3 Road and railway transportation

Transporting CO₂ via road or railway can be used for CO₂ distribution at low transport volumes and short distances with the CO₂ being liquified and transported in tankers. Due to weak scalability, it is unlikely for road and railway transportation to have a major role in CO₂ infrastructures at large-scale, but it may be essential before CCUS logistics has matured, e.g., in demonstration projects. The low transport capacities of road and railway tankers yield significantly higher transport cost compared to pipelines and shipping. According to the National Petroleum Council (2019) truck and rail transport yields three to ten times higher costs than pipeline transportation due to lacking economies of scale.

2.7 Utilization and storage

The final stage and the primary objective of CCUS is either utilization or storage of CO₂. Utilization refers to using the CO₂ as feedstock to create benefit or value, whereas storage refers to permanently storing the CO₂ into geological formations to avoid its adverse greenhouse effect in the atmosphere. The end-use application of the CO₂ determines the desired properties regarding quantity and quality of the CO₂.

In utilization, the captured CO₂ is used to create value directly or indirectly. Direct utilization refers to using the CO₂ as it is as a component of a process, e.g., in beverage carbonation or greenhouse enrichment. Indirect utilization refers to using the CO₂ as feedstock in processing or refining to create value-added products like fuels, chemicals, or materials. CCU-based products could be used to replace conventional products based on fossil sources. Figure 10 illustrates the various pathways of CCU.



Figure 10. Pathways for CO₂ utilization. (NETL cited in Smart Specialisation Platform, 2022)

CO₂ utilization has economic appeal as value of the final product may enable benefitting from carbon capture even without incentives, which has been a major obstacle for introduction of carbon capture to commercial level. In most CCU pathways, the CO₂ is released at

the end of the product's lifecycle and thus CCU value chains do not directly provide emission reducing effects. However, CCU can indirectly provide positive climate impact if used to replace production based on fossil sources as many CCU products yield lower life cycle emissions than their fossil-based counterparts (IEAGHG, 2021).

CO₂ storage refers to permanently storing the captured CO₂ into geological formations, preventing it from being released into the atmosphere. Depending on natural origin of the CO₂ (i.e., biogenic or fossil), storage can be used to reduce the harmful fossil-based emissions or to produce negative emissions by removing biogenic carbon from its natural cycle. CO₂ can be stored into porous geological formations such as depleted oil and gas fields, saline aquifers, unmineable coal seams, and basalt formations. The CO₂ is injected underground through a well as a supercritical fluid, filling the pores of the reservoir and ultimately becoming trapped and sealed by a cap rock. To ensure storage permanence and safety, the reservoirs are monitored over the project lifecycles and at least 20 years after injection operations have been seized. The National Petroleum Council (2019) reports the costs of injection and geological storage to be around 1–18 USD/tCO₂ with the lowest cost estimated for onshore storage reservoirs and the highest for offshore reservoirs. For CO₂ monitoring and verification, Global CCS Institute (Sieminski, 2021) estimate a cost of 2–4 USD/tCO₂.

2.8 Summary and cost breakdown of CCUS stages

Objectives, methods, and indicative costs of CCUS stages are summarized in Table 4. The data is collected from multiple sources that are presented in chapters above. All costs originally reported in USD are converted to EUR using a conversion rate of 1.1 USD/EUR.

Table 4. Summary of the common stages of CCUS (carbon capture, utilization, and storage).

Stage	Objective	Method	Indicative cost, €/tCO ₂ *
Source characterization	Characterization of the emission source and operating conditions to evaluate feasibility and techno-economic performance of carbon capture	Evaluating properties of the emission stream, operating environment, and desired capture performance	
Capture	Separating CO ₂ from other gas components to be collected as a concentrated stream	Various technology choices e.g., absorption, adsorption, membranes, cryogenic separation, electrochemical separation	Dilute streams: 36–110 €/tCO ₂ (incl. compression) Inherent: 14–32 €/tCO ₂ (incl. compression)
Purification	Improving quality of CO ₂ to desired level determined by latter stages of the value chain	Dehydration via compression and inter-cooling with vapor-liquid separators or by using liquid and solid desiccants Desulphurization via solvents (e.g., Rectisol, Selexol) or adsorbents (e.g., activated carbon) Removal of non-condensables and inerts (e.g., N ₂ , H ₂ , O ₂ , Ar) via distillation or flashing	0–9 €/tCO ₂
Compression	Increasing pressure of the gas to achieve more dense and logistically efficient form	Centrifugal compressors with inter-stage cooling	12–21 €/tCO ₂ (150 bar)
Liquefaction	Converting gaseous CO ₂ into a liquid phase	Compression and refrigeration with an external or integrated refrigerant cycle (7–20 bar, -50 to -20 °C)	13–20 €/tCO ₂ (1 MtpaCO ₂)
Interim storage	Storage of CO ₂ for a finite period prior to transportation, utilization, or storage	Compressed gas, liquefied compressed gas at >0 °C, or cryogenic liquefied at <0 °C	
Transportation	Transporting CO ₂ to a location of interim storage, utilization, or geological storage	Pipeline Shipping Road- and railway (small-scale)	3–23 €/tCO ₂ 10–17 €/tCO ₂ 3–10x vs. pipeline transport
Utilization	Utilizing CO ₂ in processes or as feedstock for products to generate value	Direct (e.g., greenhouse fertilization, food and beverage carbonation) or indirect (e.g., fuels, chemical and materials)	Case-specific production cost and income
Storage	Storing CO ₂ into geological formations, preventing it from returning to the atmosphere	Injection into depleted oil and gas fields, saline aquifers, salt caverns, including monitoring	Injection and geological storage: 1–16 €/tCO ₂ Monitoring and verification: 2–4 €/tCO ₂

*All costs originally reported in USD are converted to EUR with an assumed currency conversion rate of 1 EUR = 1.1 USD.

Indicative costs of common CCUS stages are presented in Figure 11. It is noteworthy that all stages are not always necessary, whereas some stages are mutually exclusive.

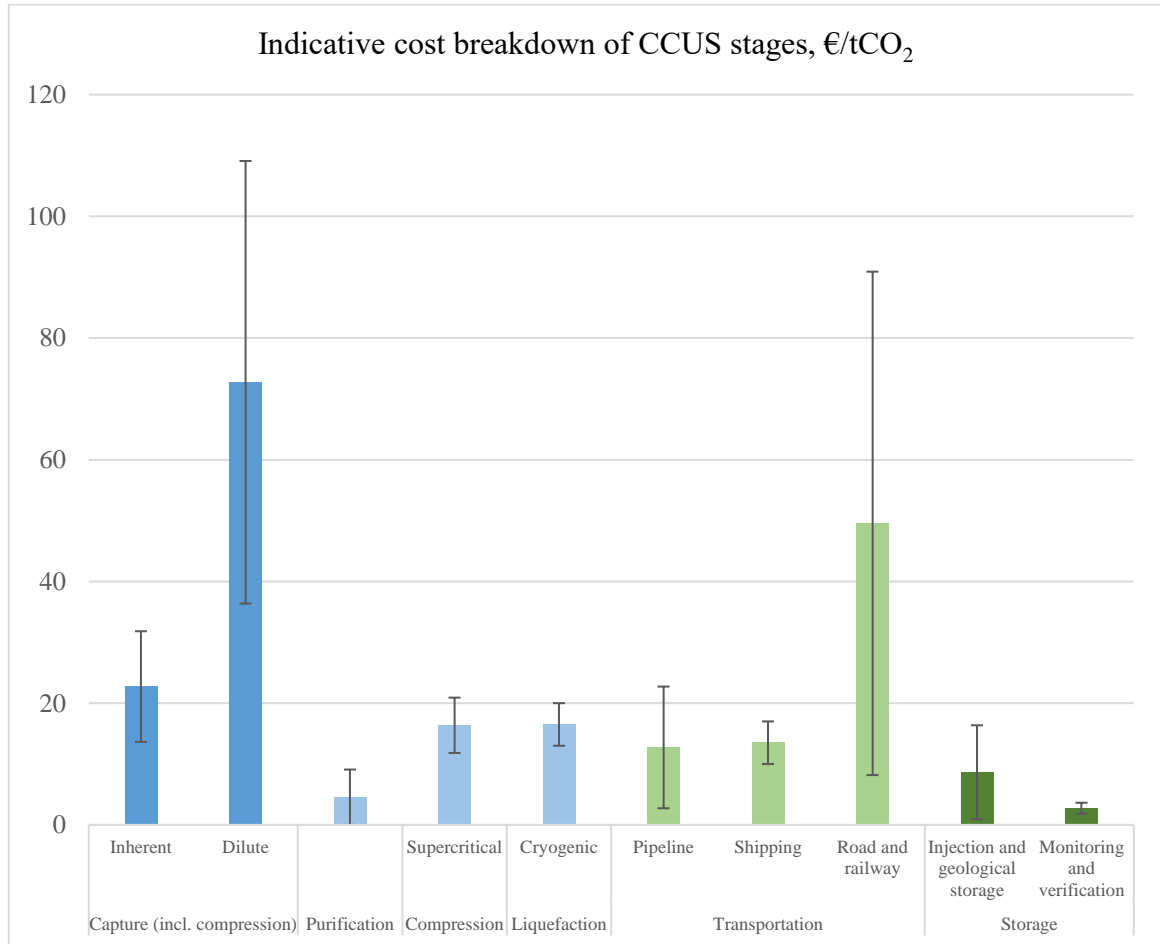


Figure 11. Indicative cost of CCUS stages based on estimates collected from literature. The colored bar illustrates the average cost, whereas the error bar presents the range of minimum and maximum cost.

As Figure 11 shows, costs of CCUS derives from several stages. Capture is often the most impactful stage on cost unless possibilities for capture from high CO₂ purity sources are available. Required purification depends on purity of the product CO₂ after capture and desired quality determined by latter stages but generally purification cost is only a fraction compared to capture cost. CO₂ conditioning via compression or liquefaction is energy-intensive, also deriving a major cost component. Cost of transport, which at large scale is primarily done by pipelines or ships, depends on transport capacity and distance. Road and railway transport is expensive and lacks economies of scale, making it unappealing at large scale. Cost and income deriving from CO₂ utilization is dependent on the application and is

difficult to estimate at a general level. Cost of geological storage of CO₂ depends on factors like volume and quality of the stored CO₂ and properties of the storage site, e.g., onshore vs. offshore, existing infrastructure, and knowledge on site characteristics.

Indicative costs collected from literature can be used to roughly estimate the total cost of various types of value chains. Based on estimates collected from literature, a CCS value chain consisting of post-combustion capture, purification, liquefaction, ship transport and geological storage would yield a total cost of 50–154 €/tCO₂, averaging around 102 €/tCO₂. If supercritical compression and pipeline transport is used instead of liquefaction and shipping, the value chain yields a total cost of 42–161 €/tCO₂, averaging around 101 €/tCO₂. Table 5 shows how the costs are distributed between different stages.

Table 5. Distribution of CCS cost between different stages based on estimates collected from literature.

Value chain	CCS, ship transport	CCS, pipeline transport
Total cost	50–154 €/tCO ₂	42–161 €/tCO ₂
Capture (post-combustion, excl. compression)	49–57 %	55–59 %
Purification	0–6 %	0–6 %
Liquefaction	13–26 %	-
Compression (supercritical)	-	13–28 %
Transport	11–20 %	7–14 %
Storage	5–13%	7–12 %

Based on estimates collected from literature, on average, cost of CCS and cost distribution of the stages are similar whether supercritical compression and pipeline transport or liquefaction and shipping is used.

3 REVIEW ON CARBON CAPTURE TECHNOLOGIES

There are several types of technologies available and in development for carbon capture as Figure 12 shows. In this chapter, we review the most mature and promising technologies, focusing on status, techno-economic performance, and future perspectives. We focus primarily on post-combustion capture that generally offers a straightforward and retrofitable option for point source capture at industrial applications, with emphasis on technologies that have reached pilot-scale or higher ($TRL \geq 6$) and have ongoing development. The objective is to map potential technology options for point source carbon capture.

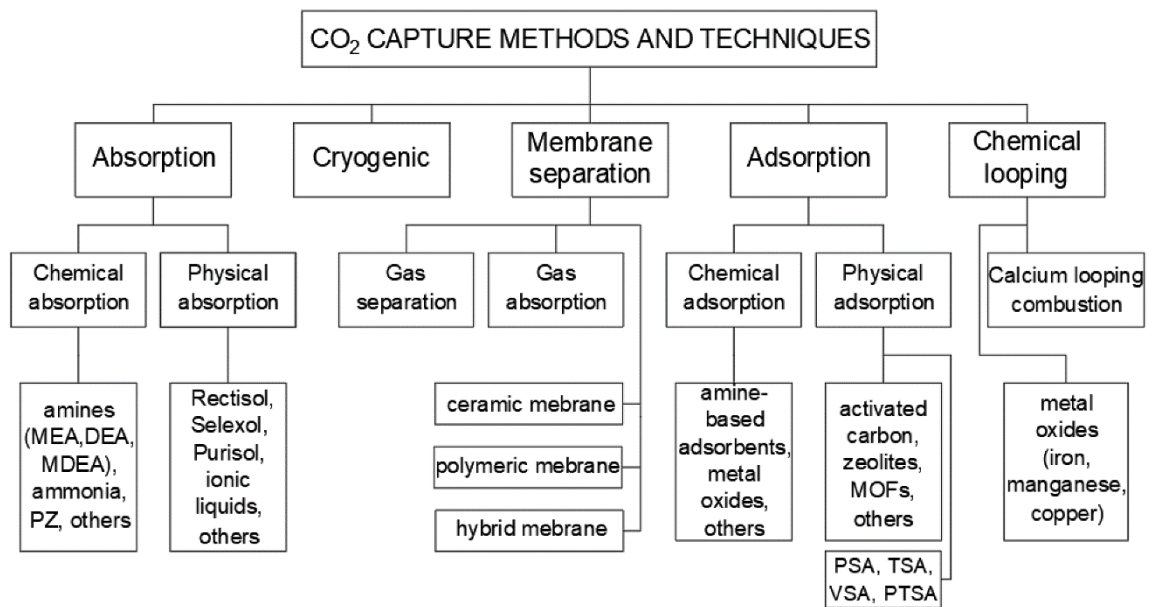


Figure 12. Common methods and techniques for carbon capture (Madejski et al., 2022).

In carbon capture various chemical and physical phenomena can be utilized, e.g., absorption, adsorption, membranes, electrochemical reactions, and cryogenics. Technologies based on these phenomena can often be divided into more precise subcategories, which in turn may contain several types of technology configurations. We review the following technologies in more detail: absorption via liquid solvents, adsorption using solid sorbents, membrane separation, electrochemical separation, cryogenic separation, and inherent capture.

3.1 Liquid solvents

Solvent-based capture is the most common technology for carbon capture. Liquid solvents are CO₂-absorbing chemical mixtures that are used in a cyclic capture process consisting of two primary stages that are absorption and desorption. In absorption, the CO₂-rich target gas stream is mixed into the solvent typically using packed bed columns (Wilcox, 2012). The solvent then absorbs the CO₂ via physical and/or chemical absorption. In desorption, the CO₂ is released from the solvent, which is regenerated commonly via heating or flash evaporation. After regeneration, the CO₂-lean solvent is cycled back to absorption.

Several types of solvents have been developed for carbon capture, e.g., amines, carbonate salts, physical solvents, phase-changing solvents, water-lean solvents, and ionic liquids. Generally, capture solvents are aqueous meaning that a CO₂-binding absorbent is dissolved to water. A significant challenge of solvent-based capture is the high energy demand deriving from solvent regeneration, which often requires heating large volumes of liquid. Energy consumption is the most significant cost factor, accounting for 60–75 % of the capture cost (Roussanaly et al., 2018). Aiming to reduce regeneration energy demand, alternative solvents such as water-lean and phase-separating solvents have been developed. Water-lean solvents use non-aqueous liquid mediums with lower specific heat capacities than water, whereas phase-separating solvents form CO₂-rich and CO₂-lean solvent phases that can be separated. However, maturity of these alternative solvents is still low compared to aqueous solvents and benefit in economic performance is uncertain (Just et al., 2021). Mature and promising solvents are reviewed in more detail below.

3.1.1 Amines

Amines are the most mature absorbents in solvent-based capture, having been used in industrial gas purification applications for decades. Amines are derivatives of ammonia (NH₃) with one or more of the hydrogen atoms substituted by an organic group. Depending on the number of substitutions, amines can be categorized into primary (R₁NH₂), secondary (R₁R₂NH), and tertiary amines (R₁R₂R₃N). Primary amines like monoethanolamine (MEA) have one carbon bonded to the nitrogen, secondary amines like diethanolamine (DEA) have two, and tertiary amines like methyldiethanolamine (MDEA) have three. Cyclic amines (e.g., piperazine PZ) refer to secondary and tertiary amines connected to a form of a ring.

Sterically hindered amines (e.g., 2-amino-2-methyl-1-propanol AMP) refer to primary amines with the amino group attached to a tertiary carbon atom and secondary amines with the amino group attached to secondary or tertiary carbon atom (Sartori & Savage, 1983). Primary and secondary amines react with CO₂ forming carbamates, while tertiary and sterically hindered amines form bicarbonates. Carbamate formation is rapid with high heat of absorption, whereas bicarbonate formation results in higher CO₂ loading and lower heat of absorption but with slower kinetics (P.-C. Chen et al., 2021; Rochelle, 2016). Sterically hindered amines benefit from moderately fast absorption kinetics while maintaining high CO₂ loading and low heat of absorption (DOE & NETL, 2015).

Generally, amines possess many favorable qualities for carbon capture such as high CO₂ absorption capacity, rapid transfer kinetics, good reversibility, and high product CO₂ purities. Amines can reach high capture efficiencies even with gases of low CO₂ partial pressure, making them favorable for post-combustion capture. Despite high maturity and favorable qualities, amines face drawbacks such as energy-intensive regeneration, volatility, toxicity, and corrosivity. Many of these challenges have been improved with advanced solvents and process configurations but remain relevant in development of amine-based capture.

Variety of amines and amine-blends have been developed for carbon capture and there are several commercially available amine-based technologies, e.g., by Mitsubishi Heavy Industries, Shell, Fluor, BASF, and Aker Carbon Capture. An aqueous blend of 30 wt. % monoethanolamine (MEA) has been long considered as the benchmark technology of carbon capture due to high maturity and performance. An advanced amine blend of piperazine (PZ) and amino-2-methyl-1-propanol (AMP) – referred to as CESAR1 – has been suggested as the new benchmark technology due to having outperformed MEA in recent studies (IEAGHG, 2019). PZ is a cyclic diamine with rapid transfer kinetics, whereas AMP is a sterically hindered amine with high CO₂ loading and low heat of absorption. Commercial solvents like Shell's Cansolv, MHI's KS-1 and KS-21, and Fluor's Econamine FG+ are also promising. However, these solvents are difficult to evaluate in similar manner as MEA and CESAR1 as composition of these proprietary solvents is not reported in detail.

Amine-based solvents are typically regenerated at 100–150 °C using low-pressure steam. Conventional solvents based on primary and secondary amines suffer from energy-intensive thermal regeneration due to high absorption heat of carbamate formation. However, significant reductions in regeneration energy demands have been achieved with advanced solvents like sterically hindered amines or conventional amines promoted with additives. For the conventional aqueous 30 wt.-% MEA blend reboiler heat duties around 3.6–4.0 GJ/tCO₂ have been reported (Bui et al., 2018), whereas advanced solvents like Shell's Cansolv and MHI's KS-1 and KS-21 have reached reboiler duties around 2.3–2.6 GJ/tCO₂ (IEAGHG, 2019; Singh & Stéphenne, 2014).

Amines are prone to degradation, which leads to solvent losses and toxic degradation products such as ammonia, nitramines, and nitrosamines (Buvik et al., 2021). Degradation has been identified to be caused by heat and presence of CO₂, O₂, SO_x and NO_x (Vega et al., 2014). Thermal degradation occurs mainly in the stripper due to combination of high temperature (>100 °C) and high partial pressure of CO₂. Purification of SO_x and NO_x is required prior to capture to avoid degradation caused by these impurities. To mitigate the toxic solvent-based and degradation-based emissions, emission control systems such as water or acid washing may be required (Monteiro et al., 2020). Flue gas cooling to around 40 °C prior to capture is common as higher CO₂ loadings are achieved in lower absorber temperatures (Kvamsdal et al., 2011).

Performance of 30 wt. % MEA and CESAR1 (~26.74 wt. % AMP, ~12.92 wt. % PZ) were evaluated in the ALIGN CCUS project (Moser et al., 2020, 2021). Two long-term post-combustion capture pilot campaigns with a ~13,000 h runtime and 7.2 tpd capture capacity were conducted using both solvents at a lignite-fired power plant in Niederraussem, Germany. A minimum specific heat demand of 2.97 GJ/tCO₂ was reported for CESAR1 and 3.45 GJ/tCO₂ for MEA. Degradation of CESAR1 showed a slowly progressing linear nature, whereas degradation of MEA shifted from linear to exponential after 220 days of operation. Solvent consumption of 0.45 kg/tCO₂ was identified for CESAR1. For MEA solvent consumption less than 0.3 kg/tCO₂ was identified before the exponential degradation phase occurred. Using an emission mitigation system referred to as the dry bed configuration, following emissions were reported in the CO₂-lean flue gas with a CESAR1 solvent: 15–20

mg/Nm³ AMP, 3–7 mg/Nm³ PZ, and <3 mg/Nm³ NH₃. With MEA, emissions of <3 mg/m³ MEA and 20–40 mg/m³ NH₃ were reported. Economic performance of the two solvents were evaluated via process modelling based on the pilot test results (Garcia et al., 2021). With a 90 % capture rate in the lignite-fired reference plant, capture cost of 31.5 €/tCO₂ was calculated for MEA and 32.2 €/tCO₂ for CESAR1. Garcia et al. (2021) suggest that CESAR1 should not be promoted to benchmark technology as there seems to be no clear performance advantage over MEA. They state that both are viable solvents and that the solvent choice is a case-by-case matter. Solvent cost of CESAR1 is significantly higher compared to MEA (8100 €/t vs. 2100 €/t), but due to lower specific energy demand CESAR1 may be a favorable option when the heat costs are high or if heat availability is limited.

3.1.2 Carbonate salts

Carbonate salts such as potassium and sodium carbonate (K₂CO₃, Na₂CO₃) are promising, eco-friendly absorbents for carbon capture. Alkaline solutions based on carbonate salts have been widely used in industrial gas purification applications to remove acidic gases like CO₂ and H₂S. Carbonates react with CO₂ via chemical absorption by forming bicarbonate salts. Advantages of carbonates over amines are low toxicity and corrosivity, common and inexpensive absorbent materials, high degradation resistance and low regeneration energy demands (K. H. Smith et al., 2016).

Potassium carbonate is the most widely studied carbonate salt in carbon capture. It can withstand high temperatures, enabling absorption at elevated temperatures. This is beneficial regarding energy efficiency as the process does not require radical temperature changes between absorption and desorption. Also, flue gas cooling demand is lower or not necessarily required at all. Bicarbonates can be regenerated under a vacuum at around 60–80 °C, allowing the regeneration heat demand to be supplied using low-grade heat (e.g., waste heat) instead of steam. SO_x and NO_x treatment is not critical prior to capture as carbonates react with these impurities by forming heat stable salts that could be recovered via a purge stream, although the presence of these impurities increases absorbent consumption. Carbonates do not react with oxygen nor does oxidative degradation occur. A major disadvantage of carbonate salts is weak transfer kinetics, which is why higher solvent flow rates and larger equipment may be required to reach equivalent capture performance as with amines.

However, absorption kinetics can be improved with promoters and catalysts. Another challenge is presented by precipitation of bicarbonates, which have lower solubility to water than carbonates. With too high absorbent concentrations unwanted precipitation may occur, causing a risk of clogging. Technologies that utilize precipitation or crystallization to separate the CO₂-rich and CO₂-lean phases of the solvent have also been developed. This however requires more complex equipment to handle the solid masses. Capture technologies using carbonate salts as CO₂ absorbents have been developed, e.g., by CO₂ Capsol, Saipem, KC8 Capture Technologies, Kleener Power Solutions, VTT, Baker Hughes, and Honeywell.

Capsol EoP (end-of-pipe) by CO₂ Capsol is based on the hot potassium carbonate (HPC) process, which is a derivative technology of the Benfield process used to remove acidic gas components from industrial gases. The technology is currently at TRL 8 in post-combustion capture and TRL 9 in syngas applications i.e., pre-combustion capture. Figure 13 presents a schematic flow diagram of the process. The feed gas is pressurized to 8–20 bar with absorption taking place at an elevated temperature of 110–120 °C using an aqueous potassium carbonate solvent (Hamrin, 2016). Elevated pressure and temperature improve bicarbonate solubility, allowing to use high absorbent concentrations, thus improving capture efficiency. After absorption, the solvent is led to a desorber via an expander or control valve at 1–3 bar and regenerated using a reboiler that can be heated with steam, electricity, or both. CO₂ Capsol has improved energy efficiency of the HPC process by using steam recycling in the desorber.

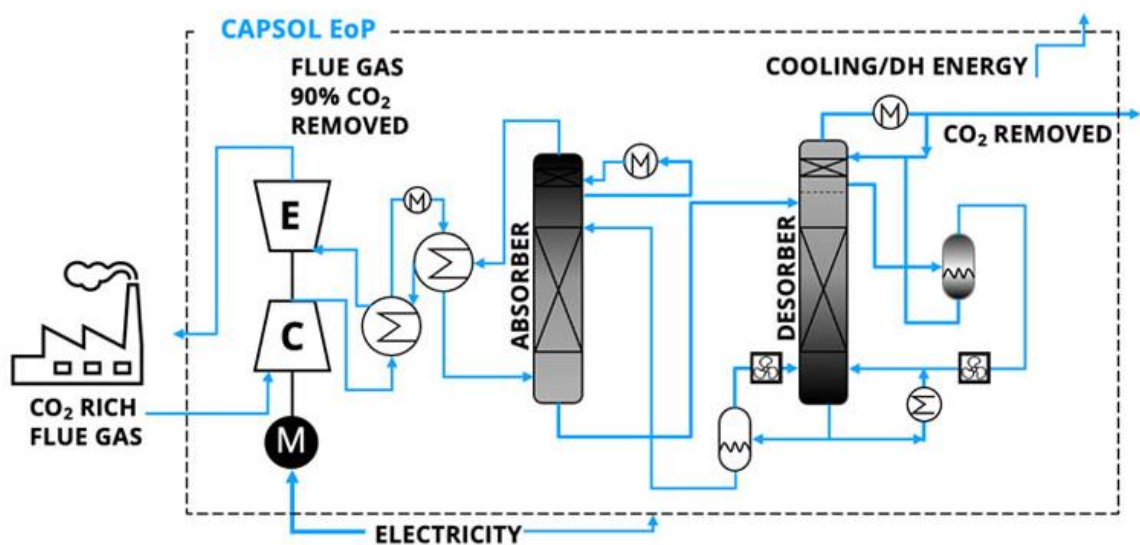


Figure 13. A schematic flow diagram of the Capsol EoP process. (HZ Inova, 2022)

Energy consumption of the Capsol EoP process is estimated around 0.7–1.5 GJ/tCO₂, depending on flue gas properties. Capture cost is estimated to be 30–37 USD/tCO₂ with a capture rate of 90–95 % (CO₂ Capsol, 2022). The hot potassium carbonate technology has been successfully piloted in post-combustion capture at Stockholm Exergi's Värtaverket CHP plant (Beccs Stockholm, n.d.; Bryngelsson & Westermark, 2009). European Union granted funding to a project aiming to scale-up the process to full scale at the 375 MW Värtaverket bio-CHP plant.

CO₂ Solutions by Saipem is a technology where the weak absorption kinetics of potassium carbonate has been enhanced with a natural enzyme catalyst. The aqueous potassium carbonate solvent is catalyzed with a proprietary carbonic anhydrase enzyme named 1T1. The solvent can be regenerated at ~85 °C, allowing to use low-grade heat like waste heat in regeneration (Surprenant, 2019). Thermal energy demand is estimated at 2.4 GJ/tCO₂. Capture cost is estimated to be 28 \$/tCO₂, although with an assumption that the waste heat used in regeneration does not yield any costs (Fradette et al., 2017). The technology has been successfully piloted at several industrial sites. Currently, a commercial project capturing 30 tpd from Resolute's kraft pulp mill in Quebec is in operation. The technology is also demonstrated at TRL 7 with 2 tpd capture capacity at Store Enso's pulp mill in Sweden and a cement kiln in Poland as part of the EU-funded ACCESS project (CORDIS, 2021).

UNO MK 3 by KC8 Capture Technologies is an absorption technology based on a catalytically enhanced potassium carbonate solvent (KC8, 2022). Unlike in conventional solvent-based capture processes, the potassium bicarbonate formed in CO₂ absorption is allowed to precipitate, enabling to separate the CO₂-rich phase from the solvent. This allows using higher solvent concentrations, greater CO₂ loadings and lower circulation rates, reducing energy requirement of the process. Regeneration energy requirement of the process is estimated at 2–2.5 GJ/tCO₂. According to the company, the retrofittable UNO MK 3 process can achieve capture rates of >95 % in industrial pre- and post-combustion applications. The process has been piloted at the brown coal fired Hazelwood Power Station in Australia (K. H. Smith et al., 2017). KC8 has partnered with Cement Australia in project PACER, which

includes installing a demonstration plant to a cement facility in Gladstone during 2023 (AFR, 2022).

Chilled Ammonia Process (CAP) is an ammonia-based capture process developed by Alstom that is currently owned and marketed by Baker Hughes. CAP has been previously studied as a precipitating process, but current development focuses on non-precipitating operation. The aqueous ammonium solvent consists of ammonium carbamate, ammonium bicarbonate, ammonium carbonate and some free ammonia. Steam is typically used as an energy supply for the high-pressure regeneration, but also other high-temperature heat sources or electrical heating can be used. The process produces high purity CO₂ (>99.5 %) at an elevated pressure of 14–25 bar, thus reducing downstream compression demands. Advantages of CAP are low oxidative, thermal, and impurity-related degradation and the use of low-cost, non-proprietary absorbent that is a global commodity. Challenges include controlling the hazardous ammonia-based emissions that are reduced by chilling the solvent. CAP has been validated with a design capacity of up to 100 ktpaCO₂, reaching currently a TRL of 7. Demonstration at TCM with refinery cracker off-gas (13–15 % CO₂) resulted on a specific thermal energy consumption of 2.6 GJ/tCO₂ and ammonia emissions of <10 ppm (Augustsson et al., 2017). A specific heat energy consumption of 2.2 GJ/tCO₂ was determined when cooling water at adequate temperatures is available.

VTT has developed an enhanced soda scrubbing process combining a novel absorber configuration and low-temperature regeneration. An eco-friendly solution of aqueous sodium carbonate is used to capture CO₂ via chemical absorption. Instead of using a conventional absorber column, an ejector-like micro-bubble generator has been developed to create a large contact area for the solvent and feed gas. The micro-bubble generator can also reduce equipment size and capital cost. Absorption takes place at 1.2–1.7 bar and 30–40 °C. The solvent is regenerated under a 0.2–0.5 bar vacuum at a temperature of 60–80 °C, allowing to use low-grade heat as a regeneration heat supply. The process has been successfully tested at bench/small pilot scale (TRL 5) in post-combustion capture at realistic conditions (Linjala, 2021).

Kleener Power Solutions has developed a proprietary alkaline capture solvent called the Kleener-liquid, which is manufactured from power plant ashes. The solvent has been operated using VTT's enhanced scrubbing process that has been licensed to Kleener Power Solutions. The solvent has high thermal stability, allowing to operate absorption at an elevated temperature around 50–65 °C. Regeneration is done at 0.2–0.5 bar and 60–80 °C. Regeneration heat can be supplied using low-grade heat like waste heat. As absorption and desorption can be operated at similar temperature levels, an energy efficient capture cycle with minimal heating and cooling demands can be achieved. The company has estimated energy consumption of the process at 2.6 GJ/tCO₂ and capture cost at 29 €/tCO₂ (Kleener, 2021). Kleener-liquid scrubbing has been successfully tested in post-combustion capture at bench scale (Linjala, 2021). A 2 ktpd pilot system is currently under construction.

3.1.3 Phase-separating solvents

Phase-separating (aka phase-changing or precipitating solvents) go through a phase change upon CO₂ absorption or change in process conditions. Depending on the solvent, the CO₂-rich phase may precipitate to a solid or form a separate liquid phase, which can be separated from the CO₂-lean solvent, thus reducing regenerated solvent volume and regeneration energy demand compared to conventional solvent processes. Challenges of phase-separating processes include adequate gas and solvent contact and process design regarding solid or slurry handling. Carbonate salts (e.g., K₂CO₃, (NH₄)₂CO₃), amino acids, tertiary amines, and ammonia can be used as CO₂ absorbents in phase-changing solvents.

DMX is phase-separating capture process developed by IFPEN and marketed by Axens. The process uses an aqueous solution of two organic compounds that separate under certain conditions of temperature and CO₂ partial pressure. After absorption the phases are separated, and the CO₂-rich phase is led to regeneration. The DMX solvent has high stability, and it can be regenerated at higher temperature than amines such as MEA. Desorption can be done at an elevated pressure, producing CO₂ up to 7 bar, which can reduce downstream compression cost. The solvent is mentioned to be less corrosive than MEA, allowing to use carbon steel as the principal material, which reduces capital cost. A capture rate of >95 %, product CO₂ purity of >99 %, and steam energy consumption of 2.3–2.9 GJ/tCO₂ depending on application and capture rate have been reported for the DMX process (Kearns, 2022). Capture

cost is estimated at 30–40 €/tCO₂ (ArcelorMittal, n.d.). The process is demonstrated at TRL 7 at ArcelorMittal's steel plant in Dunkirk as part of the EU-funded 3D project (3D, 2023).

3.1.1 Physical solvents

Physical solvents can be used capture CO₂ via physical absorption, where the CO₂ dissolves into the solvent without chemical reactions. To achieve high capture capacity, physical absorption requires high partial pressure of CO₂. Therefore, physical solvents are mainly suitable for pre-combustion capture applications (e.g., natural gas and syngas processing) where higher CO₂ concentrations occur compared to post-combustion. Solubility of CO₂ into the solvent is mostly affected by partial pressure of CO₂ and temperature. As Henry's law states, higher partial pressure of the solute results in greater amount of dissolved gas. Also, solubility of CO₂ increases as temperature decreases. In absorption, temperature is typically kept at room temperature or less and pressure is raised to improve CO₂ solubility. Desorption is typically done with pressure reduction and/or temperature increase. There are several commercially available physical solvents for CO₂ removal/capture that are used in refineries, natural gas upgrading, syngas processing and fertilizer production. Common physical solvents include Selexol (a mixture of dimethyl ethers of polyethylene glycols), Rectisol (methanol), Fluor (propylene carbonate) and Purisol (N-methyl-2-pyrrolidone).

CarbonReUse Finland has developed an enhanced water scrubbing process that uses plain water as a physical solvent in post-combustion capture. Water scrubbing is a mature technology for CO₂ removal from biogas, but a novel concept in carbon capture. In CarbonReUse's process the solvent water is cooled down to 5 °C and the feed gas is pressurized to 4–5 bar to improve the weak absorption capacity of plain water. Before absorption, water-soluble impurities like SO₂ and HCl are removed in a pre-scrubbing water-wash section. Regeneration is done via flash evaporation at 0.3–0.8 bar. Energy consumption of the fully electric process has been estimated at 0.34–0.40 MWh/tCO₂. Advantages of water scrubbing are simplicity of retrofit with plug-in energy integration and a low-cost, eco-friendly, and non-volatile solvent. The biggest disadvantage is the low CO₂ solubility of water leading to large volume flows. The process is currently at pilot level (TRL 6), and it has been successfully tested at several industrial sites in Finland. In small pilot tests with biomass combustion

flue gases at 2 kgCO₂/h capacity a product CO₂ purity of 97 vol-% with <20 ppm of N₂O was reported (Linjala, 2021).

3.2 Solid sorbents

Solid sorbents are promising alternatives to liquid solvents with potential to reduce energy requirements and capture costs as sorbent regeneration does not require heating large liquid volumes. In adsorption, the CO₂ binds onto the sorbent's surface via physical or chemical adsorption. In physical adsorption weak van-der Waals forces occur, whereas stronger chemical bonds take place in chemical adsorption. Challenges of sorbent-based capture include heat and flow management and durability of sorbent materials.

Adsorption technology has been used in industrial gas purification, for instance, to remove CO₂ and H₂S from natural gas and synthesis gas. In carbon capture, there is significantly less activity compared to solvent-based capture, but some adsorption-based technologies have emerged to near commercial level. Solid sorbents have been studied in post- and pre-combustion, as well as direct air capture. Several sorbent materials have been studied for carbon capture, e.g., activated carbons, amine supported materials, zeolites, carbonates, and metallic organic frameworks. Characteristics of the sorbents differ regarding CO₂ selectivity, lifetime, impurity-tolerance, thermal stability, and cost. Suitable sorbent choice depends on operating conditions and desired capture performance.

Solid sorbents are used in a cyclic adsorption/desorption process. The feed gas is led into the sorbent bed, for which several configurations have been studied, e.g., fixed, rotating, or fluidized. Typically, the feed gas must be pre-treated to remove excess moisture. After the sorbent is saturated, it is generally regenerated with temperature swings in chemical adsorption and pressure or vacuum swings in physical adsorption. Chemical adsorbents suffer from slow reaction kinetics, but high selectivity makes them suitable for low CO₂ concentration streams. The strong chemical bonds also make regeneration more energy intensive. Physical adsorbents have faster kinetics but weak selectivity and CO₂ loading, making them more suitable for high CO₂ concentration streams. Sorbent-based capture processes are generally categorized based on the regeneration method into temperature-swing adsorption (TSA), pressure-swing adsorption (PSA) or vacuum-swing adsorption (VSA) that are illustrated in

Figure 14. Temperature and pressure swings may also be combined for more rapid regeneration. Also, electrical-swing adsorption (ESA) has been studied but it is considered unsuitable for treating large gas volumes (IEAGHG, 2019).

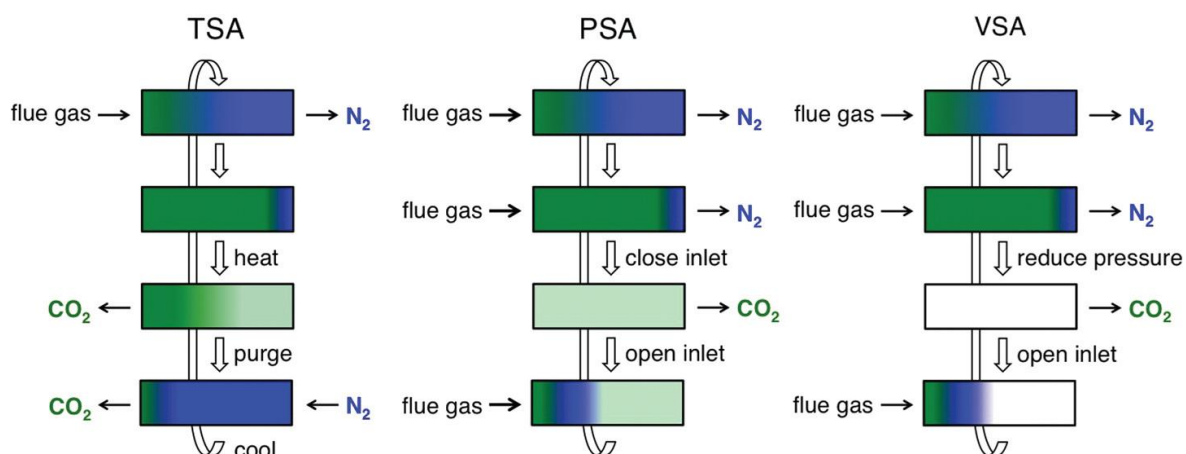


Figure 14. Schematic diagrams of temperature swing adsorption (TSA), pressure swing adsorption (PSA), and vacuum swing adsorption (VSA) processes. (Sumida et al., 2012)

PSA is a common gas purification technology used, for instance, in hydrogen production units of refineries and ammonia plants and in biogas upgrading. In carbon capture, PSA has potential for pre-combustion capture applications, where high CO₂ concentrations and pressures occur. It can be also used as a pre-concentration process. TSA is also a mature technology in gas purification and drying applications. In carbon capture, it is promising for post-combustion capture applications due to high selectivity, although it is critical to reach short process cycle times to make it cost-effective. Solid sorbent technologies for CO₂ capture or separation have been developed, e.g., by Svante, Shell, Kawasaki, Honeywell, and Linde.

Svante has developed an intensified rapid temperature-swing adsorption process called Veloxotherm that is based on structured adsorbent beds arranged on a rotating structure. The bed is divided into adsorption, desorption and conditioning segments that are operated simultaneously due to the rotating structure, which has allowed to reduce cycle time and capital cost compared to conventional TSA processes. Different sorbent materials can be used depending on properties of the feed gas. Veloxotherm has been successfully demonstrated at 10 ktpa capacity at a heavy oil site in Saskatchewan, Canada, capturing CO₂ from flue gases of a once-through steam generator (Cenovus, 2021a). At Chevron's Kern River oil field in

San Joaquin Valley, California, a demonstration project is ongoing where the process will be tested both in coal and natural gas firing at 25 tpd capacity.

3.3 Membranes

Membranes are thin selective barriers that some compounds permeate easier than others. Selectivity of the membrane defines the ratio of permeability of gas components (e.g., CO₂ or N₂). As partial pressure difference over the membrane is the driving force of separation, feed gas pressurization or permeate side vacuum may be needed to enhance permeability. In carbon capture, membranes can be used as a sole capture system or in hybrid systems as a pre-concentration process before a primary capture step. Membranes may be a poor option for post-combustion capture as low CO₂ concentration creates a low driving force for separation, thus requiring large membrane areas or significant pressurization/vacuum for efficient capture. Membranes have shown cost benefit in partial capture, where lower capture rates than the common 90 % are used (Batoon et al., 2019). Advantages of membrane-based capture include compact and modular nature, simplicity of installation, eco-friendliness, low energy requirement, and flexibility of operation and maintenance. Challenges include tradeoff between permeability and selectivity and material challenges regarding stability and lifetime of membranes, especially when exposed to impurities (He, 2018).

Various membrane materials are potential for carbon capture applications including polymer membranes, microporous organic polymers, fixed-site carrier membranes, mixed matrix membranes, carbon molecular sieve membranes, and inorganic membranes such as ceramic, metallic, and zeolite membranes (He, 2018). The choice of suitable membrane material is done based on feed gas properties, operating conditions, and desired capture performance.

According to Chen et al. (2022) especially polymers, copolymers and polymer blends have shown promise for post-combustion capture processes, benefitting from low costs, good processability, and variety of material options. Polymer materials studied for post-combustion capture include polyacetylene, polyaniline, polyetherimides, polycarbonates, poly(phenyleneoxide), poly(ethyleneoxide) and polysulfone. Permeability and selectivity of polymer membranes can be affected by manipulating polymer preparation and chemical composition, although possible swelling and plasticization caused by CO₂ adsorption should be taken into

account. For instance, a thermal rearrangement process has been used to significantly improve permeance of polymer membranes like polyamides and polyimides.

Relevant developers and suppliers of membrane-based CO₂ capture and separation include MTR, Air Liquide, Honeywell, Linde, and Schlumberger. MTR is one of the leading developers with their polymer membrane Polaris and PolarCap process (Figure 15) that is applicable for carbon capture in processes of energy, cement, steel, and refining sectors.

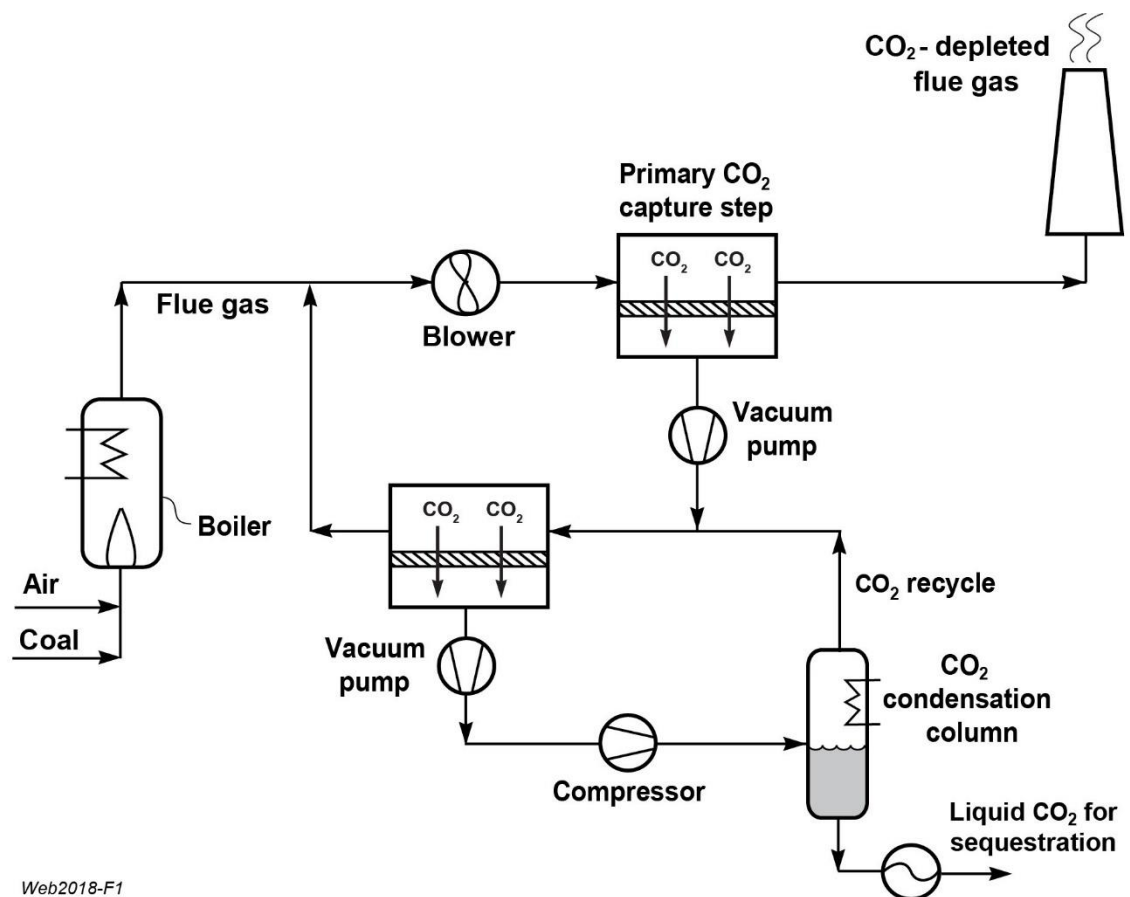


Figure 15. Schematic flow diagram of MTR's PolarCap process. (MTR, 2023)

Power requirement for a two-stage Gen-2 Polaris system with CO₂ selective flue gas recycling used in post-combustion capture is estimated to be 277 kWh/tCO₂ with a capture rate of 80 % (Baker et al., 2018). IEAGHG (2019) estimated a 47 €/tCO₂ capture cost for the process in coal-firing with a 90 % capture rate. In partial capture applications with capture rates around 40–70 %, a capture cost around 35 \$/tCO₂ could be achieved (Baker et al., 2018). Gen-1 Polaris membranes have been piloted at National Carbon Capture Center and

B&W Research Center in US in coal and natural gas firing at 20 tpd capacity. Gen-2 Polaris membranes have been piloted at Technology Center Mongstad in Norway with fluid catalytic cracker flue gas at 10 tpd capacity. Aiming towards commercialization, a 10 MWe large pilot campaign in coal-firing will be conducted at Wyoming Integrated Test Center.

3.4 Calcium looping

Calcium looping (CaL) is based on an adsorption/desorption process, where the CO₂-rich feed gas is led in contact with a fluidized bed of calcium oxide (CaO) sorbent that binds CO₂ by forming calcium carbonate (CaCO₃) at a temperature around 650 °C. The carbonate is regenerated at a separate fluidized bed reactor at around 850–950 °C. Flue gas impurities like SO₂ will also react to form calcium sulphate, and therefore fresh make-up limestone is needed. Advantages of CaL include non-toxic, low-cost, and widely available sorbent, maturity of fluidized bed reactor configurations, and potential for additional steam generation via energy recovery from the high temperature process. Disadvantages include sorbent degradation over several process cycles and high temperature requirement of regeneration, which is typically achieved using oxyfuel combustion. Calcium looping is a retrofittable technology for post-combustion capture, with potential especially in applications where additional steam generation capacity is needed. It also yields potential for cement plants and lime cycles of pulp mills (Romano et al., 2013; Santos et al., 2021). Calcium looping is developed in the EU-funded projects CLEANKER and CaLby2030. In project CLEANKER calcium looping is demonstrated at TRL 7, whereas in CaLby2030 it is piloted at TRL 6 at several industrial sites and framework for commercialization is developed. Sumitomo SHI FW is one of the companies offering calcium looping on their portfolio of carbon capture solutions. IEAGHG (2019b) calculated a 40 €/tCO₂ capture cost for calcium looping in coal-firing, yielding a lower capture cost than the 44 €/tCO₂ calculated for MEA.

3.5 Cryogenic separation

Cryogenic separation technologies are based on differences in dew points and freezing points of CO₂ and other compounds to achieve CO₂ phase change for separation via cooling. Cryogenic separation can be categorized into distillation, condensation and sublimation technologies.

According to a technology review by Font-Palma (Font-Palma et al., 2021), conventional cryogenic gas-liquid separation method with low temperature is recommended for streams with a CO₂ concentration higher than 50 % to limit refrigeration and energy consumption. Required gas purity and recovery are done by the fine-tuning of the operating temperatures and pressures and including the additional flash separation stages to remove the lower boiling point gases like oxygen, nitrogen and argon. If inlet gas contains oxygen, the removal of trace oxygen from CO₂ needs a separate distillation column to reach oxygen levels below 100 ppm. Another listed shortcoming is that the cryogenic method requires expensive methods to reduce water content to trace levels to avoid plugging caused by ice or the formation of solid CO₂ on the heat exchanger surface.

Liquefaction process for high content CO₂ flows to below 8 bar ship-transport condition has been developed and tested in the Research Institute of SINTEF (Trædal et al., 2021). The focus was set due to the knowledge that transport at 8 bar(a) enable significant cost reductions compared to transport at higher pressures for most transport distances and volumes. Liquefaction close to the triple point pressure of CO₂ have concerns related to dry ice formation and potential clogging in parts of the chain that could lead to operational issues during operation. Process works at low pressure of 5.4–6.5 bar and at temperature of -56 to -50°C, the scale of experiments is in the range of 150–200 kg per hour. In the process the CO₂ gas is compressed to 120 bar, cooled with water to around 20 °C, then CO₂ gas stream is aftercooled against the liquid CO₂ product stream. For further cooling of the stream down to the desired liquid separation temperature, there are three different possibilities. For pure CO₂ the freezing point is predictable, but fractions of N₂ are expected to lower the freezing point temperature. In the performed experiments, it is assumed that the CO₂ stream is dehydrated before the liquefaction process. They performed the experimental campaign to de-risk and gain operational experience using six experiments using pure CO₂ or CO₂/N₂ mixtures: two experiments with high purity CO₂ (4.2 quality), and four using mixtures of 94.2 %, 86.5 % and 76.7 % CO₂ which represents simplified and synthesized CO₂ mixtures relevant for post-combustion capture. These experiments demonstrate that pure CO₂ can be safely liquefied at 5.8 bar(a) and a CO₂/N₂ mixture can be liquefied at 6.5 bar(a) without issues related to dry ice formation. The power requirement of 71 kW was reported. Costs were not presented.

According to techno-economic analysis of Sustainable Energy Solutions a Chart Company and Brigham Young University (Hoeger et al., 2021), the Cryogenic Carbon Capture™ (CCC) process separates CO₂ from flue gases or light streams by cooling the gases to the frost or desublimation point of CO₂ (−100 to −135 °C), separates and pressurizes the solids, and warms all streams to produce a pure (>99 %) pressurized liquid CO₂ stream at ambient temperature and about 150 bar. Tested capacity has been nominally 1 tCO₂/day with capture rate of 95–99 % and initial raw gas CO₂ contents in range from 4 to 28 %. The capture costs of 27 USD/tCO₂ was reported, with capture rate of 90 % and having power demand of 0.894 GJe/tCO₂. From the power consumption the refrigerant compression share is about 94 %. Company is upscaling the systems which are capable from 20 to 100 tons per day liquid CO₂ production.

In the same report it was estimated the case with an assumption that CCC can also capture pollutants and can replace other pollutant equipment such as flue gas desulfurization (FGD), selective catalytic reducer (SCR) units for NO_x reduction, activated carbon beds, and even baghouses or electrostatic precipitators for particulates. Carbon monoxide (CO) and any other compounds lighter than CO₂ cannot be captured by the CCC process. The case estimation was identical to the CCC case but removes the capital cost, operating cost, and electric load of the ancillary pollutant systems of FGD, SCR and baghouse since those can be replaced by CCC. The capture costs of 12.4 USD/tCO₂ was reported with power demand of 0.854 GJe/tCO₂.

Air Liquide has a portfolio of cryogenic technologies (Cryocap) for different industrial sectors (Kearns, 2022). In most case technology uses pre-purification and pre-concentration before cryogenic purification. The pre-concentrated CO₂ stream is compressed, dried and sent to a cryogenic unit, where the CO₂ is separated from the other components by a combination of partial condensation and distillation.

- Cryocap H2 for hydrogen production for Steam Methane Reformer, AutoThermal Reforming, or Partial Oxidation with the capacity: 300–5000 tpd, recovery rate >98 % from syngas and Opex+Capex: 30–50 €/tCO₂

- Cryocap FG for flue gases is optimal for >15% CO₂ dry basis, flue gas is first compressed, dried and sent to a PSA (Pressure Swing Adsorption). The PSA pre-concentrates the CO₂ in the offgas. Capacity 300–10000 tpd, capture rate up to 95 %, 40 to 80 €/tCO₂
- Cryocap Oxy for oxycombustion (flue gas >40 % CO₂), includes flue gas drying, dust filtration, and cryogenic purification. Capacity 1000–15000 tpd, capture rate up to 90–98 %, 30 to 50 €/tCO₂
- Cryocap Steel for steel production (content 20–50% CO₂). The gas is first compressed, dried and sent to a PSA (Pressure Swing Adsorption). Capacity 300–5000 tpd, capture rate up to 80–95 %, 25 to 60 €/tCO₂
- Cryocap NG for biogas, natural gas where >35 % CO₂. Gas is first dried and sent to a cold process, where CO₂ is pre-separated with membrane and later from the other components through a combination of partial condensation and distillation. The CO₂-enriched permeate stream of the membrane is sent back to the cold process. The CO₂ and heavy hydrocarbons condense in the cold process and are collected at high pressure. Process is tolerant to some content of H₂S and it also allows for bulk removal of H₂S from natural gas like streams. Capacity Up to 1,000,000 Nm³/h.
- Cryocap XLL is designed to liquefy large volumes of CO₂. The solution allows aggregation of CO₂ from various emitters utilizing possibly different types of carbon capture technologies. On top of liquefying CO₂, Cryocap™ XLL also allows the removal of moisture and other compounds (such as O₂) to meet CO₂ sink specifications. Capacity 800-10000+ tpd, liquefies CO₂ at ambient temperature, 5–25 €/t CO₂ liquefied, Opex 30–130 kWh/tCO₂.

CAPTICO2 has developed a cryogenic capture technology in collaboration with SINTEF (Kearns, 2022). According to the company, the cryogenic distillation process can separate 99 % of CO₂ from a flue gas source at a cost of 15–20 €/tCO₂. CAPTICO2's cryogenic capture is non-toxic, uses nitrogen and oxygen present in the flue gas as cooling medium to distil CO₂ from the flue gas. The process has been developed to be used as a part of mineralization of calcium carbonate. As a CCUS solution, it was estimated that the total cost of CO₂ capture and mineralization, including source supply and logistics for the end-product is

between 30–40 €/tCO₂. Pilot test rig with a capacity of 1,300 tCO₂/a capture and mineralization per year will be installed at Enea in Poland, thus elevating the technology to TRL 7.

3.6 Electrochemical separation

Electrochemical CO₂ separation technologies utilize electrochemical potential difference (e.g., fuels cells, electrodialysis) or electrochemical cycles (e.g., pH swings, redox reactions) to capture or release CO₂. Electrochemical methods are claimed to have higher energy efficiency and better flexibility compared to conventional CO₂ capture approaches due to the rapid and easily controllable nature of electric potential. Depending on the technology, the captured CO₂ stream may contain high amount of moisture and other gases thus the product CO₂ stream may need further purification. Electrochemical CO₂ capture is typically classified into four categories shown in Figure 16: (1) methods with pH-swing to capture and recover the CO₂, (2) methods which use the binding affinity of CO₂ molecules to redox-active species, (3) molten carbonate cells and (4) hybrid electrochemical processes that combine CO₂ capture and e.g., direct conversion.

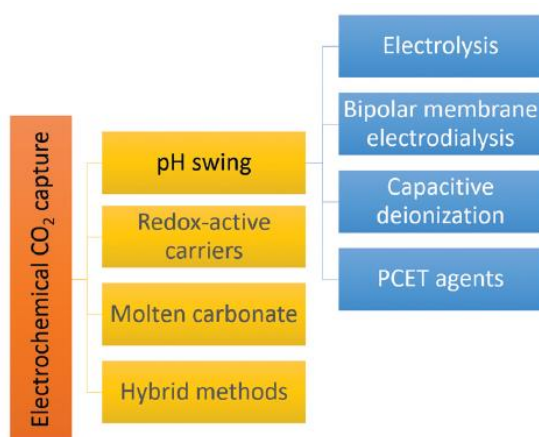


Figure 16. The primary methods of electrochemical CO₂ capture (Sharifian et al., 2021).

pH-swing is a widely studied method of electrochemical separation. It is operationally straightforward method with relatively cheap and non-toxic chemicals. In theory, a mild pH-swing over ca. 2–3 pH units would allow to capture 98% of the CO₂. It has been mentioned that in practice slow kinetics occur in such a mild swing, therefore either a wider pH range (ca. 5–6 pH units) or catalytic enzymes (e.g., carbonic anhydrase) could be applied to enhance kinetics. Electrochemical pH-swing can be done via electrolysis, bipolar membrane

electrodialysis (BPMED), redox active molecules that undergo proton coupled electron transfer or capacitive deionization. (Sharifian et al., 2021)

pH-swing electrolysis is the earliest method used for alkaline absorbent regeneration. Electrolysis enables pH-swing between two electrodes and can be enhanced using membranes for alkali absorbent regeneration or simultaneous H₂ production. Alkaline compounds form carbonates or bicarbonate with dissolved CO₂ at cathodic side and the absorbent is recovered at anode side. At the anode the CO₂ can be either released as a gas (e.g., in reaction $2 \text{H}_2\text{O} + \text{K}_2\text{CO}_3(\text{aq}) \rightarrow 2 \text{KOH}(\text{aq}) + \text{CO}_2(\text{g}) + \text{H}_2(\text{g}) + 0.5 \text{O}_2(\text{g})$), or the bicarbonate products can be conducted to other process or to storage when fresh alkali must be added (e.g. $2 \text{H}_2\text{O} + \text{CaCO}_3(\text{s}) + \text{CO}_2(\text{g}) \rightarrow \text{Ca}(\text{HCO}_3)_2(\text{aq}) + \text{H}_2(\text{g}) + 0.5 \text{O}_2(\text{g})$). In the latter case, theoretically if one mole of CO₂(g) is captured per one mole of CaCO₃, it is possible that 22 tonnes of CO₂ is captured per tonne of H₂ produced. Simultaneous hydrogen production can partially decrease costs of the process. It has been mentioned that upscaling of direct alkali electrolysis might be unfeasible due to low current density. Also, salt electrolysis using NaCl or KCl could be used for CO₂ capture. In direct salt electrolysis the chlorine gas would be released from the anode, thus ion change membranes can be used to avoid Cl₂ gas release. (Sharifian et al., 2021)

Bipolar membrane electrodialysis (BPMED) has a membrane with two exchange layers laminated together, an anion layer and a cation layer. When the electric field is applied, the BPM dissociates water into OH⁻ and H⁺, producing a controllable pH change over the membrane. One benefit of the BPM is that it can dissociate the water with 2.5 times less energy compared to electrolysis and no gases are released. The cell configuration often consists also cation exchange membrane and anion exchange membranes, reactions follow their equilibria curves and, there are two different liquids used, e.g., at cathodic side acids KH₂PO₄ + H₃PO₄ and at anionic side bases KHCO₃, K₂CO₃ and KOH. Energy consumptions between 100 and 500 kJ/mol_{CO2} have been reported. (Sharifian et al., 2021)

Capacitive deionization is the membrane capacitive deionization method which utilizes local pH near the electrodes to capture and release CO₂ by changing the current direction. Method uses deionized water, ion exchange membranes and inexpensive activated carbon electrodes.

Other type of porous electrodes and different kind of cell configurations can be also used. In the charging phase the HCO_3^- and H^+ ions are adsorbed into the porous electrodes inside of the cell which causes a local low pH at the cathode and increases pH in the bulk bulk/deionized water. Increased pH at the electrolyte enables that more $\text{CO}_2(\text{g})$ can be absorbed in the deionized water, until no pH changes in electrolyte occur. In the discharging phase the current direction is turned and $\text{CO}_2(\text{g})$ is formed from the electrolyte. Method has been studied also in combination with NH_3 -based CO_2 capture process. (Sharifian et al., 2021)

PCET agents refers to proton-coupled electron transfer of organic molecules (so called redox-active carriers) which can generate H^+ and OH^- ions. Maturity level of the process is low with proof-of-concept studies reported. According to Renfrew et al. (2020) to enable effective CO_2 capture with PCET of an organic molecule, the catholyte must reach and be stable at a high pH which is controlled in part by concentration (solubility), mass transfer coefficient, and buffering capacity of the electrolyte. Also, ion selective membranes are needed to maintain the pH gradient, keeping the catholyte at high pH and the anolyte at low pH. Redox carriers can be organic or metal oxide-based compounds, mentioning, e.g., quinones (at least benzoquinone and 2,6-dimethylbenzoquinone), tiron (1,2-dihydroxybenzene-3,5-disulfonic acid) and MnO_2 .

Redox-active carriers can be divided into two categories as direct and indirect carriers. Even though some carrier compounds are the same as in PCET process, here are no pH changes during the process due to different cell structures using e.g., gas diffusion electrodes. In both cases the CO_2 is captured cathodically and released anodically. The direct carrier sorbent itself is redox-active and its nucleophilicity is directly modified electrochemically, activating and deactivating its affinity toward the sorbate (CO_2). Direct redox-active methods are called electrochemically mediated complexation separations or electrochemically modulated complexation. The indirect carrier sorbent itself is not redox-active but it interacts with a redox-active competitor which has affinity for the sorbent when activated. Thus, the CO_2 binds to the sorbent and it is released when the competitor is activated with electricity. Indirect redox-active method might also be called as electrochemically mediated competitive complexation separation. Interesting redox carrier compounds such as bipyridines, quinone species, disulfides and copper or amine systems are widely studied, especially quinone compounds have

high interest. Drawback of these techniques are that the presence of protons can neutralize the reduced carrier which lowers the efficiency as well as the capacity of CO₂ capture. Also mentioned challenges for direct carrier approaches are slow kinetics, low solubilities, side reactions due to reactive intermediates, sensitivity to oxygen and the expense of ionic liquid electrolytes. At the moment quinone compounds incorporated into a carbon mesh and transition metal complexes are mentioned to be potential compounds. Also, the choices of catalysts on the surface of the electrodes to facilitate the electron transfer together with the type and concentration of the electrolyte are important in determining the process efficiency in terms of capture, kinetics, transport and release of CO₂. Redox-active systems have yet to achieve industrial utility, but they have the potential of producing a pure CO₂ stream even from dilute gas mixtures. (Renfrew et al., 2020b)

High-temperature molten carbonate fuel cells (MCFC) have molten carbonate salt electrolyte sandwiched between ceramic membranes and in contact with the electrodes. The gas containing CO₂ and O₂ is fed to the cathode side of an electrochemical cell, where electricity is used to drive CO₂ and O₂ (in form of CO₃²⁻) across a molten carbonate salts electrolyte. In anode the carbonate ion will be reduced back to CO₂ and H₂O, if H₂ is used as a fuel in anode. There are possibilities to use different kind of selective membranes which enables, e.g., molten carbonate fuel cell where CO₂ is captured while H₂ is also produced. Closed-loop operation of MCFC consumes CO₂ and O₂ at cathode side which makes it to be good option for post-combustion capture from flue gases. MCFC can use any hydrogen-carbon mixtures as a fuel. Challenges due to high temperatures (>450°C), low tolerance for impurities, corrosion, development stage of CO₂ selective membranes have been reported. Impurities reported include particulates, sulphur compounds, halides, nitrogen compounds, trace metals, silicon compounds and long-chain hydrocarbons. (Sharifian et al., 2021; Slater & Chronopoulos, 2019). FuelCell Energy is one of the developers of electrochemical carbon capture with their MCFC system that is presented in Figure 17.

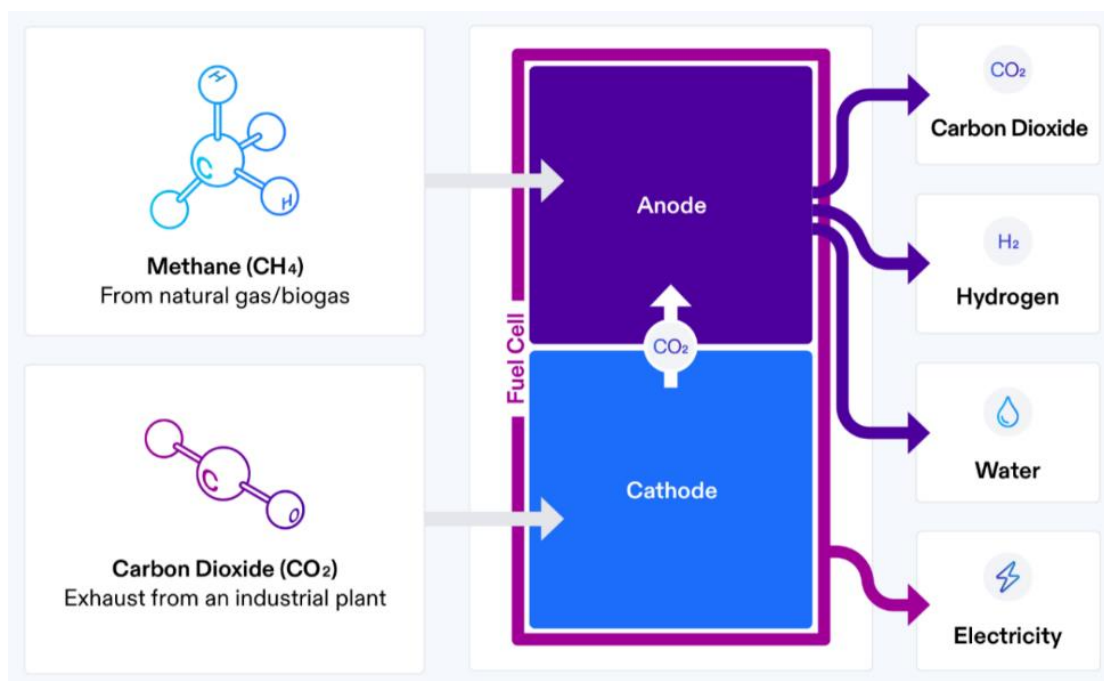


Figure 17. A schematic illustration of FuelCell Energy’s MCFC-based carbon capture system (Leo, 2022).

FuelCell Energy received funding from the Clean Resource Innovation Network to pilot their MCFC technology in post-combustion capture at the Scotford oil sand upgrader in Alberta, Canada, capturing CO₂ from process heater flue gases (CRIN, 2022; FuelCell Energy, 2022). The pilot system can capture 22 tonnes of CO₂ while generating an additional electricity production capacity of 600 kW.

3.7 Inherent capture and purification

Inherent capture refers to processes where CO₂ capture can be inherently incorporated into design of the process. In practice this means that the process produces an exhaust stream with CO₂ concentration so high that a specific technology for carbon capture is not required to obtain CO₂ applicable for CCUS. We divide inherent capture into natural and technological pathways. Natural inherent capture refers to processes naturally producing exhaust streams of high purity CO₂ such as ethanol fermentation (Chapter 4.2.3) and production of hydrotreated vegetable oils via decarboxylation routes (Chapter 4.2.4). Technological inherent capture refers to technologies purposefully designed to produce a by-stream of pure CO₂ for inherent capture for instance as part of energy production, manufacturing, or refining. Technological pathways of inherent capture include, e.g., electrically heated calcination (Katajisto, 2020), chemical looping combustion, and NET Power’s Allam-Fetvedt cycle

based on oxy-combustion. Some treatment such as dehydration, desulphurization or other purification may be required, especially in the natural pathways of inherent capture. The common CO₂ purification methods are reviewed in Chapter 2.3.

The natural pathways of inherent capture typically yield the lowest capture cost of all carbon capture pathways as little work is required to obtain a pure stream of CO₂. Furthermore, the purification technologies used in these pathways are at mature level. IEA (2019) estimates a capture cost of 15–35 USD/tCO₂ (incl. compression) for high CO₂ purity streams (e.g., natural gas processing and ethanol fermentation), whereas the Global CCS Institute (Sieminski, 2021) assumes a cost range of 0–10 USD/tCO₂ for conditioning of CO₂ captured from high concentration sources. Although these sources are a low hanging fruit regarding capture cost, the quantitative capture potential is low as only a few emission point sources are of such nature.

In technological pathways of inherent capture, the capture cost is typically higher than in natural pathways as the high CO₂ purity exhaust stream is purposefully created via novel process designs rather than occurring as a natural by-product of the process. Furthermore, these processes are often not retrofittable and lack commercial maturity, with the most advanced technologies like the Allam-Fetvedt Cycle being at TRL 6–7. However, these technologies yield promise for the future. IEAGHG (2019b) calculated a 34 €/tCO₂ capture cost for the Allam cycle in gas-firing, yielding a significantly lower cost than the 64 €/tCO₂ calculated for MEA.

3.8 Summary of the reviewed carbon capture technologies

Multiple technologies have been developed for CO₂ capture, with different qualities regarding operating principle, technical properties, and performance. Maturity of the technologies vary, with some being commercially available, and some under demonstration, piloting, or conceptual research. Evaluating different technologies in a comparable way is difficult as there is little public information available on proprietary technologies, and as performance is always case-dependent. For instance, capture costs reported on literature may not be comparable as often the costs have been calculated using different limitations, assumptions, and estimates. Energy consumption is a relevant factor to compare as it is often the most significant factor affecting operating costs. However, there are also uncertainties on energy consumptions reported on literature as it may be measured, calculated, or estimated based on reaction kinetics. Also, depending on the capture technology and energy integration opportunities at the capture site, the energy supply and thus the energy costs may vary significantly, depending on if electricity, waste heat, low-pressure steam, or high-pressure steam is used.

Many carbon capture technologies are still a relatively novel in terms of relevant experience in industrial applications, therefore posing risks of technical failure and economic losses for potential technology implementors. The magnitude of technology implementation risk mostly relates to the level of technological maturity. Capture technologies based on scrubbing with amine solvents currently offer a low-risk option with proven high capture performance and high maturity with plenty of commercial experience. Also, inherent capture/CO₂ purification applications have low risk since a specific capture technology is not required. Some alternative technologies with more eco-friendly nature and potential to outperform amines have reached TRL 8–9 and have become reasonable options to consider alongside amines, e.g., carbonate salt processes by CO₂ Capsol and Saipem. Additionally, several emerging technologies with promising performance are at TRL 6–7 and facing large-scale demonstration soon, but before being proven at industrial scale the risk of implementation remains high. Technologies for post-combustion capture at this level include solid sorbents, membranes, cryogenic separation, and fuel cell-based capture. As intensive development is ongoing to commercialize the technologies, maturity levels, performance data and risk estimations may change rapidly as new development projects proceed.

This report does not include regulatory perspective, but environmental regulations should be carefully examined especially when considering capture processes that may produce toxic pollutants. In the European Union there are several regulations and guidance documents related to carbon capture.

With focus on post-combustion capture, technologies reviewed in this work were liquid solvents (amines, carbonate salts, phase-separating, physical), solid sorbents, membranes, electrochemical separation, solid looping, cryogenic separation, and inherent capture/purification technologies. Table 6 summarizes maturity, indicative capture cost, advantages and disadvantages and developers of the carbon capture technologies reviewed in this work.

Table 6. A summary of mature and emerging CO₂ capture technologies reviewed in this work.

Technology	TRL	€/tCO ₂	Advantages	Disadvantages	Developers/suppliers
Amines	6–9	25–40	High maturity, several commercial technology suppliers, high capture performance even with low CO ₂ concentration streams	Thermal and oxidative degradation resulting in toxic emissions, energy-intensive regeneration, corrosivity, foaming possibility	Mitsubishi Heavy Industries, Shell, Fluor, BASF, Aker Carbon Capture, Honeywell
Carbonate salts	5–9	25–40	Non-toxic, low-cost, and widely available absorbent materials, applicability to low-temperature regeneration, low corrosivity	Slow absorption kinetics, risk of solid formation, foaming	CO ₂ Capsol, Saipem, KC8, Kleener, VTT, Baker Hughes, Honeywell
Phase-separating solvents	6–7	30–40	Low regeneration energy requirement, low corrosivity, stability	Adequate gas and solvent contact, solid or slurry handling	Axens/IPPEN
Physical solvents	8–9	30–55	Widely used in industrial gas purification applications	Not suitable for low CO ₂ concentration streams	Honeywell, Carbon-ReUse
Solid adsorbents	6–9	30–50	Mature technology in industrial gas purification, low regeneration energy, several sorbent choices	Slow transfer kinetics (chemisorption), weak selectivity (physisorption), sensitivity to impurities	Svante, Shell, Kawasaki, Honeywell, Linde
Membranes	6–9	35–55	Compact and modular nature, simplicity of installation, eco-friendliness, low energy requirement, flexibility of operation and maintenance, several material choices	Tradeoff between permeance and selectivity, material challenges especially in the presence of impurities (e.g., lifetime and stability)	MTR, Air Liquide, Honeywell, Linde, Schlumberger
Calcium looping	6–7	40	Non-toxic, low-cost, and widely available sorbent, steam generation potential, maturity of fluidized bed technology	High temperature requirement of regeneration (~900 °C), sorbent degradation over several process cycles	Sumitomo SHI FW
Cryogenic separation	6–9	30–70	High capture efficiency	Moisture removal required, high energy requirement of refrigeration	Air Liquide, CAPTICO ₂ , Honeywell
Electrochemical separation	4–6	35–	High efficiency and flexibility vs. thermochemical processes as electric potential is easy and quick to control, power output potential	Demand for additional fuel, further CO ₂ separation may be needed	FuelCell Energy
Natural inherent capture	9	0–25	Low capture cost as only some purification if any required	Often low quantitative capture potential	
Technological inherent capture	6–7	30–70	Simplicity of capture	Weak retrofittability, implemented as new installations	NET Power, VTT

4 CARBON CAPTURE POTENTIAL OF FOREST INDUSTRY, PETROLEUM REFINERIES AND BIOREFINERIES IN FINLAND

In project E-Fuel, we examine capturing CO₂ from emission streams of forest industry, petroleum refineries, and biorefineries to supply CO₂ as feedstock for CCU-based electrofuel production. As various emission point sources with unique characteristics occur in these industries, it is essential to identify streams with high potential for carbon capture implementation. In this chapter, carbon capture potential of relevant industries in Finland are evaluated by examining properties of the emission point sources and techno-economic feasibility and maturity of carbon capture implementation in these industries. The results are presented in Chapter 4.3. A scoring matrix based on key performance indicators (KPI) is used to score and rank carbon capture potential of the reviewed industries. Details of the KPI scoring matrix are presented in Table 7.

Table 7. A scoring matrix based on key performance indicators developed to evaluate carbon capture potential of industrial emission point sources. Higher score indicates higher potential for carbon capture implementation.

Key performance indicator	Score	Relevance	Method of evaluation	
Annual CO ₂ emissions of the industry in Finland	0	<1 Mtpa	Quantitative carbon capture potential of the industry	Reported emissions of the industries
	1	1–5 Mtpa		
	2	>5 Mtpa		
On-site CO ₂ emissions of an average facility/complex	0	<100 ktpa	Quantitative carbon capture potential per facility and economy of scale	Finnish reference plants
	1	100–500 ktpa		
	2	>500 ktpa		
Industry trend by 2030	0	To diminish	Future CCUS potential	Planned and decided investments and de-commissioning
	1	To remain largely unchanged		
	2	To grow		
Average CO ₂ concentration of the emission point sources	0	Low: <20 %	Ease of CO ₂ separation, capture cost	Typical characteristics of the emission point sources
	1	Moderate: 20–90 %		
	2	High: >90 %		
Degree of carbon capture implementation	0	Development (TRL 1–4)	Technological maturity, readiness for implementation	Review on global projects and technology suppliers
	1	Pilot (TRL 5–7)		
	2	Industrial deployment (TRL 8–9)		
Ease of system integration	0	Implemented as new installations	Ease of integration and capital cost	Process reviews, literature
	1	Significant process modifications or external demands required		
	2	Straightforward retrofit with minor effects on the original process		
Natural origin of CO ₂	0	<25 % of biogenic origin	Climate impact (depends also on the end-use application of CO ₂ and sustainability of biomass use)	Reported emissions of the industries
	½	25–75 % of biogenic origin		
	1	>75 % of biogenic origin		

The KPI matrix presented in Table 7 aims to include the most relevant factors regarding the potential of carbon capture implementation. Each factor is scored using a following scale: 0 = low potential, 1 = intermediate potential, and 2 = high potential. We consider natural origin of CO₂ to be less relevant than the other factors since climate impact of CCUS depends also on the end-use application of the captured CO₂ and sustainability of possible biomass use in addition to origin of the CO₂. Therefore, we apply an alternative scoring of 0/½/1 for natural origin of CO₂.

4.1 Industrial CO₂ emissions in Finland

According to the European Pollutant Release and Transfer Register (EEA, 2021), a total of 41.4 Mt of CO₂ emissions originated from industrial activity in Finland in 2020. The register includes facilities with annual emissions of ≥ 100 ktCO₂. Figure 18 illustrates sectoral distribution and natural origin (biogenic or fossil) of the reported emissions.

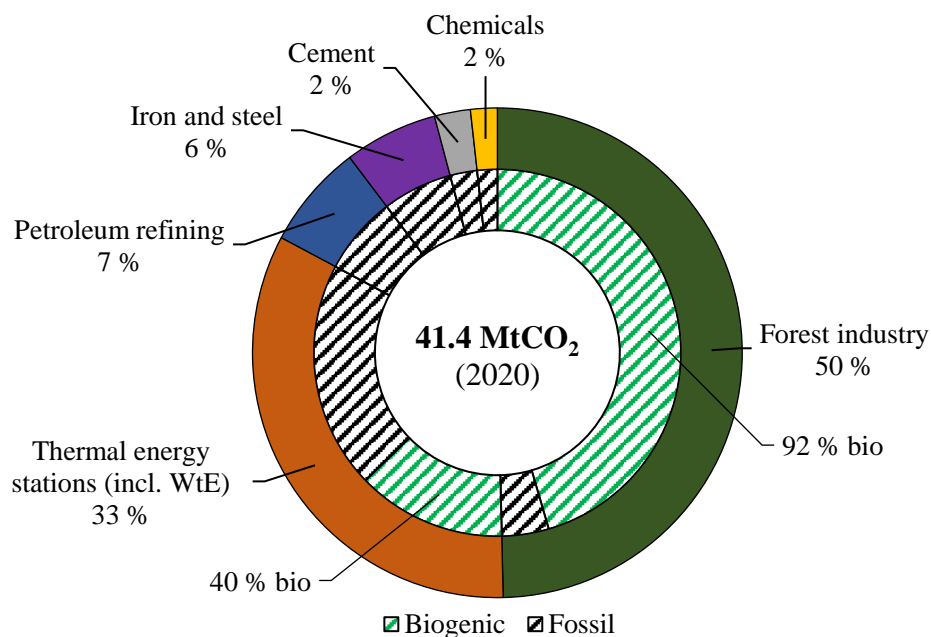


Figure 18. Sectoral distribution and natural origin (biogenic/fossil) of industrial CO₂ emissions in Finland in 2020. The data includes facilities with emissions of ≥ 100 ktCO₂/a. (Based on data from EEA, 2021).

Of the annual 41.4 Mt of industrial CO₂ emissions in Finland, 59 % (24 Mt) are of biogenic origin and 41 % (17 Mt) of fossil origin. Forest industry is the largest industrial emitter, accounting for 50 % (20.6 Mt) of emissions reported in E-PRTR, of which 92 % originates

from biogenic sources. Heat and power production in thermal power plants, waste-to-energy facilities and other combustion installations is the second largest industrial emitter accounting for 32 % (13.4 Mt) of the total emissions, of which 40 % are biogenic. Emissions from petroleum refining (2.9 Mt), production of iron and steel (2.6 Mt), cement (1.0 Mt) and chemicals (0.7 Mt) are predominantly fossil-based.

4.2 Carbon capture potential of forest industry, petroleum refineries and biorefineries in Finland

In this work, we examine carbon capture potential of forest industry, petroleum refineries and biorefineries, which are relevant CO₂ sources in Finland. Although being a significant source of emissions in Finland, thermal power plants are excluded from this study having been the focus of VTT's project BECCU in years 2019-2022. However, carbon capture of thermal power plants is in many ways similar to processes reviewed in this study such as combustion processes in pulp mills.

4.2.1 Pulp and paper mills

Forest industry is a significant emitter of CO₂ in Finland, accounting for 50 % (20.6 Mt) of emissions reported in E-PRTR, although 92 % of the CO₂ originates from biogenic sources. In 2022, there were 19 pulp and mass production plants and 14 paper mills in Finland (Metsäteollisuus ry, 2022). Focus of this study is in typical kraft pulp mill processes.

Majority of CO₂ emissions in pulp and paper mills originate from combustion processes in recovery boiler, power boiler, and lime kiln. Recovery boiler is used to regenerate pulping chemicals and to supply heat and power for the mill. It is fueled with black liquor, i.e., the spent pulping chemicals that have been concentrated by evaporating majority of the water content. Power boiler supplies additional energy for the mill, and it is commonly fueled with biomass residues such as bark, chippings, and bio-sludge. Lime kiln is used for calcination, where lime mud (Ca(OH)₂) is converted into quicklime (CaO) at high temperatures, releasing CO₂ both via calcination reaction and combustion that is commonly fueled with fuel oil or natural gas. CO₂ emissions of recovery and power boilers are predominantly biogenic, whereas CO₂ emissions from the lime kiln are roughly 60 % biogenic (originating from calcination) and 40 % fossil-based (originating from fossil fuel combustion) (Onarheim et al.,

2017a). Table 8 presents typical flue gas properties of the recovery boiler, the power boiler, and the lime kiln in a modern kraft pulp mill.

Table 8. Flue gas properties of recovery boiler, power boiler, and lime kiln in a modern kraft pulp mill with a pulp production capacity of 800 000 adt/y. (Adapted from Onarheim et al., 2017a).

	Unit	Recovery boiler	Power boiler	Lime kiln
Temperature	°C	184	189	250
Mass flow	MTPY	8 151 000	1 508 000	684 000
Share of mass flow		79 %	15 %	7 %
CO ₂	mol-%	13	12.1	20.4
N ₂	mol-%	67.6	53.4	47.4
O ₂	mol-%	2.3	1.7	1.2
H ₂ O	mol-%	17	32.7	30.9
SO _x	ppm	60	40	50
NO _x	ppm	125	150	175
TRS	ppm	15	15	15
PM	ppm	30	15	30

As flue gas streams of the processes are separate and distributed at the site, it is unlikely that all CO₂ emissions are covered with carbon capture unless a common stack is used to combine the flue gas streams. Recovery boiler is by far the largest point source of CO₂ and therefore the most favorable option for carbon capture implementation, possessing economy of scale -benefit. With a capture rate of 90 % around 60–80 % of the mill’s total CO₂ emissions could be captured from the recovery boiler (Kuparinen 2019). Properties of the flue gas streams are similar, although lime kiln flue gas has a slightly higher CO₂ concentration due to the CO₂ released in calcination, which could possibly result in lower capture cost.

Carbon capture could be implemented into pulp and paper mills using various technologies. To ensure straightforward integration we consider retrofittability as an essential factor for suitable technology choices. Post-combustion capture technologies are commonly end-of-pipe solutions and could be retrofitted into the processes without major modifications, offering presumably the simplest option for carbon capture. Technology options for post-combustion capture are reviewed in more detail in Chapter 3. Onarheim et al. (2017b) calculated a 52–66 €/tCO₂ cost of CO₂ avoided for a modern kraft pulp mill and 71–89 €/tCO₂ for an integrated pulp and board mill, when capturing 60–90 % of the emissions with amine-based post-combustion capture technology. Oxy-combustion technologies lack applicability for straightforward integration, requiring major modifications or new installations (e.g., an air

separation unit). Pre-combustion capture could be a potential technology for mills where gasification or pyrolysis are used to produce hydrogen, synthesis gas, or bioliquids, e.g., for biorefinery feedstock or as fuel. For the lime cycle, calcium looping is a potential, retrofitable option for carbon capture. Santos et al. (2021) estimated via modelling a 39 €/tCO₂ cost of CO₂ avoided when implementing calcium looping to the lime of cycle of a kraft pulp mill. VTT has also studied calcination using an electrically heated rotary kiln (Katajisto, 2020), which would eliminate emissions deriving from combustion, enabling inherent capture of nearly pure CO₂ stream released in calcination, requiring only some gas conditioning, if any, to obtain CO₂ applicable for CCUS. VTT has estimated by modelling a production cost of 70 €/tCO₂ for production 320 t of lime/day using an electrically heated rotary kiln concept, with the biggest cost impact deriving from electricity price (Tsupari et al., 2022).

A carbon capture system significantly affects mass and energy balances of the mill, although depending on the mills properties and the capture technology in use. According to Onarheim et al. (2017a) increases can be expected on steam and electricity consumption, and utility streams like process and cooling water, boiler feed water and condensates, and waste streams. Energy integration may present a challenge as most carbon capture technologies require steam for solvent or sorbent regeneration, which may not be available as steam supply is often effectively utilized in the mill's processes. Especially implementing carbon capture to the recovery boiler would significantly increase steam demand and reduce net electricity export. Onarheim et al. (2017a) estimate that in a stand-alone kraft pulp mill steam supply can cover the demand of an amine-based capture system, whereas in a pulp and board integrate an auxiliary boiler is required if carbon capture is implemented to the recovery boiler. Also, partial capture could be an option if the steam supply is inadequate to cover full-scale capture.

There has been some carbon capture activity in the forest industry globally. Saipem is operating a 30 tpd capture unit (TRL 8) at Resolute's kraft pulp mill in Quebec, Canada, capturing CO₂ from lime kiln flue gases using an enzyme enhanced potassium carbonate solvent and utilizing the mill's waste heat in solvent regeneration (CO₂ Solutions, 2021; Surprenant, 2019). The captured CO₂ is utilized in a nearby greenhouse. Saipem's solvent is also

demonstrated at TRL 7 together with Prospin's rotating packed bed technology at Stora Enso's pulp mill in Sweden as part of the ACCSESS project (ACCSESS, 2022).

4.2.2 Petroleum refineries and steam methane reforming

In petroleum refineries crude oil is refined into usable products like gasoline, diesel, jet fuel and other petroleum-based products. Steam methane reforming (SMR) is widely used hydrogen production technology in industry and therefore also an essential technology for petroleum refineries where hydrogen is an important feedstock. Petroleum refining in Finland is solely focused at Neste's Porvoo refinery. In Finland around 80 % of SMR production locates in the Porvoo refinery area.

Petroleum refineries have generally several CO₂ emission point sources, e.g., process heaters, steam and electricity generation utilities, fluid catalytic crackers and hydrogen production units. CO₂ emissions of petroleum refineries, that are predominantly fossil-based, distribute as follows: 30–60 % from process heaters, 20–50 % from utilities, 20–50 % from fluid catalytic cracking and 5–20 % from hydrogen production (Bains et al., 2017). Process heaters (or furnaces) are used to generate heat needed, e.g., in pre-heating, distillation, hydrotreating, cracking, reforming, and coking. Steam and electricity are produced in utilities plant using gas turbines and heat exchangers. Heaters and utilities are generally fueled using natural gas or refinery fuel gas (RFG) that contains light hydrocarbons and hydrogen. In fluid catalytic cracking large hydrocarbons are fractioned into smaller, more valuable products via catalysts in an elevated temperature and pressure. Coke formed in the cracking process is combusted, releasing CO and CO₂ after which the CO is converted to CO₂ in a CO boiler. Hydrogen, which is an important feedstock for refineries, is generally produced via steam methane reforming, where methane and high-temperature steam react under catalysts, forming hydrogen, carbon monoxide and some carbon dioxide. Water-gas shift (WGS) reaction is used to increase hydrogen output by converting carbon monoxide and water steam into hydrogen and carbon dioxide. WGS is followed by hydrogen purification commonly using pressure-swing adsorption (PSA) or in some cases with other techniques like amine scrubbing. Table 9 presents typical characteristics of exhaust streams in petroleum refineries.

Table 9. Properties of emission point sources in petroleum refineries (Bains et al., 2017; Kearns et al., 2021).

Point source	CO ₂ concentration	Temperature	Pressure	Composition
Process heaters	8–10 %	160–190 °C	atm	Depends on fuel
Utilities (steam, electricity)	3–5 %	160–190 °C	atm	Depends on fuel
Fluid catalytic cracker (FCC)	10–20 %	160–190 °C	atm	O ₂ , CO ₂ , H ₂ O, N ₂ , Ar, CO, NO _x , SO _x
Hydrogen production (SMR)	30–45 % (PSA) 98–100 % (scrubbing)	20–40 °C 100–120 °C	20–30 bar (PSA)	CO ₂ , H ₂ , CO, CH ₄

Exhaust streams of process heaters, utilities, and fluid catalytic crackers are combustion flue gases with near-atmospheric pressure and low CO₂ concentration. Composition and present impurities depend on the used fuel, but generally natural gas or refinery fuel gas are used. Natural gas combustion results in a rather pure flue gas stream, whereas in RFG combustion sulphureous impurities may occur. SMR exhaust stream has higher CO₂ concentration and outlet pressure, offering greater potential for carbon capture.

Feasibility of carbon capture implementation to petroleum refineries has been evaluated e.g., by van Straelen et al. (2010), Johansson et al. (2012) and Bains et al. (2017). As there are multiple CO₂ point sources in refineries, full-scale carbon capture implementation is challenging without a common stack. Therefore, the largest emission sources or units with highest carbon capture potential are likely to be prioritized. SMR units have high potential regarding economics as high CO₂ concentration occurs in the exhaust stream. However, SMR capacity may reduce as green hydrogen capacity is expected to grow in the future. Flue gas streams of process heaters, utilities, and fluid catalytic crackers could be harnessed using post-combustion capture technologies. Refinery plants typically have multiple energy utilities available which is beneficial regarding system integration, but refineries have often limited amount of space, which may set size limitations for an additional carbon capture system. Regarding climate impact the carbon sources in refineries are typically fossil-based but transition toward non-fossils is ongoing in many refineries. Refineries are often located near coasts, which is favorable regarding logistics.

Carbon capture has been successfully implemented to petroleum refineries in several projects. In many of these projects, the high CO₂-concentration exhaust streams of steam methane

reformer units have been targeted. At Neste's Kilpilahti refinery in Porvoo, Finland, Linde is capturing around 400 ktpa of food-grade CO₂ for the market from a steam methane reforming unit using pressure-swing adsorption and an additional distillation (Teir et al., 2009). At Tomakomai, Japan, as part of the Tomakomai CCS project a total of 300 ktCO₂ (100 ktpa) was captured during 2016–2019 from an oil refinery's hydrogen production unit's PSA exhaust gases using BASF's OASE amine scrubbing process and stored into offshore reservoirs below the seabed (Sawada et al., 2021). The two-stage absorption process averaged a reboiler duty of 0.9 GJ/tCO₂ and gross capture energy of 1.2 GJ/tCO₂. At Cenovus Energy's (formerly Husky Energy's) Pikes Peak South heavy oil site in Saskatchewan, Canada, a 10 ktpa pilot plant has been operated from 2019 onwards capturing CO₂ for enhanced oil recovery from the flue gases of a natural gas fired steam generator using Svante's rotating structured adsorbent bed technology (Cenovus, 2021b). At Sinopec's Qilu refinery in Shandong, China, a CCS project with capacity of 1 Mtpa started in 2022, capturing CO₂ for enhanced oil recovery from the coal gasification hydrogen production unit (McCoy, 2022).

4.2.3 Ethanol fermentation

Ethanol fermentation is a biological conversion process used to produce ethanol from plant-based feedstock. In Finland bioethanol production capacity is currently less than 20 million litres in year, and mainly forest residues and biogenic wastes are used as feedstock in bioethanol production. Main developer and producer St1 has in Finland three plants using biogenic wastes and one plant using forest residues, total production capacity is annually between 11 and 19 million litres (St1 Oy, 2022). Bioethanol production capacity in Finland is expected to grow in the near future. Bioenergo (2022) has planned a bioconversion plant with bioethanol production capacity of 47 kt to Pori, whereas NordFuel (2022) has planned a biorefinery producing 65 kt of wood-based bioethanol to Haapavesi. However, final investment decisions on these projects have not been made.

Carbon capture from ethanol fermentation is a low-hanging fruit of biogenic CO₂. Exhaust stream from ethanol fermentation is nearly pure CO₂ (~99 %) with low amount of impurities such as moisture, methanol, ethanol, H₂S and dimethylsulphide (Sanchez et al., 2018; Xu et al., 2010). Generally, only dehydration is required before compression and transportation of CO₂ to avoid corrosion of pipelines (Xu et al., 2010). Purification may be required if CO₂

quality requirement is high. For instance, in the food and beverage industry deodorization of CO₂ is required before utilization. Carbon capture from ethanol fermentation is commercially proven and widely used in the US to provide CO₂. Dahowski & Dooley (2008) estimate that the cost for capturing CO₂ from ethanol fermentation falls around 6–12 USD/tCO₂, consisting of dehydration and compression. According to a more recent study by Sanchez et al. (2018), the cost estimates for CO₂ capture and compression from ethanol fermentation are typically around 30 USD/tCO₂.

Globally, as of 2021 there were several ethanol plants capturing CO₂ with a combined capture capacity of 2.21 Mt CO₂ per year, split roughly equally between CO₂ storage and use, with 1.65 Mt CO₂ per year from projects destined for enhanced oil recovery or storage (IEA, 2022).

4.2.4 Hydrotreated vegetable oils

Hydrotreated vegetable oils (HVO) – also known as renewable diesel – are second generation biofuels that offer green alternatives to conventional petroleum diesel. In Finland, HVO's are produced by Neste and UPM. Neste's NEXBTL renewable diesel is produced from vegetable oils and waste fats, whereas UPM produces its BioVerno renewable diesel from tall oil – a by-product from kraft pulping. HVO production capacity in Finland is 520 ktOE, consisting of two Neste NEXBTL units at Porvoo with a total capacity of 420 ktOE and UPM's BioVerno unit at Lappeenranta with a 100 ktOE capacity (Sipilä et al., 2018). Calculated with a GHG emission factor of 4.48 gCO₂eq/MJ for the hydrotreating stage in HVO production (Garraín et al., 2010), HVO production in Finland results in around 97.5 ktPA of biogenic CO₂ emissions (=0.188 tCO₂/toe_{HVO}). Global HVO production capacity in year 2021 was 16 000 million liters. HVO projects can provide new life for petroleum refineries, since 6 of the 18 projects and expansions are defined to be refinery conversions (International Energy Agency, 2021).

HVO's are produced via hydroprocessing, where biogenic oils and fats react with hydrogen under high pressure and catalysts to obtain paraffinic hydrocarbons equivalent to petroleum diesel. Hydrogen consumption and product yield of the process depend on reaction pathways that are controlled with catalyst choice and process conditions. There are three major reaction

pathways for hydrotreatment: deoxygenation, decarbonylation, and decarboxylation, as Figure 19 shows. Deoxygenation has the highest hydrogen consumption but also resulting in the largest diesel yield with H₂O as by-product. Decarbonylation has lower hydrogen consumption with lower diesel yield, releasing CO and H₂O as by-product. Decarboxylation does not consume any hydrogen, while resulting in diesel yield equivalent to decarbonylation with CO₂ as by-product.

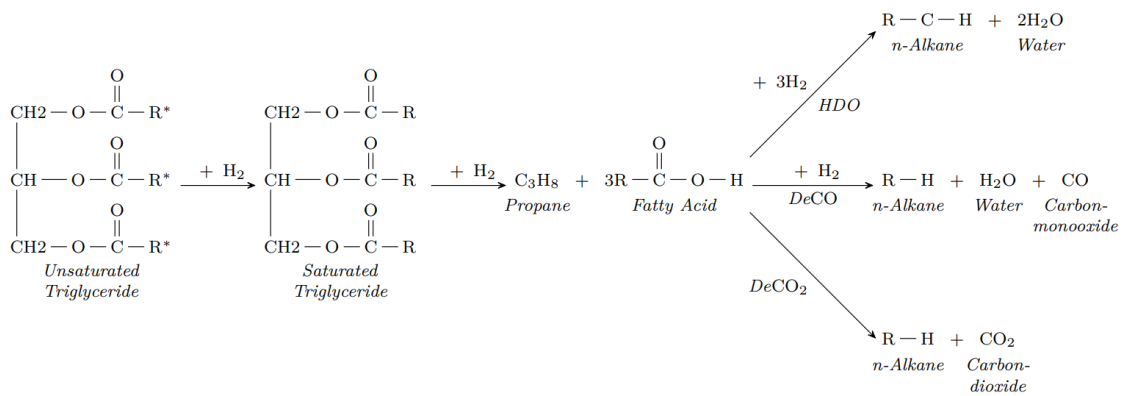


Figure 19. The three main hydrotreatment pathways to produce hydrotreated vegetable oils. (Kiefel & Lüthje, 2018)

Decarboxylation produces an exhaust stream with high CO₂ concentration (>90 %) that could be applicable for inherent CO₂ capture, requiring only some conditioning to produce high purity CO₂. Some sulphur may be present in the exhaust stream as with some catalysts H₂S is added to the feed stream to avoid catalyst deactivation (Kiefel & Lüthje, 2018). Excess water can be reduced to low concentrations using compression and inter-stage cooling or more effective methods like liquid or solid desiccants. If CO is present, a water-gas shift reaction could be used to convert CO to CO₂, producing a stream of H₂ and CO₂ that could be separated, for instance, using pressure-swing adsorption. Although carbon capture in HVO production seems a promising, low-cost source of biogenic CO₂, any activity related to carbon capture in HVO production has yet not been reported.

4.3 Industrial CO₂ sources with high carbon capture potential in Finland

In E-Fuel we examine forest industry, petroleum refineries and biorefining processes as potential CO₂ supplies for CCU in Finland. Carbon capture potential of these industries in Finland were evaluated using a scoring matrix based on key performance indicators (Table 7). Results of the evaluation are presented in Table 10.

Table 10. Carbon capture potential of various industrial CO₂ sources in Finland assessed using a scoring matrix on key performance indicators (KPI).

KPI	Pulp and paper mills	Petroleum refineries (excl. SMR)	Steam methane reforming	Ethanol fermentation	Hydrotreated vegetable oils
Annual CO ₂ emissions of the industry in Finland	2 20.6 Mtpa (2020)	1 2.9 Mtpa (2020)	1 Estimated based on facilities in Finland	0 18 ktpa (2017)	0 97.5 ktpa (est.)
Onsite CO ₂ emissions of an average Finnish facility/complex	2 1 Mtpa (average of facilities reported in E-PRTR)	2 2.7 Mtpa (Neste Kilpilahti)	1	0	0
Industry trend in Finland by 2030	2 Capacity to grow, e.g., Metsä Fibre Kemi bioproduct mill	1 Capacity expected to remain similar	1 Capacity expected to remain similar	2 Capacity expected to grow, e.g., Bioenergo Pori and NordFuel Haapavesi	1 Capacity expected to remain similar
Average CO ₂ concentration of the emission point source(s)	0 12–13 % (recovery and power boiler) 20 % (lime kiln)	0 8–10 % (heaters) 3–5 % (utilities) 10–20 % (FCC)	1 30–45 % (PSA exhaust stream)	2 >90 %	2 >90 % (decarboxylation)
Degree of carbon capture implementation	2 Industrial deployment: e.g., Saipem at Resolute's kraft pulp mill in Quebec, Canada (TRL 8)	2 Commercial: e.g., Sinopec at Qilu refinery, China	2 Commercial: e.g., Air Products Port Arthur and Linde Kilpilahti	2 Commercial: widely used in the US to provide CO ₂ for enhanced oil recovery	0 No reported activity
System integration challenges (e.g., equipment size limitations, energy integration, utility and waste streams)	1 Requires post-combustion capture retrofit. Steam supply may be inadequate, and an auxiliary boiler may be required if the recovery boiler is targeted.	1 Several point sources of CO ₂ , often limited space available, unique site configurations for which it is difficult to create a standard solution for CO ₂ capture.	1 Requires PSA-based capture or solvent-based CO ₂ scrubbing	2 Straightforward integration, requiring only dehydration and purification of the exhaust stream.	2 Straightforward integration expected if the exhaust stream is not mixed with other streams, requiring only dehydration and purification.
Natural origin of the CO ₂	1 >90 % biogenic	0 Fossil	0 Fossil	1 Biogenic	1 Biogenic
Total score (max. 13)	10 High potential	7 Moderate potential	7 Moderate potential	9 High potential	6 Moderate potential

Based on the chosen key performance indicators, pulp and paper mills and ethanol fermentation offer the highest carbon capture potential of the reviewed industries.

Pulp and paper mills yield high potential for bio-CCUS; the mills emit high quantities of biogenic CO₂, the industry is stable and has growth potential, and there is ongoing carbon capture activity in forest industry with successful demonstration projects. Also, the mills often have good preconditions regarding energy availability and logistics. Disadvantages include low CO₂ concentration of the emission point sources and moderate difficulty of system integration, which makes carbon capture more costly than, for instance, in processes with high CO₂ concentration exhaust streams and straightforward integration.

Ethanol fermentation is a low hanging fruit of bio-CO₂ regarding cost, but with low quantitative potential. Fermentation produces an exhaust stream with high concentration of biogenic CO₂, enabling low capture cost with little work required. Carbon capture from fermentation is also mature with decades of experience in the US. However, ethanol fermentation capacity in Finland is low, although new investments are expected to take place soon.

Petroleum refineries have high quantitative capture potential per facility and good preconditions for energy availability and logistics. However, carbon capture implementation is not appealing due to the fossil origin of the carbon, low CO₂ concentration exhaust streams that are distributed over several point sources at the site, and unique and hard-to-standardize site configurations.

Steam methane reformers have moderate quantitative capture potential per unit, exhaust streams with moderately high CO₂ concentration, and commercial maturity in carbon capture. However, fossil origin of the CO₂ and outlook of natural gas reforming amidst the growing green hydrogen capacity reduce the appeal.

Hydrotreated vegetable oil production based on decarboxylation emits a high CO₂ concentration exhaust stream with potential to capture bio-CO₂ at low-cost and little effort. Low quantitative capture potential and lack of maturity in carbon capture reduce its relevance at national level, although still being promising regarding future sources of bio-CO₂.

5 CONCLUSIONS

CCUS consists of several stages that can be generally divided into source characterization, capture or separation, purification, compression or liquefaction, interim storage, transportation, and utilization or geological storage. Stages required in CCUS are case-specific and may alter between different value chains depending on properties of the source stream, capture technology in use, location, logistical readiness and end-use of the CO₂. A CCS value chain consisting of post-combustion capture, conditioning, transport, and storage yields a total cost ranging around 42–161 €/tCO₂, with the cost primarily depending on CO₂ concentration of the emission source, scale of operation, and required stages of logistics. Capture is typically the most impactful stage on cost, with post-combustion capture from dilute streams accounting for 50–60 % of total costs in CCS. Natural inherent capture/purification from high CO₂ concentration sources offers potential for significantly lower capture costs, but only few emissions point sources are of such nature.

There are several industrial emission point sources applicable for carbon capture and several technology options for capturing CO₂. Therefore, finding the most cost-effective pathways for carbon capture in each application should be examined case-by-case. Selection of a suitable capture technology for a certain application is determined by operating conditions and desired capture performance regarding CO₂ purity and capture efficiency. Feasibility of implementation and techno-economic performance of carbon capture depends on factors like emission stream characteristics, available energy streams on site (steam, low-grade heat, electricity, cooling), equipment size restrictions, required emission and waste management, and other auxiliary demands. Also, additional treatment (e.g., cooling, purification, compression) may be required before and/or after capture depending on the emission source and the capture technology in use.

Several technology options are available and in development for carbon capture. Post-combustion capture is the most promising method of carbon capture for industrial applications due to retrofittable nature and wide applicability of the technologies. In post-combustion capture, scrubbing technologies using amine absorbents are proven, high-performing option with commercial maturity and several technology suppliers available, yielding a low risk of implementation. However, amines suffer from thermal, oxidative, and impurity-related

degradation that leads to toxic degradation products, corrosivity and high regeneration energy requirement. Some alternative technologies with more eco-friendly nature and improved performance vs. amines have emerged to TRL 8–9 and have become reasonable options to consider for carbon capture implementors at commercial level. Carbonate salt absorbents (e.g., hot potassium carbonate and enzyme-enhanced K_2CO_3) are currently one of the most promising technologies to replace amines in similar applications of post-combustion capture. Several other technologies like solid sorbent processes, membranes, cryogenic separation, and fuel cell systems are on the brink of commercialization at TRL 6–7, but the risk of implementation is currently too high for an industrial party seeking a proven, commercial technology for carbon capture. As carbon capture requires energy integration and other utility demands, feasibility and techno-economic performance of carbon capture is highly case-specific.

Carbon capture potential of forest industry, petroleum refineries and biorefineries in Finland were evaluated by developing a scoring system based on key performance indicators. Based on the scoring results, pulp mills and ethanol fermentation plants yield the most potential for carbon capture implementation. Pulp mills have high potential for bio-CCUS as there is high quantities of biogenic CO_2 available, the industry is stable and has growth potential, and there are successful demonstration projects and ongoing research and development activity related to carbon capture. Due to low CO_2 concentration of the exhaust streams in pulp mills, moderate effort with a specific capture equipment is required for system integration and long-term commitment for the storage or utilization project is needed. High CO_2 concentration sources, e.g., exhaust streams from ethanol fermentation and HVO production, offer the lowest hanging fruits regarding capture cost, but quantitative capture potential of such sources is in Finland low. These sources could be used to provide low-cost CO_2 for in-situ CCU at small-scale with relatively low integration effort and little economic commitment. Petroleum refineries have low appeal for carbon capture as the fossil-based CO_2 emissions are distributed over several point sources, and as the site configurations are often unique and difficult to standardize for carbon capture. Capturing CO_2 from steam methane reformers yields lower capture cost vs. combustion processes but the fossil origin of carbon and outlook of steam methane reforming amidst the growing green hydrogen capacity reduces the appeal of carbon capture implementation compared to other options.

To evaluate feasibility and economics of a certain technology in a certain application, a detailed case-study with process modelling together with a well-known benchmark technology is required. As logistics yields significant costs, location and readiness for CO₂ logistics should be carefully considered when screening potential emission point sources for carbon capture implementation. Joint development between industrial stakeholders is important for speeding up the introduction of CCUS in Finland. Pilot and demonstration campaigns at industrial sites are needed to develop shared knowledge and competence on carbon capture in the field of industry.

REFERENCES

- 3D. (2023). *3D project Homepage*. <https://3d-ccus.com/>
- ACCSESS. (2022). *Access project page*. <https://www.projectaccess.eu/>
- AFR. (2022). *Cement Australia signs carbon capture and storage deal with KC8*. <https://www.afr.com/companies/energy/australia-s-largest-cement-producer-explores-carbon-capture-20221203-p5c3f4>
- al Baroudi, H., Awoyomi, A., Patchigolla, K., Jonnalagadda, K., & Anthony, E. J. (2021). A review of large-scale CO₂ shipping and marine emissions management for carbon capture, utilisation and storage. *Applied Energy*, 287, 116510. <https://doi.org/10.1016/J.APENERGY.2021.116510>
- ArcelorMittal. (n.d.). *The 3D Project (DMX™ Demonstration in Dunkirk) | ArcelorMittal*. Retrieved January 17, 2023, from <https://corporate.arcelormittal.com/climate-action/decarbonisation-technologies/the-3d-project-dmx-demonstration-in-dunkirk>
- Aspelund, A. (2010). Gas purification, compression and liquefaction processes and technology for carbon dioxide (CO₂) transport. *Developments and Innovation in Carbon Dioxide (CO₂) Capture and Storage Technology*, 383–407. <https://doi.org/10.1533/9781845699574.4.383>
- Aspelund, A., & Jordal, K. (2007). Gas conditioning—The interface between CO₂ capture and transport. *International Journal of Greenhouse Gas Control*, 1(3), 343–354. [https://doi.org/10.1016/S1750-5836\(07\)00040-0](https://doi.org/10.1016/S1750-5836(07)00040-0)
- Augustsson, O., Baburao, B., Dube, S., Bedell, S., Strunz, P., Balfe, M., & Stallmann, O. (2017). Chilled Ammonia Process Scale-up and Lessons Learned. *Energy Procedia*, 114, 5593–5615. <https://doi.org/10.1016/J.EGYPRO.2017.03.1699>
- Bains, P., Psarras, P., & Wilcox, J. (2017). CO₂ capture from the industry sector. *Progress in Energy and Combustion Science*, 63, 146–172. <https://doi.org/10.1016/J.PECS.2017.07.001>
- Baker, R. W., Merkel, T., & Freeman, B. C. (2018). *Large Pilot Testing of the MTR Membrane Post-Combustion CO₂ Capture Process (DE-FE0031587; FOA 1788) NETL Project Manager: Sai Gollakota*.
- Batoon, V., Hicks, D., Huang, I., Hofmann, T., Kniep, J., Merkel, T., Paulaha, C., & Westling, E. (2019). Scale-Up and Testing of Advanced Polaris Membrane CO₂ Capture

- Technology (DE-FE0031591) . In *Carbon Capture, Utilization, and Storage Integrated Review Meeting*.
- Beccs Stockholm. (n.d.). *Beccs Stockholm Homepage*. Retrieved January 13, 2023, from <https://beccs.se/>
- Bilbak, V. (2009). *Conditioning of CO₂ coming from a CO₂ capture process for transport and storage purposes*.
- BioEnerg. (2022). *BioEnerg Website*. <https://bioenergo.fi/en/>
- Bitsch-Larsen, A., Degenstein, N. J., & Schmidt, L. D. (2008). Effect of sulfur in catalytic partial oxidation of methane over Rh–Ce coated foam monoliths. *Applied Catalysis B: Environmental*, 78(3–4), 364–370. <https://doi.org/10.1016/J.APCATB.2007.09.006>
- Bryngelsson, M., & Westermark, M. (2009). CO₂ capture pilot test at a pressurized coal fired CHP plant. *Energy Procedia*, 1(1), 1403–1410. <https://doi.org/10.1016/J.EGYPRO.2009.01.184>
- Bui, M., Adjiman, C. S., Bardow, A., Anthony, E. J., Boston, A., Brown, S., Fennell, P. S., Fuss, S., Galindo, A., Hackett, L. A., Hallett, J. P., Herzog, H. J., Jackson, G., Kemper, J., Krevor, S., Maitland, G. C., Matuszewski, M., Metcalfe, I. S., Petit, C., ... mac Dowell, N. (2018). Carbon capture and storage (CCS): the way forward. *Energy & Environmental Science*, 11(5), 1062–1176. <https://doi.org/10.1039/C7EE02342A>
- Buvik, V., Høisæter, K. K., Vevelstad, S. J., & Knuutila, H. K. (2021). A review of degradation and emissions in post-combustion CO₂ capture pilot plants. *International Journal of Greenhouse Gas Control*, 106, 103246. <https://doi.org/10.1016/J.IJGGC.2020.103246>
- Cenovus. (2021a). *Carbon capture technology shows potential for commercial application*. <https://www.cenovus.com/news/our-stories/carbon-capture-technology-shows-potential-for-commercial-application.html>
- Cenovus. (2021b). *Carbon capture technology shows potential for commercial application*. <https://www.cenovus.com/news/our-stories/carbon-capture-technology-shows-potential-for-commercial-application.html>
- Chen, F., & Morosuk, T. (2021). Exergetic and economic evaluation of co₂ liquefaction processes. *Energies*, 14(21). <https://doi.org/10.3390/en14217174>

- Chen, G., Wang, T., Zhang, G., Liu, G., & Jin, W. (2022). Membrane materials targeting carbon capture and utilization. *Advanced Membranes*, 2, 100025. <https://doi.org/10.1016/j.advmem.2022.100025>
- Chen, P.-C., Cho, H.-H., Jhuang, J.-H., & Ku, C.-H. (2021). Selection of Mixed Amines in the CO₂ Capture Process. *C 2021*, Vol. 7, Page 25, 7(1), 25. <https://doi.org/10.3390/C7010025>
- CO₂ Capsol. (2022). *CO₂ Capsol: A Proven, Cost Competitive Carbon Capture Technology - A company presentation*.
- CO₂ Solutions. (2021). *CO₂ Solutions*. CO₂ Solutions by Saipem Web-Page. <https://co2solutions.com/en/>
- CORDIS. (2021). *Providing access to cost-efficient, replicable, safe and flexible CCUS / ACCSESS Project | Fact Sheet | H2020 | CORDIS | European Commission*. <https://cordis.europa.eu/project/id/101022487>
- CRIN. (2022). *Molten Carbonate Fuel Cell (MCFC) Demonstration Pilot (FuelCell Energy) – Accelerating Clean Energy*. <https://acceleratingcleanenergy.com/projects/molten-carbonate-fuel-cell-mcfc-demonstration-pilot-canadian-natural/>
- Dahowski, R. T., & Dooley, J. J. (2008). *Source/Sink Matching for U.S. Ethanol Plants and Candidate Deep Geologic Carbon Dioxide Storage Formations*. <http://www.ntis.gov/ordering.htm>
- de Visser, E., Hendriks, C., Barrio, M., Mølnvik, M. J., de Koeijer, G., Liljemark, S., & le Gallo, Y. (2008). Dynamis CO₂ quality recommendations. *International Journal of Greenhouse Gas Control*, 2(4), 478–484. <https://doi.org/10.1016/J.IJGGC.2008.04.006>
- Deng, H., Roussanaly, S., & Skaugen, G. (2019). Techno-economic analyses of CO₂ liquefaction: Impact of product pressure and impurities. *International Journal of Refrigeration*, 103, 301–315. <https://doi.org/10.1016/j.ijrefrig.2019.04.011>
- DOE, & NETL. (2015). *Carbon Dioxide Capture Handbook*. <https://netl.doe.gov/node/5881>
- Dry, M. E. (2002). The Fischer–Tropsch process: 1950–2000. *Catalysis Today*, 71(3–4), 227–241. [https://doi.org/10.1016/S0920-5861\(01\)00453-9](https://doi.org/10.1016/S0920-5861(01)00453-9)
- EEA. (2021). *Pollutant and sector*. <https://industry.eea.europa.eu/analyse/pollutant-and-sector>

- EQUINOR. (2019). *EL001 Northern Lights-Receiving and permanent storage of CO₂ Plan for development, installation and operation Part II-Impact Assessment*. <https://northernlightsccs.eu/>
- Equinor. (2019). *Northern Lights Project Concept report*. www.equinor.com
- Font-Palma, C., Cann, D., & Udemu, C. (2021). Review of Cryogenic Carbon Capture Innovations and Their Potential Applications. *C*, 7(3), 58. <https://doi.org/10.3390/c7030058>
- Fradette, L., Lefebvre, S., & Carley, J. (2017). Demonstration Results of Enzyme-Accelerated CO₂ Capture. *Energy Procedia*, 114, 1100–1109. <https://doi.org/10.1016/J.EGYPRO.2017.03.1263>
- FuelCell Energy. (2022). *Fuelcell Energy Project Identified for Funding From Canada's Clean Resource Innovation Network to Design Pilot for Clean Carbon Capture*. <https://investor.fce.com/press-releases/press-release-details/2022/Fuelcell-Energy-Project-Identified-for-Funding-From-Canadas-Clean-Resource-Innovation-Network-to-Design-Pilot-for-Clean-Carbon-Capture/default.aspx>
- Garcia, S., Weir, H., van der Spek, M., Saleh, A., Charalambous, C., Sanchez-Fernandez, E., Ros, J., Skylogianni, E., Garcia Moretz-Sohn Monteiro, J., Wiechers, G., Moser, P., Kvamsdal, H. M., Haugen, G., Eldrup, N. H., & Skagestad, R. (2021). Process Integration of Advanced Amine-based Solvents in Power and Industrial Plants: A New Benchmark for Post-combustion Carbon Capture? *SSRN Electronic Journal*. <https://doi.org/10.2139/SSRN.3816508>
- Garraín, D., Herrera, I., Lago, C., Lechón, Y., & Sáez, R. (2010). Renewable Diesel Fuel from Processing of Vegetable Oil in Hydrotreatment Units: Theoretical Compliance with European Directive 2009/28/EC and Ongoing Projects in Spain. *Smart Grid and Renewable Energy*, 01(02), 70–73. <https://doi.org/10.4236/SGRE.2010.12011>
- Global CCS Institute. (2011). *The costs of CO₂ capture, transport and storage: Post-demonstration CCS in the EU*. <https://www.globalccsinstitute.com/resources/publications-reports-research/the-costs-of-co2-capture-transport-and-storage-post-demonstration-ccs-in-the-eu/>
- Gray, N., McDonagh, S., O'Shea, R., Smyth, B., & Murphy, J. D. (2021). Decarbonising ships, planes and trucks: An analysis of suitable low-carbon fuels for the maritime,

- aviation and haulage sectors. *Advances in Applied Energy*, 1, 100008. <https://doi.org/10.1016/j.adapen.2021.100008>
- Hamrin, S. (2016). *Method and plant for CO₂ capture* (Patent No. US10391447B2). <https://patents.google.com/patent/US10391447B2/en>
- He, X. (2018). A review of material development in the field of carbon capture and the application of membrane-based processes in power plants and energy-intensive industries. *Energy, Sustainability and Society* 2018 8:1, 8(1), 1–14. <https://doi.org/10.1186/S13705-018-0177-9>
- Hoeger, C., Burt, S., & Baxter, L. (2021). *Cryogenic Carbon CaptureTM Technoeconomic Analysis*.
- HZ Inova. (2022). *Additional CO₂ Separation Process – Hitachi Zosen Inova Signs MoU with CO₂ Capsol*. <https://www.hz-inova.com/additional-co2-separation-process-hitachi-zosen-inova-signs-mou-with-co2-capsol/>
- IEA. (2019). *Levelised cost of CO₂ capture by sector and initial CO₂ concentration*. <https://www.iea.org/data-and-statistics/charts/levelised-cost-of-co2-capture-by-sector-and-initial-co2-concentration-2019>
- IEA. (2021). *Tracking Transport 2021 – Analysis - IEA*. <https://www.iea.org/reports/tracking-transport-2021>
- IEA. (2022). *IEA (2022), Biofuels*. <https://www.iea.org/reports/biofuels>
- IEAGHG. (2014). *Evaluation and analysis of the performance of dehydration units for CO₂ capture*. www.ieaghg.org
- IEAGHG. (2019). *Further Assessment of Emerging CO₂ Capture Technologies for the Power Sector and their Potential to Reduce Costs*. www.ieaghg.org
- IEAGHG. (2021). *IEAGHG report: 2021-02 CO₂ as a Feedstock: Comparison of CCU Pathways*. <https://ieaghg.org/ccs-resources/blog/new-ieaghg-report-2021-02-co2-as-a-feedstock-comparison-of-ccu-pathways>
- International Energy Agency, I. (2021). *Renewable Energy Market Update - Outlook for 2021 and 2022*. www.iea.org/t&c/
- Johansson, D., Rootzén, J., Berntsson, T., & Johnsson, F. (2012). Assessment of strategies for CO₂ abatement in the European petroleum refining industry. *Energy*, 42(1), 375–386. <https://doi.org/10.1016/J.ENERGY.2012.03.039>

- Just, P.-E., Leenders, S., & Wijenberg, J. (2021). Non-Aqueous Solvents Unlikely to Present Any Cost Benefit for Post-Combustion CO₂ Capture. *SSRN Electronic Journal*. <https://doi.org/10.2139/SSRN.3813213>
- Katajisto, O. (2020). *Calcination of calcium carbonate based materials in electric heated rotary kiln*. <https://trepo.tuni.fi/handle/10024/123811>
- KC8. (2022). *KC8 Capture Technologies Homepage*. <https://kc8capture.com/>
- Kearns, D. (2022). *STATE OF THE ART: CCS TECHNOLOGIES 2022*.
- Kearns, D., Liu, H., & Consoli, C. (2021). *Technology Readiness and Costs of CCS*.
- Kiefel, R., & Lüthje, J. T. (2018). *Conceptual Process Design: Production of Hydrotreated Vegetable Oil as an Additive for Petro-Diesel*.
- Kleener. (2021). *Kleener Power Solutions - A company presentation*. https://www.beccu.fi/wp-content/uploads/2021/02/BECCU-mid-term-workshop-100221-final_long.pdf
- Kvamsdal, H. M., Haugen, G., & Svendsen, H. F. (2011). Flue-gas cooling in post-combustion capture plants. *Chemical Engineering Research and Design*, 89(9), 1544–1552. <https://doi.org/10.1016/J.CHERD.2011.02.029>
- Lee, U., Yang, S., Jeong, Y. S., Lim, Y., Lee, C. S., & Han, C. (2012). *Carbon Dioxide Liquefaction Process for Ship Transportation*. <https://doi.org/10.1021/ie300431z>
- Leo, T. (2022). *The Basics of FuelCell Energy's Carbon Capture Platform*. <https://www.fuelcellenergy.com/blog/basics-of-fuelcell-energy-carbon-capture-platform/>
- Linjala, O. (2021). *Review on Post-Combustion Carbon Capture Technologies and Capture of Biogenic CO₂ Using Pilot-Scale Equipment*.
- Madejski, P., Chmiel, K., Subramanian, N., & Kuś, T. (2022). Methods and Techniques for CO₂ Capture: Review of Potential Solutions and Applications in Modern Energy Technologies. *Energies* 2022, Vol. 15, Page 887, 15(3), 887. <https://doi.org/10.3390/EN15030887>
- Mazzetti, M. J., Eldrup, N. H., Anthonsen, K. L., Haugen, H. A., Onarheim, K., Bergmo, P., Kjarstad, J., Johnson, F., Stigson, P., Gislason, S. R., & Røkke, N. A. (2014). NOR-DICCS CCS roadmap. *Energy Procedia*, 51, 1–13. <https://doi.org/10.1016/J.EGYPRO.2014.07.001>

- McCoy, M. (2022). Large-scale carbon capture comes to China. *C&EN Global Enterprise*, 100(5), 8–8. <https://doi.org/10.1021/CEN-10005-BUSCON1>
- Metsäteollisuus ry. (2022, November 16). *Metsäteollisuus ry:n jäsenyritysten tuotantolaitokset kartalla*. <https://www.metsateollisuus.fi/uutishuone/tuotantolaitoskartta>
- Monteiro, J., Ros, J., Skylogiani, E., Hartono, A., Svendsen, H., Knuutila, H., Moser, P., Wiechers, G., Charalambous, C., & Garcia, S. (2020). *Accelerating Low carbon Industrial Growth through CCUS Deliverable Nr. D1.1.7 Guidelines for Emissions Control Dissemination level Public Written By*.
- Moser, P., Wiechers, G., Schmidt, S., Garcia Moretz-Sohn Monteiro, J., Charalambous, C., Garcia, S., & Sanchez Fernandez, E. (2020). Results of the 18-month test with MEA at the post-combustion capture pilot plant at Niederaussem – new impetus to solvent management, emissions and dynamic behaviour. *International Journal of Greenhouse Gas Control*, 95, 102945. <https://doi.org/10.1016/J.IJGGC.2019.102945>
- Moser, P., Wiechers, G., Schmidt, S., Garcia Moretz-Sohn Monteiro, J., Goetheer, E., Charalambous, C., Saleh, A., van der Spek, M., & Garcia, S. (2021). ALIGN-CCUS: Results of the 18-Month Test with Aqueous AMP/PZ Solvent at the Pilot Plant at Niederaussem – Solvent Management, Emissions and Dynamic Behavior. *SSRN Electronic Journal*. <https://doi.org/10.2139/SSRN.3812132>
- MTR. (2023). *Carbon Capture - Membrane Technology and Research*. <https://www.mtrinc.com/our-business/carbon-capture/>
- Network Technology Guidance for CO₂ transport by ship ZEP/CCSA Report*. (2022).
- NordFuel. (2022). *NordFuel Website*. <https://nordfuel.fi/en/front-page/>
- Norsk e-Fuel. (2022). *Norsk e-Fuel project page*. <https://www.norsk-e-fuel.com/>
- NPC. (2019). *Meeting the Dual Challenge A Roadmap to At-Scale Deployment of Carbon Capture, Use, and Storage*. <https://dualchallenge.npc.org/downloads.php>
- Olsson, O., Bang, C., Borchers, M., Hahn, A., Karjunen, H., Thrän, D., & Tynjälä, T. (2020). *Deployment of BECCS/U value chains Technological pathways, policy options and business models Title of publication Subtitle of publication*.
- Onarheim, K., Santos, S., Kangas, P., & Hankalin, V. (2017a). Performance and costs of CCS in the pulp and paper industry part 1: Performance of amine-based post-combustion CO₂ capture. *International Journal of Greenhouse Gas Control*, 59, 58–73. <https://doi.org/10.1016/J.IJGGC.2017.02.008>

- Onarheim, K., Santos, S., Kangas, P., & Hankalin, V. (2017b). Performance and cost of CCS in the pulp and paper industry part 2: Economic feasibility of amine-based post-combustion CO₂ capture. *International Journal of Greenhouse Gas Control*, *66*, 60–75. <https://doi.org/10.1016/J.IJGGC.2017.09.010>
- Pieri, T., Nikitas, A., Castillo-Castillo, A., & Angelis-Dimakis, A. (2018). Holistic Assessment of Carbon Capture and Utilization Value Chains. *Environments 2018, Vol. 5, Page 108*, *5*(10), 108. <https://doi.org/10.3390/ENVIRONMENTS5100108>
- Renfrew, S. E., Starr, D. E., & Strasser, P. (2020a). Electrochemical Approaches toward CO₂ Capture and Concentration. *ACS Catalysis*, *10*(21), 13058–13074. <https://doi.org/10.1021/acscatal.0c03639>
- Renfrew, S. E., Starr, D. E., & Strasser, P. (2020b). Electrochemical Approaches toward CO₂ Capture and Concentration. *ACS Catalysis*, *10*(21), 13058–13074. <https://doi.org/10.1021/acscatal.0c03639>
- Reuze. (2022). *Reuze project page*. <https://www.reuze.eu/>
- Ritchie, H., & Roser, M. (2020). CO₂ and Greenhouse Gas Emissions. *Our World in Data*. <https://ourworldindata.org/co2-and-other-greenhouse-gas-emissions>
- Rochelle, G. T. (2016). Conventional amine scrubbing for CO₂ capture. *Absorption-Based Post-Combustion Capture of Carbon Dioxide*, 35–67. <https://doi.org/10.1016/B978-0-08-100514-9.00003-2>
- Romano, M. C., Spinelli, M., Campanari, S., Consonni, S., Cinti, G., Marchi, M., & Borgarello, E. (2013). The Calcium Looping Process for Low CO₂ Emission Cement and Power. *Energy Procedia*, *37*, 7091–7099. <https://doi.org/10.1016/J.EGYPRO.2013.06.645>
- Roussanaly, S., Anantharaman, R., Lindqvist, K., & Hagen, B. (2018). A new approach to the identification of high-potential materials for cost-efficient membrane-based post-combustion CO₂ capture. *Sustainable Energy & Fuels*, *2*(6), 1225–1243. <https://doi.org/10.1039/C8SE00039E>
- Sanchez, D. L., Johnson, N., McCoy, S. T., Turner, P. A., & Mach, K. J. (2018). Near-term deployment of carbon capture and sequestration from biorefineries in the United States. *Proceedings of the National Academy of Sciences of the United States of America*, *115*(19), 4875–4880. https://doi.org/10.1073/PNAS.1719695115/SUPPL_FILE/PNAS.201719695SI.PDF

- Santos, M. P. S., Manovic, V., & Hanak, D. P. (2021). Unlocking the potential of pulp and paper industry to achieve carbon-negative emissions via calcium looping retrofit. *Journal of Cleaner Production*, 280, 124431. <https://doi.org/10.1016/J.JCLEPRO.2020.124431>
- Sartori, G., & Savage, D. W. (1983). Sterically hindered amines for carbon dioxide removal from gases. *Industrial and Engineering Chemistry Fundamentals*, 22(2), 239–249. <https://doi.org/10.1021/I100010A016>
- Sawada, Y., Tanaka, J., Tanase, D., Sasaki, T., & Suzuki, C. (2021). Overall Review of Tomakomai CCS Demonstration Project ~Target of 300,000 tonnes CO₂ injection achieved. *SSRN Electronic Journal*. <https://doi.org/10.2139/SSRN.3812038>
- Sharifian, R., Wagterveld, R. M., Digdaya, I. A., Xiang, C., & Vermaas, D. A. (2021). Electrochemical carbon dioxide capture to close the carbon cycle. In *Energy and Environmental Science* (Vol. 14, Issue 2, pp. 781–814). Royal Society of Chemistry. <https://doi.org/10.1039/d0ee03382k>
- Shirley, P., & Myles, P. (2019). *Quality Guidelines for Energy System Studies: CO₂ Impurity Design Parameters*. <https://doi.org/10.2172/1566771>
- Sieminski, • Mr Adam. (2021). *TECHNOLOGY READINESS AND COSTS OF CCS 2 THE CIRCULAR CARBON ECONOMY: KEYSTONE TO GLOBAL SUSTAINABILITY SERIES assesses the*.
- Singh, A., & Stéphenne, K. (2014). Shell Cansolv CO₂ capture technology: Achievement from First Commercial Plant. *Energy Procedia*, 63, 1678–1685. <https://doi.org/10.1016/J.EGYPRO.2014.11.177>
- SINTEF. (2019). *CO₂ impurities: What else is there in CO₂ except CO₂?* <https://blog.sintef.com/sintefenergy/energy-efficiency/what-else-is-there-in-co2-except-co2/>
- Sipilä, E., Kiuru, H., Jokinen, J., Saarela, J., Tamminen, S., Laukkanen, M., & Palonen, P. (2018). *Biopolttoaineiden kustannustehokkaat toteutuspolut vuoteen 2030*. <https://julkaisut.valtioneuvosto.fi/handle/10024/161074>
- Slater, J., & Chronopoulos, T. (2019). *IEA GREENHOUSE GAS R&D PROGRAMME Review of Fuel Cell Technologies with CO₂ Capture for the Power Sector*. www.ieaghg.org
- Smart Specialisation Platform. (2022). *Carbon Capture and Utilization*. <https://s3platform-legacy.jrc.ec.europa.eu/carbon-capture-and-utilization>

- Smith, E., Morris, J., Kheshgi, H., Teletzke, G., Herzog, H., & Paltsev, S. (2021). The cost of CO₂ transport and storage in global integrated assessment modeling. *International Journal of Greenhouse Gas Control*, *109*, 103367. <https://doi.org/10.1016/J.IJGGC.2021.103367>
- Smith, K. H., Harkin, T., Mumford, K., Kentish, S., Qader, A., Anderson, C., Hooper, B., & Stevens, G. W. (2017). Outcomes from pilot plant trials of precipitating potassium carbonate solvent absorption for CO₂ capture from a brown coal fired power station in Australia. *Fuel Processing Technology*, *155*, 252–260. <https://doi.org/10.1016/J.FUPROC.2016.08.008>
- Smith, K. H., Nicholas, N. J., & Stevens, G. W. (2016). Inorganic salt solutions for post-combustion capture. *Absorption-Based Post-Combustion Capture of Carbon Dioxide*, 145–166. <https://doi.org/10.1016/B978-0-08-100514-9.00007-X>
- St1 Oy. (2022, November 16). *St1 Ethanol production concepts*. <https://www.st1.com/fi/st1-lyhyesti/tietoa-yrityksesta/liiketoiminta-alueet/edistyneita-polttonesteita-jatteista>
- Sumida, K., Rogow, D. L., Mason, J. A., McDonald, T. M., Bloch, E. D., Herm, Z. R., Bae, T. H., & Long, J. R. (2012). Carbon dioxide capture in metal-organic frameworks. *Chemical Reviews*, *112*(2), 724–781. https://doi.org/10.1021/CR2003272/ASSET/IMAGES/LARGE/CR-2011-003272_0048.JPEG
- Surprenant, Richard. (2019). *Start-up of a new CO₂ capture unit in a pulp mill - A company presentation*.
- Teir, S., Tsupari, E., Koljonen, T., Pikkarainen, T., Kujanpää, L., Arasto, A., Tourunen, A., Kärki, J., Nieminen, M., & Aatos, S. (2009). *Hiilidioksidin talteenotto ja varastointi (CCS)*. <https://publications.vtt.fi/pdf/tiedotteet/2009/T2503.pdf>
- Trædal, S., Stang, J. H. G., Snustad, I., Johansson, M. V., & Berstad, D. (2021). CO₂ liquefaction close to the triple point pressure. *Energies*, *14*(24). <https://doi.org/10.3390/en14248220>
- Tsakoumis, N. E., Rønning, M., Borg, Ø., Rytter, E., & Holmen, A. (2010). Deactivation of cobalt based Fischer–Tropsch catalysts: A review. *Catalysis Today*, *154*(3–4), 162–182. <https://doi.org/10.1016/J.CATTOD.2010.02.077>
- Tsupari, E., Korpijärvi, K., Kauppinen, J., Pikkarainen, T., Leino, T., Simell, P., Lappalainen, M., Wingerg, I., Katajisto, O., & Mäkikouri, S. (2022). *Decarbonate - Public Final report*. www.decarbonate.fi

- Ueckerdt, F., Bauer, C., Dirnaichner, A., Everall, J., Sacchi, R., & Luderer, G. (2021). Potential and risks of hydrogen-based e-fuels in climate change mitigation E-fuels promise to replace fossil fuels with renewable electricity without the demand-side transformations required for a direct electrification. *Nature Climate Change*. <https://doi.org/10.1038/s41558-021-01032-7>
- van Straelen, J., Geuzebroek, F., Goodchild, N., Protopapas, G., & Mahony, L. (2010). CO₂ capture for refineries, a practical approach. *International Journal of Greenhouse Gas Control*, 4(2), 316–320. <https://doi.org/10.1016/J.IJGGC.2009.09.022>
- Vega, F., Sanna, A., Navarrete, B., Maroto-Valer, M. M., & Cortés, V. J. (2014). Degradation of amine-based solvents in CO₂ capture process by chemical absorption. *Greenhouse Gases: Science and Technology*, 4(6), 707–733. <https://doi.org/10.1002/GHG.1446>
- Vozniuk, O., Tanchoux, N., Millet, J.-M., Albonetti, S., Renzo, F. di, & Cavani, F. (2019). *Spinel Mixed Oxides for Chemical-Loop Reforming: From Solid State to Potential Application Spinel Mixed Oxides for Chemical-Loop Reforming: From Solid State to Potential Application*. Stefania Albonetti; Siglinda Perathoner; Elsje Alessandra Quadrelli. *Horizons in Sustainable Industrial*. <https://doi.org/10.1016/B978-0-444-64127-4.00014-8>
- Wilcox, J. (2012). Carbon capture. *Carbon Capture*, 1–323. <https://doi.org/10.1007/978-1-4614-2215-0>
- Xu, Y., Isom, L., & Hanna, M. A. (2010). Adding value to carbon dioxide from ethanol fermentations. *Bioresource Technology*, 101(10), 3311–3319. <https://doi.org/10.1016/J.BIORTECH.2010.01.006>
- Zang, G., Sun, P., Elgowainy, A. A., Bafana, A., & Wang, M. (2021). Performance and cost analysis of liquid fuel production from H₂ and CO₂ based on the Fischer-Tropsch process. *Journal of CO₂ Utilization*, 46, 101459. <https://doi.org/10.1016/J.JCOU.2021.101459>