

EnMAP Spectral and Radiometric Calibration

D. Marshall Ingram^{1,*}, K. Alonso², S. Baur³, M. Bachmann⁴, B. Gerasch¹, M. Habermeyer⁴, S. Holzwarth⁴, M. Langheinrich¹, M. Pato¹, R. de los Reyes¹, M. Schneider¹, P. Schwind¹, H. Witt¹, E. Carmona¹ and EnMAP Team

¹ German Aerospace Center (DLR), Remote Sensing Technology Institute, Weßling, Germany

² RHEA Group c/o European Space Agency (ESA), Frascati, Italy

³ OHB-System AG, Weßling, Germany

⁴ German Aerospace Center (DLR), German Remote Sensing Data Center, Weßling, Germany

[*David.Marshall@dlr.de](mailto:David.Marshall@dlr.de)

1st EnMAP User Workshop

Virtual, 10-11.10.2023




Federal Ministry
for Economic Affairs
and Climate Action




Knowledge for Tomorrow



EnMAP Onboard Calibration

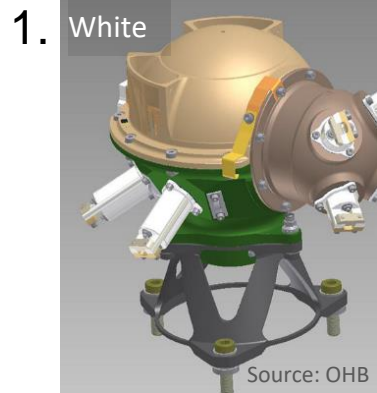

1. **OBCA-Radiometric Stability** Lamp calibration with white spectralon sphere, frequency: weekly




2.

2. **OBCA-Spectral** Spectral calibration with doped spectralon sphere, frequency: 2 weeks

3.



3. **Absolute Radiometric** Sun calibration with sun diffuser, frequency: monthly



4.

4. **Linearity Calibration** with LEDs in front of focal plane, frequency: monthly

5A.



5. **A. Shutter Calibration Mechanism** Deep Space calibration, frequency: monthly

5. **B. Shutter Calibration Mechanism** dark measurement, frequency: before and after every image acquisition



5B.



Radiometric Calibration Measurements: April – December 2022





Knowledge for Tomorrow





First Calibration Measurements



- OBCA-Radiometric Lamp

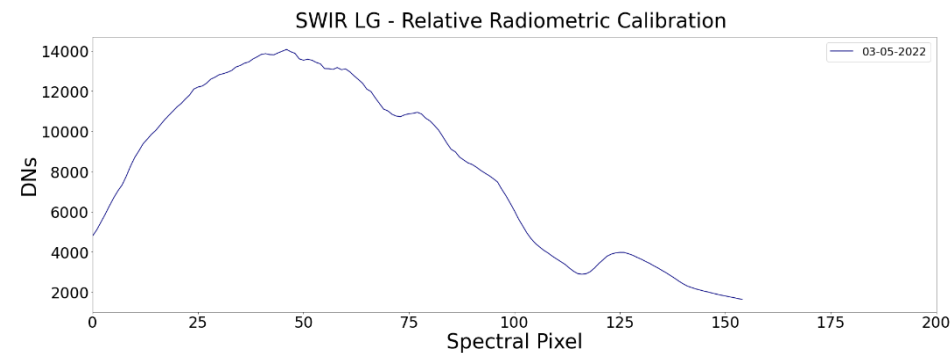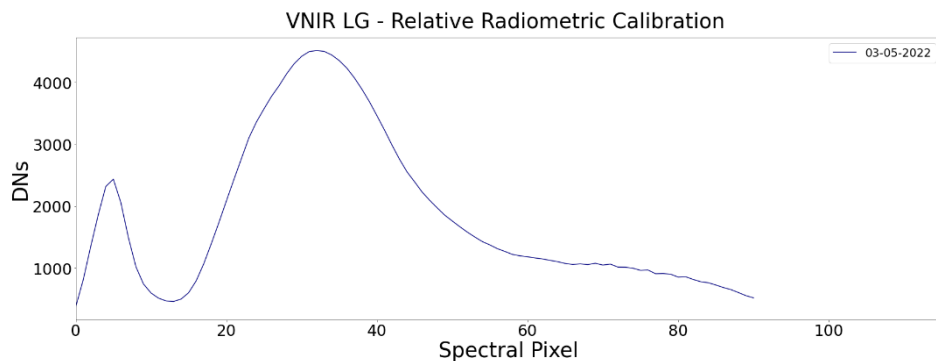

- OBCA-Spectral

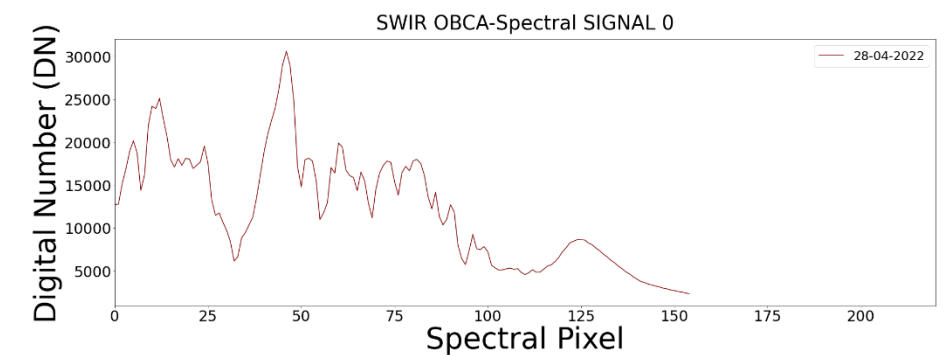
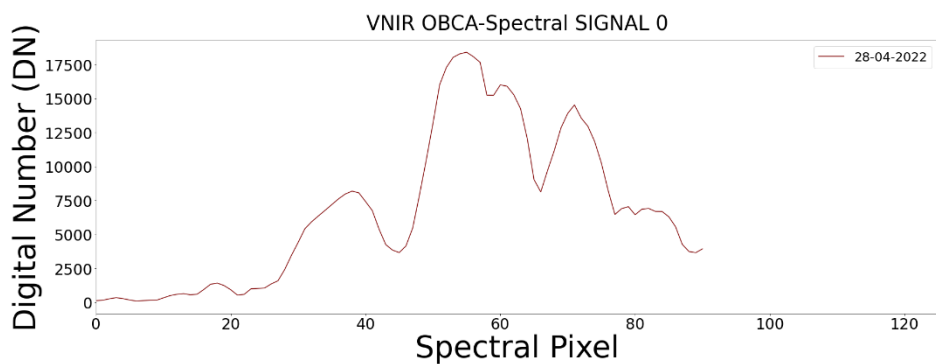


- Linearity

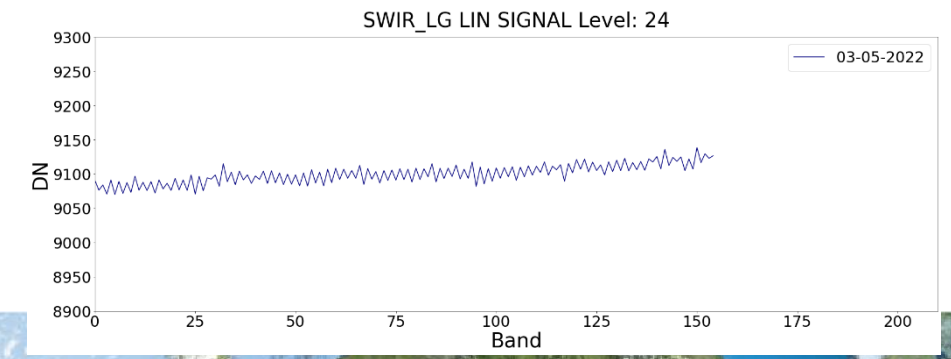
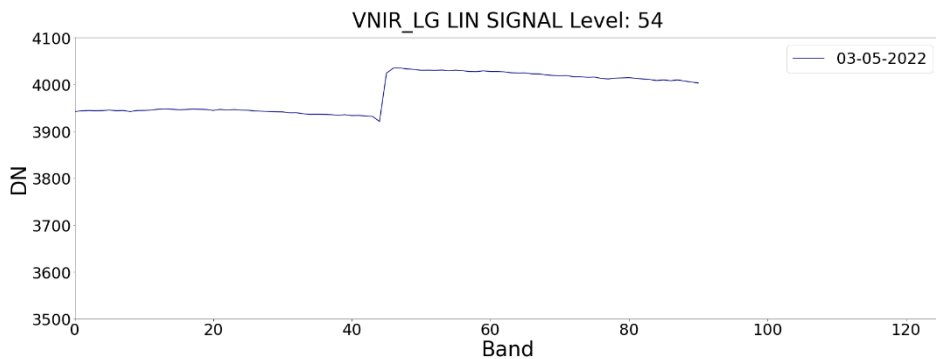


Change in Calibration Measurements



- OBCA-Radiometric Lamp

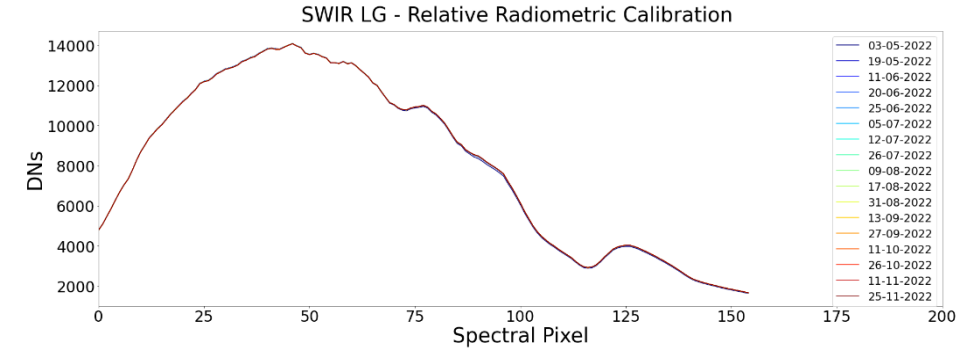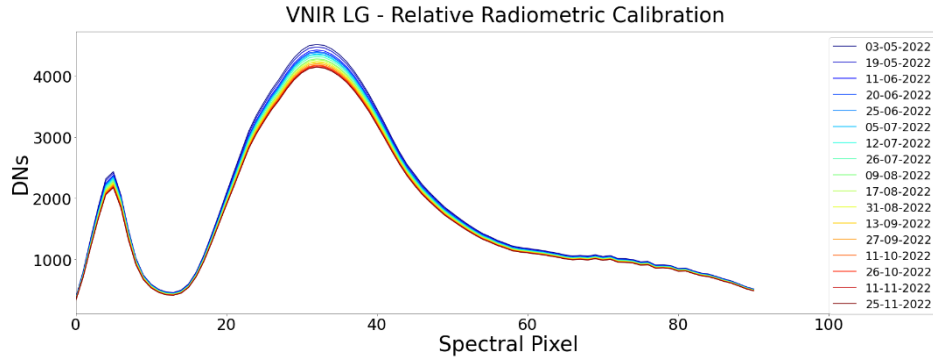

- OBCA-Spectral

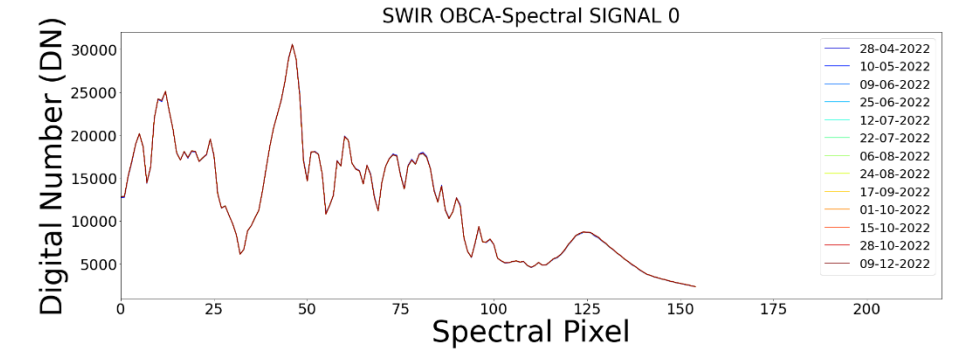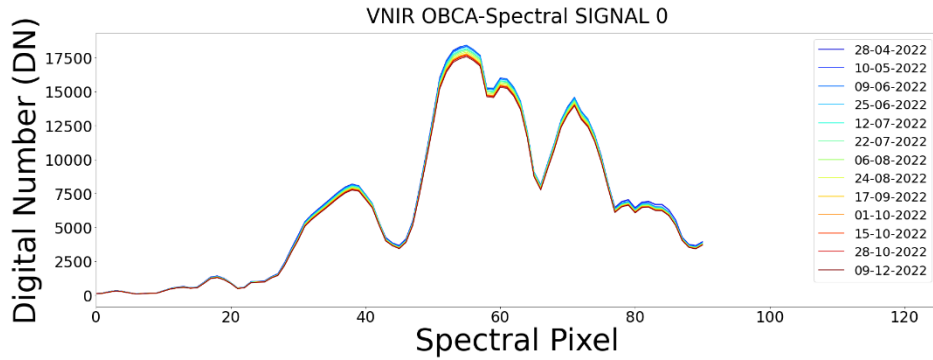


- Linearity





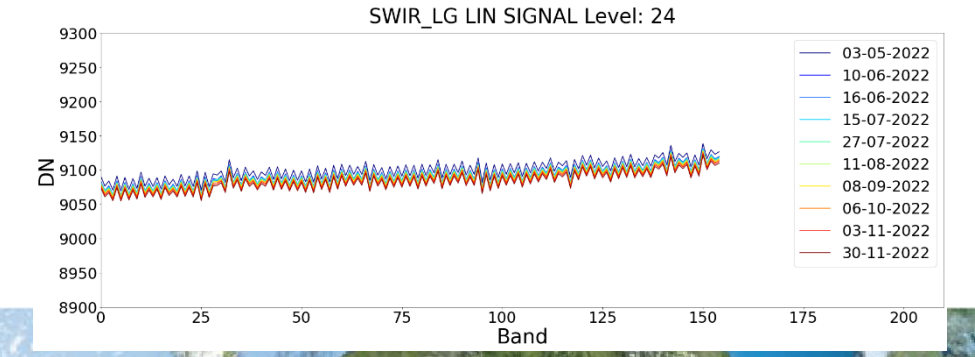
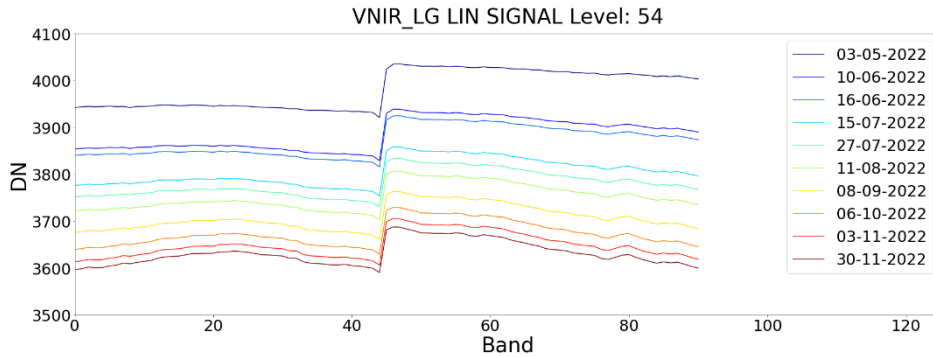


Degradation Distribution Pattern

- Degradation map from OBCA-Radiometric Lamp in VNIR HG
- Percentage change from May – November 2022

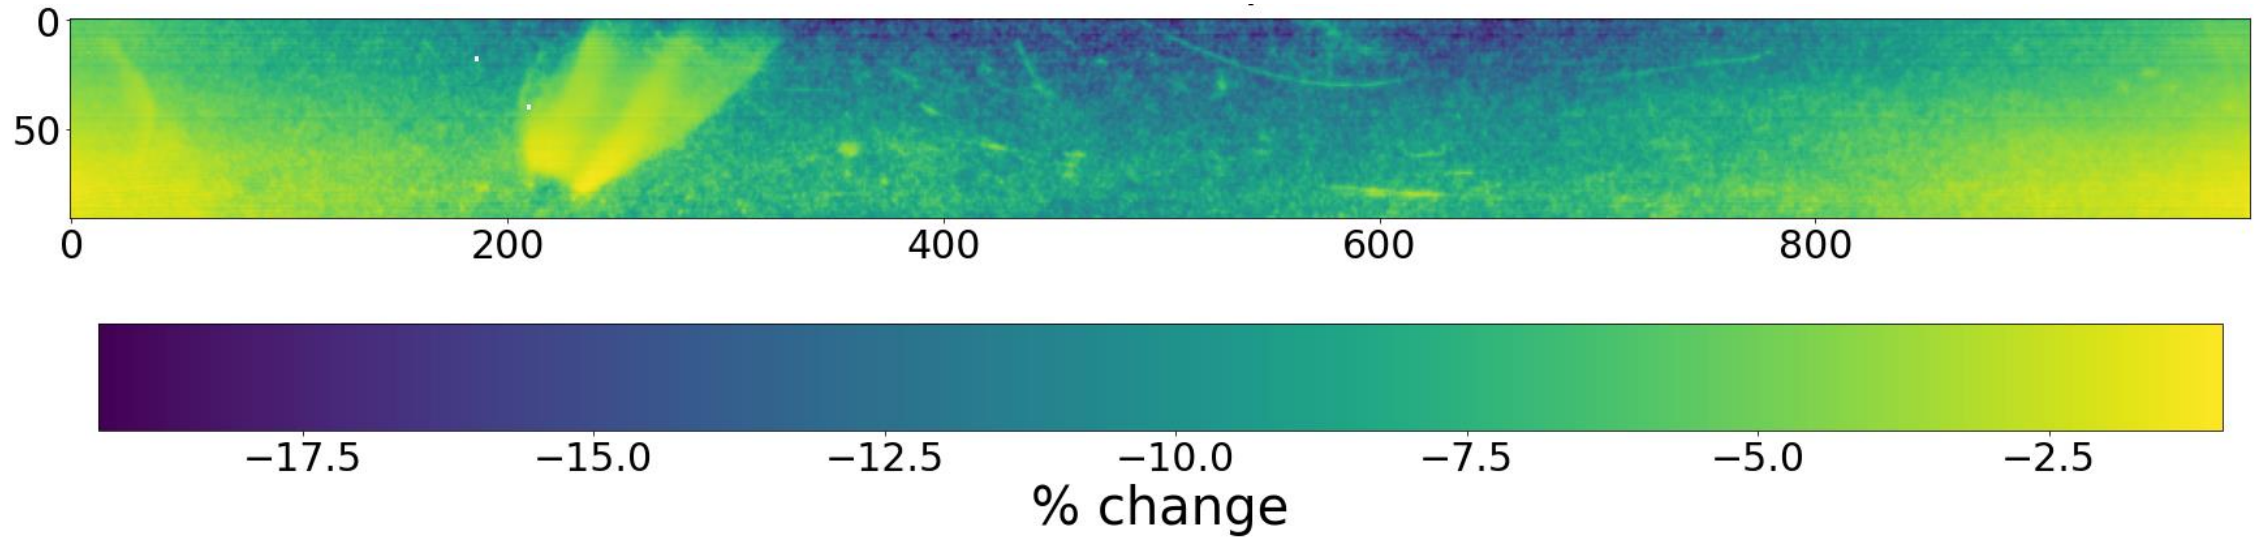

Absolute Radiometric Calibration Coefficients

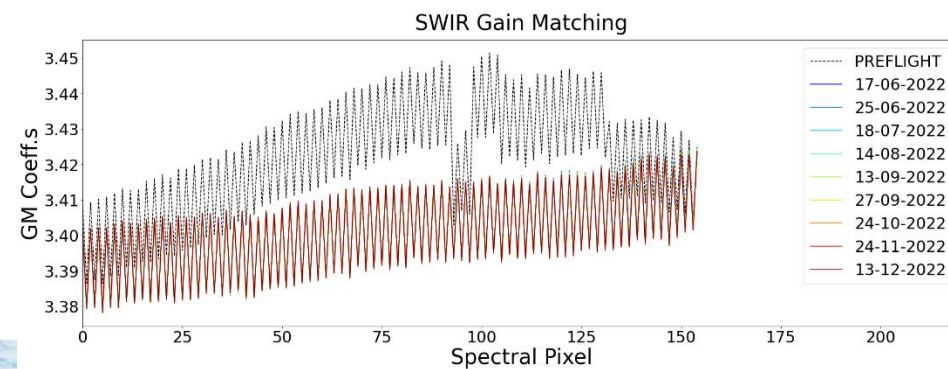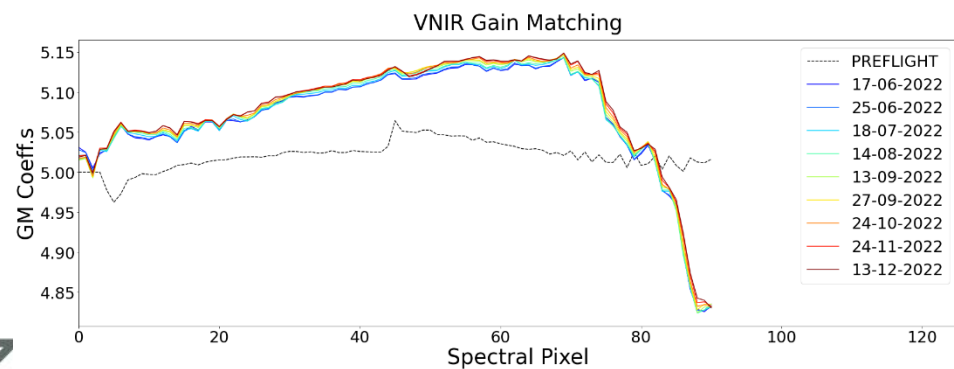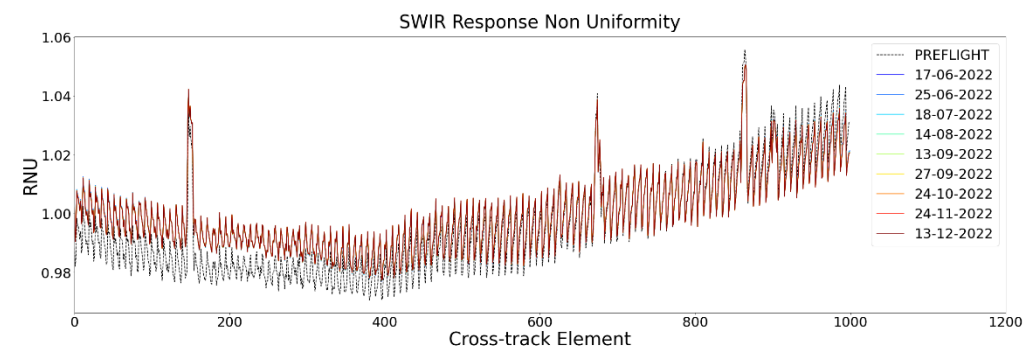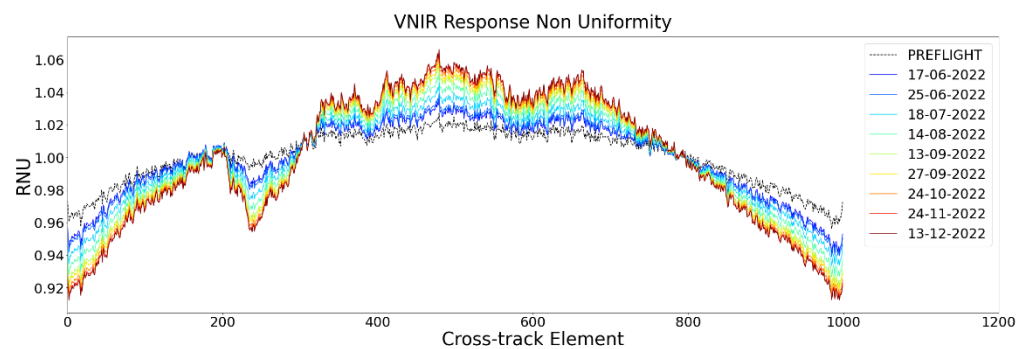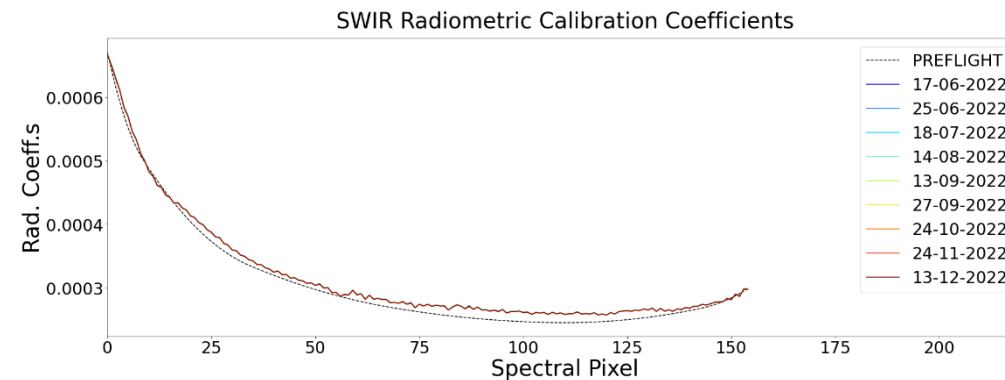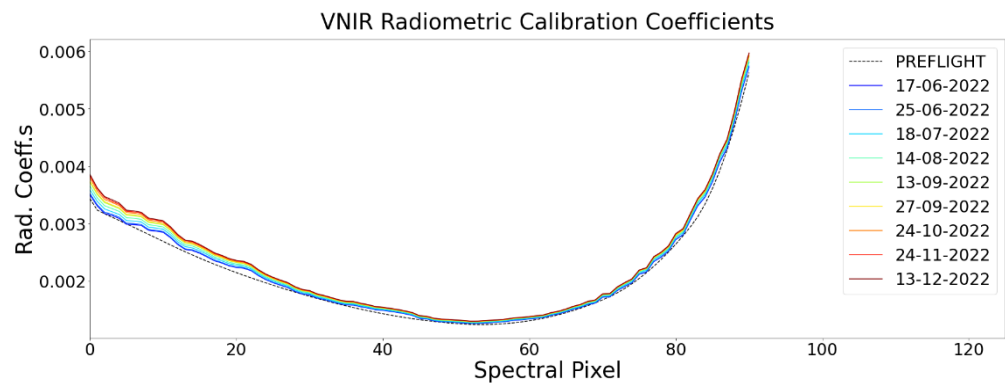


Dynamic Coefficients

Due to fast degradation in VNIR sensor, calibration tables used in L1B processing could become outdated quickly

Solution: model VNIR RNU and radiometric behaviour with „Dynamic Coefficients“ from an exponential-polynomial function

Dynamic Coefficients are used between April – December 2022 rather than coefficients in calibration tables

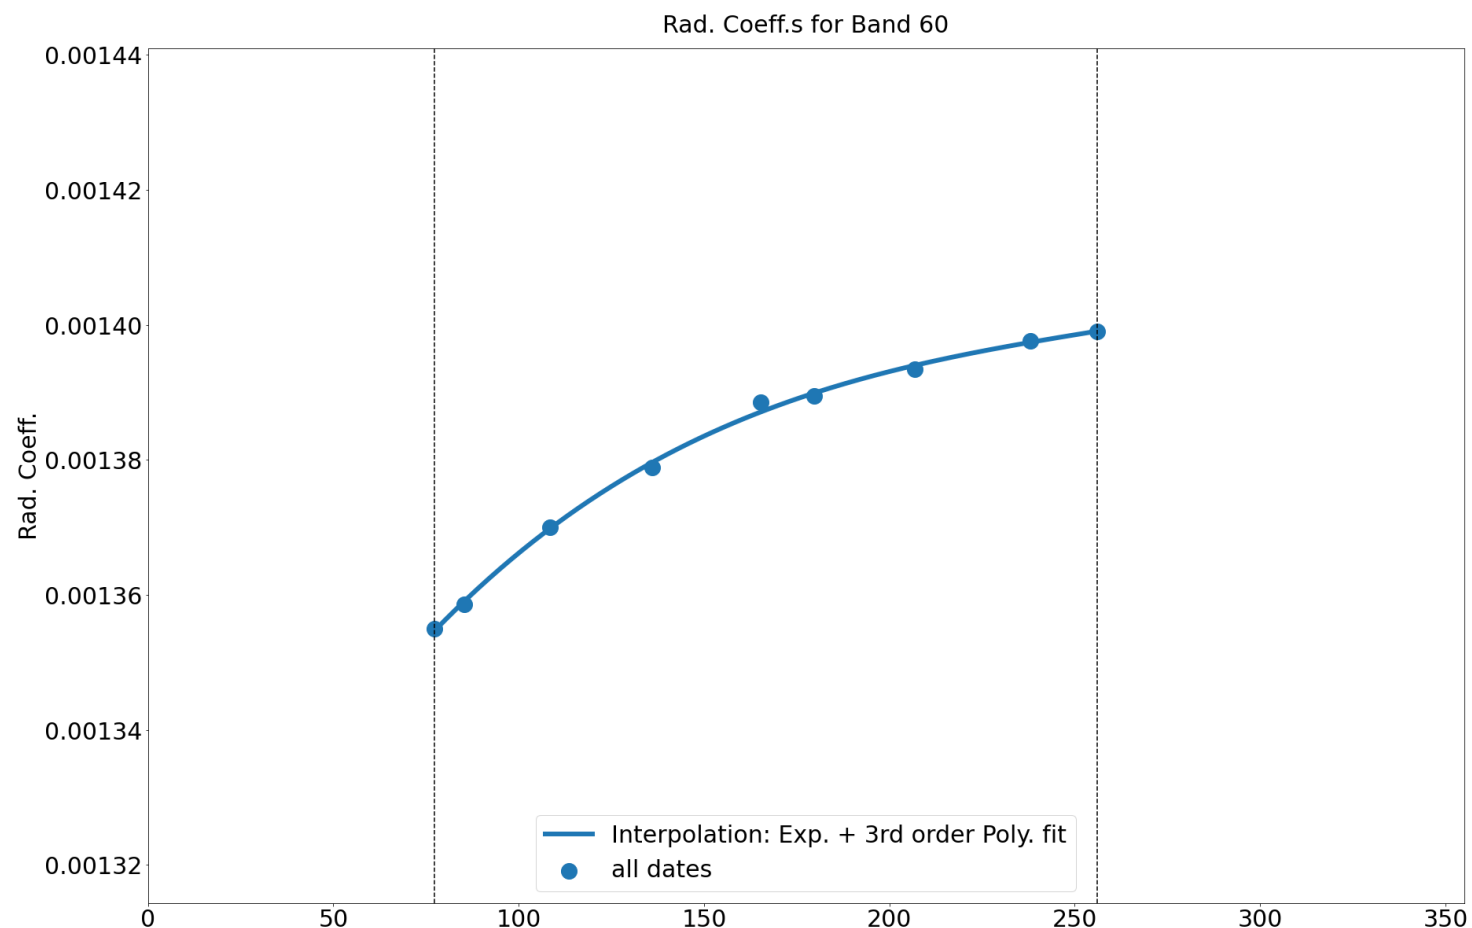

$$\text{Coefficient}^{RNU/CC} = Ae^{Bx} + Cx^3 + Dx^2 + Ex + F$$

X is days from 1st April 2022



Radiometric Calibration Measurements: January – September 2023





Knowledge for Tomorrow





Change in Calibration Measurements



- OBCA-Radiometric Lamp

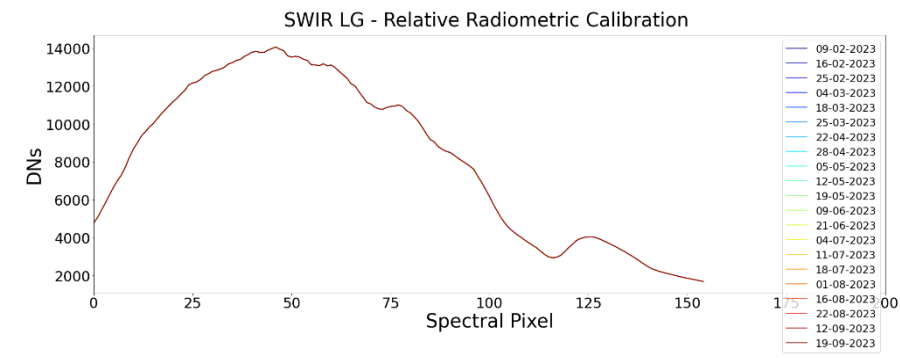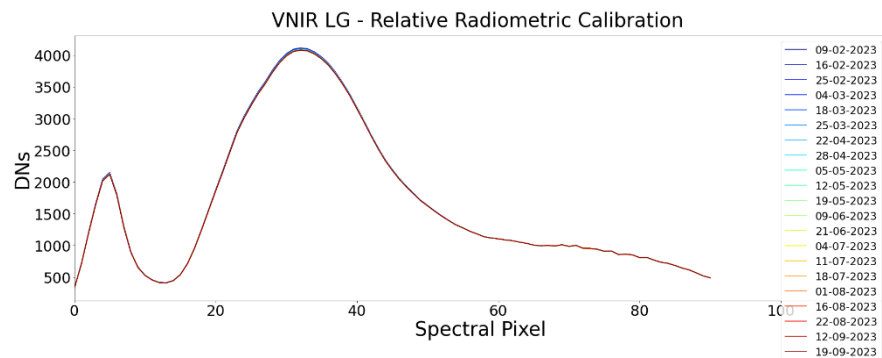

- OBCA-Spectral


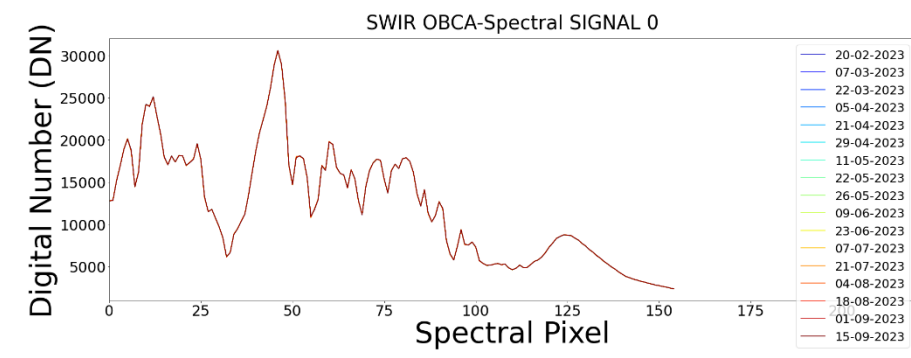
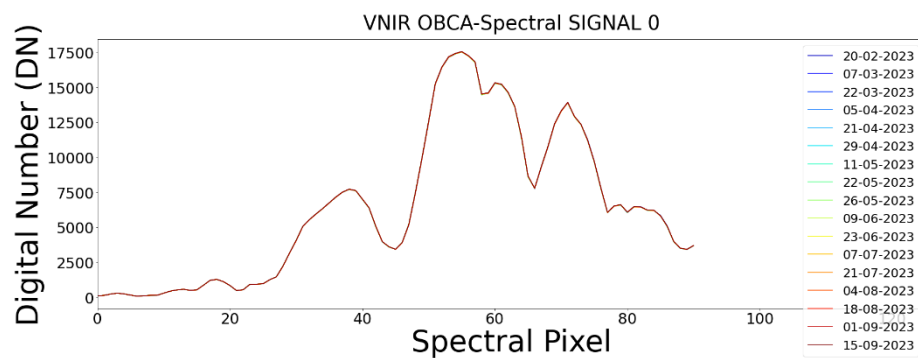


- Linearity





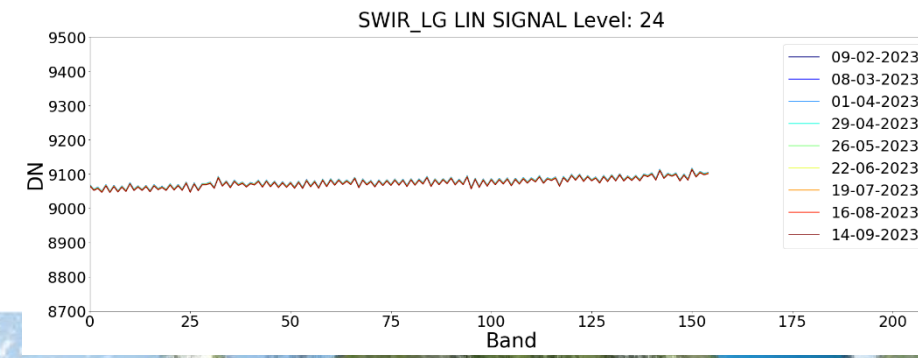
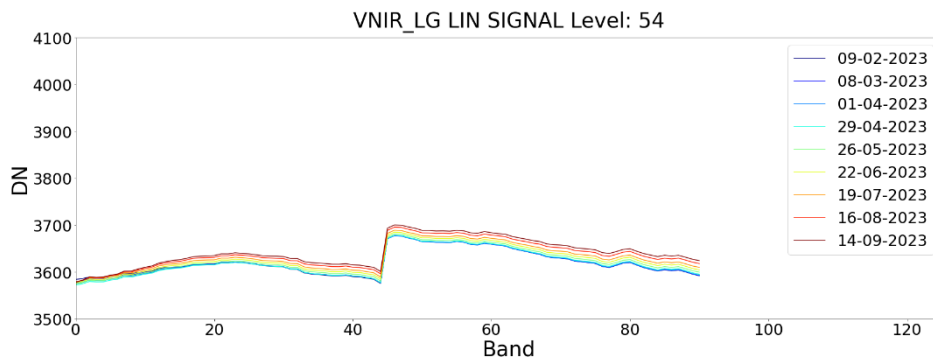


Change in Degradation per Day

- Degradation per day calculated from OBCA-Radiometric, OBCA-Spectral and Linearity measurements
- Large values during Commissioning Phase (-0.05% per day)
- Values decreasing over time
- Approximately zero degradation now (with some variability)
- Cause still unknown
- Total loss around 10%

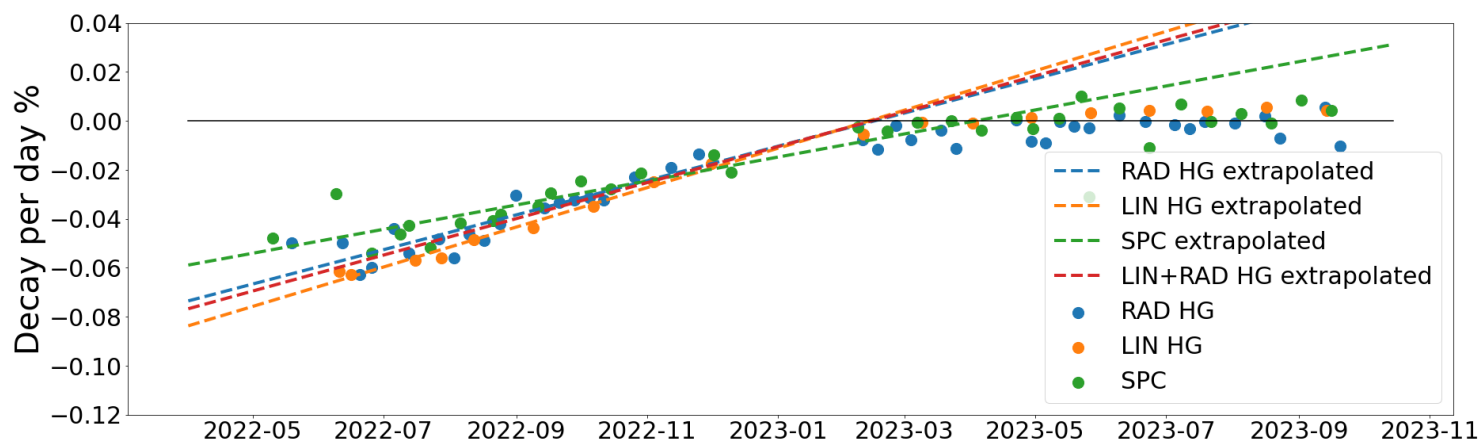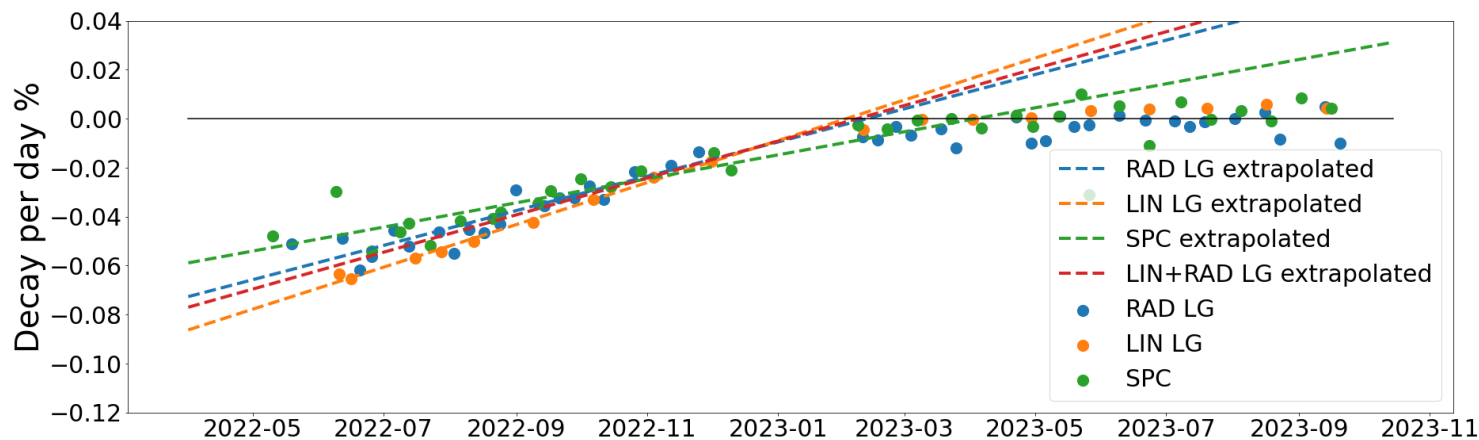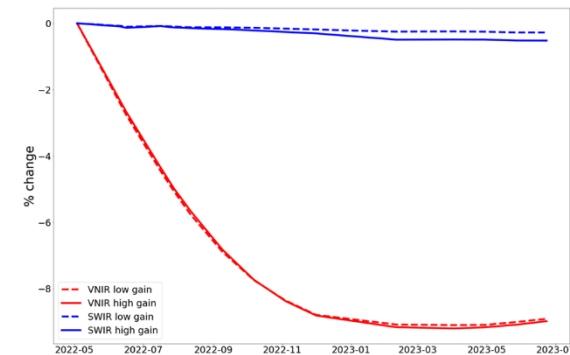

Calibration Coefficients

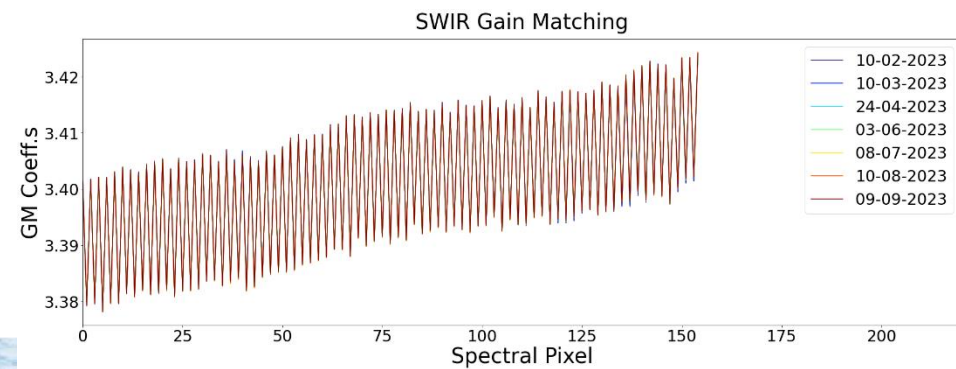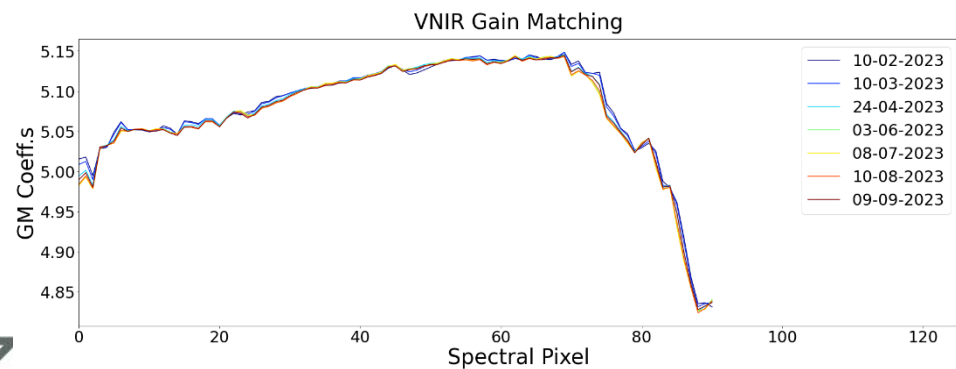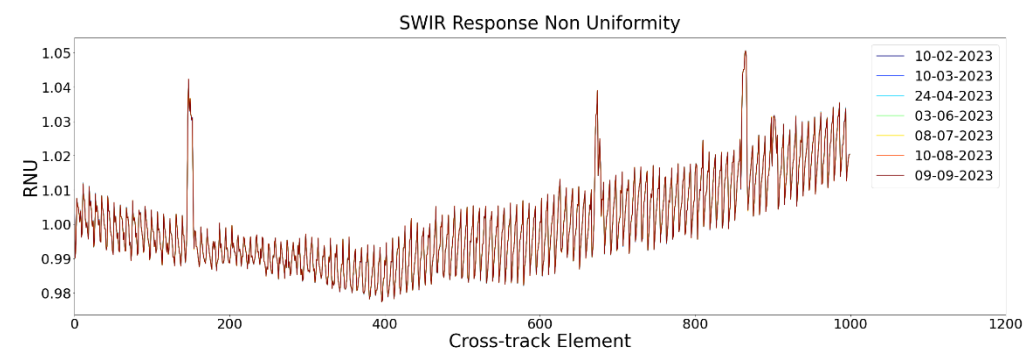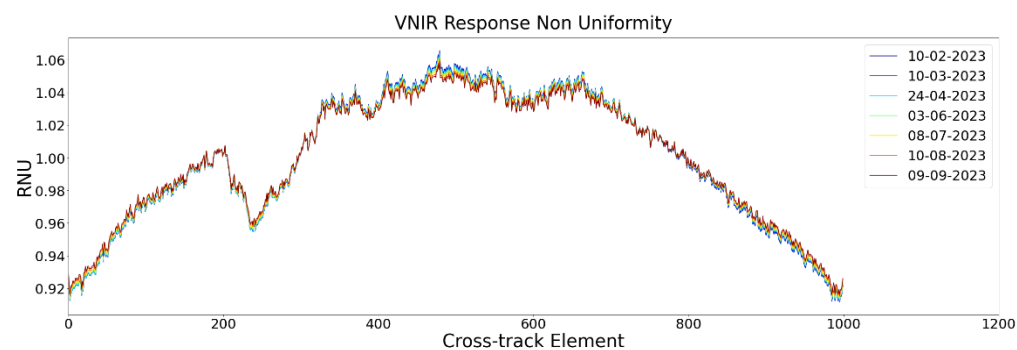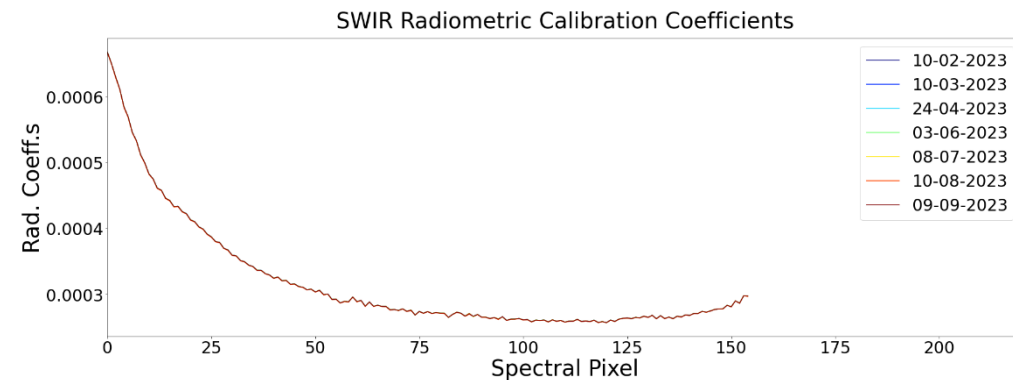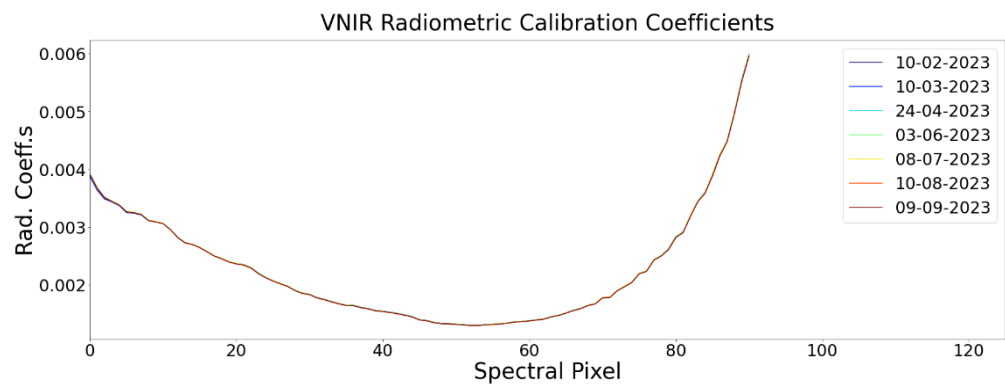

Spectral and Dark Calibration Measurements: April 2022 – September 2023




Knowledge for Tomorrow




Spectral stability

VNIR OBCA Spectral change in centre wavelength with previous, spec pixels

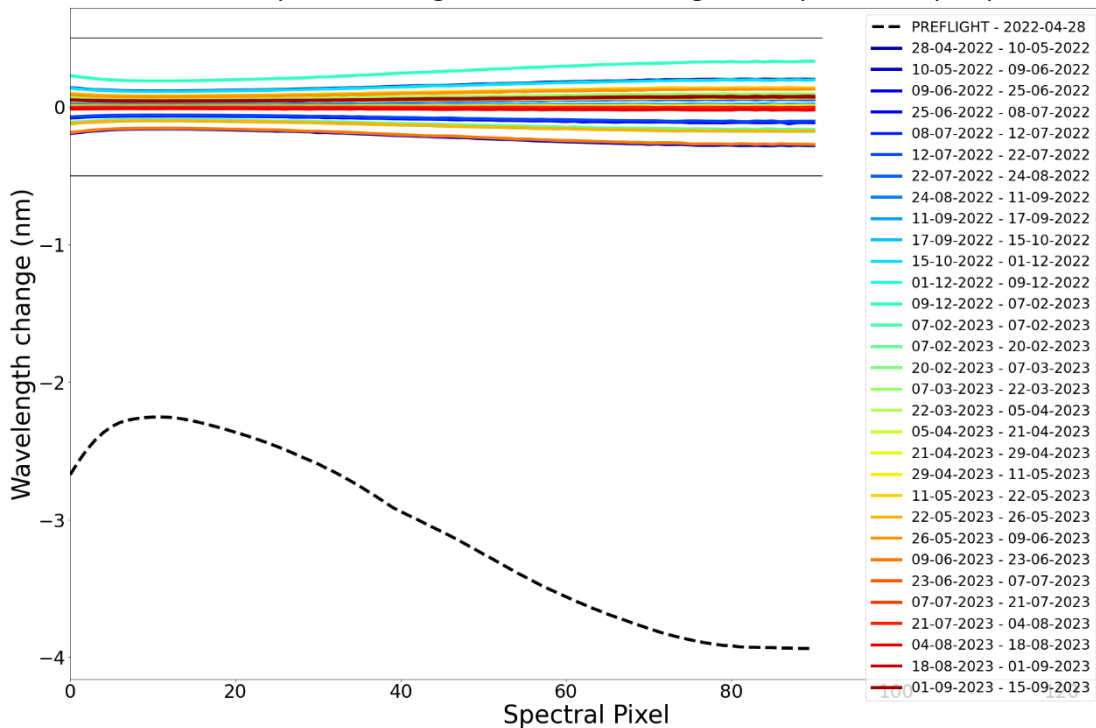





SWIR OBCA Spectral change in centre wavelength with previous, spec pixels

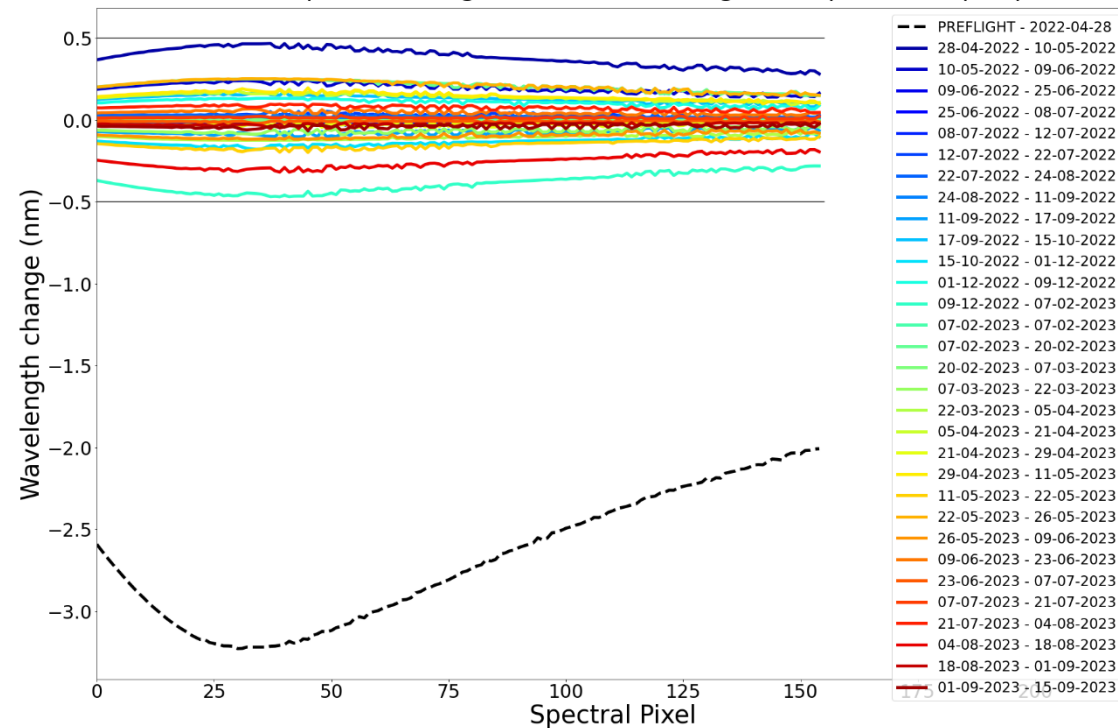

- Good spectral stability: within requirements (0.5 nm VNIR, 1.0 nm SWIR)
- 6 spectral updates during mission (4 during Commissioning, 1 after outage, 1 for SWIR band swap)



Dark signal stability

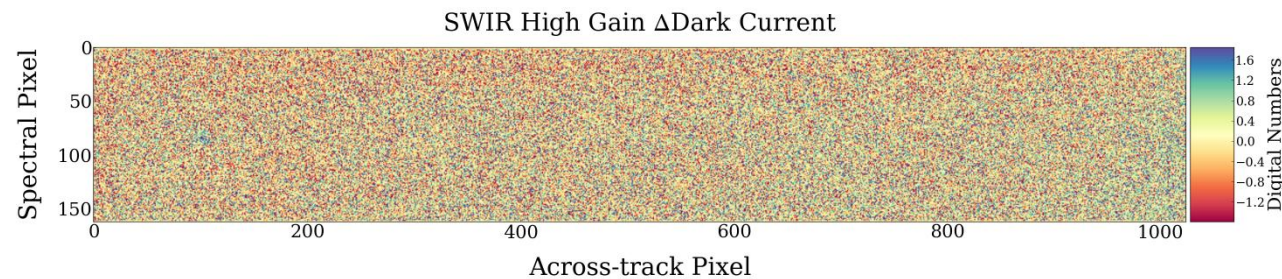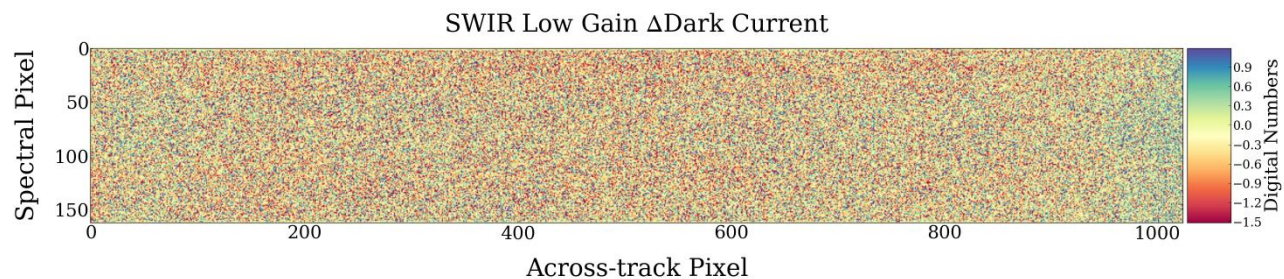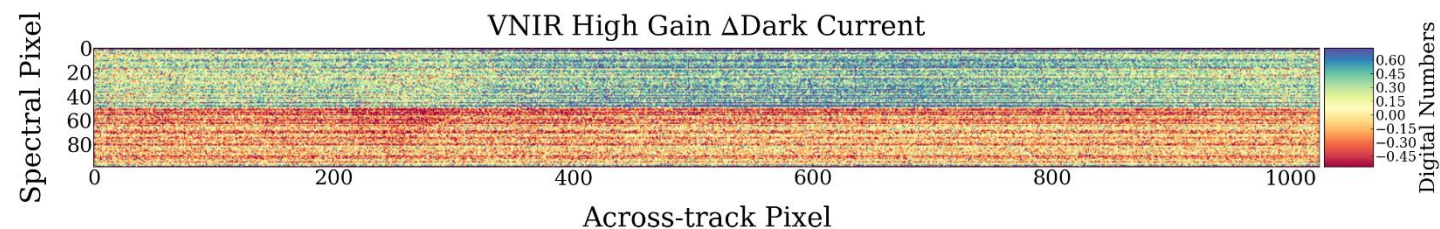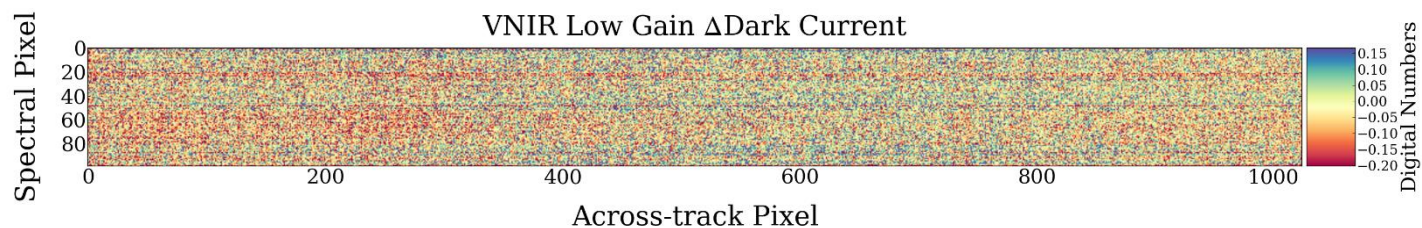

- Good Dark Signal stability
 - Average change close to 0 DN



Summary

	April – December 2022	January 2023 – Present
VNIR sensor	Degradation (10%)	Stable
VNIR radiometric calibration coefficients	Changes due to degradation, dynamic coefficients used	Stable (meets 2.5% requirement between observations), calibration tables used
SWIR sensor	Stable after launch	Stable
SWIR radiometric calibration coefficients	Stable after launch (meets 2.5% requirement between observations)	Stable (meets 2.5% requirement between observations)
Dark Signal	Stable	Stable
VNIR spectral calibration	Stable after launch (meets 0.5 nm requirement)	Stable (meets 0.5 nm requirement)
SWIR spectral calibration	Stable after launch (meets 1.0 nm requirement)	Stable (meets 1.0 nm requirement)
VNIR-SWIR mismatch	Calibration improvement under investigation	

