



Research article

Scrapping of PEKK-based thermoplastic composites retaining long fibers and their use for compression molded recycled parts


Alejandro Sandá^{1,*}, Rocío Ruiz², Miguel Ángel Mafé², Jon Ander Sarasua¹ and Antonio González-Jiménez²

¹ Advanced Manufacturing Technologies, Tekniker–Basque Research and Technology Alliance (BRTA), C/Iñaki Goenaga 5, 20600 Eibar, Gipuzkoa, Spain


² AIMPLAS–Plastic Research Center, València Parc Tecnològic-Calle Gustave Eiffel 4, 46980 Paterna, Valencia, Spain

* **Correspondence:** Email: alejandro.sanda@tekniker.es; Tel: +34-943-206-744.

Supplementary

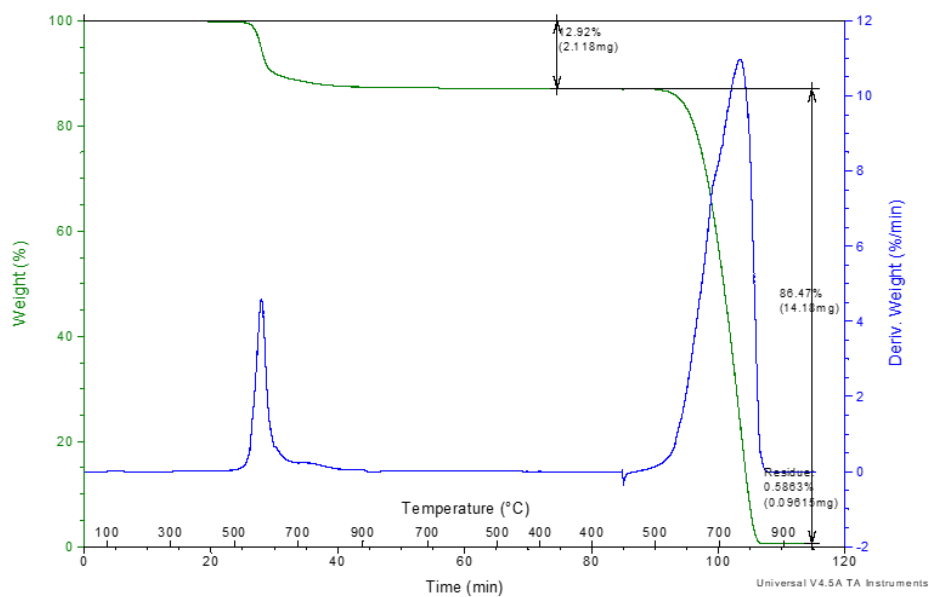

(a) TGA plot of the virgin PEKK/AS4 sheet.

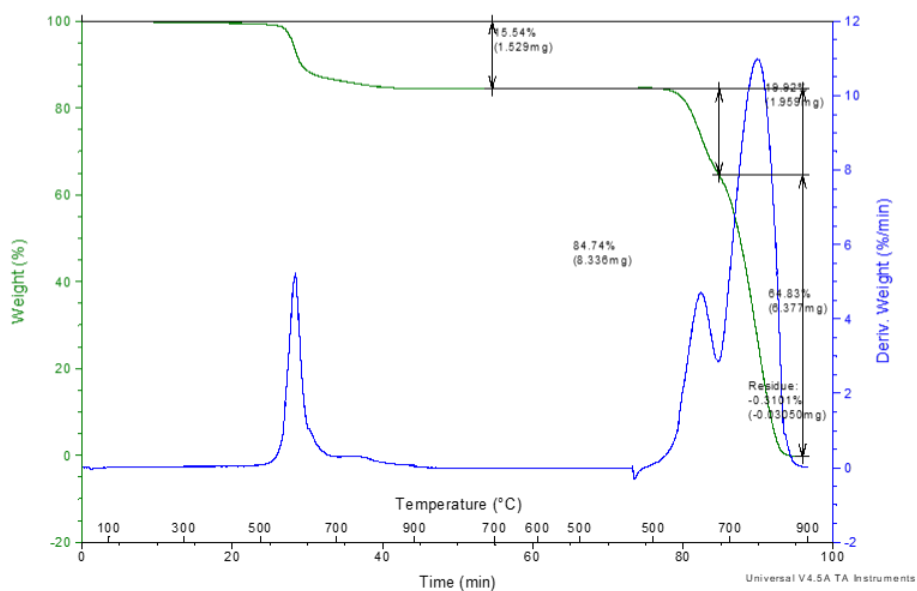

(b) TGA plot of scrap tape sample.

Figure S1. TGA plots of tapes.



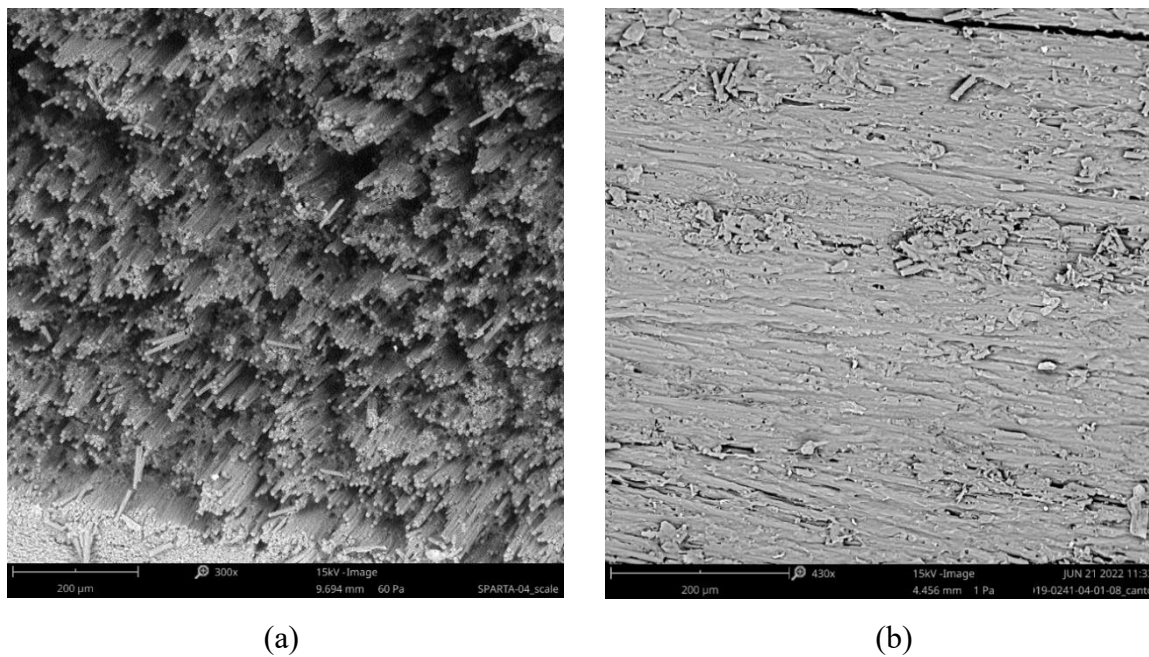


Figure S2. The SEM images show the cross section of the virgin $[0]_{16}$ panel (a) and the recycled composite panel (b) (scale 200 μm).

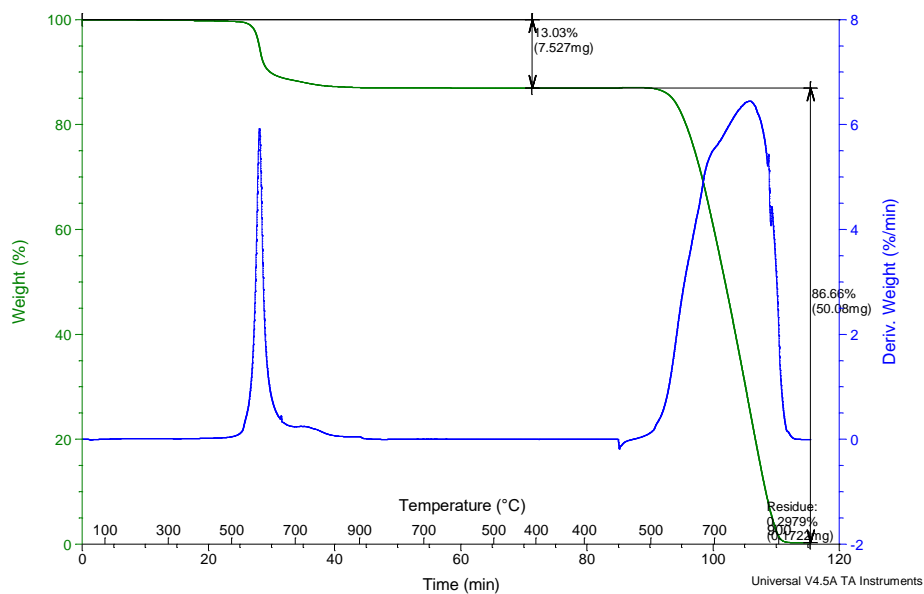

(a) TGA plot of the virgin panel.

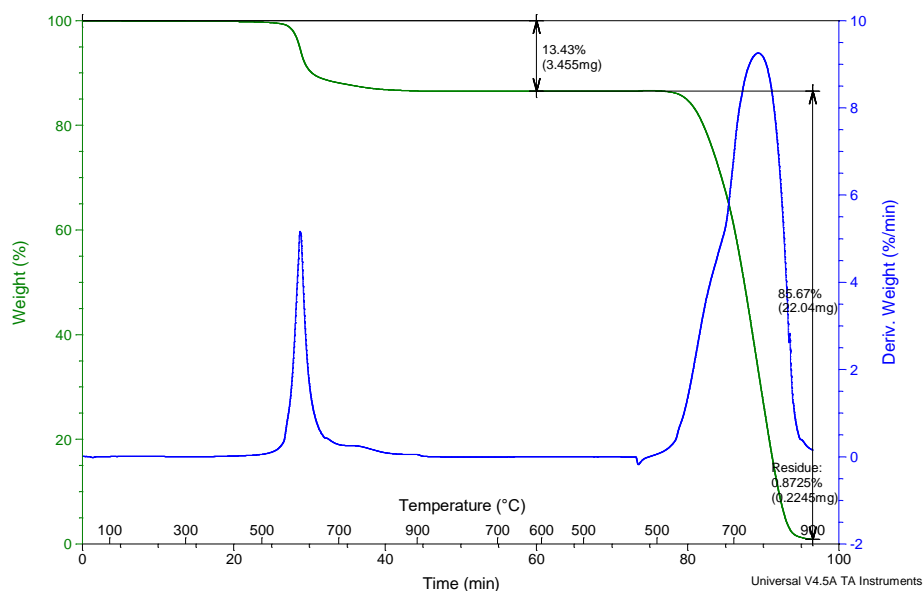

(b) TGA plot of recycled panel.

Figures S3. TGA plots of panels.



AIMS Press

© 2023 the Author(s), licensee AIMS Press. This is an open access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>)