



**AALBORG UNIVERSITY**  
DENMARK

**Aalborg Universitet**

## **Active Vibration Control of a Monopile Offshore Structure**

*part one - pilot project*

Nielsen, Søren R. K.; Kirkegaard, Poul Henning

*Publication date:*  
1996

*Document Version*  
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

*Citation for published version (APA):*

Nielsen, S. R. K., & Kirkegaard, P. H. (1996). *Active Vibration Control of a Monopile Offshore Structure: part one - pilot project*. Dept. of Building Technology and Structural Engineering, Aalborg University. Fracture and Dynamics Vol. R9609 No. 73

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

### **Take down policy**

If you believe that this document breaches copyright please contact us at [vbn@aub.aau.dk](mailto:vbn@aub.aau.dk) providing details, and we will remove access to the work immediately and investigate your claim.

**FRACTURE & DYNAMICS**  
**PAPER NO. 73**

---

**S. R. K. NIELSEN & P. H. KIRKEGAARD**  
**ACTIVE VIBRATION CONTROL OF A MONOPILE OFSHORE STRUCTURE**  
**PART ONE - PILOT PROJECT**  
**MARCH 1996**

**ISSN 1395-7953 R9609**

---

The FRACTURE AND DYNAMICS papers are issued for early dissemination of research results from the Structural Fracture and Dynamics Group at the Department of Building Technology and Structural Engineering, University of Aalborg. These papers are generally submitted to scientific meetings, conferences or journals and should therefore not be widely distributed. Whenever possible reference should be given to the final publications (proceedings, journals, etc.) and not to the Fracture and Dynamics papers.

**FRACTURE & DYNAMICS**  
**PAPER NO. 73**

---

**S. R. K. NIELSEN & P. H. KIRKEGAARD**  
**ACTIVE VIBRATION CONTROL OF A MONOPILE OFSHORE STRUCTURE**  
**PART ONE - PILOT PROJECT**  
**MARCH 1996**

**ISSN 1395-7953 R9609**

---



# Active Vibration Control of a Monopile Offshore Structure

Part one - Pilot Project

S.R.K. Nielsen & P.H. Kirkegaard  
Aalborg University  
Department of Building Technology and Structural Engineering  
Sohngaardsholmsvej 57  
DK-9000 Aalborg, Denmark

## Preface

The present report *Active Vibration Control of a Monopile Offshore Structure - Part One* describes the experimental investigations with a test model of a monopile offshore structure. The experimental research was performed in the Hydraulics and Coastal Engineering Laboratory at Aalborg University, Sohngaardsholmsvej 57, DK-9000 Aalborg, Denmark.

The aim of the experimental investigations was to investigate a proposed approach to active vibration control of a new monopile offshore structure concept developed by the first author for RAMBØLL A/S, Esbjerg, Denmark.

Aalborg University  
January, 1996.

S.R.K. Nielsen  
P.H. Kirkegaard

## Abstract

In the Danish part of the North Sea it has been found that marginal fields can be exploited using monopile offshore platforms which present significant advantages with respect to the costs involved in fabrication and installation and can therefore tip the economic balance favourably. Monopile platforms have been developed for approximately 35 m water depth and to be remotely operated. However, there has recently been a wish to use the monopile concept on 75 m water depth. Using monopiles in such water depths can imply significantly dynamic problems. Therefore, in order to reduce the vibrations, it can be necessary to use an active or a passive vibration control system. However, for a monopile with severe space problems it can be difficult to locate a passive control system such as e.g. a tuned mass damper. Therefore, in order to active control wave introduced vibrations of a monopile structure an active control technique has been proposed in corporation with the consulting company Rambøll, Esbjerg, Denmark. The proposed control technique is based on the relationship between the position of the separation points of the boundary layer flow and the drag term in the wave force on the cylinder. This concept has been experimentally investigated with a test model in stationary flow tests. The idea is to have a large drag coefficient when the cylinder moves opposite of the wave direction implying a relatively large damping excitation. When the structure moves in the wave direction a small drag coefficient should be obtained in order to have a relatively small excitation on the cylinder. The drag coefficient can be controlled if the separation points of the boundary layers can be controlled. It is proposed to control the separation points by blowing compressed air out of the holes in the cylinder. If the natural separation points of the boundary layers are rejected by blowing air out of the holes the drag coefficient will increase while it will decrease if it is possible to attach the boundary layer. The results from the experimental test have shown that it is possible to increase the drag coefficient with a factor 1.5-2 by blowing air out of the holes in a cylinder vibrating in a stationary water flow.

**PREFACE****ABSTRACT****CONTENTS**

1. INTRODUCTION .....	5
2. THEORY .....	6
2.1 Relationship between vibrations and wave force .....	6
2.2 Mathematical model .....	7
3. DESCRIPTION OF TEST MODEL AND INSTRUMENTATION .....	9
3.1 Model used in experimental investigations .....	9
3.2 Instrumentation .....	9
3.3 Measurement conditions .....	9
4. RESULTS .....	11
4.1 Estimation of structural parameters .....	11
4.2 Estimation of $C_{D_1}$ and $C_{D_2}$ .....	13
5. CONCLUSIONS .....	18
6. ACKNOWLEDGEMENTS .....	18
7. REFERENCES .....	18

## 1. INTRODUCTION

Many of the oil fields discovered in the North Sea are marginal fields. Furthermore, the layers in which the reservoirs are located may have very small permeability. Consequently, it is very difficult to predict the production rate for these fields. To develop this type of oil fields it is necessary to minimize the initial investments in the field in order to limit the consequences of a production smaller than predicted. This can be accomplished by means of a smaller remotely operated installation with provision for only one or a few wells.

In the Danish part of the North Sea it has been found that marginal fields can be exploited using monopile offshore platforms, see figure 1, which present significant advantages with respect to the costs involved in fabrication and installation and can therefore tip the economic balance favourably.

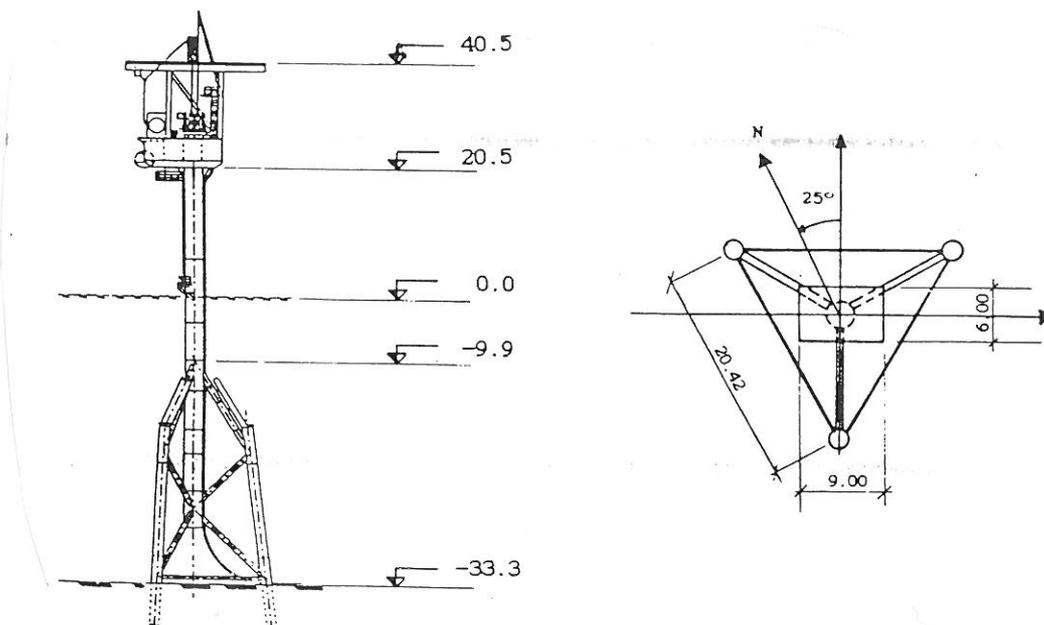


Figure 1: Elevation of a monopile offshore structure used in the Danish part of the North Sea.

The monopile platform shown in figure 1 was developed for approximately 35 m water depth and was remotely operated. This means that in 35 m water depth the free standing structure is governed by its dynamic behaviour and thus prone to fatigue. However, since the structure is remotely operated comfort criteria can be neglected in the design phase. The monopile design has been found not to be governed by the extreme storm load case, but more significantly influenced of fatigue life.

Recently, there has been a wish to use the monopile concept on 75 m water depth. Using monopiles in such water depths can imply significantly dynamic problems. Therefore, in order to reduce the vibrations, it can be necessary to use an active vibration control system. Active vibration control of civil engineering structures can be done using different techniques, see e.g. Soong et al. [1] and Thesbjerg [2]. Active control implies an external excitation in order to obtain a vibration suppression of a structure which is dynamically loaded. Active control is an alternative to passive control which has been seriously considered during the last 50 years. Passive control implies an arrangement which can reduce the response of the structure. The general subject

concerning active control of dynamic systems has been studied longer than active control of civil engineering structures. For many decades, the basic concepts of active control have been the staple of electrical and control engineering and they have been applied successfully in a variety of disciplines, such as aerospace engineering and mechanical engineering.

In order to reduce the vibrations of a monopile structure passive control techniques can be used, e.g. a tuned mass damper, see Soong et al. [1]. However, for a monopile with severe space limitation it can be difficult to locate a tuned mass damper.

In order to active control wave introduced vibration of a monopile structure a control technique has been proposed in corporation with the consulting company Rambøll, Esbjerg, Denmark.

The proposed control technique is based on the relationship between the boundary layer flow and the drag term in the wave force on the structure. It is well known that the wave force consists of a drag term and an inertia term. Normally, the drag term can be estimated using a so-called drag coefficient approximately equal to 0.6 for a cylinder. However, this drag coefficient is a function of the geometry of the structure, but the drag coefficient also depends on the separation points of the boundary layers. This means that the drag coefficient can be controlled if the separation points of the boundary layers can be controlled. One way to control these points could be to perforate the structure and blow air out of the holes. How this concept can be used to reduce the vibrations is explained in the following section.

## 2. THEORY

This section outlines how the vibrations of a monopile offshore structure can be reduced by controlling the boundary layer separation points. Further, the mathematical model which has been used to experimentally investigate the idea is given.

### 2.1 Relationship between Vibrations and Wave Force

It is well known that the force on a vertically placed cylinder subjected to wave action consists of a drag  $f_D$  as well as an inertia  $f_I$  component, see e.g. Sarpkaya et al.[3]. It is generally assumed that the total wave force per unit length of a fixed vertical cylinder of the diameter  $D$  is

$$f = f_D + f_I = \frac{1}{2}C_D\rho D|\dot{u} - \dot{v}|(\dot{u} - \dot{v}) + \frac{\pi}{4}C_M\rho D^2\ddot{u} - (C_M - 1)\frac{\pi}{4}\rho D^2(\ddot{v}) \quad (1)$$

where  $\dot{u}$  and  $\ddot{u}$  and  $\dot{v}$  and  $\ddot{v}$  are the velocity and the acceleration of the fluid and the structure, respectively.  $C_D$  and  $C_M$  are the drag and inertia coefficients, respectively.  $\rho$  is the density of water.

The idea of the active vibration control system proposed in this research relies on changes in the drag term. Normally, the drag term can be estimated using a drag coefficient approximately equal to 0.6 for a cylinder. However, this drag coefficient is a function of the geometry of the structure, but the drag coefficient also depends on the position of the separation points of the boundary layers. This means that the drag coefficient can be controlled if the position of the separation points of the boundary layers can be controlled. One way to control these points could be to perforate the structure and blow air out of the holes. If the boundary layers are forced to separate by blowing air out of the holes the drag coefficient will increase. This is the opposite of the well-known principle that the drag force can be reduced by suction. The idea is now to have a large

drag coefficient when the cylinder moves opposite of the wave direction, see figure 2a, implying a relatively large damping excitation. When the structure moves in the wave direction a small drag coefficient should be obtained in order to have a relatively small excitation on the cylinder, see figure 2b.


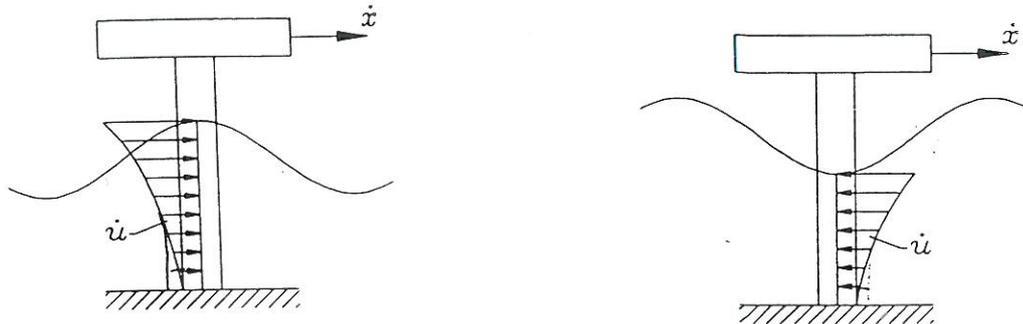


Figure 2a: Wave velocity  $u$  and cylinder velocity in opposite direction      2b: Wave velocity and cylinder velocity in same direction

## 2.2 Mathematical Model

The following model was proposed to be used in an experimental investigation of the change in drag coefficient as a function of air blown out of the holes in a cylinder vibrating in a stationary flow.

Figure 3: Definition of parameters in mathematical model of a monopile offshore structure

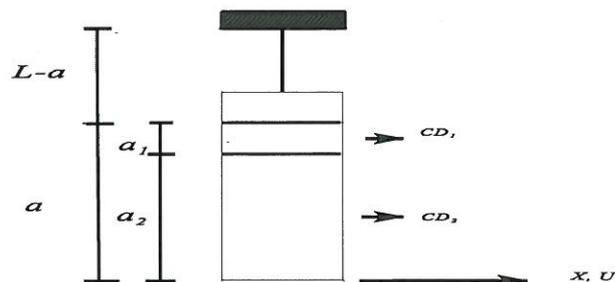

A test model consisting of a steel cylinder has been made as explained in section 3. This model is tested in a stationary flow with the velocity  $\dot{U}$ .  $L$  and  $a$  are the distances from the bottom of the cylinder to the beam where the model is attached and water level, respectively. The cylinder is perforated from water level and to  $a_1$  under water level. It is assumed that the force on the structure now can be estimated using two drag coefficients.  $C_{D_1}$  is the drag coefficient or the area where the cylinder is perforated and  $C_{D_2}$  is the drag coefficient or the area where the cylinder is not perforated. The model is assumed to be described using one degree-of-freedom which is selected as the displacement  $x$  of the cylinder bottom. The eigenmode is a linearly varying

function, so  $v(z,t) \approx x(t)z/L$  where  $z$  is a vertical coordinate. This means that the governing differential equation for the model in figure 3 can be written in the following way using (1) with  $\dot{u}(z,t) = \dot{U}(t)$  and  $\ddot{u}(z,t) = \ddot{U}(t)$ , i.e the flow is independent of  $z$

$$m_s(\ddot{x} + 2\zeta_0\omega_0\dot{x} + \omega_0^2x) = C_{D_1}\frac{1}{2}\rho D L f_0\left(1-\frac{a}{L}, 1-\frac{a_2}{L}, \dot{U}, \dot{x}\right) + C_{D_2}\frac{1}{2}\rho D L f_0\left(1-\frac{a_2}{L}, 1, \dot{U}, \dot{x}\right) - m_h\ddot{x} + m_1\ddot{U} \quad (2)$$

where  $\omega_0$  and  $\zeta_0$  are the frequency and damping ratio of the system, respectively. The structural mass  $m_s$ , the modal hydrodynamic mass  $m_h$  and the induced mass  $m_1$ , respectively are given by

$$m_s = \int_0^L \mu(z) \left(\frac{z}{L}\right)^2 dz, \quad m_h = \frac{\pi}{4}(C_M - 1)\rho D^2 \int_{L-a}^L \left(\frac{z}{L}\right)^2 dz, \quad m_1 = \frac{\pi}{4}C_M\rho D^2 \int_{L-a}^L \left(\frac{z}{L}\right) dz \quad (3)$$

The function  $f_0(\cdot, \cdot, \cdot, \cdot)$  is given by

$$f_0(\alpha, \beta, \dot{U}, \dot{x}) = \int_{\alpha}^{\beta} \xi |\dot{U} - \dot{x}\xi| (\dot{U} - \dot{x}\xi) d\xi$$

which can be analytically calculated as (where  $\eta = \frac{\dot{x}}{\dot{U}}$ )

$$U > 0: f_0(\alpha, \beta, \dot{U}, \dot{x}) = \frac{U^2}{12} \begin{cases} 6(\beta^2 - \alpha^2) - 8(\beta^3 - \alpha^3)\eta + 3(\beta^4 - \alpha^4)\eta^2, & \infty < \eta \leq \frac{1}{\beta} \\ \frac{2}{\eta^2} - 6(\beta^2 + \alpha^2) + 8(\beta^3 + \alpha^3)\eta - 3(\beta^4 + \alpha^4)\eta^2, & \frac{1}{\beta} < \eta \leq \frac{1}{\alpha} \\ -6(\beta^2 - \alpha^2) + 8(\beta^3 - \alpha^3)\eta - 3(\beta^4 - \alpha^4)\eta^2, & \frac{1}{\alpha} < \eta \leq \infty \end{cases} \quad (5)$$

$$U = 0: f_0(\alpha, \beta, 0, \dot{x}) = -\frac{1}{4}(\beta^4 - \alpha^4)\dot{x}|\dot{x}| \quad (7)$$

$$U < 0: f_0(\alpha, \beta, \dot{U}, \dot{x}) = \frac{U^2}{12} \begin{cases} -6(\beta^2 - \alpha^2) - 8(\beta^3 - \alpha^3)\eta + 3(\beta^4 - \alpha^4)\eta^2, & \infty < \eta \leq \frac{1}{\beta} \\ \frac{2}{-\eta^2} + 6(\beta^2 + \alpha^2) - 8(\beta^3 + \alpha^3)\eta + 3(\beta^4 + \alpha^4)\eta^2, & \frac{1}{\beta} < \eta \leq \frac{1}{\alpha} \\ 6(\beta^2 - \alpha^2) - 8(\beta^3 - \alpha^3)\eta + 3(\beta^4 - \alpha^4)\eta^2, & \frac{1}{\alpha} < \eta \leq \infty \end{cases} \quad (6)$$

### 3. DESCRIPTION OF TEST MODEL AND INSTRUMENTATION

The model presented in figure 3 was produced and instrumentated as described in this section.

#### 3.1 Model used in Experimental Investigations

Figures 4 and 5, respectively, show pictures of the produced test model. The model consists of a 0.5 m high steel cylinder with a diameter at 0.16 m which is closed in the bottom with a steel plate. The cylinder is mounted to a steel beam across the flow channel with a 0.16 m long, 0.03 m width and 0.003 m thick steel plate. The cylinder is 0.2 and 0.24 m from the top of the cylinder perforated with 12 holes with equidistant distance, i.e the cylinder is perforated with 24 holes. Compressed air can be blown out of these holes since each hole is connected with a rubber tubing. It is possible to open and close each rubber tubing with a valve. All the 24 valves are placed on a connection box which is connected to one high-pressure rubber tubing having a manometer and a valve. This implies that it is possible to regulate the pressure of the air submitted to the connection box and to the 24 rubber tubings.

#### 3.2 Instrumentation

The test programme was divided into two parts. The first part without water in the flow channel consisted of static tests to calibrate a strain gauge mounted on the steel plate which connects the steel cylinder to the beam across the flow channel. Further, some free decay tests without water in the flow channel were performed in order to estimate the structural parameters in equation (4). The second part of the test consisted of free decay tests with stationary water flow in the flow channel and different air pressure out of the holes in the cylinder. These tests were used to estimate  $C_{D_1}$  and  $C_{D_2}$  in (2). The flow was measured using an ultra sonic flow meter. The strain gauge signal and flow signal were both recorded using a data acquisition system based on a personal computer 386-40 MHz with an add-on A/D 16 bit simultaneous DT-2829 data acquisition board. The signal was samples at 135 Hz with a time series length at 30 sec.

#### 3.3 Measurements Conditions

The tests were performed on December 22 and 23, 1995, in a 2-dimensional flow channel in the Hydraulics and Costal Engineering Laboratory at Aalborg University, Sohngaardsholmsvej 57, DK-9000 Aalborg, Denmark. During the tests the water level was changing approximately  $\pm 0.01$  m. The water level  $a$  was 0.355 m and the distance  $a_2$  from the bottom of cylinder to the lowest holes in the cylinder was 0.238 m. The free decay tests were performed by giving the cylinder, using the hand, a deflection corresponding to approximately the same number of strains each time.

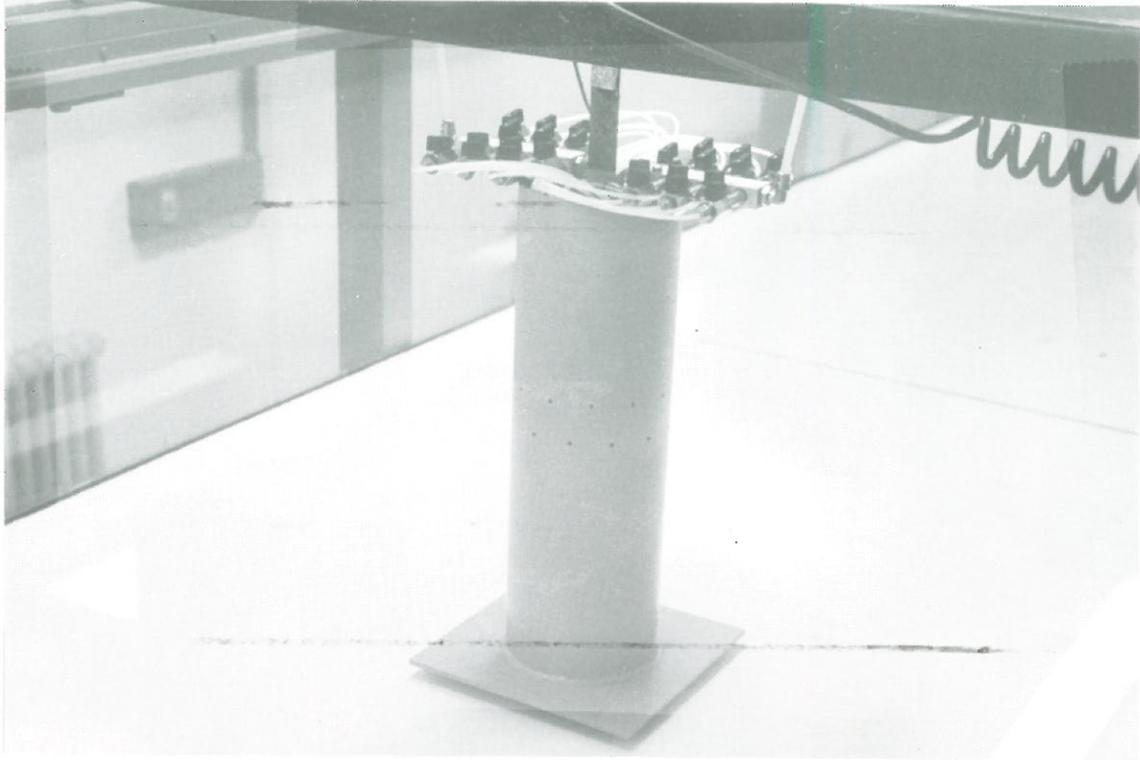


Figure 4. Picture of the monopile test model.

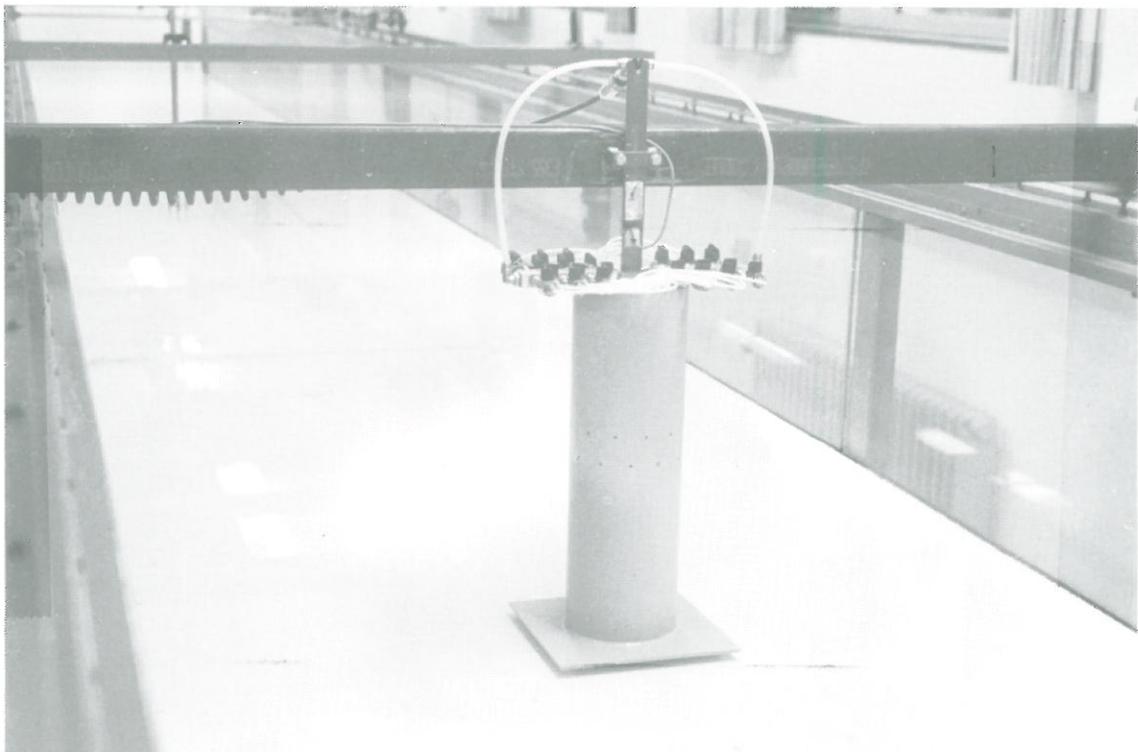


Figure 5. Picture of the monopile test model.

## 4. RESULTS

In the following section the results will be presented and discussed. Section 4.1 describes the results performed to calibrate the strain gauge and the test model while section 4.2 presents the results from the test used to estimate  $C_{D_1}$  and  $C_{D_2}$  in (2).

### 4.1 Estimation of Structural Parameters

In order to find the calibration factor between measured strains  $S$  and deflection  $x$  of the bottom of the test model and to find the stiffness of the system some static tests were performed. A string combined to a pulley and a plumb bob were connected to the bottom of the cylinder in the longitudinal direction of the flow channel. The results from a test where the weight of the plumb bob was  $PI$  were repeated five times and are shown in table 1

$PI$ (g)	$x$ (mm)	$S$ ( $\mu\epsilon$ )
0	0.00	-5
294.5	7.05	254
294.5 +294.7	14.28	502
0	0.11	0
294.5	7.01	247
294.5 +294.7	11.31	496
0	0.31	2
294.5	6.99	248
294.5 +294.7	14.24	496
0	0.22	-3
294.5	6.98	250
294.5 +294.7	14.33	501
0	0.01	-3
294.5	7.11	248
294.5 +294.7	14.35	495

Table 1: Static tests to calibration of strain gauge and estimation of stiffness.

From table 1 estimates of the calibration factor between strain and displacement are found. Further, the stiffness of the system is estimated. Next, 10 free decay tests without water in the flow channel and 8 tests with water in the flow channel were performed. These tests were performed in order to estimate the natural frequencies  $f_0$  and  $f_1$  of the system, respectively. The detrended time series were analysed using an Auto-Regressive model of order 6, see e.g. Pandit [4]. From the natural frequencies results from tests without water in the flow in the channel, see table 2, the generalised mass was estimated as

$$m_s = \frac{k}{(2\pi f_0)^2} = 7.46 \text{ kg}$$

The modal hydrodynamic mass  $m_h$  can now be estimated from the following relation as

$$m_h = k \left( \frac{1}{(2\pi f_1)^2} - \frac{1}{(2\pi f_0)^2} \right) = 7.96 \text{ kg}$$

Test no.	$f_0$ (Hz)	$\zeta_1$ (%)
01	1.1883	0.275
02	1.1891	0.223
03	1.1894	0.181
04	1.1892	0.207
05	1.1889	0.229
06	1.1894	0.183
07	1.1893	0.212
08	1.1897	0.188
09	1.1895	0.216
10	1.1896	0.193

Table2: Natural frequencies and damping ratios estimated without water in the flow channel.

Test no.	$f_1$ (Hz.)	$\zeta_1$ (%)
11	0.8266	0.275
12	0.8313	0.256
13	0.8196	0.253
14	0.8254	0.270
15	0.8260	0.254
16	0.8386	0.227
17	0.8254	0.263
18	0.8284	0.243

Table3: Natural frequencies and damping ratios estimated with water in the flow channel.

#### 4.2 Estimation of $CD_1$ and $CD_2$

With the parameters estimated in section 4.2 the only unknowns in equation (2) are the drag coefficients  $C_{D_1}$  and  $C_{D_2}$ . Since the tests are performed in stationary flow the last term in equation (2) is equal to zero. In order to estimate the drag coefficients  $C_{D_1}$  and  $C_{D_2}$  the Extended Kalman Filtering technique was used, see e.g. Ljung [5] and Söderström [6]. It was decided to test the model blowing air with pressure  $p = \{0, 0.5, 1.0, 1.5, 2.5, 5.0\}$  bar out of the holes in the cylinder. Further, the tests were performed with some of the valves closed. Four different layout valve positions were selected. One layout with all valves opened, another with only 5 valves opened in each side of the cylinder and at last two layouts where the valves were open upstream and downstream, respectively. The results from the tests are shown in tables 4, 5, 6 and 7, respectively. The modal parameters are estimated using an AR model, as described in section 4.1. The relative changes of the drag coefficient estimates  $C_{D_1}^i$  are shown in figures 3 and 4, respectively, for the two different water flows. It is seen from these figures that a significant change of the drag coefficient can be obtained when air is blown out of the holes in the cylinder.

Test no.	$\dot{U}$ (cm/s)	$p$ (bar)	$f_i$ (Hz.)	$\zeta_1$ (%)	$C_{D_1}^i$
045	10.60	0.0	0.8230	2.642	1.04
046	10.69	0.5	0.8219	2.798	1.56
047	10.21	1.0	0.8206	2.784	1.10
048	10.57	1.5	0.8214	2.842	1.14
049	10.70	2.5	0.8196	3.405	1.52
050	10.35	5.0	0.8174	3.890	2.02
069	20.28	0.0	0.8199	3.670	0.52
070	19.06	0.5	0.8184	3.976	0.50
071	19.80	1.0	0.8187	3.779	0.68
072	19.40	1.5	0.8164	4.552	0.69
073	19.57	2.5	0.8168	5.082	0.63
074	19.66	5.0	0.8128	5.343	0.67

Table 4: Description of performed measurements with all valves opened.

Test no.	$\dot{U}$ (cm/s)	$p$ (bar)	$f_i$ (Hz.)	$\zeta_1$ (%)	$C_{D_1}^i$
039	10.60	0.0	0.8217	2.693	1.06
040	10.69	0.5	0.8202	2.959	1.25
041	10.21	1.0	0.8200	3.365	1.48
042	10.57	1.5	0.8196	3.532	1.85
043	10.70	2.5	0.8204	3.722	2.25
044	10.35	5.0	0.8239	4.276	3.22
081	19.30	0.0	0.8191	3.630	0.47
082	19.34	0.5	0.8240	4.289	0.64
083	19.31	1.0	0.8294	4.923	0.55
084	19.07	1.5	0.8245	5.171	0.74
085	18.96	2.5	0.8277	4.477	0.76
086	20.17	5.0	0.8291	4.628	0.76

Table 5: Description of performed measurements with all 2 x 5 valves opened.

Test no.	$\dot{U}$ (cm/s)	$p$ (bar)	$f_I$ (Hz.)	$\zeta_1$ (%)	$C_{D_1}^i$
057	10.75	0.0	0.8246	2.830	1.02
058	10.25	0.5	0.8251	2.857	1.08
059	10.33	1.0	0.8282	3.532	1.19
060	10.09	1.5	0.8268	3.892	1.75
061	10.55	2.5	0.8295	3.698	1.85
062	10.67	5.0	0.8368	6.038	4.50
063	20.11	0.0	0.8243	3.257	0.54
064	19.66	0.5	0.8186	3.952	0.84
065	19.33	1.0	0.8281	6.725	0.92
066	19.57	1.5	0.8220	4.847	1.00
067	18.85	2.5	0.8310	4.989	1.12
068	19.74	5.0	0.8301	5.650	1.23

Table 6: Description of performed measurements with all valves downstream opened.

Test no.	$\dot{U}$ (cm/s)	$p$ (bar)	$f_I$ (Hz.)	$\zeta_1$ (%)	$C_{D_1}^i$
051	10.68	0.0	0.8244	2.555	0.96
052	10.29	0.5	0.8223	2.725	1.25
053	10.27	1.0	0.8197	2.912	1.32
054	10.42	1.5	0.8186	2.991	1.58
055	10.65	2.5	0.8262	2.967	2.01
056	10.54	5.0	0.8120	4.429	3.21
075	19.42	0.0	0.8232	3.517	0.55
076	19.27	0.5	0.8186	3.904	0.64
077	19.74	1.0	0.8196	4.164	0.67
078	19.90	1.5	0.8194	3.881	0.68
079	19.39	2.5	0.8128	4.997	0.86
080	19.41	5.0	0.8166	4.480	1.12

Table 7: Description of performed measurements with all valves upstream opened.

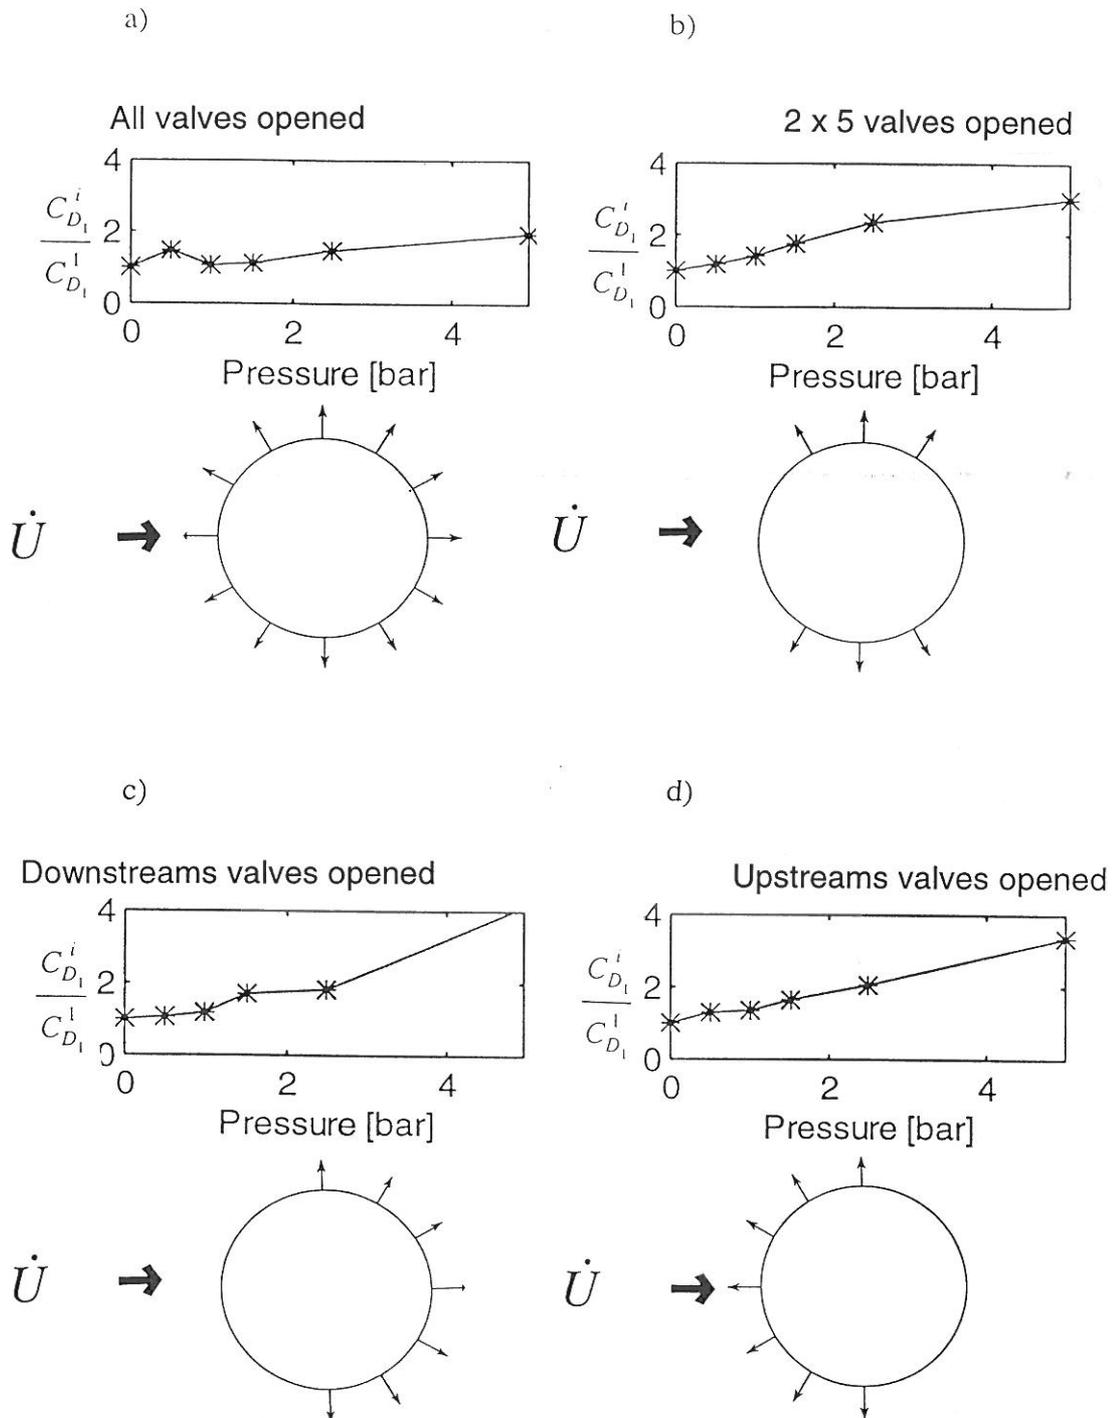


Figure 3: Relative changes in drag coefficients as a function of air pressure. a) All valves opened. b) 2 x 5 valves opened. c) Downstream valves opened. d) Upstream valves opened. ( $\dot{U} \approx 0.1 \text{ m/s}$ )

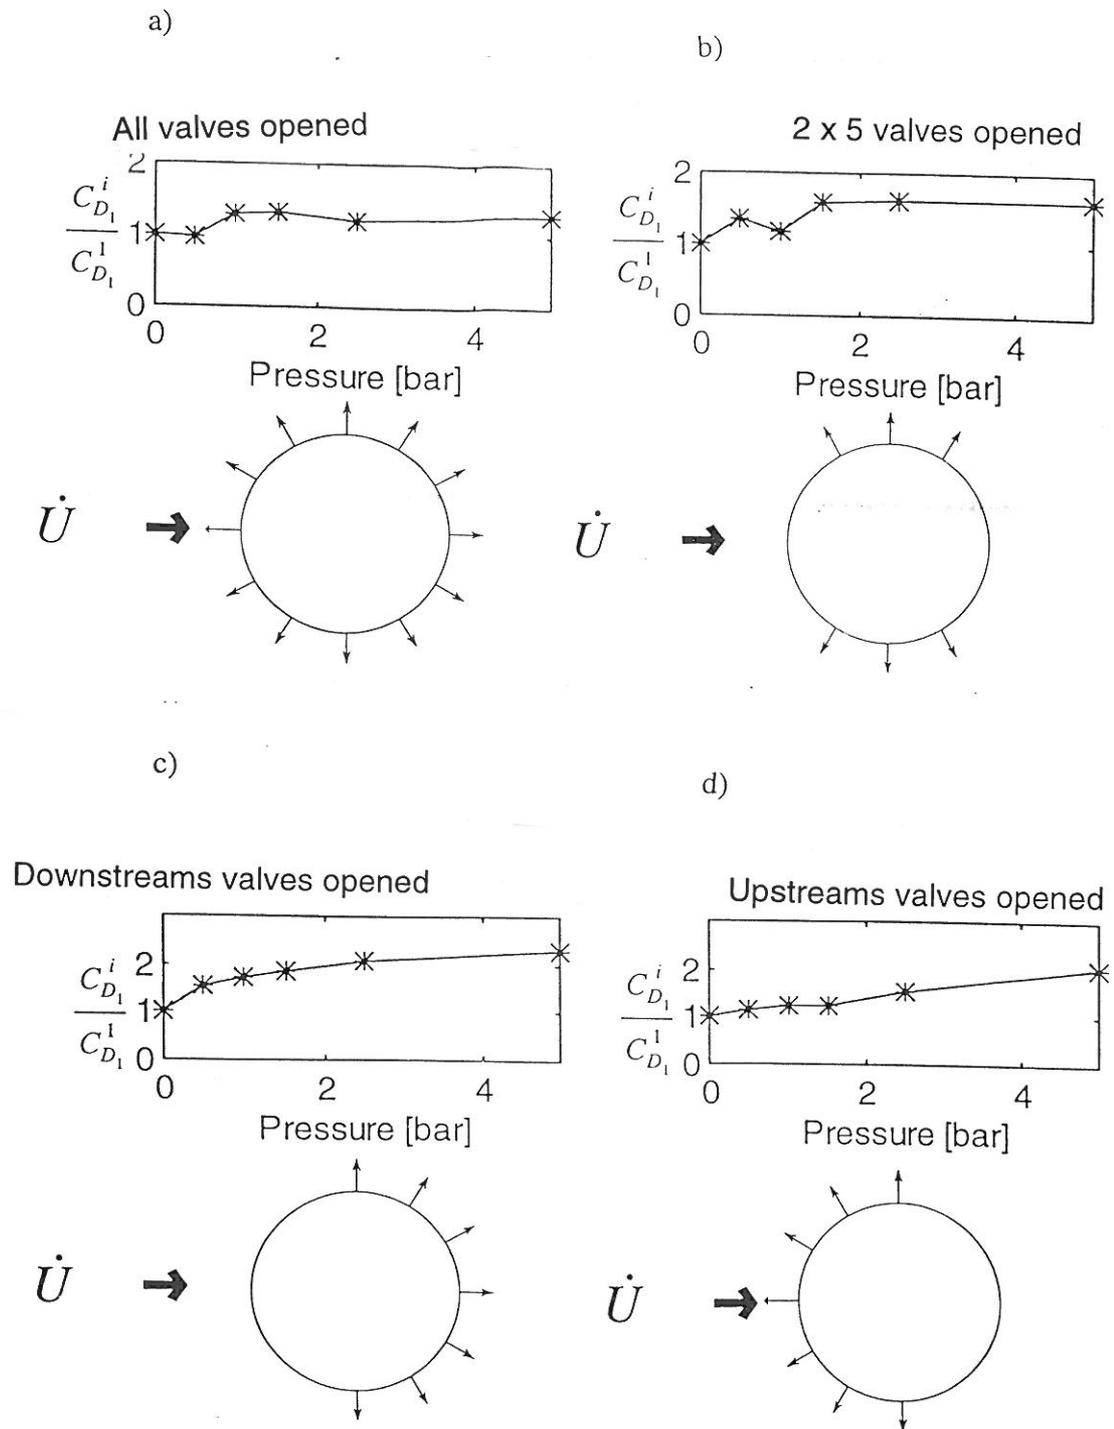


Figure 4: Relative changes in drag coefficients as a function of air pressure. a) All valves opened. b) 2 x 5 valves opened. c) Downstream valves opened. d) Upstream valves opened. ( $\dot{U} \approx 0.2 \text{ m/s}$ )

## 5. CONCLUSIONS

The results presented in the present report *Active Vibration Control of a Monopile Offshore Structure - Part One* show that it is possible to increase the drag coefficient with a factor 1.5-2 by blowing air out of the holes in a cylinder vibrating in a stationary water flow. This means that the proposed control technique based on the relationship between the position of the separation points of the boundary layer flow and the drag term in the wave force on the cylinder should be expected to work. However, before a final conclusion can be done, the test model should be tested in nonstationary water flow, i.e. in a test facility where it is possible to excite the model using waves. This will be the subject for research in the future.

## 6. ACKNOWLEDGEMENTS

The present research was partially supported by The Danish Technical Research Council within the project: "Dynamics of Structures".

## 7. REFERENCES

- [1] Soong, T.T.: *Active Vibration Control in Civil Engineering. State-of-the-Art, Eng. Structural, Vol.10, 1988.*
- [2] Thesbjerg, L: *Optimal Vibration Control of Civil Engineering Structures. Ph.D thesis, Structural Reliability Paper No. 93, Aalborg University, 1992*
- [3] Sarpkaya, T & M. Isaacson: *Mechanics of Wave Forces on Offshore Structures. Van Nostrand Reinhold Company, 1981.*
- [4] Pandit, S.M & S.M. Wu: *Time Series and System Analysis with Applications. John Wiley and sons, 1983.*
- [5] Ljung, L.: *System Identification - Theory for the User. Prentice Hall, Englewood Cliffs, 1987.*
- [6] Söderström, T. & P. Stoica: *System Identification. Prentice Hall, 1987.*

## FRACTURE AND DYNAMICS PAPERS

PAPER NO. 43: M. Krawczuk: *A New Finite Element for Static and Dynamic Analysis of Cracked Composite Beams*. ISSN 0902-7513 R9305.

PAPER NO. 44: A. Rytter: *Vibrational Based Inspection of Civil Engineering Structures*. Ph.D.-Thesis. ISSN 0902-7513 R9314.

PAPER NO. 45: P. H. Kirkegaard & A. Rytter: *An Experimental Study of the Modal Parameters of a Damaged Steel Mast*. ISSN 0902-7513 R9320.

PAPER NO. 46: P. H. Kirkegaard & A. Rytter: *An Experimental Study of a Steel Lattice Mast under Natural Excitation*. ISSN 0902-7513 R9326.

PAPER NO. 47: P. H. Kirkegaard & A. Rytter: *Use of Neural Networks for Damage Assessment in a Steel Mast*. ISSN 0902-7513 R9340.

PAPER NO. 48: R. Brincker, M. Demosthenous & G. C. Manos: *Estimation of the Coefficient of Restitution of Rocking Systems by the Random Decrement Technique*. ISSN 0902-7513 R9341.

PAPER NO. 49: L. Gansted: *Fatigue of Steel: Constant-Amplitude Load on CCT-Specimens*. ISSN 0902-7513 R9344.

PAPER NO. 50: P. H. Kirkegaard & A. Rytter: *Vibration Based Damage Assessment of a Cantilever using a Neural Network*. ISSN 0902-7513 R9345.

PAPER NO. 51: J. P. Ulfkjær, O. Hededal, I. B. Kroon & R. Brincker: *Simple Application of Fictitious Crack Model in Reinforced Concrete Beams*. ISSN 0902-7513 R9349.

PAPER NO. 52: J. P. Ulfkjær, O. Hededal, I. B. Kroon & R. Brincker: *Simple Application of Fictitious Crack Model in Reinforced Concrete Beams. Analysis and Experiments*. ISSN 0902-7513 R9350.

PAPER NO. 53: P. H. Kirkegaard & A. Rytter: *Vibration Based Damage Assessment of Civil Engineering Structures using Neural Networks*. ISSN 0902-7513 R9408.

PAPER NO. 54: L. Gansted, R. Brincker & L. Pilegaard Hansen: *The Fracture Mechanical Markov Chain Fatigue Model Compared with Empirical Data*. ISSN 0902-7513 R9431.

PAPER NO. 55: P. H. Kirkegaard, S. R. K. Nielsen & H. I. Hansen: *Identification of Non-Linear Structures using Recurrent Neural Networks*. ISSN 0902-7513 R9432.

PAPER NO. 56: R. Brincker, P. H. Kirkegaard, P. Andersen & M. E. Martinez: *Damage Detection in an Offshore Structure*. ISSN 0902-7513 R9434.

PAPER NO. 57: P. H. Kirkegaard, S. R. K. Nielsen & H. I. Hansen: *Structural Identification by Extended Kalman Filtering and a Recurrent Neural Network*. ISSN 0902-7513 R9433.

PAPER NO. 58: P. Andersen, R. Brincker, P. H. Kirkegaard: *On the Uncertainty of Identification of Civil Engineering Structures using ARMA Models*. ISSN 0902-7513 R9437.

PAPER NO. 59: P. H. Kirkegaard & A. Rytter: *A Comparative Study of Three Vibration Based Damage Assessment Techniques*. ISSN 0902-7513 R9435.

## FRACTURE AND DYNAMICS PAPERS

PAPER NO. 60: P. H. Kirkegaard, J. C. Asmussen, P. Andersen & R. Brincker: *An Experimental Study of an Offshore Platform*. ISSN 0902-7513 R9441.

PAPER NO. 61: R. Brincker, P. Andersen, P. H. Kirkegaard, J. P. Ulfkjær: *Damage Detection in Laboratory Concrete Beams*. ISSN 0902-7513 R9458.

PAPER NO. 62: R. Brincker, J. Simonsen, W. Hansen: *Some Aspects of Formation of Cracks in FRC with Main Reinforcement*. ISSN 0902-7513 R9506.

PAPER NO. 63: R. Brincker, J. P. Ulfkjær, P. Adamsen, L. Langvad, R. Toft: *Analytical Model for Hook Anchor Pull-out*. ISSN 0902-7513 R9511.

PAPER NO. 64: P. S. Skjærbæk, S. R. K. Nielsen, A. Ş. Çakmak: *Assessment of Damage in Seismically Excited RC-Structures from a Single Measured Response*. ISSN 1395-7953 R9528.

PAPER NO. 65: J. C. Asmussen, S. R. Ibrahim, R. Brincker: *Random Decrement and Regression Analysis of Traffic Responses of Bridges*. ISSN 1395-7953 R9529.

PAPER NO. 66: R. Brincker, P. Andersen, M. E. Martinez, F. Tallavó: *Modal Analysis of an Offshore Platform using Two Different ARMA Approaches*. ISSN 1395-7953 R9531.

PAPER NO. 67: J. C. Asmussen, R. Brincker: *Estimation of Frequency Response Functions by Random Decrement*. ISSN 1395-7953 R9532.

PAPER NO. 68: P. H. Kirkegaard, P. Andersen, R. Brincker: *Identification of an Equivalent Linear Model for a Non-Linear Time-Variant RC-Structure*. ISSN 1395-7953 R9533.

PAPER NO. 69: P. H. Kirkegaard, P. Andersen, R. Brincker: *Identification of the Skirt Piled Gullfaks C Gravity Platform using ARMAV Models*. ISSN 1395-7953 R9534.

PAPER NO. 70: P. H. Kirkegaard, P. Andersen, R. Brincker: *Identification of Civil Engineering Structures using Multivariate ARMAV and RARMAV Models*. ISSN 1395-7953 R9535.

PAPER NO. 71: P. Andersen, R. Brincker, P. H. Kirkegaard: *Theory of Covariance Equivalent ARMAV Models of Civil Engineering Structures*. ISSN 1395-7953 R9536.

PAPER NO. 72: S. R. Ibrahim, R. Brincker, J. C. Asmussen: *Modal Parameter Identification from Responses of General Unknown Random Inputs*. ISSN 1395-7953 R9544.

PAPER NO. 73: S. R. K. Nielsen, P. H. Kirkegaard: *Active Vibration Control of a Monopile Offshore Structure. Part One - Pilot Project*. ISSN 1395-7953 R9609.

**Department of Building Technology and Structural Engineering  
Aalborg University, Sohngaardsholmsvej 57, DK 9000 Aalborg  
Telephone: +45 98 15 85 22    Telefax: +45 98 14 82 43**