

Sensitivity analysis from single-well ERT simulations to image CO₂ migrations along wellbores

STEFANO PICOTTI, DAVIDE GEI, and JOSÉ M. CARCIONE, *Istituto Nazionale di Oceanografia e di Geofisica Sperimentale*
 VIVIAN GRÜNHUT and ANA OSELLA, *Facultad de Ciencias Exactas y Naturales*

CO₂ plume imaging is a required step in CO₂ geological storage for both performance assessment and risk management purposes. This work has been performed in the frame of the CO₂CARE project, and its aim is to develop tools and methodologies to monitor CO₂ migration and verify the long-term well integrity after site abandonment. The timely detection of an anomaly is essential to perform a suitable remediation. For this purpose, downhole tools are permanently installed, but it is important to check the resolution and efficiency of the adopted techniques. In particular, this study investigates the possibility of using electrical resistivity tomography (ERT) to image CO₂ migrations around observation boreholes through a sensitivity study.

Under certain conditions, the ERT technique can image the subsurface distribution of electrical resistivity. Following the development of robust inversion algorithms and suitable data-acquisition systems, ERT has been applied to a wide range of environmental and engineering problems (Herman, 2001; Daily et al., 2004; Samouëlian et al., 2005; Martinelli et al., 2012). ERT applications are not constrained to surface investigations, because recent technical developments allow the use of downhole electrodes. Therefore, ERT may be appropriate for oil and gas reservoir and deep saline aquifer characterization. The installation of electrodes deep in a reservoir can be done, cost effectively, during the completion of production/injection wells (Prevedel et al., 2008). The surveys can be performed in 1-, 2- or 3D with different resolutions, from centimeters to hundred of meters. It is also worth noting an innovative method called long electrode mise à la masse (LEMAM) using the available metal-cased boreholes as long electrodes distributing the current along the boreholes and measuring the electric field at the surface (Girard et al., 2009; Bourgeois and Girard, 2010).

ERT can be important in CO₂ geological storage to monitor injected CO₂ migration as an alternative to/or in combination with seismic methods. Seismic methods have been proven to be efficient in CO₂ geological storage monitoring. In saline aquifers, such as Sleipner and Nagaoka, repeated seismic surveys and time-lapse seismic data analysis have allowed the mapping of the CO₂ plume and its temporal and spatial evolution (Saito et al., 2006; Chadwick et al., 2010). However, this may not be the case elsewhere. For example, in some gas-depleted reservoirs, such as the Rouse and K12-B gas fields (Vandeweyer et al., 2006), because of the large depths involved (4500 m and 3800 m respectively), CO₂ saturation variations hardly can be detected. Moreover, gas-depleted reservoirs may contain another gas, making the seismic response of the injected CO₂ small and easily masked by the noise (e.g., Picotti et al., 2012). This is also the case when trying to detect possible CO₂ migrations in the cap rock, which may be caused by faults and fractures or by damaged

old wells. The difficulty here is that the host rock has a stiffer matrix and lower porosity and permeability than the reservoir formation. In addition, the CO₂ can be present in the supercritical state, with a density and a bulk modulus much higher than those of the gaseous phase (Picotti et al., 2012). The fluid effect under such conditions is smaller than that observed in a softer and more permeable rock, because of the reduced mobility of the fluid. Picotti et al. (2012) assessed the sensitivity of the reflection seismic method from the surface for this specific problem, suggesting a reference detection threshold corresponding to a signal-to-noise ratio of about 10 dB. Another problem is the low sensitivity of the P-wave velocity to high saturations. In fact, when the CO₂ saturation exceeds 40%, the variation of the velocity is weak and not enough to estimate the injected volume quantitatively if White's model of patchy saturation is used (Carcione and Picotti, 2006). Gassmann's theory is even more restrictive, with a threshold of 20% (e.g., Carcione et al., 2006).

In all these cases, complementary monitoring surveys, such as ERT or other methods based on electric or electromagnetic properties may be useful, because the electrical properties are more sensitive to the presence of fluids than the elastic properties (Ramirez et al., 1993; Carcione et al., 2007; Nakatsuka et al., 2009; Carcione et al., 2012). ERT in crosswell, single-well, and surface-downhole configurations is an efficient technique that can be employed to detect a gas within a conductive fluid and, more specifically, to image CO₂ plumes. Under certain conditions, it also might be helpful to detect small amounts of CO₂ near the wellbore. al Hagrey (2010) performed an ERT crosswell numerical study and showed that the method can discriminate the various components of a CO₂ storage in conductive saline reservoirs, namely, the plume, the host reservoir, and the

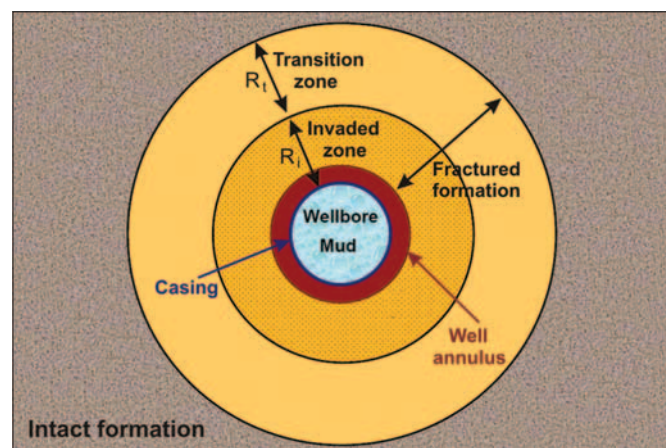


Figure 1. Planar section (not in scale) of the well and the surrounding medium, where $R_t = 98$ cm and $R_i = 2$ cm in the mudstone, and $R_t = 97$ cm and $R_i = 3$ cm in the sandstone.

cap rock. Recent studies (Christensen et al., 2006; Kiessling et al., 2010; Schmidt-Hattenberger et al., 2011; Bergmann et al., 2012) have shown the potential of ERT to detect resistivity changes caused by CO₂ injection and migration in geological reservoirs.

In particular, by using a surface-downhole configuration at Ketzin injection site, Bergmann et al. (2012) detected resistivity anomalies approximately 20 m above the reservoir, close to the observation wells. The authors suggest that these resistivity anomalies may be caused by weak coupling conditions of some electrodes to the formation, as a consequence of a possible infiltration of CO₂ in the uncemented part of the well annulus or CO₂ buoyancy-driven displacement of brine within the same well intervals (Bergmann et al., 2012). It is, therefore, reasonable to assume ERT as a potential tool to detect CO₂ migrations along wellbores. In order to estimate the amount of migrated CO₂ from downhole ERT measurements, the imaging technique can be useful. If the CO₂ invades only the well annulus, it can be detected as shown by Bergmann et al. (2012). However, if for some reason (e.g.,

cement degradation and fracturation of the cap rock around the wells) the amount and extension of the migrated CO₂ is larger, it might also be imaged.

The aim of this work is to perform a sensitivity study with single-well simulations to show if it is possible to image potential early-stage CO₂ migrations close to a well, above the reservoir. To perform our modeling on a realistic configuration, we benefit from the large and well-documented case history database of the CO₂CARE project. We first design a synthetic model representing a possible CO₂ migration close to a well. This model, built on the basis of published data, represents a typical storage complex in a sandstone saline aquifer. Then, we perform numerical electrical resistivity forward modeling using different electrode configurations. Finally, we invert the resulting apparent resistivity models by ERT and compute

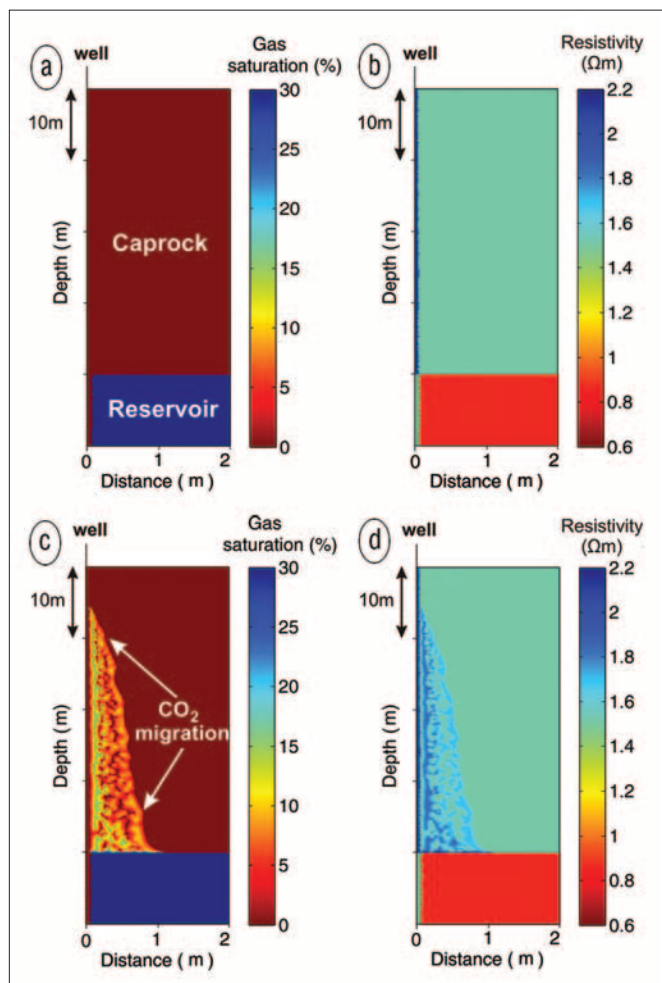


Figure 2. Gas saturation (a) and resistivity (b) models before CO₂ migration. Gas saturation (c) and resistivity (d) models after CO₂ migration (damaged cap rock scenario). The well is on the left side (black vertical line). The CO₂ saturation in the reservoir is 30%. The CO₂ migration scenario consists in a straightforward vertical CO₂ migration assumed within a 1-m cap-rock damaged zone.

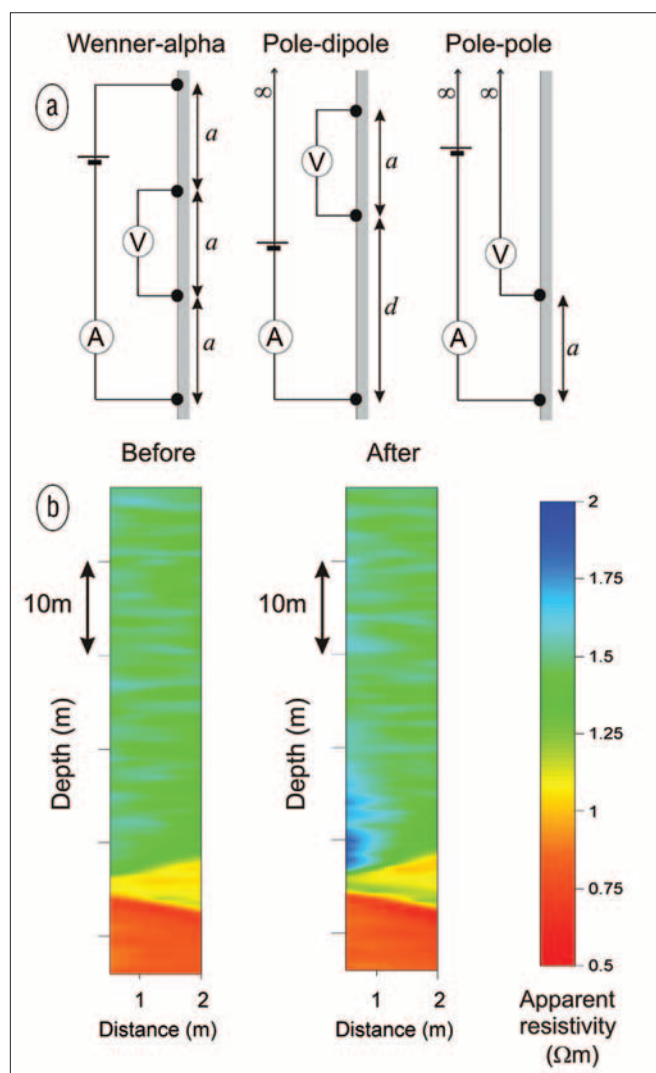


Figure 3. Representation of the electrode configurations (a) used in this work: Wenner-alpha, pole-dipole, and pole-pole, where a is the electrode spacing, n is the dipole spacing factor and $d = na$. The current is injected through the outer electrodes and measured by the amperometer A, while the potential is measured between the inner electrodes by the voltmeter V. Results of the forward modeling before and after the CO₂ migration using the pole-dipole configuration (b), where $a = 1$ m and $n = 7$. It corresponds to the apparent resistivity of the medium, with 3% random noise added.

the rms difference between the original CO₂ migration model and the inverted resulting models.

Monitoring programs of the CO₂CARE EU project

Important monitoring programs have been applied in several CO₂ storage pilot projects in the European Union, using geophysical, geochemical, and biological methods. The aim is to develop and validate tools and techniques to meet the requirements of the EU directive on carbon capture and storage (CCS) regarding geological storage safety and long-term integrity and stability. The results of these investigations revealed that CO₂ can be safely stored in deep saline aquifers and depleted hydrocarbon fields. The CO₂CARE project aims to deliver technologies and procedures for abandonment and post-closure safety by addressing the research requirements of CO₂ storage site abandonment. One of the main objectives of the project is to suggest innovative plugging techniques to ensure long-term well integrity while studying feasible monitoring methods for early detection of CO₂ migrations. Dry runs for implementing closure scenarios at Sleipner, Ketzin, and K12-B injection sites will be elaborated upon in this project.

The Ketzin pilot site is located near Postdam in a rural area with few industrial infrastructures. The CO₂ storage reservoir is a saline aquifer, formed with fluvial deposit sandstones, located below an old natural gas storage reservoir. The CO₂ is trapped in an anticline structure of the German Basin, inside a sandstone unit of the Upper Triassic Stuttgart Formation, at 630–650 m depth. The injection began in June 2008 and after 39 months of operations about 53 thousand tons of CO₂ have been stored (Martens et al., 2012).

Medium	Resistivity (Ωm)
Clay	5
Reservoir grain	90.9
Cap rock grain	28.6
Drilling mud	0.18
Brine	0.05
CO ₂	∞

Table 1. Resistivity of the single constituents.

Medium	Resistivity (Ωm)	Porosity (%)	Clay content (%)
Reservoir with mud (invaded zone) / mudcake	1.41	29	25
Reservoir saturated with brine	0.46	30	25
Reservoir saturated with brine and CO ₂	0.88	30	25
Cap rock with mud (invaded zone) / mudcake	3.13	11	50
Mud (30%) + CO ₂ (70%)	3.13	100	0
Cap rock with brine	1.50	12	50

Table 2. Formation properties.

The K12-B storage site is located in the Dutch sector of the North Sea. The project started in 2004 when part of the CO₂ separated from the natural gas extracted from the K12-B reservoir was re-injected into the same reservoir located at about 3800 m below sea level (Vandeweyer et al., 2006). Since 2004, nearly 60 thousand tons of CO₂ have been injected.

In all three sites, the migration of the injected CO₂ is monitored at different scales, integrating together a broad range of geological, geophysical, geochemical, and microbiological techniques. Field data sets are regularly acquired and used to update performance assessment models and scenarios, aiming at predicting the long-term fate of CO₂. In practice, much work has been done in research and development projects, delivering valuable information. The monitoring campaigns have not shown any CO₂ migration outside the storage complex on these sites. We, nevertheless, aim at delivering monitoring tools and solutions for guaranteeing safe-closure and post-closure phases. Here, we design a representative scenario of a near-wellbore CO₂ migration to evaluate the ERT imaging technique sensitivity. Indeed, although the possibility of CO₂ migrations through the cap rock along a wellbore is low, it is one of the risks, and as such it has to be systematically considered in risk management and remediation studies. It must be taken into account in monitoring plan designs, in agreement with the EU Directive recommendations on CCS.

Model of a possible CO₂ migration

In this work, we consider a typical storage scenario where the reservoir is a saline aquifer formed by fluvial deposit sandstones and the cap rock consists in a thick mudstone layer. As the main objective of this work is to optimize a permanent downhole ERT system to image possible CO₂ migrations close to the wellbore, we focus our analysis on a maximum distance of 2 m from the wellbore casing. Moreover, our investigations address the transition zone between the sandstone reservoir and the cap rock, where we assume that an array of electrodes can be installed outside the insulated casing, in contact with the formations. The previous CO₂SINK project demonstrated that this is feasible. In fact, at the Ketzin injection site, some of the wells are equipped with a vertical electrical resistivity array (VERA; Prevedel et al., 2008) to monitor the CO₂ plume by performing crosswell and surface-downhole investigations (Bergmann et al., 2012; Schmidt-Hattenberger et al., 2011; Kiessling et al., 2010).

As commonly observed at wellbores, we assumed the presence of a thin layer of mudcake between the casing and the formation, and a drilling mud invasion in the formation. Following the measurements of Wandrey et al. (2010), the thickness of the invaded zone in the reservoir should be less than 0.5 cm. Therefore, we assume the average thickness of the mud-cake and invaded zone to be 3 cm in the reservoir and 2 cm in the cap rock (see Figure 1). The permeability may vary considerably along the radial direction because of the wellbore mud and formation damage while drilling. At the first 2 cm around the well, the permeability is low (<1 mD, Wandrey et al., 2010) because of the presence of the mudcake and drilling debris together with drilling mud in the pore space. However, we assume that the porosity ϕ , varies only 1% radially. In the cap rock mudstone $\phi = 12\%$, and in the reservoir sandstone $\phi = 30\%$ (Wandrey et al., 2010). The clay content (constant) is 50% in the cap rock and 25% in the reservoir. Drilling-induced damages at the wellbore are frequently observed (using Fullbore Formation MicroImager (FMI) measurements) and have been documented in the literature (e.g., Aadnoy and Bell, 1998). Practically, drilling operations may induce fractures and cracks in the rock surrounding a well, in a way that is not easily predictable, because it depends on many factors (e.g., depth, rock properties, fluids properties present in the pore space, including mud, and in-situ stresses, pressure, and temperature conditions). Generally, such fractures are supposed to extend within less than 1 m from the wellbore.

Therefore, we make such an assumption to evaluate our ERT approach with this scenario, defining a cap rock transition zone with drilling-induced fractures between 2 cm and 1 m from the metal casing, saturated only with brine, where CO₂ could migrate (see Figure 1). The formation is assumed to be intact at a distance greater than 1 m from the well.

In order to better detect potential CO₂ migrations, the resistivity of the drilling mud should be low. For this reason, oil-based drilling fluids are not recommended. Therefore, the drilling-mud resistivity is assumed to be 0.18 Ωm , which corresponds to a water-based mud with addition of a strong electrolyte to make it more conductive (Sherborne and Newton, 1942). The brine resistivity is 0.05 Ωm , while the formation resistivity without CO₂ is 1.5 Ωm in the mudstone and 0.46 Ωm in the reservoir (Kiessling et al., 2010). We use the complex refractive index method (CRIM) to obtain the missing parameters:

$$\rho = [(1-\phi)(1-C)\rho_c^\gamma + (1-\phi)C\rho_f^\gamma + \phi(1-S_g)\rho_b^\gamma + \phi S_g\rho_g^\gamma]^{1/\gamma}, \gamma = -1/2$$

(Carcione, 2007; Carcione et al., 2012), where C is the clay content, ϕ is the porosity, ρ is the resistivity of the formation, ρ_c , ρ_b , ρ_g are the clay, fluid, and gas (CO₂) resistivities, respectively, and ρ_q represents the average grain (clastic) conductivity of the rock. Using the formation conductivity, we obtain $\rho_q = 90.9 \Omega\text{m}$ in the reservoir and 28.6 Ωm in the cap rock. Then, using the CRIM equation and the drilling

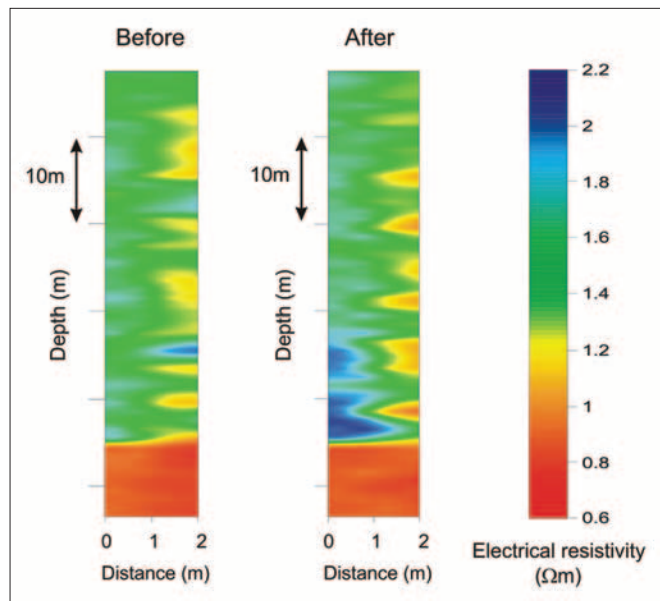


Figure 4. Results of the ERT inversion before and after the CO₂ migration using the Wenner-alpha configuration, where $a = 1$ m.

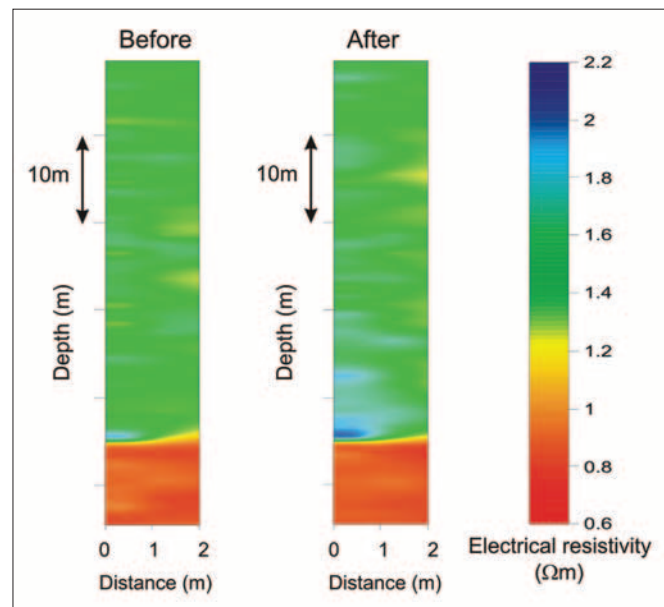


Figure 6. Results of the ERT inversion before and after the CO₂ migration using the pole-pole configuration, where $a = 1$ m.

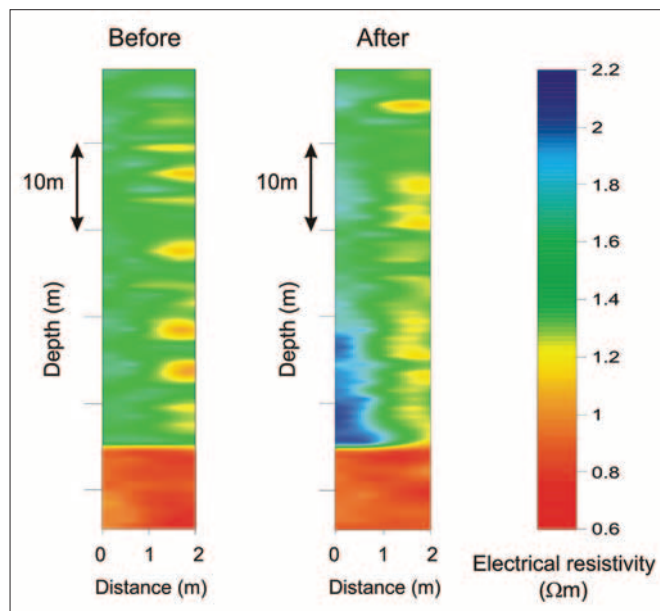


Figure 5. Results of the ERT inversion before and after the CO₂ migration using the pole-dipole configuration, where $a = 1$ m and $n = 7$.

mud conductivity, we compute the conductivity of the invaded formations. The resistivity of the mudcake occupying the well annulus (the volume between the casing and the formation) is assumed to be the same of that corresponding to the invaded formation. All the properties are summarized in Tables 1 and 2.

Finally, we assume a possible CO₂ migration within the transition zone (2 cm–1 m). The amount of migrated CO₂ is estimated to be about 150 kg, while the average CO₂ saturation is less than 10%. The CO₂ saturation in the reservoir is 30%. The CO₂ migration geometry is large at the base and thin at the top. To study how the detection sensitivity is changing in relation to the thickness of the CO₂ migration,

we use a grid composed of 200 × 5000 points, where the sample interval (grid spacing) is 1 cm. Figure 2 shows the gas saturation and resistivity models before and after the assumed CO₂ migration, where the well is located at the left side.

In this case, we assume that the CO₂ cannot diffuse in the drilling-mud-invaded zone and in the mudcake because of their low permeability (<1 mD, Wandrey et al., 2010). However, the mudcake might occupy only part of the well annulus, or it might not be present at all. In this case, the CO₂ may invade this zone occupied only by mud, producing CO₂ migrations with high CO₂ saturations. The resistivity value of the mud-cake in the well annulus (about 3.13 Ωm) is quite similar to the resistivity of a fluid mixture composed by mud and CO₂, where the CO₂ saturation is about $S_g = 70\%$. Therefore, this thin high-resistivity zone may also simulate a possible CO₂ migration in the well annulus close to the well. We will also consider this case.

Electrical resistivity forward modeling

We simulate the geoelectric response of the CO₂ migration model of Figure 2 by using hypothetical arrays having different electrode configurations, i.e., Wenner-alpha, pole-pole, and pole-dipole (see Figure 3a). These configurations are the most used in ERT (Reynolds, 1997). Moreover, for each configuration, different electrode spacings are tested. Note that the pole-dipole arrays have two parameters, the electrode spacing a and the dipole spacing factor n . The apparent resistivity distributions of both models (with and without the CO₂ migration) are computed by using the RES2MOD software (Loke, 2002), based on a finite-difference method in which the subsurface (in this case the medium outside the well) is discretized in a 2D rectangular mesh, with a denser part in the area of interest. The values of the electrical resistivity in each cell are assigned accordingly to the model shown in Figure 2. Assuming the well is electrically insulated, the

interface where the electrodes are placed can be considered a dielectric medium. Gaussian random noise with 3% amplitude is added to the apparent resistivity data in order to simulate a more realistic situation. Figure 3b shows the result of the forward modeling before and after the CO₂ migration using the pole-dipole configuration, where $a = 1$ m and $n = 7$. The CO₂ migration effect is clear in the apparent resistivity data distribution.

Bearing in mind that the purpose is to investigate the possibilities to image the CO₂ migration in an efficient way, we performed numerical simulations to find the highest a , i.e., the minimum number of electrodes, allowing the anomaly to be imaged. To do this, we varied a from 0.5 to 3 m, for all the considered electrode configurations.

Electrical resistivity tomography

Once we simulated the apparent resistivity data with random noise, we performed the inversion using the RES2D-INV software (Loke, 2004), whose scheme is based on the least squares method (Loke and Barker, 1996). Figures 4, 5, and 6 show, respectively, the ERT results obtained from the

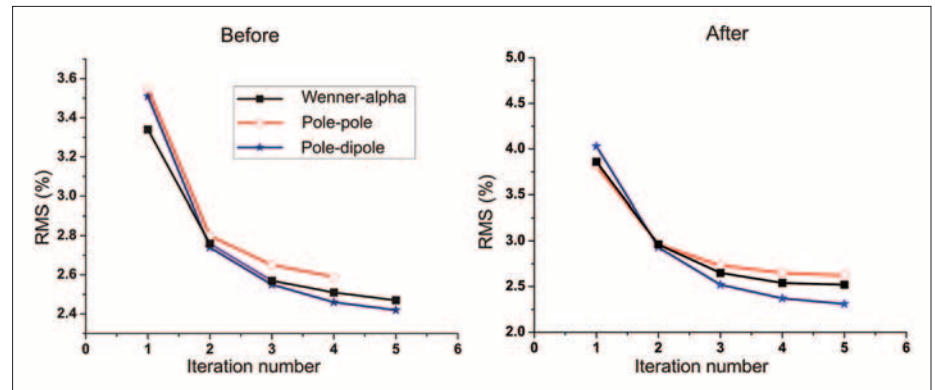


Figure 7. Plot of the rms errors versus number of iterations, before and after the CO₂ migration, for the different electrode configurations, where $a = 1$ m and $n = 7$.

inversion of the simulated forward models before and after assuming the CO₂ migration with the three electrode configurations. We use seven apparent resistivity levels, the electrode spacing is 1 m and the number of electrodes is 55, covering the entire profile. The CO₂ migration can be imaged clearly with all of these electrode arrays when the dipole spacing factor n is set to 7, which is usually the maximum advisable for a real profile. In order to verify which configuration is the most effective, the rms difference between the inverted and the original model is computed for each case. Figure 7 shows the progressive rms difference obtained for each configuration

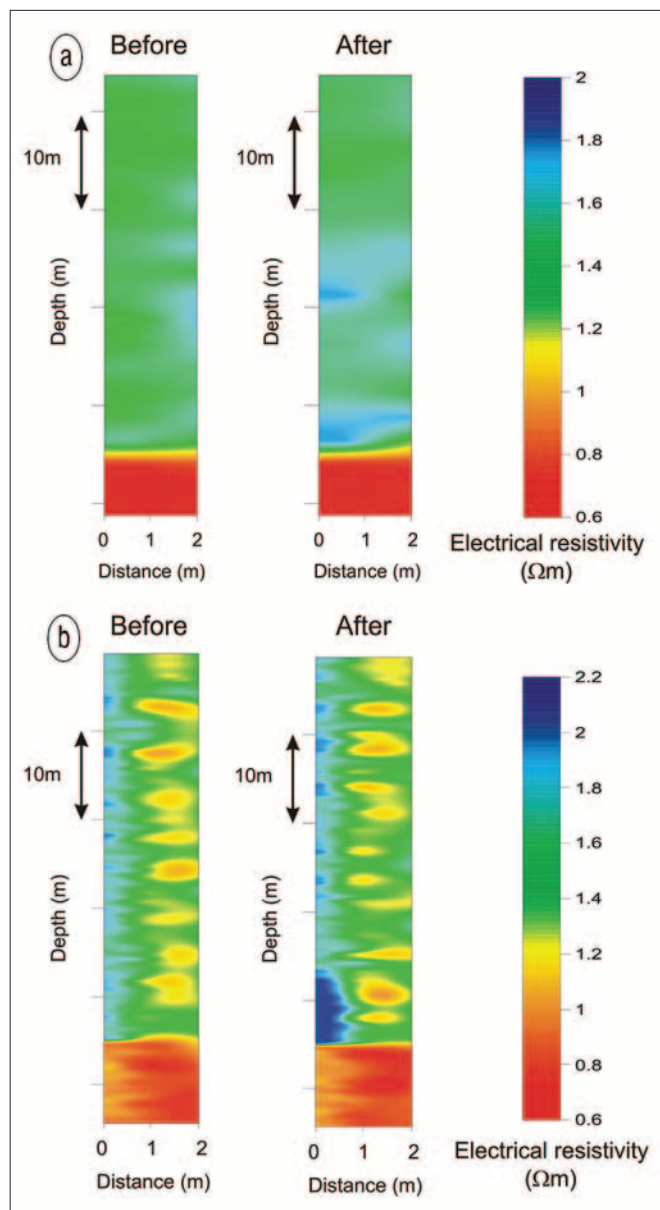


Figure 8. Results of the ERT inversion before and after the CO₂ migration using the Wenner-alpha configuration, where the electrode spacing is 2.5 m in (a), and 0.5 m in (b). Note that the thin high-resistivity zone close to the well is visible.

as a function of the inversion iteration number. The rms difference decreases as this number increases, and shows that the pole-dipole array has the smallest rms error.

Increasing the electrode spacing, the CO₂ migration imaging becomes, as expected, more difficult. We find that, using an electrode spacing of 2.5 m and 22 electrodes to cover the entire profile, the pole-dipole, and the pole-pole arrays, we are not able to image the CO₂ migration. On the other hand, as shown in Figure 8a, the Wenner-alpha configuration can still identify (image) the CO₂ migration. Furthermore, we found that when the electrode separation is larger than 3 m, the CO₂ migration cannot be imaged by any of these arrays. Otherwise, we verified that using all these configurations, the CO₂ migration becomes more visible by decreasing the electrode

separation. In particular, Figure 8b shows that, decreasing the electrode spacing to 0.5 m, it is possible to image also the thin high-resistivity zone close to the well, which is not visible in any of the previous experiments. Figure 8b shows the result obtained using the Wenner-alpha configuration; a similar result can be obtained also using the pole-dipole configuration. In the previous simulations, this zone represents the mud-cake between the casing and the formation, and a thin zone of the formation invaded by the drilling mud, where the CO₂ cannot infiltrate. However, as explained in the model construction, if the mudcake is not present this thin high-resistivity zone may also simulate a possible CO₂ migration in the well annulus, where the CO₂ saturation is $S_g = 70\%$. This simulation shows that to image possible CO₂ migrations in the well annulus, the electrode spacing must be set to 0.5 m at the most.

Conclusions

The electrical resistivity tomography (ERT) technique has been proven to be efficient in CO₂ geological storage to monitor the injected plumes in crosswell and surface-downhole experiments. ERT acquisition design, in combination with seismic methods when possible, might be a useful tool for imaging and quantification of CO₂ migrations.

In this work, we aim at testing the ERT technique to monitor possible early-stage CO₂ migrations along the wellbore at the cap rock level, where seismic methods are less sensitive to the presence of the CO₂. To this aim, we built a representative model of a possible CO₂ migration close to a wellbore, on the basis of petrophysical data from sandstone saline aquifer reservoirs, and carried out single-well electrical simulations to perform a sensitivity study. In our scenario, we assumed that the CO₂ migration may occur within 1 m around the well, because of the presence of fractures and cracks induced by drilling operations. We used different electrode spacings and three electrode configurations, i.e., Wenner-alpha, pole-pole, and pole-dipole. The ERT technique allowed us to reconstruct the CO₂ migration by inverting the simulated forward apparent resistivity distributions. The rms differences between the original CO₂ migration model and the inverted models suggest that the pole-dipole array is the most effective when the electrode spacing is lower than 2.5 m and the dipole spacing factor is 7. For larger electrode spacings, the Wenner-alpha configuration performs better, but the CO₂ migration can hardly be imaged. The inversions also suggest that possible CO₂ migrations in the well annulus can be imaged using the Wenner-alpha or the Pole-dipole configurations with electrodes spaced 0.5 m at the most. **TLE**

References

- Aadnoy, B. S. and J. S. Bell, 1998, Classification of drill-induced fractures and their relationship to insitu stress directions: The Log Analyst, **39**, 27–42.
- al Hagrey, S. A., 2011, CO₂ plume modeling in deep saline reservoirs by 2D ERT in boreholes: The Leading Edge, **30**, 24–33, <http://dx.doi.org/10.1190/1.3535429>.
- Bergmann, P., C. Schmidt-Hattenberger, D. Kiessling, C. Rücker, T. Labitzke, J. Hennings, G. Baumann, and H. Schütt, 2012, Surface-downhole electrical resistivity tomography applied to

- monitoring of CO₂ storage at Ketzin, Germany: *Geophysics*, **77**, no. 6, B253–B267, <http://dx.doi.org/10.1190/geo2011-0515.1>.
- Bourgeois, B. and J. F. Girard, 2010, First modeling results of the EM response of a CO₂ storage in the Paris Basin: *Oil & Gas Science and Technology—Rev: IFP*, **65**, no. 4, 597–614.
- Carcione, J. M., 2007, *Wave fields in real media. Theory and numerical simulation of wave propagation in anisotropic, anelastic, porous and electromagnetic media*: Elsevier.
- Carcione, J. M., D. Gei, S. Picotti, and A. Michelini, 2012, Cross-hole electromagnetic and seismic modeling for CO₂ detection and monitoring in a saline aquifer: *Journal of Petroleum Science and Engineering*, <http://dx.doi.org/10.1016/j.petrol.2012.03.018>.
- Carcione, J. M., B. Ursin, and J. I. Nordskag, 2007, Cross-property relations between electrical conductivity and the seismic velocity of rocks: *Geophysics*, **72**, no. 5, E193–E204, <http://dx.doi.org/10.1190/1.2762224>.
- Carcione, J. M. and S. Picotti, 2006, P-wave seismic attenuation by slow-wave diffusion: Effects of inhomogeneous rock properties: *Geophysics*, **71**, no. 3, O1–O8, <http://dx.doi.org/10.1190/1.2194512>.
- Carcione, J. M., S. Picotti, D. Gei, and G. Rossi, 2006, Physics and seismic modeling for monitoring CO₂ storage: *Pure and Applied Geophysics*, **163**, no. 1, 175–207, <http://dx.doi.org/10.1007/s00024-005-0002-1>.
- Chadwick, R. A., G. Williams, N. Delepine, V. Clochard, K. Labat, S. Sturton, M.-L. Buddensiek, M. Dillen, M. Nickel, A. L. Lima, R. Arts, F. Neele, and G. Rossi, 2010, Quantitative analysis of timelapse seismic monitoring data at the Sleipner CO₂ storage operation: *The Leading Edge*, **29**, no. 2, 170–177, <http://dx.doi.org/10.1190/1.3304820>.
- Christensen, N. B., D. Sherlock, and K. Dodds, 2006, Monitoring CO₂ injection with cross-hole electrical resistivity tomography: *Exploration Geophysics*, **37**, no. 1, 44–49, <http://dx.doi.org/10.1071/EG06044>.
- Daily, W., A. Ramirez, A. Binley, and D. LaBrecque, 2004, Electrical resistance tomography: *The Leading Edge*, **23**, no. 5, 438–442, <http://dx.doi.org/10.1190/1.1729225>.
- Girard, J. F., B. Bourgeois, J. Rohmer, C. Schmidt-Hattenberger, 2009, The LEMAM array for CO₂ injection monitoring: Modeling results and baseline at Ketzin in August 2008: *Geophysical Research Abstracts*, **11**, EGU2009-7478-4.
- Herman, R., 2001, An introduction to electrical resistivity in geophysics: *American Journal of Physics*, **69**, no. 9, 943–952, <http://dx.doi.org/10.1119/1.1378013>.
- Kiessling, D., C. Schmidt-Hattenberger, H. Schuett, F. Schilling, K. Krueger, B. Schoebel, E. Danckwardt, and J. Kummerow, 2010, Geoelectrical methods for monitoring geological CO₂ storage: First results from crosshole and surface-downhole measurements from the CO₂SINK test site at Ketzin (Germany): *International Journal of Greenhouse Gas Control*, **4**, no. 5, 816–826, <http://dx.doi.org/10.1016/j.ijggc.2010.05.001>.
- Loke, M. H., 2004, Tutorial: 2D and 3D electrical imaging surveys, course notes, <http://www.geoelectrical.com/coursenotes.zip>.
- Loke, M. H., 2002, Rapid 2D resistivity forward modeling using the finite-difference and finite-element methods: *Geotomo*.
- Loke, M. H. and R. D. Barker, 1996, Rapid least-squares inversion of apparent resistivity pseudosections by quasi-Newton method: *Geophysical Prospecting*, **44**, no. 1, 131–152, <http://dx.doi.org/10.1111/j.1365-2478.1996.tb00142.x>.
- Martens, S., T. Kempka, A. Liebscher, S. Lüth, F. Möller, A. Myrntinen, B. Norden, C. Schmidt-Hattenberger, M. Zimmer, and M. Kühn, 2012, Europe's longest-operating on-shore CO₂ storage site at Ketzin, Germany: a progress report after three years of injection: *Environmental Earth Sciences*, **67**, no. 2, 323–334, <http://dx.doi.org/10.1007/s12665-012-1672-5>.
- Martinelli, H. P., F. E. Robledo, A. M. Osella, and M. de la Vega, 2012, Assessment of the distortions caused by a pipe and an excavation in the electric and electromagnetic responses of a hydrocarbon-contaminated soil: *Journal of Applied Geophysics*, **77**, 21–29, <http://dx.doi.org/10.1016/j.jappgeo.2011.10.016>.
- Nakatsuka, Y., Z. Xue, Y. Yamada, and T. Matsuoka, 2009, Experimental study on monitoring and quantifying of injected CO₂ from resistivity measurement in saline aquifer storage: *Energy Procedia*, no. 1, 2211–2218, <http://dx.doi.org/10.1016/j.egypro.2009.01.287>.
- Picotti, S., J. M. Carcione, D. Gei, G. Rossi, and J. E. Santos, 2012, Seismic modeling to monitor CO₂ geological storage—The Atzbach-Schwanenstadt gas field: *Journal of Geophysical Research*, **117**, B6, B06103, <http://dx.doi.org/10.1029/2011JB008540>.
- Prevedel, B., L. Wohlgemuth, J. Henniges, K. Krüger, B. Norden, and A. Förster, 2008, The CO₂SINK boreholes for geological storage testing: *Scientific Drilling*, **6**, 32–37, doi:10.2204/ioldp.sd.6.04.2008.
- Ramirez, A., W. Daily, D. LaBrecque, E. Owen, and D. Chesnut, 1993, Monitoring an underground steam injection process using electrical resistance tomography: *Water Resources Research*, **29**, no. 1, 73–87, <http://dx.doi.org/10.1029/92WR01608>.
- Reynolds, J., 1997, *An introduction to applied and environmental geophysics*: John Wiley & Sons.
- Saito, H., H. Azuma, D. Tanase, and Z. Xue, 2006, Time-lapse crosswell seismic tomography for monitoring the pilot CO₂ injection into an onshore aquifer, Nagaoka, Japan: *Exploration Geophysics*, **37**, no. 1, 30–36, <http://dx.doi.org/10.1071/EG06030>.
- Samouëlian, A., I. Cousin, A. Tabbagh, A. Bruand, and G. Richard, 2005, Electrical resistivity survey in soil science: A review: *Soil and Tillage Research*, **83**, no. 2, 173–193, <http://dx.doi.org/10.1016/j.still.2004.10.004>.
- Schmidt-Hattenberger, C., P. Bergmann, D. Kießling, K. Krüger, C. Rücker, H. Schütt, and K. Group, and the Ketzin Group, 2011, Application of a vertical electrical resistivity array (VERA) for monitoring CO₂ migration at the Ketzin test site: First performance evaluation: *Energy Procedia*, **4**, 3363–3370, <http://dx.doi.org/10.1016/j.egypro.2011.02.258>.
- Sherborne, J. E. and W. M. Newton, 1942, Factors influencing electrical resistivity of drilling fluids: *Transactions of the AIME*, **146**, no. 1, 204–220.
- Vandeweyer, V. P., L. G. H. Van der Meer, C. Hofstee, D. D'Hoore, and F. Mulders, 2006, CO₂ storage and enhanced gas recovery at K12-B: Presented at 71st Conference and Exhibition, EAGE.
- Wandrey, M., D. Morozova, M. Zettlitzer, and H. Würdemann, 2010, Assessing drilling mud and technical fluid contamination in rock core and brine samples intended for microbiological monitoring at the CO₂ storage site in Ketzin using fluorescent dye tracers: *International Journal of Greenhouse Gas Control*, **4**, no. 6, 972–980, <http://dx.doi.org/10.1016/j.ijggc.2010.05.012>.

Acknowledgments: The research leading to these results has received funding from the European Union Seventh Framework Programme (FP7/2007-2013) under grant agreement number 256625 (project CO₂CARE), and from the industrial partners of the project. This work was also supported by the CO₂MONITOR project. We thank Jean-Pierre Deflandre and the GFZ staff for their constructive observations and suggestions.

Corresponding author: spicotti@ogs.trieste.it