



INSTITUT DE FRANCE
Académie des sciences

Comptes Rendus

Géoscience

Sciences de la Planète

Anne Jost, Shuaitao Wang, Thomas Verbeke, François Colleoni and Nicolas Flipo

Hydrodynamic relationships between gravel pit lakes and aquifers: brief review and insights from numerical investigations

Volume 355, Special Issue S1 (2023), p. 245-269

Online since: 24 January 2023


Issue date: 23 February 2024

Part of Special Issue: Geo-hydrological Data & Models

Guest editors: Vazken Andréassian (INRAE, France),

Valérie Plagnes (Sorbonne Université, France), Craig Simmons (Flinders University, Australia) and Pierre Ribstein (Sorbonne Université, France)

<https://doi.org/10.5802/crgeos.181>

 This article is licensed under the
CREATIVE COMMONS ATTRIBUTION 4.0 INTERNATIONAL LICENSE.
<http://creativecommons.org/licenses/by/4.0/>



*The Comptes Rendus. Géoscience — Sciences de la Planète are a member of the
Mersenne Center for open scientific publishing*

www.centre-mersenne.org — e-ISSN : 1778-7025



Research article

Geo-hydrological Data & Models

Hydrodynamic relationships between gravel pit lakes and aquifers: brief review and insights from numerical investigations

Anne Jost^{ⓧ,*}, Shuaitao Wang^{ⓧ,a}, Thomas Verbeke^b, François Colleoni^c and Nicolas Flipo^{ⓧ,d}

^a Sorbonne Université, CNRS, EPHE, Metis, F-75005 Paris, France
URL: <https://www.metis.upmc.fr/~jost/index.html>

^b Ecole Normale Supérieure Paris-Saclay, Laboratoire de Mécanique Paris-Saclay, Gif-sur-Yvette, France

^c INRAE-AMU, Aix-en-Provence, France

^d Geosciences Department, Mines Paris, PSL University, Paris, France
E-mails: anne.jost@sorbonne-universite.fr (A. Jost), shuaitao.wang@upmc.fr (S. Wang), thomas.verbeke@ens-paris-saclay.fr (T. Verbeke), francois.colleoni@inrae.fr (F. Colleoni), nicolas.flipo@minesparis.psl.eu (N. Flipo)

Abstract. Supply of aggregate materials for every construction requires mining of sand and gravel, which leads to the formation of a myriad of freshwater lakes, a now common feature of the landscape in the valleys of large rivers. Typically small in size and shallow, they are filled with waters from the adjacent aquifers and directly exposed to the atmosphere. The creation of gravel pit lakes has various and contrasting effects on their immediate environment. This article first provides a review of these impacts from the hydrodynamic point of view, and illustrates them on simple numerical test cases. It also introduces the gravel pit lake module developed for the occasion within the integrated modelling platform CAWAQS, which formulation was tested on the same test cases against the LAK package, its MODFLOW counterpart. By accurately simulating gravel pit lake interactions with groundwater in different configurations, this modelling exercise also aims to identify the preponderant factors leading water level fluctuations of those artificial lakes, whose temporal monitoring will soon be accessible to satellite observation.

Keywords. Gravel pit lake, Groundwater–lake interaction, Numerical modelling, In silico experiments, Natural resources.

1. Introduction manuscript received 23 May 2022, accepted 15 November 2022

The low-carbon transition requires an increasing amount of raw materials, from the most traditional, such as aggregates, to the most emerging and rare metals, raising the question of their availability [de Marsily and Tardieu, 2018]. In particular, sand

and gravel will be needed for large-scale infrastructure development such as for wind turbine foundations and structures or for insulation materials. Although sand is one of the most abundant materials on Earth [Sverdrup et al., 2017], its exploitation faces major environmental issues, associated economical difficulties and even regional scarcity concerns [Ioannidou et al., 2020], in particular when it comes to its quality requirements. Population growth, rapid

* Corresponding author.

urbanisation and infrastructure development have led to increasing demand since the 1950s [OECD, 2019]. Mostly used in the construction industry as a key ingredient in the production of concrete, for road bases and land reclamation, sand and gravel are the world's most consumed primary materials after water, up to 50 billion tonnes produced each year [Bendixen *et al.*, 2021], at unsustainable levels far greater than their natural renewal [Bendixen *et al.*, 2019, Peduzzi, 2014].

Sand and gravel resources are derived from various geomorphological settings such as beach deposits, streambeds, river floodplains and terraces, alluvial fans, and glacial deposits. Extraction of material from terraces and upland areas is generally perceived as having less impact than removing sand and gravel from active floodplains and stream channels [Kondolf, 1997, Sandercock and Ladson, 2014]. However, when aggregates are mined below the water table, artificial water bodies fed by groundwater appear as a new landscape feature. These thousands of gravel pit lakes are now a common freshwater lake type significantly influencing the morphology of the watershed, the natural hydrologic system and regional biogeochemical cycles [e.g., Mollema and Antonellini, 2016]. In these environments, surface water and groundwater will mix and interact with the atmosphere. By offering open water surfaces where direct evaporation can occur, sustained by groundwater inflow, gravel pit lakes are generally recognised as a sink for adjacent aquifers in temperate and Mediterranean climates [Mollema and Antonellini, 2016], particularly in dry years [Schanen, 1998], although they may also act as a temporary buffer reservoir [Sinoquet, 1987], especially during low-amplitude floods [Czernichowski-Lauriol, 1998]. This freshwater loss is of concern, in areas where the mining of sand and gravel from those productive reservoirs is already in competing use with drinking water supply.

Furthermore, gravel pit lakes, characterised by infinite transmissivity and a unit storage coefficient, also alter the hydraulic gradient in the adjacent aquifer, causing the water table to rise or fall and thus disturbing the groundwater drainage pattern [Peaudecerf, 1975]. By establishing a surface of equipotential head, gravel pit lake levels may nonetheless be representative of the average groundwater level, like giant piezometers. With the develop-

ment of ever more efficient remote sensing systems, satellite observation will soon provide regular monitoring of temporal fluctuations of open continental water surfaces with unprecedented precision. Despite their small size, gravel pit lakes are a good candidate for future monitoring by the SWOT (Surface Water and Ocean Topography) satellite [Ottlé *et al.*, 2020]. For landscapes where few *in situ* groundwater level measurements are available, gravel pit lakes could be used as proxy indicators of local water resource trends. This will require the use of a modelling tool for the coupled gravel pit-aquifer system.

A lot of effort has recently been put into analysing lake-aquifer interactions but future work still needs to assess the potential of using the lakes, and in particular the increasingly common gravel pit lakes, as monitoring wells of shallow groundwater for better water resources planning and management [Shrestha *et al.*, 2021]. Understanding how gravel pit lake level will fluctuate in response to groundwater exchange, overland flow and atmospheric conditions (precipitation and evaporation) is therefore fundamental for this purpose, especially as artificial lakes interact differently with groundwater compared to natural lakes [El-Zehairy *et al.*, 2018]. Special emphasis in this paper is on the dynamics of these interactions. By first reviewing the results of field and numerical studies, we recall which consequences gravel mining may have on groundwater systems from a quantitative point of view. We then present the numerical code we have developed in order to simulate the gravel pit lake/aquifer interaction and introduce the test case used to validate the lake module. On the basis of the same test case, we finally illustrate numerically the hydrodynamic effects associated with gravel pit lakes and also discuss the main factors influencing lake level changes.

2. A brief review of the hydrodynamical impacts of gravel pit lakes

The interactions between gravel pit lakes and their environment have received attention for many years and have recently been summarised by Mollema and Antonellini [2016]. This additional state of knowledge report is meant to be an overview of relevant information on the hydrodynamic aspects associated

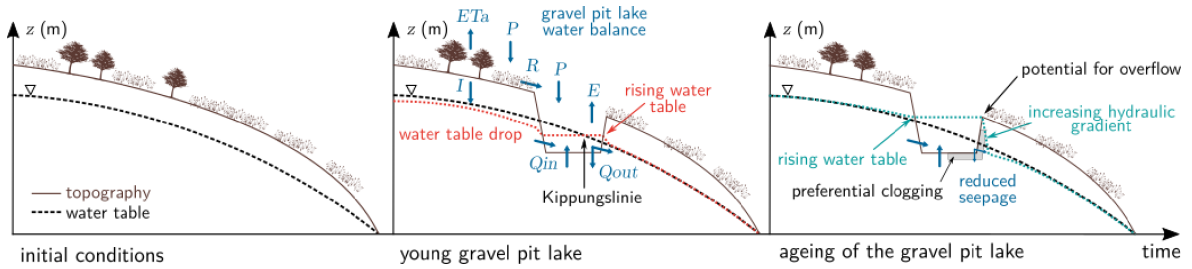


Figure 1. Illustration of gravel pit lake–aquifer interactions over time. The terms of the water balance are: precipitation P , land actual evapotranspiration ET_a , open-water evaporation E , diffuse runoff R , infiltration I , groundwater inflow Q_{in} , groundwater outflow Q_{out} .

with the presence of gravel pit lakes. The main elements discussed in this section are summarised in Figure 1.

2.1. Characteristics of gravel pit lakes

By definition, a gravel pit lake develops where sand and gravel extraction extends below the water table. Gravel excavations are therefore typically found in areas with a shallow water table, in floodplains and adjoining terraces of large rivers, in glacial valleys or coastal areas, where most coarse-grained sediments were deposited. Scattered throughout these landscapes, pit lakes are permanent water bodies of recent formation, mostly dredged since the second half of the last century. Usually located near urban areas, where aggregates are needed, water-filled pits are used for a variety of purposes, as reservoirs for water supply and irrigation, for recreational activities, and wildlife habitat. As such, they play an important ecological role [Seelen et al., 2021].

The gravel pit pools are usually small, with a surface area varying from a few hundred square metres to several hectares. Many of them have steep sides, uneven but relatively flat bottoms and irregular shorelines [e.g., Hindák and Hindáková, 2003, Kondolf, 1997]. Their maximum depth depends on the thickness of the gravel layers, which is usually limited, resulting in generally shallow lakes but they tend to be deeper than natural lakes [Vucic et al., 2019] and some can reach a depth of several tens of metres [Mollema and Antonellini, 2016].

Gravel pit lakes are often in close proximity to each other, with large areas of the plains turning into open pits, up to nearly 25% [Peckenham et al., 2009], but

they are usually disconnected from permanent watercourses, except during exceptional floods [Kondolf, 1997]. They therefore generally have no natural surface inlet and outlet. When they are located in relatively flat floodplains, diffuse runoff is also limited. In contrast, they are in close hydrologic continuity with the surrounding groundwater body [Søndergaard et al., 2018], as highly permeable sand and gravel deposits allow significant groundwater seepage. Groundwater inflow is thus considered a key component in the water balance of quarry lakes. This inflow returns either downstream to the aquifer or to the atmosphere, making most of these artificial lakes so called flow-through or seepage lakes [Wilson, 1984].

2.2. Hydrodynamic effects associated with gravel pit lakes

Gravel pits are young objects in the landscape whose environmental effects have been observed *in situ* for about 50 years. A number of studies on their hydrodynamical impacts have been published since the pioneering work of Peaudecerf [1975] and Vandenberg [1975] in France, Wrobel [1980] in Germany or Wilson [1984] and Morgan-Jones et al. [1984] in Great Britain. Most of them have been carried out in temperate and western countries where sand and gravel mining was historically practised [Koehnken and Rintoul, 2018] and are summarised in Table 1.

A major concern in the development of aggregate mines is to avoid or minimise negative effects on local water resources. Peaudecerf [1975] was among the first to consider their impacts on groundwater and to question the compatibility of simultaneous

Table 1. Summary of the scientific literature on the hydrodynamic impacts of gravel pit lakes, by site and in chronological order

Reference	Site	Deposit type
Vandenbeusch [1975]		
Saplaïroles et al. [2007]	Garonne River, France	Alluvial
Bessière et al. [2013]		
Morgan-Jones et al. [1984]	River Colne, England	Alluvial
Wilson [1984]	Rivers Thames and Avon, England	Gravel terraces
Durbec [1986]		
Sinoquet [1987]	Rhine River, France	Alluvial
Marsland and Hall [1989]	Southern coastline, England	Beach
Mazenc et al. [1990]	Oise River, France	Alluvial
Panel [1991]	Marne River, France	Alluvial
Blanchard et al. [1991]		
Mimoun [2004]	Loire River, France	Alluvial
Hatva [1994]	Finland	Glaciofluvial
Mead [1995]	Thurston county, Washington, USA	Unconsolidated deposits of glacial and nonglacial origin
Schanen [1998]	Seine River, France	Alluvial
Kattner et al. [2000]	Danube River, Germany	Alluvial
Michalek [2001]	Columbia River, Oregon, USA	Floodplain
Green et al. [2005]	Minnesota, USA	Unconsolidated deposits of glacial and nonglacial origin
Kuchovský et al. [2008]	Morava River, Czech Republic	Alluvial
Peckenham et al. [2009]	Hancock county, Maine, USA	Unconsolidated deposits of glacial and nonglacial origin
Smerdon et al. [2012]	Boreal Plains, Canada	Glacial outwash plains
Apaydın [2012]	Kazan Plain, Turkey	Fluvial
Mollema and Antonellini [2016]	River Meuse, the Netherlands	Alluvial
Mollema and Antonellini [2016]	Adriatic coast, Italy	Coastal areas

water abstraction and gravel mining. First, gravel extraction produces an area of high permeability within the aquifer, which alters the direction of groundwater, either by providing preferred groundwater flow paths towards the lake or conversely, as an obstacle to groundwater flow due to clogging of the pit bed and banks. Second, what was previously the water table becomes an horizontal lake surface. As a result, groundwater levels immediately adjacent to the open pit must fall upgradient and increase at its downgradient end (Figure 1). Wrobel [1980] postulates that the initial level of the gravel pit lake should theo-

retically stabilise at the height of the pre-extraction water table that existed approximately halfway between the upstream and downstream ends of the open pit. He calls the line where the pre-extraction water table intersects the surface of the lake the “Kippungslinie”. It divides the lake into an upstream section where groundwater inflow is prevalent, and a downstream area where outflow takes place. Any further shift in the position of this line would thus determine the presence and extent of lake sealing [Wilson, 1984]. The effects of existing mines on groundwater have been confirmed by field observations of local

changes in groundwater levels [Morgan-Jones *et al.*, 1984], of up to a few tens of centimetres in the immediate perimeter of the gravel pits and measurable over a maximum of several hundred metres around the gravel pit [e.g., Bessi re *et al.*, 2013, Gravost, 1988, Sinoquet, 1987]. Assessing these changes quantitatively, however, is often difficult due to the lack of site-specific data on water levels prior to gravel mining.

Changes in groundwater levels can affect the water supply of nearby wetlands [Green *et al.*, 2005], streams [Kuchovsk y *et al.*, 2008] or other surface water features [Smerdon *et al.*, 2012], either adversely upstream of the lake or favourably where downgradient increases in water levels create opportunities for wetland enhancement [Maliva *et al.*, 2010]. Of major concern and source of land-use conflicts is the potential impact on groundwater supply, as the deposits that contain significant aggregate resources also host valuable unconfined aquifers [e.g., Apaydın, 2012, Nadeau *et al.*, 2015]. Marsland and Hall [1989] recall in this respect the dispute between the “water” and “gravel” interests during the 1970s in Kent County, England. The former argued that the water resource available for abstraction would decrease due to evaporative losses from open water surfaces. The latter replied that the additional storage provided by lakes mitigated the drawdowns of the neighbouring production wells and that it was water withdrawal that was the cause of the decline in water levels. Marsland and Hall [1989] eventually conclude that the average groundwater level had fallen due to both gravel extraction and groundwater abstraction, making this coastal aquifer more vulnerable to saline intrusion.

It is still necessary to clarify in which direction aggregates extraction affects the water balance components (Figure 1). When examined on a monthly basis, precipitation generally exceeds open-water evaporation in winter and the gravel pit lakes recharge the aquifer; however evaporation exceeds precipitation in other months of the year, resulting in a loss to the aquifer [Wilson, 1984].

On one hand, the removal of vegetated, low-permeability soil layers in the excavation area can promote enhanced recharge and a higher rate of water cycling [Smerdon *et al.*, 2012], provided that the lakes capture available excess precipitation and spring snowmelt [Hatva, 1994], river water infiltra-

tion [Kattner *et al.*, 2000] or local surface water runoff [Apaydın, 2012]. However, the topography is often flat in the vicinity of gravel pits and they are also designed to be protected from surface water intrusion which could cause pollution in the aquifer [Saplaioles *et al.*, 2007].

Furthermore, removing the gravel itself increases the storage capacity, which can act to maintain locally higher aquifer water levels. Particularly during floods or after a rainfall event, gravel pit lakes may temporarily act as a buffer reservoir to dampen groundwater level fluctuations, depending mainly on the hydraulic conductivity of the aquifer [Sinoquet, 1987]. However, the storage volume available at the time of overflow may be negligible so that this effect is only observed for small overflows in spring and summer, but is cancelled out for large floods [Mazenc *et al.*, 1990]. Gravel mines can instead facilitate the transfer of water [Mazenc *et al.*, 1990] or even be captured by the active channel in case of flooding when they are located close to a watercourse [Kondolf, 1997].

On the other hand, the gravel pits create windows through the unsaturated soil layer into the aquifer, which is directly exposed to the atmosphere and thus, to increased water losses through evaporation, which can lead to a water balance deficit, especially during dry years [Saplaioles *et al.*, 2007, Schanen, 1998]. Two processes operate that are difficult to quantify, direct evaporation from the open water surface and transpiration by emergent plants, depending on meteorological factors and local conditions such as the depth of the water body, the presence of riparian trees along the shoreline [Hayashi and van der Kamp, 2021] or the connection with the surrounding groundwater body that replenishes the evaporated water. In most cases, evaporation from the artificial pond should be larger than actual land evapotranspiration notably in temperate and Mediterranean climates [Mollema and Antonellini, 2016], even though it can be substantially smaller than potential evapotranspiration [Hayashi and van der Kamp, 2021]. Evaporation losses from gravel pit lakes have been estimated at an average of 6 to 11 m³ per day and per hectare of pits [Panel, 1991, Schanen, 1998] but varies according to the hydrological year. In addition to the amount of water that would have infiltrated in the absence of the quarries, it may represent a significant share of the renew-

able resource, especially as compared to groundwater withdrawals, and given the relatively small area occupied by the water bodies [Bessière *et al.*, 2013]. If the lakes are concentrated in close proximity to each other, the cumulative effect of their large number may be sufficient to cause a measurable drop in the water table [Marsland and Hall, 1989, Wilson, 1984].

In conclusion, the increase in open water resulting from gravel extraction surely affects the water balance of their catchment. The processes involved are, however, often difficult to quantify, vary from one year to another and depend on the regional context, including previous land use prior to the land-water conversion. For example, one should also consider former groundwater-consuming activities such as irrigation in areas replaced by gravel pits [Maliva *et al.*, 2010]. One of the major hydrological impacts of the flooded gravel pits is their significant open water evaporation, which is expected to increase further under climate change [Mollema and Antonellini, 2016], as does the global evaporative water loss, especially from artificial lakes [Zhan *et al.*, 2019, Zhao *et al.*, 2022].

2.3. Factors that matter

The aforementioned impacts of gravel pits on groundwater flow patterns depend on several key factors: (i) the extent of clogging of the sides and the bottom of the lakes, (ii) the geometry of the excavations, (iii) their position with respect to the general direction of groundwater flow, and (iv) the characteristics of the aquifer itself, which influence the hydraulic gradient.

Clogging occurs as the result of a series of phenomena leading to a decrease in the permeability of the solid matrix at the interface between surface water and groundwater. Among the mechanisms involved in clogging, the most important is the sedimentation of fine particles in suspension, the origin of which lies partly in the extraction and processing phase itself, when silt and clay tend to be washed out of the gravel as it is excavated [Wilson, 1984]. The partial filling of the excavations by the low-permeability overburden in the restoration phase is a further source of fine sediment and another clogging factor [Vandenbeusch, 1975]. To a lesser extent,

chemical and biological processes are also responsible for progressive clogging over time. Indeed various geochemical reactions of oxidation–reduction, precipitation/dissolution or dissolved complex formation take place in the lake water when it mixes with groundwater and can lead to clogging of the lake boundary [Wilson, 1984]. The development of algae, bacterial flora or rooted aquatic vegetation in summer and the deposition of organic matter in winter will also cause biological clogging [Blanchard *et al.*, 1991].

The amount of clogging in gravel pit lake varies significantly depending on a number of factors such as the morphology of the pit and in particular the slope of the banks, the mining method and subsequent reclamation, the current use of the lake, the presence of vegetation on the banks, or the turbidity of the lake water. According to field observations, clogging is not evenly distributed along the banks (Figure 1): it is usually predominant on the downstream banks of the gravel pits, in the direction of flow [Vandenbeusch, 1975], and preferentially occurs on their lower fringe [Blanchard *et al.*, 1991], whereas there is little or no clogging when the slope is greater than 20% [Eberentz and Rinck, 1987, Gravost, 1988]. The lake bottom is also subject to long-lasting clogging, particularly due to the collapse of the steep slopes [Zhang *et al.*, 2019], but otherwise does not vary significantly throughout the pit. Clogging starts from the first stages of mining and is generally established within a few years from the cessation of excavation [Muellegger *et al.*, 2013, Vandenbeusch, 1975]. It increases over time but with less intensity [Eberentz and Rinck, 1987], at a variable rate of evolution that depends mainly on the quality of the lake water [Wilson, 1984], and eventually becomes imperceptible to field measurements [Darmendrail, 1986]. Observations made *in situ* show clogged layers of varying thickness, from 0.5 to 1.5 m, and hydraulic conductivity between 10^{-8} and 10^{-3} m/s [Durbec, 1986, Schanen *et al.*, 1998].

The level of the lake, compared to the average pre-existing water table in the gravel pit area, is a good indicator of the presence and extent of lake sealing [Wilson, 1984]. Likewise, variations in the level of the gravel pit lake that are not synchronised with those of the water table and of smaller amplitude characterise the buffering role played by partially clogged reservoirs [Sinoquet, 1987]. Indeed,

sealing of the downstream boundary of gravel lake influences the long-term lake and groundwater levels, by raising the water level in the lake, as well as in the aquifer up-gradient from the lake, while downstream, the water table is lowered and the hydraulic gradient is locally increased [Peaudecerf, 1975, Vandenbeusch, 1975] (Figure 1). It is sufficient to maintain lake–aquifer exchanges [Sinoquet, 1987] but the low-permeability gravel lake sediments notably reduce the rate of groundwater seepage through the banks [Schanen, 1998, Wilson, 1984]. In the case of deep gravel pits and because clogging occurs primarily at depth, a low water table during a dry period will not favour groundwater seepage on the lower banks, whereas efficient exchanges between the lake and the aquifer are still possible when the water level can reach the upper unclogged fringes of the banks [Eberentz and Rinck, 1987, Mead, 1995].

The ageing of a water-filled gravel pit therefore results in a gradual slowing down of its exchanges with the adjacent aquifer. Several techniques are now available to estimate groundwater inflow and outflow in lakes and map their spatial distribution and temporal variability, using for example seepage meters, onshore and offshore geophysical measurements, or environmental tracers such as stable isotopes and temperature [Kidmose *et al.*, 2011, Masse-Dufresne *et al.*, 2021].

With regard to the influence of shape and size of the excavations on lake–groundwater interactions, Peaudecerf [1975] mentions that the disturbance of the original equipotential lines will be accentuated if gravel pit lakes are excavated in line parallel to the regional hydraulic gradient whereas elongated excavations, with their long axis perpendicular to the groundwater flow direction, will have relatively little effect on flow conditions. The creation of small water bodies rather than a large pond is also preferable to limit the risk of causing temporary overflows during high-flow periods [Mazenc *et al.*, 1990]. This is an important point to take into account when digging a gravel pit to avoid any potential overflow, should the raised lake level downstream exceed the topographic surface, especially when the latter is flat (Figure 1). Other lake parameters, such as the lake bed slope, have been identified as controlling the amount and spatial distribution of seepage [Genereux and Bandopadhyay, 2001], while excavation depth will have virtually no effect [Peaudecerf, 1975].

As for the position of the open water body within the regional flow system, it is obviously important for the gravel pit lake's water budget [Peaudecerf, 1975]: as numerically simulated by Cheng and Anderson [1994], groundwater inflow and outflow in lakes located lower in a watershed are likely to be higher and more important to the budget of lakes relative to precipitation than for uppermost lakes since lakes located in the discharge area intercept deeper groundwater than in the upper portion of the watershed where groundwater flows to and from the lakes originate from more variable shallow flow system.

Last but not least, it has long been known to what extent the hydrodynamic properties of the porous medium itself strongly influence the interaction of lakes and groundwater [Winter, 1976]. The magnitude of seepage is often governed by the regional groundwater conditions, i.e. hydraulic head gradient, anisotropy and heterogeneity of the aquifer which determine the background height of the water table relative to the lake level, especially on the downslope side of the lake.

2.4. *Modelling gravel pit lakes*

The large volume of literature referred to above provides guidelines for sand and gravel mining operations, well known to professionals, which aim to ensure a balance between responsible economic development and mitigation strategies to protect local water resources and avoid overflows. Mining policies vary considerably between states and local jurisdictions but in most countries, sand mining is not only formally regulated by national mining legislation but must also comply with environmental legislation [Botta *et al.*, 2009]. Accordingly, an integrated environmental assessment, management and monitoring programme must be implemented in order to obtain permission to start operating a sand and gravel quarry. In this context, relatively simple groundwater modelling is now commonly used in planning aggregate excavation to make predictive and quantitative assessments.

The models make it possible to assist in the management of water resources [Fouché *et al.*, 2020] and examine the impact of various developments or restoration plans. The impact of gravel extraction on groundwater conditions is usually investigated by simulating three states [Kuchovský *et al.*, 2008, Panel,

1991]: pre-mining, with the presence of the existing open pits and integrating future gravel pits. In particular, the models enable the predictions of the cumulative effects of multiple extractions at the scale of the entire alluvial system [Bessière *et al.*, 2013] or to consider that all remaining alluvial resources are exploited [Mazenc *et al.*, 1990]. Field observations are used to adjust selected hydraulic parameters used in the hydrodynamic model such as the degree of clogging of the gravel pit banks [Durbec, 1986]. On theoretical case studies, sensitivity analyses are performed to assess the dominant parameters determining the response of the aquifer-gravel pit lake system.

Such numerical studies of lake–groundwater interactions are mainly conducted on natural lakes, from the early work of Winter [1976] who examined the general principles of these interactions to the more recent investigations of Jazayeri *et al.* [2021] who modelled the effects of lakes on groundwater wave propagation. They are also instructive with respect to artificial lakes when they aim to identify the main factors controlling lake–groundwater systems by varying lake and aquifer characteristics [e.g., Genereux and Bandopadhyay, 2001].

Different types of representation have been used to simulate the hydraulic effect of gravel pit lakes in groundwater flow models: (i) the simplest way is to specify the lake level as a constant head over the areal extent of the pit, assuming that it does not vary as a result of atmospheric exchanges or interactions with surface water and groundwater [e.g., Mimoun, 2004]; (ii) the famous and widely used “high K” technique, which proved to adequately simulate lakes [Winter, 1976], where they are considered to be a domain of very high hydraulic conductivity, of specific recharge and with a storage coefficient equal to 1 [e.g., Bessière *et al.*, 2013, Durbec, 1986, Michalek, 2001, Mimoun, 2004]; (iii) as the latter method is nevertheless subject to some numerical instabilities and faces difficulties in representing the seepage through the clogged boundaries of the lake, it may be necessary to consider more sophisticated lake modules [e.g., Smerdon *et al.*, 2012, Zhang *et al.*, 2019], such as the LAK package developed for MODFLOW [Merritt and Konikow, 2000] or the new SLM package [Lu *et al.*, 2021]. One of the particularities of lake packages is that they allow lake water levels to fluctuate in response to the lake–aquifer interaction, driven by the conductance of the interfaces.

3. Numerical modelling of groundwater-gravel pit lake exchanges

The next step was to provide the integrated modelling platform CAWAQS with such a tool capable of simulating the fluctuations in gravel pit lake water levels, in relation to their environment. We chose to develop a library dedicated to the hydrological simulation of gravel pits, given the modular architecture of CAWAQS and thus, on the basis of the one already available in MODFLOW [Harbaugh, 2005]. This module is based on the calculation of the water balance of the gravel pit, taking into account precipitation, evaporation, runoff and exchanges with adjacent aquifers. It has therefore been validated on a simplified alluvial plain case by comparing its performances with those of its counterpart and precursor, the LAK3 package [Merritt and Konikow, 2000].

3.1. *Including a lake module in the CAWAQS hydrosystems modelling platform*

3.1.1. *The CAWAQS platform*

CAWAQS (CAtchment WAter Quality Simulator) is a distributed and modular modelling platform for regional hydrosystems [Flipo, 2005, Labarthe, 2016]. This tool couples specific packages to simulate water transfers within and between the different reservoirs of the water cycle, from the surface to the underground compartment. The platform is conceptually divided into three components representing the surface, the unsaturated and saturated zones. Among its various libraries, it includes a package for the calculation of hydraulic heads in multi-layer aquifer systems, applying a semi-implicit finite volume scheme for the numerical resolution of the groundwater flow equation. We relied on the functionalities already existing in this library to develop a new module to simulate the interactions between the aquifer and a surface water body in order to estimate the hydrodynamic impacts of gravel pits.

3.1.2. *Mathematical formulation of the gravel pit lake module*

The gravel pit lake module is designed to compute the lake level based on the volumetric exchanges of water into and out of the lake with the atmosphere, surface waters and adjacent aquifers, summarised

in the overall lake water balance. As described in Equation (1), the lake water level is controlled by the balance between the following terms of dimension ($L^3 \cdot T^{-1}$): direct precipitation onto the lake P , diffuse runoff R , evaporation E , groundwater inflow Q_{in} and outflow Q_{out} from the aquifers, both laterally through the gravel pit banks and vertically across its bed. As gravel pit lakes usually have no permanent surface inflow or outflow streams, this term was not included in their water budget. During a given period Δt (T),

$$\frac{h_g^t - h_g^{t-1}}{\Delta t} = \frac{P - E + R + Q_{in} - Q_{out}}{A}, \quad (1)$$

where the first term ($L \cdot T^{-1}$) expresses the rate of lake water level h_g (L) change between the current time step t and the previous time step $t - 1$, and A (L^2) is the surface area of the gravel pit. The exchange rate of water per unit area q ($L \cdot T^{-1}$) across a gravel pit-aquifer interface depends on the hydraulic head gradient between the two units and on a specific conductance C (T^{-1}), i.e., a conductance per unit interface area, that is based on the material properties and grid cell dimensions. According to Darcy's law:

$$q = C(h_a - h_g), \quad (2)$$

where h_a (L) is the hydraulic head in the aquifer. As written, q is positive when the flow of water is from the aquifer to the lake. C (T^{-1}) is equal to the harmonic mean of the specific conductances of the aquifer and of the lakebed:

$$\frac{1}{C} = \frac{\Delta l}{K_a} + \frac{b}{K_g}, \quad (3)$$

with Δl (L) the half size of the aquifer mesh in the direction of flow, K_a the hydraulic conductivity of the aquifer ($L \cdot T^{-1}$), b (L) the thickness of the bed or banks of the gravel pit and K_g their hydraulic conductivity ($L \cdot T^{-1}$). Groundwater seepage $Q_{in} - Q_{out}$ is the sum of all individual flows exchanged through the N gravel pit-aquifer interfaces: $Q_{in} - Q_{out} = \sum_n^N C_n (h_{an}^t - h_g^t)$, where h_{an} is the hydraulic head in the adjacent element of the n th aquifer-gravel pit interface at time step t , h_g is the lake level at time step $t - 1$ and C_n is the conductance ($L^2 \cdot T^{-1}$) of the n th aquifer-gravel pit interface. Equation (1) is an explicit scheme, used for steady state resolution. In transient state, an implicit or semi-implicit scheme can also be introduced, using $h_g = (1 - \theta)h_g^{t-1} + \theta h_g^t$, where $0 \leq \theta \leq 1$. In order to determine the equilibrium state of the system,

hydraulic heads in the aquifer and lake level are calculated iteratively, until convergence. The lake water level from the lake water balance is determined after solving the groundwater flow equation:

$$h_g = \frac{P - E + R + \sum_n^N C_n h_{an}}{\sum_n^N C_n}. \quad (4)$$

In transient state, the calculated lake water level in the $(t - 1)$ th iteration is first used as a Dirichlet boundary condition when solving the groundwater equation then calculated at the current time step according to the following equation:

$$h_g^t = \frac{h_g^{t-1} + \Delta t \frac{P - E + R + (\sum_n^N C_n h_{an}^{t-1} - (1 - \theta)h_g^{t-1} \sum_n^N C_n)}{A}}{1 + \frac{\theta \Delta t}{A} \sum_n^N C_n}. \quad (5)$$

3.2. Validation on a test case

The numerical performance of the gravel pit package was evaluated by comparison with the state-of-the-art LAK package [Merritt and Konikow, 2000] associated with MODFLOW [Harbaugh, 2005], on a test case consisting of a gravel pit connected to two aquifers, as representative conditions in alluvial aggregate mining areas, such as those found in the alluvial plain of the Seine River, upstream of Paris, France [Schanen, 1998].

3.2.1. Case description

A gravel pit lake, 250 m wide and 500 m long in the direction of flow thus covering about 14 ha, is dug into a 6 m thick first layer of alluvial deposits down to a 20 m thick second layer of chalk, in the centre of a domain of dimensions 3125 m \times 3125 m, with a grid cell size of 62.5 \times 62.5 m (Figure 2). The top surface of the model is flat, at an altitude of 126 m. The alluvial aquifer is fed to the west by a lateral flow of $1.85 \times 10^{-3} \text{ m}^3 \cdot \text{s}^{-1}$, at the surface by a recharge of about 218 mm/year and is hydraulically connected to the chalk aquifer, itself bounded by no flow conditions on each side and at the bottom. Constant head boundaries were placed along the eastern edge of the first alluvial layer and no flow boundaries, parallel to the west to east groundwater flow. Both aquifer layers are confined, with a horizontal hydraulic conductivity of respectively $6 \times 10^{-3} \text{ m} \cdot \text{s}^{-1}$ for the top layer and $5 \times 10^{-4} \text{ m} \cdot \text{s}^{-1}$ for the deeper aquifer, and a vertical-to-horizontal anisotropy ratio of 0.1.

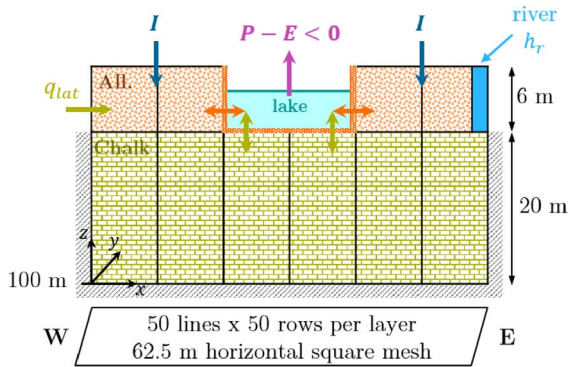



Figure 2. Description of the hypothetical two-layer case study.

The surface runoff is considered to be zero. The gravel pit is fed by precipitation of 675 mm/year but is subject to a higher evaporation of 710 mm/year. The same specific conductance is chosen for the bed and the banks of the gravel pit, which translates using Equation (3) into equivalent specific conductances of $4.0 \times 10^{-5} \text{ s}^{-1}$ for the vertical interfaces separating the gravel pit from the alluvial deposits and $4.5 \times 10^{-6} \text{ s}^{-1}$ for the horizontal interfaces between the lake bottom and the chalk. Multiplying by the surface area of the interface gives conductances C_n of $1.5 \times 10^{-2} \text{ m}^2 \cdot \text{s}^{-1}$ and $1.8 \times 10^{-2} \text{ m}^2 \cdot \text{s}^{-1}$ respectively.


Two simulations were carried out, in steady and transient states, using a time step of one day and the explicit procedure for the lake scheme. The threshold for groundwater convergence was set to 0.0001 m. The forcings remain constant during the transient simulation, which is initialised under arbitrary conditions but sufficiently far from the steady state, with the initial lake level at its minimum and contrasting conditions in the two aquifers. For a sufficiently long simulation, the transient solution must converge towards the simulated steady-state. The proposed setup and model parameters are summarised in Table 2.

3.2.2. Simulation results

A first set of simulations made it possible to ensure the similarity of the results produced by the two codes CAWAQS and MODFLOW in the absence of a gravel pit. In steady-state, the simulated head differences over the study area are less than 1 mm and negligible in terms of calculation accuracy. The

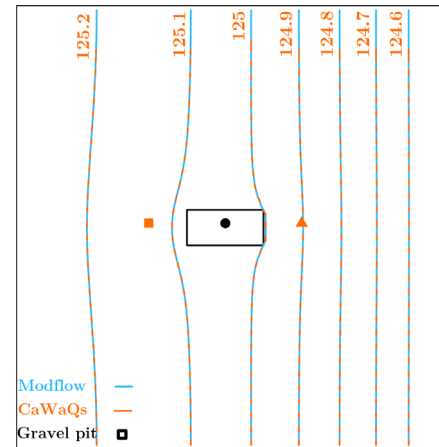

(a) Groundwater level contours (m) simulated using MODFLOW or CAWAQS (equipotential lines overlap) in steady-state in the alluvial aquifer in the presence of a gravel pit in the centre of the study area. The modelled area is 3125 m on each side.

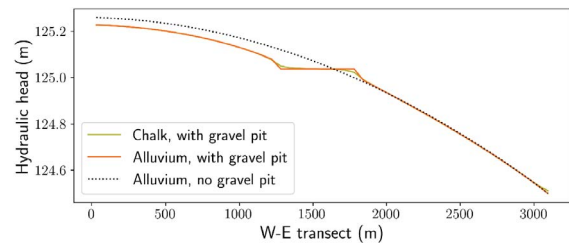

(b) Water table profiles with and without a gravel pit lake as simulated by CAWAQS along a west-east flow line and across the water body.

Figure 3. Simulation results for validation.

introduction of a gravel pit has an impact on the distribution of equipotential lines and therefore on the flow pattern in the vicinity of the water body, converging upstream and diverging downstream (Figure 3a). The water table is lowered upstream of the gravel pit lake up to more than 8 cm, while a high hydraulic gradient develops downstream (Figure 3b). Between the two models CAWAQS and MODFLOW, the simulated head differences in the alluvial aquifer do not exceed 0.1 mm, within the margin of error of the case without a gravel pit. The water budget of the gravel pit is detailed in Table 3. The atmospheric moisture deficit $E - P$ of $35 \text{ mm} \cdot \text{year}^{-1}$ results in a net inflow to the gravel pit of the same magnitude, of which nearly three quarters are from the alluvial aquifer. There is no difference between the flows calculated by each code.

When using the explicit procedure at a daily time step, the simulated lake level evolution was almost identical between the lake module of CAWAQS and

Table 2. Definition of the study area: model setup and parameters

	Alluvium (layer 1)	Chalk (layer 2)	Gravel pit (bed & banks)	River
Horizontal hydraulic conductivity K_h ($\text{m}\cdot\text{s}^{-1}$)	6×10^{-3}	5×10^{-4}		
Vertical hydraulic conductivity K_v ($\text{m}\cdot\text{s}^{-1}$)	6×10^{-4}	5×10^{-5}		
Storage S (-)	0.06	0.001		
Thickness e (m)	6	20		
Specific conductance C_g (s^{-1})			5×10^{-5}	
<i>Initial conditions</i> h_0 (m)	123	122	120	124.5
<i>Boundary conditions</i>				
Dirichlet h_r (m)				124.5
Neumann q_{lat} ($\text{m}^3\cdot\text{s}^{-1}$)	1.85×10^{-3}			
Recharge I ($\text{m}\cdot\text{s}^{-1}$)	6.9×10^{-9}			
Precipitations P ($\text{m}\cdot\text{s}^{-1}$)			2.14×10^{-8}	
Evaporation E ($\text{m}\cdot\text{s}^{-1}$)			2.25×10^{-8}	

Table 3. Gravel pit lake water balance in steady-state


	Precipitation ($\text{m}^3\cdot\text{day}^{-1}$)	Evaporation ($\text{m}^3\cdot\text{day}^{-1}$)	Groundwater flows ($\text{m}^3\cdot\text{day}^{-1}$)			
			Inflow		Outflow	
			InV	InH	OutV	OutH
CAWAQS	260.0	273.4	436.1	164.3	425.1	161.9
MODFLOW						

V and H indicate flow through vertical interfaces between the gravel pit and the first layer and through horizontal interfaces between the gravel pit and the deeper layer, respectively.


LAK, despite some differences at the beginning of the simulation, maximum on the first day (0.1 m). By decreasing the time step from one to half and then a quarter day, the transient CAWAQS model results in a consistent lake level, whatever the time step, with a maximum difference of less than 0.5 m at the beginning of the simulation, equivalent to that obtained with MODFLOW (0.48 m versus 0.42 m respectively) but which lasts longer. The temporal evolution of the heads simulated by the two numerical codes is compared at a time step of 0.25 day at two points in the alluvial aquifer, upstream and downstream of the gravel pit (see location in Figure 3a), and in the gravel pit itself. Figure 4a illustrates the convergence of the water levels in the aquifer and the gravel pit lake towards their equilibrium values. For the gravel pit, the difference in lake level is maximum on the first day of simulation (0.021 m) and decreases with

time (Figure 4). It is higher, although still acceptable, than that obtained at the same point in the alluvial aquifer in the absence of a gravel pit (0.002 m). Water balance calculations for the lake show a similar evolution of the inflow and outflow of the gravel pit from one code to another (Figure 5). After an initial filling phase, the lake acts as a flow-through system, with the rate of groundwater inflow nevertheless always exceeding the outflow (see steady-state water balance in Table 3).


Thus validated and operational, the lake module has been integrated into the modelling platform as a specific library, which can be activated if needed. The test case configuration was taken as the baseline model for further sensitivity analysis to explore the impact of the introduction of a gravel pit lake on the behaviour of a hydrogeological system composed of two connected aquifers in interaction with a river.

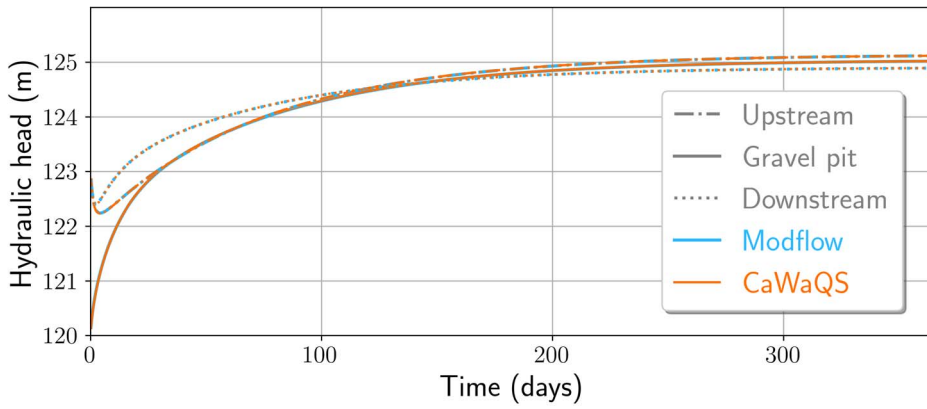

(a) Temporal evolution of heads simulated by CAWAQS and MODFLOW in the gravel pit lake and in the alluvial aquifer, on both sides of the gravel pit along a flow path. The overlap between CAWAQS and MODFLOW is further illustrated in Figure 4b.

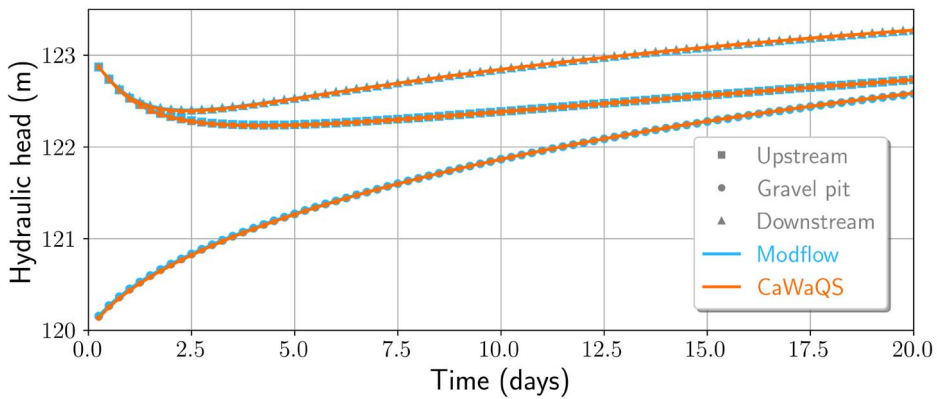

(b) Focus on the first 20 days of simulation.

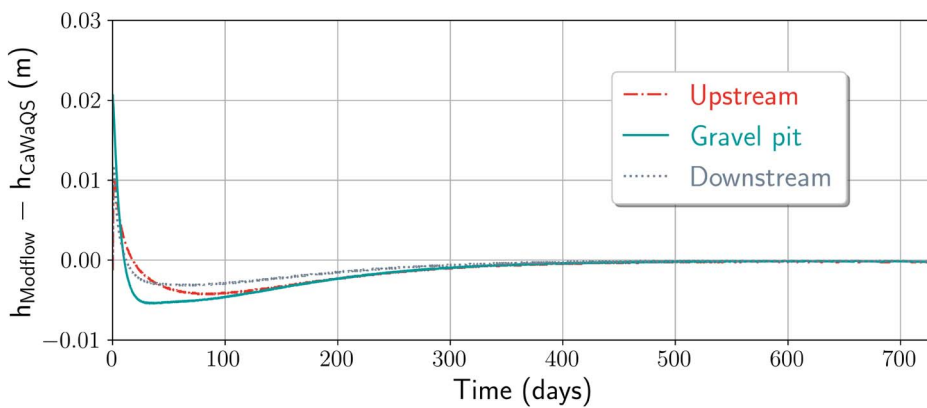

(c) Simulated head differences ($h_{Modflow} - h_{CaWaQS}$).

Figure 4. Detailed comparison CAWAQS–MODFLOW at three points (see location in Figure 3a) under transient conditions (explicit scheme, 0.25 day time step).

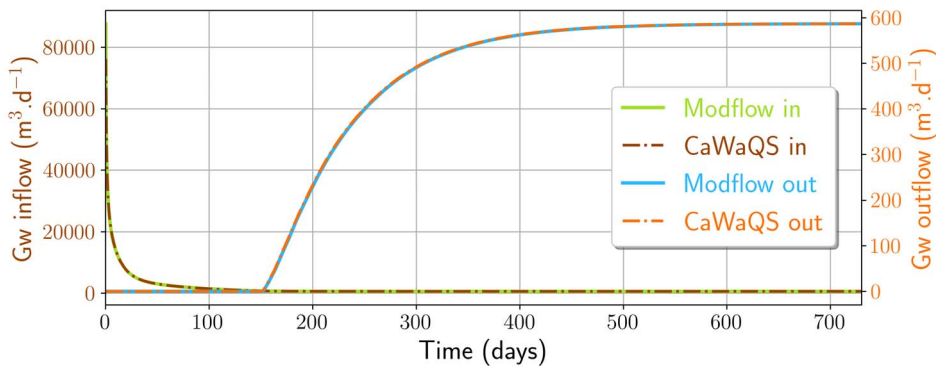


Figure 5. Flows into and out of the gravel pit lake during the transient run, as simulated by the two codes.

4. Numerical experiments characterising gravel pit lake–aquifer interactions

In a third step, *in silico* experiments are run to illustrate the general principles governing the interactions between a gravel pit lake and the aquifer system in which it is embedded, principles which were recalled in the first part of the present work. The modelling approach offers the possibility of quantifying the exchange flows between the gravel pit and the aquifers and of simulating the changes in lake level and water table following gravel excavation. We first simulate the gravel pit lake–groundwater system under steady-state conditions. By varying the various parameters that could impact groundwater seepage to the lake and local water levels, we analyse their relative significance. We then examine the response of the gravel pit lake to cyclic transient boundary conditions, whose influence on the seasonal water balance terms is also investigated.

4.1. Simulations design

Steady-state simulations were carried out from the base case (#1) using various configurations relative to (i) geometrical factors (#2 to #8): size, shape and depth of the gravel pit lake, number of lakes, lake orientation with respect to the direction of flow, distance of the gravel pit from the river, (ii) hydrodynamical factors (#9 to #15): hydraulic conductivity contrasts within the groundwater system, ratio of horizontal to vertical hydraulic conductivity and clogging of the lake bed and banks, and (iii) meteorological factors (#16 to #19): groundwater recharge

(I and q_{lat}) and atmospheric moisture deficit ($E - P$). The values of the parameters chosen for the tests are shown in Table 4. Although hypothetical settings are simulated, it is expected that these values and the selected magnitude in their change from the baseline conditions are realistic and representative of gravel pit lake environments.

Two sets of transient simulations are used, one involving a step change in water inflow and the other a sinusoidal variation in its boundary conditions. The first set, based on all the simulations carried out in steady-state and defined as initial conditions, consists of cancelling all the recharge terms of the lake–groundwater system (q_{lat} , I and $P - E$) and following the rate of gravel pit lake level recession until a new equilibrium is approached. The response time τ_c of the gravel pit lake is then deduced. This characteristic time is given by the exponential decay constant, adjusted between 10 and 90% of the total lake level change due to the cessation of recharge, in order to take into account the time necessary for the system to reach a purely exponential decay [Cuthbert, 2014]. A value of 0.06 is assigned to the storage coefficient of the upper aquifer and of 0.001 for the lower aquifer, resulting in hydraulic diffusivity T/S of 0.6 and $10 \text{ m}^2 \cdot \text{s}^{-1}$, respectively.

Additional transient simulations are developed to examine the response of the groundwater–lake system to periodically oscillating recharge (I and $P - E$) and boundary conditions (q_{lat} , h_r), independently at first and then by applying all the forcings simultaneously. The sinusoidal input signal is expressed in the form of $a \cos(\omega t)$, where a is the driving force

Table 4. Design of the steady-state simulations: model parameters

Simulations	Geometrical factors					
	Size (m ²)	Shape	Depth (m)	Number	Orientation	Position
#1 ref.	140,625	Rectangular	6	1	Parallel	Central
#2 size	257,812.5					
#3 square		Square				
#4 depth			20			
#5 × 3	46,875			3	Perpendicular	
#6 ppdcl					Perpendicular	
#7 up						Upstream
#8 down						Downstream
Hydrodynamical factors						
	Transmissivity T (m ² ·s ⁻¹)		Anisotropy		Clogging C_g (s ⁻¹)	
	Alluvium	Chalk	K_v/K_h			
#1 ref.	3.6×10^{-2}	10^{-2}	0.1			5×10^{-5}
#9 homo		3.6×10^{-2}	1		Bed	5.09×10^{-5}
#10 T _{all}	3.6×10^{-1}					
#11 T _{ch}		10^{-4}				
#12 α			0.5			
#13 noC					No clogging	
#14 C ₄					All but upstream	10^{-8}
#15 C _{tot}					All banks & bed	10^{-8}
Meteorological factors						
	q_{lat} (m ³ ·s ⁻¹)	I (m·s ⁻¹)/(mm·year ⁻¹)		$P - E$ (m·s ⁻¹)/(mm·year ⁻¹)		
#1 ref.	1.85×10^{-3}	$6.9 \times 10^{-9} / 218$		$-1.1 \times 10^{-9} / -35$		
#16 E ⁺				$-1.38 \times 10^{-8} / -44$		
#17 P				$1.1 \times 10^{-9} / 35$		
#18 P ⁺				$1.38 \times 10^{-8} = 2 \times I_{\#1} / 44$		
#19 q ⁺	$6.51 \times 10^{-2} = I_{\#1}$	$1.96 \times 10^{-10} = q_{lat\#1} / 6$				

amplitude (L, L·T⁻¹ or L³·T⁻¹), $\omega = 2\pi/T_o$ is the oscillation frequency (T⁻¹), T_o is the oscillation period (T) and t is the time (T). At the river boundary, the head amplitude is about 0.3 m. In this scenario, mean driving forces were applied so that $q_{lat} = I = 2.23 \times 10^{-2}$ m³·s⁻¹ and $I = E - P = 2.36 \times 10^{-9}$ m·s⁻¹. The period is 1 year, i.e., seasonal variations are investigated. The resulting cyclic stresses are illustrated in Figure 7. Steady-state groundwater heads and lake level are used as initial conditions and the transient model is run with daily time steps until a quasi-steady oscillatory state is reached. Models are used to evaluate the response of the gravel pit lake's level to

periodically changing hydraulic conditions, for different configurations involving increasing clogging of the lake (ref., C₄ and C_{tot}).

4.2. Simulation results

4.2.1. Steady-state analysis

The hydrodynamic disturbance caused by the gravel pit lake, as simulated by the gravel pit lake-aquifer system models, is assessed using several criteria (see Table 5) that measure (i) the impacts in terms of groundwater and lake levels, as compared

Table 5. Main results of the steady-state and transient simulations: water levels and balance components

Simulations	Water levels					Water balance					
	Δh_- (m)	Δh_+ (m)	h_L (m)	κ (%)	τ_c (days)	Q_{in} ($m^3 \cdot day^{-1}$)	$E/(Q_{in} + P)$ (%)	InV (%)	InH (%)	τ_r (years)	
#1 ref.	-0.084	0.038	125.037	70	73	600	10	32	73	27	3.2
#2 size	-0.116	0.035	125.017	77	84	851	15	38	72	28	4.2
#3 square	-0.059	0.019	125.035	73	74	569	10	33	73	27	3.4
#4 depth	-0.088	0.033	125.033	73	71	738	13	27	84	16	2.6
#5 $\times 3$	-0.032	0.004	125.048	75	74	729	13	28	79	21	2.7
#6 ppdcl	-0.040	0.004	125.054	80	75	590	10	32	74	26	3.3
#7 up	-0.050	0	125.201	\emptyset	85	225	4	56	73	27	8.9
#8 down	-0.122	0.074	124.718	63	60	988	17	22	73	27	1.8
#9 homo	-0.055	0.023	124.841	71	78	661	11	30	35	65	2.8
#10 T_{all}	-0.009	0.006	124.568	62	10	180	3	62	78	22	9.9
#11 T_{ch}	-0.106	0.049	125.182	69	94	583	10	32	100	0	3.4
#12 α	-0.084	0.037	125.034	70	71	627	11	31	65	35	3.1
#13 noC	-0.091	0.031	125.029	75	70	840	15	25	90	10	2.3
#14 C_4	-0.038	0.143	125.143	103	102	25	<1	96	100	0	79.7
#15 C_{tot}	-0.171	0.019	124.950	-4	1110	13	<1	100	7	93	142.6
#16 E^+	-0.110	0.011	125.011	87	73	667	12	35	72	28	2.9
#17 P	-0.079	0.042	125.042	66	73	589	10	30	73	27	3.3
#18 P^+	-0.053	0.069	125.068	47	73	524	9	28	73	27	3.7
#19 q^+	-0.134	0.095	125.205	58	73	1138	20	20	73	27	1.8

Δh_- and Δh_+ are respectively the maximal fall and rise in water levels along a flow path across the gravel pit lake, compared to the equivalent case without a lake, h_L is the simulated gravel pit lake level, κ is the position of the Kippungslinie within the lake as counted from upstream, τ_c is the response time of the gravel pit lake, Q_{in} is the groundwater inflow to the gravel pit lake, also expressed as a percentage of total flow in the aquifer system, $E/(Q_{in} + P)$ is the fraction of precipitated water and inflowing groundwater evaporated from the gravel pit lake, InV and InH are inflows through vertical interfaces between the gravel pit and the alluvial layer and through horizontal interfaces between the gravel pit and the chalk layer, respectively, here expressed as a percentage of total inflow Q_{in} , and τ_r is the water residence time of the gravel pit lake. Numbers in bold are discussed more specifically in the text.

to equivalent baseline simulations with no gravel pit: to this end, we calculate the difference in water levels and the position of the Kippungslinie (κ); (ii) changes in the water budget components, (iii) the water residence time of the gravel pit lake.

For the reference simulation #1, the steady-state model results in a gravel pit lake level of 125.037 m, a level that corresponds to the pre-extraction water table established at a distance of 70% of its size from its upstream side. For an unclogged gravel pit lake, it moves not at mid-point of the gravel pit lake

[Wilson, 1984] but downward at 75%. This is in line with the parabolic water table profile, here related to the specified recharge and which should apply further in the case of an unconfined shallow aquifer. The position of the Kippungslinie therefore reflects not only the presence and extent of the lake sealing as expected [Wilson, 1984, simulations #14 and #15] but also the recharge conditions of the system (see simulations #16, #18 and #19). A positive atmospheric lake balance (#18) equilibrates the lake at mid-point while as the $E - P$ deficit increases, so


decreases the predicted level of the gravel pit lake (#16, Figure 6a), as well as the water table downstream of the lake. The main changes in lake water levels are nonetheless predicted as a consequence of lake sealing. While the two simulated water table profiles in the case of clogged lake (#14 and #15) are similar, characterised by slight rise and fall respectively upstream and downstream of the lake, e.g., a limited impact on alluvial groundwater levels, the predicted lake levels are opposite. A partially clogged lake gives rise to a high lake level (125.143 m), as often described in the literature [e.g., Peaudecerf, 1975] and acts as a reservoir fed by the alluvial aquifer upstream (100% of inflowing groundwater) and mainly drained by the chalk aquifer. In contrast, if totally sealed, the gravel pit lake ends as a terminal lake, with a low level (124.950 m), nearly 20 cm lower, mainly fed by the deep aquifer and where groundwater inflow exactly compensates for the atmospheric moisture deficit. A high hydraulic head gradient, of 3.3‰, i.e., more than ten times greater than the initial gradient, is found upstream of the excavation, as opposed to its downstream location in C_4 simulation. The hydraulic gradients on either side of the lake are all the more pronounced as the clogging is significant. In the absence of clogging, the transition between the gravel pit lake and the water table is smoothed. In this case, the simulated water table is similar to that obtained from an additional run using the “high K” technique (referred to as #13b in Figure 6a).

In the chosen configuration, with a Dirichlet boundary condition downstream and a Neumann boundary condition upstream, the impact of the gravel pit lake on groundwater levels is mainly felt upstream, where the water table is generally lowered as compared to the pre-extraction levels, whereas the lake influence is rather limited downstream of the gravel pit lake (Figure 6). The intensity of the response of the aquifer system to the creation of the water body is also conditioned by the position of the lake along the flow line. Far from the low points of the valley, only a limited drop in the water table is simulated (#7, Figure 6b). It is even more pronounced the closer the gravel pit lake is to the river (#8), where the initial water table gradient is higher. This is also the case when the transmissivity of the system decreases (#11, for the chalk aquifer, Figure 6c). On the other hand, in a highly permeable aquifer (#10, for the alluvial aquifer), the change in water table from the


pre-extraction situation will be difficult to measure (see Table 5). The impact of the gravel pit on groundwater levels can finally be reduced by choosing a gravel pit layout perpendicular to the flow, which offers a larger exchange surface to the flow (#6 and #3), by favouring the number of water bodies (#5, Figure 6b) rather than a single large lake (#2), whose level could end up higher than the natural ground level downstream.

With regards to the water balance, groundwater exchange with the gravel pit lake represents, in the examples considered here, up to 20% of the total flow circulating in the aquifer system. It is enhanced when a higher upstream groundwater flow is intercepted by the water body (#19 and #8), especially if the gravel pit is larger or deeper (#2 and #4), and it is generally accompanied by a decrease in inflowing water evaporated from the lake. A greater number of water bodies also means an increased rate of water cycling (#5). Two parameters of the model again play a major role in controlling the lake seepage, namely the bed and banks conductance (#14 and #15) and the hydraulic conductivity of the superficial aquifer (#10). Indeed, the rate of groundwater input to the lake becomes a negligible component of the overall water balance when clogging is severe. With respect to the hydraulic conductivity of the alluvial aquifer, the model results indicate that there is a reduction in groundwater inflow to the lake, which is related to the lower hydraulic gradient, while the conductance of the lake/aquifer interface remains dominated by bank clogging.


For an isotropic and homogeneous porous media (#9), upward flux of deep groundwater into the gravel pit lake is predominant due to the larger area offered to the flow by the bottom of the gravel pit. However, if the medium is anisotropic and the hydraulic conductivity decreases with depth, results show that the majority (three quarters in the reference case) of the lake in-seepage comes from the shallow aquifer (horizontal conductance of the interfaces one order of magnitude higher than the vertical conductance in simulation #1). The share of flow through the lake bottom may increase in case of clogging if it is homogeneous (see noC, ref. and C_{tot} simulations). The relative contributions of the two aquifers are indeed variable and depend on the hydraulic conductivity contrast between the two units (#9–11), the ratio of horizontal to vertical hydraulic conductivity (#12) and the extent

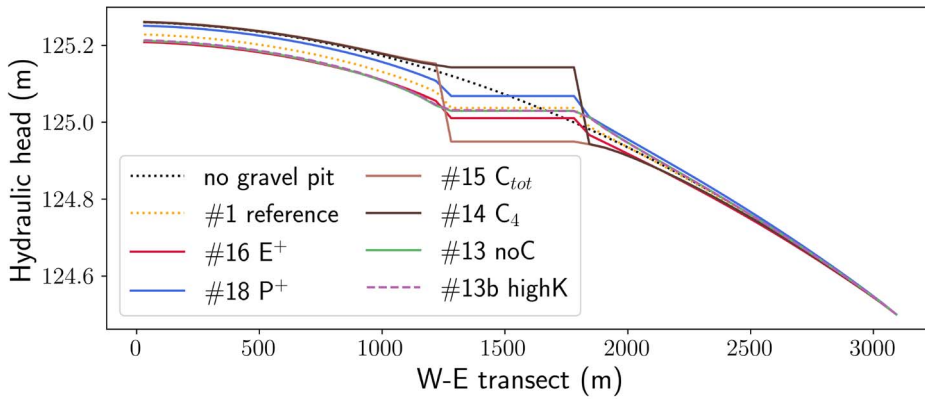

(a) Gravel pit lake meteorological factors & clogging: E⁺ stands for an increased $E - P$ deficit over the gravel pit lake, $P - E > 0$ in P⁺, #13b uses the “high K” technique, there is no clogging in #13, partial clogging in #14 and total clogging in #15.

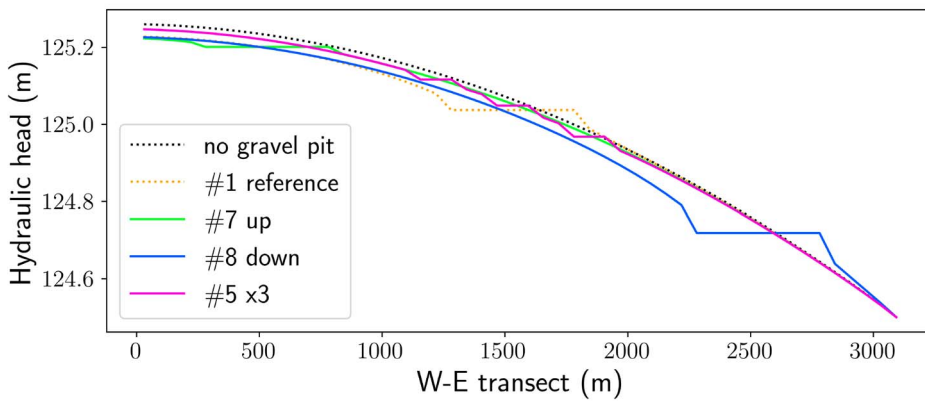

(b) Descriptive factors of the gravel pit lake: location of the gravel pit lake, #7 upstream, #1 in the centre and #8 downstream; lake cut into three pieces #5.

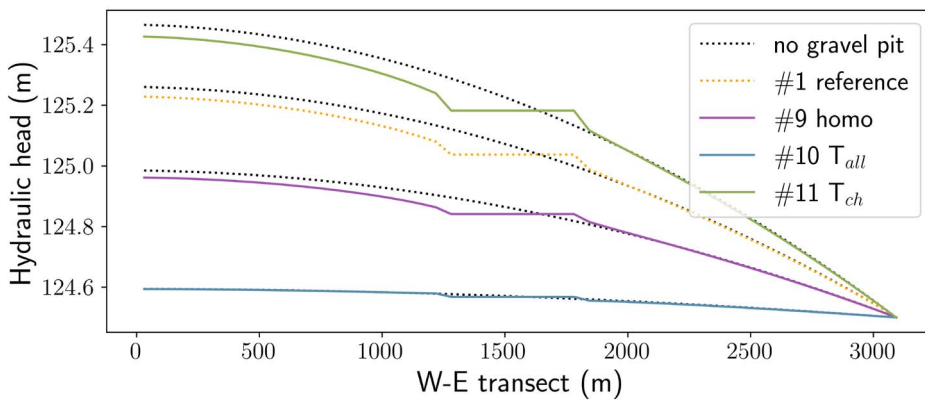

(c) Aquifer hydrodynamic factors: homogeneous aquifers in #9, more permeable alluvial aquifer in #10 and less permeable deeper aquifer in #11, as compared to the reference #1.

Figure 6. Selected results of the steady-state simulations along a west–east flow line and across the water body, for different configurations of the gravel pit (see location in Figure 3a).

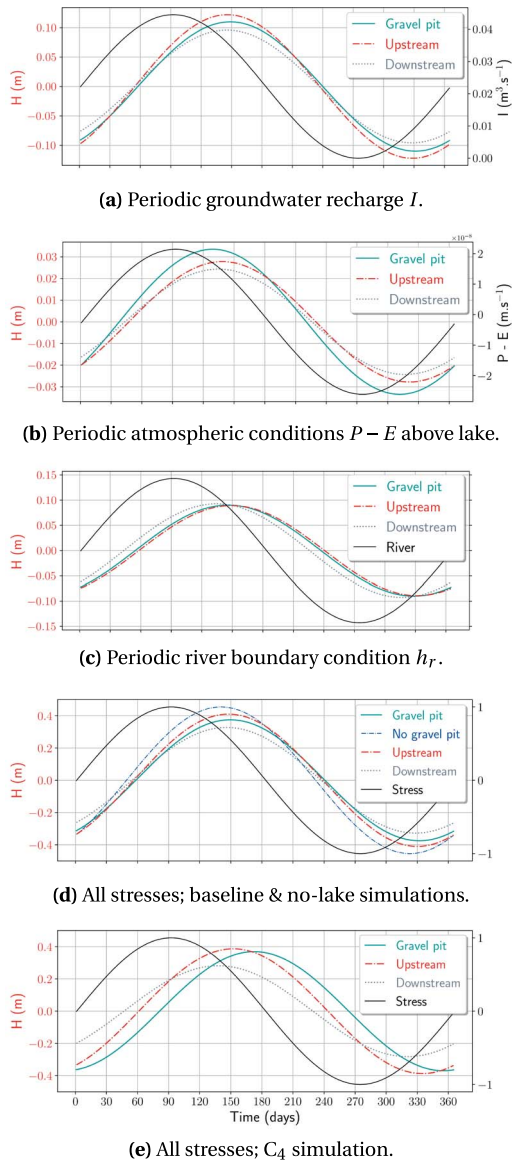


Figure 7. Theoretical response of the gravel pit lake level, and of selected upstream and downstream water levels in the alluvial aquifer (see location in Figure 3a), here represented by their amplitude, to various simple sinusoidal hydraulic stresses applied to the lake and the aquifer (shown in black in the figure). Results correspond to baseline simulation, except (e), for a partially clogged gravel pit lake (C_4 simulation). Also plotted in (d), the equivalent upstream groundwater level simulated in the absence of a gravel pit. The graphs share a common x -axis.

of lake sealing (#13–15). They are highly dependent on local groundwater flow conditions, according to whether the gravel pit is complete and rests on a low permeability layer (no exchange via the bottom of the gravel pit in the case tested here, #11), on the vertical heterogeneity of the bank clogging, or on whether the banks are more clogged than the bottom of the gravel pit due to the partial backfilling of the excavation with the overburden.

The computation of the water residence time τ_r in the gravel pit lake summarises the previous observations concerning the level at which the gravel pit lake equilibrates and its exchanges with the aquifers. In this theoretical case study, the water retention time is around 3 years. In particular, it is variable along a flow path, here five times higher upstream than downstream (down versus up simulations). It becomes longer as the amount of seepage is reduced (e.g., T_{all} simulation), mainly with the ageing of the gravel pit and the subsequent clogging (residence time more than one order of magnitude higher than the median).

4.2.2. Transient analysis

The transient numerical models are used to investigate the dynamic changes in gravel pit lake water level as a result of variations in the balance between inputs and outputs of water. Estimating gravel pit lake response times provides information on the time required for the lake level to adjust to these changes. They are shown in Table 5 for each of the 19 cases. The calculated τ_c values range from 2 to 3 months. It is dependent on the horizontal distance away from the divide, and is longer for the lake in the most up-gradient position. The lake response is also defined by the size of the gravel pit. The results mainly illustrate how the response for any gravel pit lake is determined by the hydrodynamics properties of the lake-groundwater system. The larger the hydraulic diffusivity of the shallow aquifer, the shorter the time to reach the equilibrium lake level and conversely when the gravel pit lies on a low permeability bedrock. Finally, τ_c depends largely on the connectivity between the gravel pit lake and groundwater, i.e., on the conductance of their interfaces. Significantly slower responses, up to 3 years, are simulated as a result of sealing of the bed and banks of the gravel pit lake.

For small lakes such as those in gravel pits, however, relatively short response times are expected and

Table 6. Results of the baseline transient simulations under the action of each stress separately and then all together: amplitude H and phase shift ϕ of the gravel pit lake level and of the alluvial groundwater level at about 100 m upstream and downstream of the lake

Stress	Upstream		Gravel pit lake		Downstream	
	H (m)	ϕ (days)	H (m)	ϕ (days)	H (m)	ϕ (days)
I	0.122	52	0.110	56	0.096	51
q_{lat}	0.172	56	0.145	65	0.120	65
h_r	0.089	56	0.090	53	0.093	40
$P - E$	0.028	42	0.033	36	0.024	38
All	0.410	55	0.375	58	0.328	53
No gravel pit	0.455	48	—	—	0.336	44
All C_4	0.387	60	0.370	80	0.282	46
All C_{tot}	0.369	44	0.130	91	0.216	46

Also presented are the results of an equivalent simulation with no gravel pit lake, in response to the periodic variations of the first three hydraulic stresses, and two additional simulations involving respectively a partially and a totally clogged gravel pit lake.

hence an ability to propagate forcings whose period of fluctuations is of the same order as the response time, i.e., also short. In this theoretical case study, the annual period is close to $2\pi\tau_c$. For lower frequency components, the gravel pit lake will remain approximately in equilibrium while high frequency signals will be attenuated independently of τ_c , the lake acting as a low pass filter [Mason et al., 1994].

We now examine the one-year response of the gravel pit lake to such periodic forcing, once the lake level has reached a pseudo-sinusoidal steady-state. Figure 7 illustrates the rise and fall of water levels around the average in the gravel pit lake and in the shallow aquifer about 100 m upstream and downstream of the lake, in response to seasonal varying groundwater (Figure 7a for I ; not shown for recharge flux q_{lat} across the lateral boundary) and lake recharge (Figure 7b), river head (Figure 7c) and to all hydraulic stresses considered together (Figure 7d), for the base case. Water table fluctuations are greater near the groundwater divide than in the discharge area, except where changes in the river level are the main driver, for example during high-flow periods. Their simulated amplitude H and phase ϕ values are summarised in Table 6. Relative to the no-lake case, the results show that the presence of the gravel pit lake dampens the groundwater wave propagation, as the water table exhibits smaller amplitude and increased phase lag (see also Figure 7d),

underlining the dominant role of the storage effect of the lake, as pointed out by Jazayeri et al. [2021]. Regarding the gravel pit lake's level itself, slower readjustments also occur in response to the sinusoidal variation in groundwater recharge, as compared to the aquifer, to be related to the response time τ_c of the gravel pit lake. The influence of the varying precipitation inputs and evaporation outputs into/from the lake is felt beyond its physical extent on either side of the lake, as illustrated in plot Figure 7b, but is expected to be of limited extent, due to the small amplitude involved, and masked by the variability of groundwater seepage (Figure 7d).

How the sealing layer on the banks and at the bottom of the lake influences the attenuation and phase shift of the input signal within the lake-aquifer system is illustrated using the cases of a partially and a totally clogged gravel pits (C_4 and C_{tot}). Due to the longer response time of the water-filled pit, a further attenuation in amplitude and a significant shift in phase (from 58 to 81 or even 91 days) of the lake's response are simulated (shown for C_4 case in Figure 7e), while contrasting effects on signal propagation are noted when comparing upstream and downstream of the alluvial aquifer on either side of the lake.

The water regime of the gravel pit lake is not only the result of precipitation inputs exceeding evaporation outputs or vice versa but is mainly determined

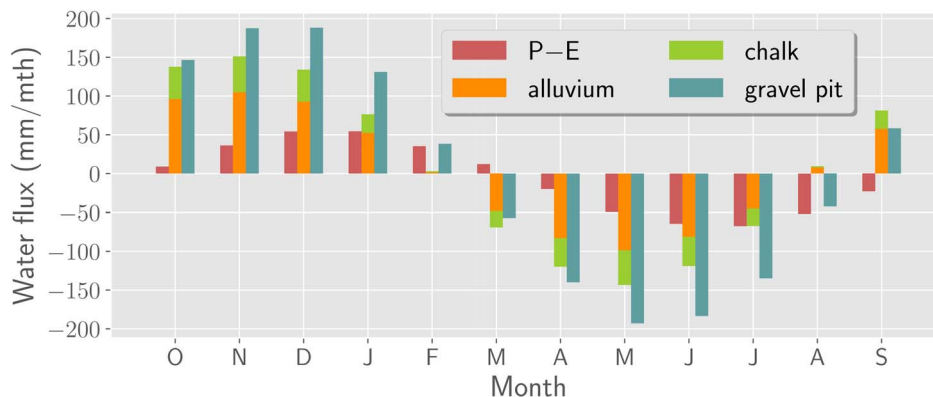


Figure 8. Water balance of the gravel pit lake: the monthly averages of net atmospheric inputs ($P - E$), net seepage from the alluvial and chalk aquifers ($Q_{in} - Q_{out}$), and variations in the gravel pit storage are shown for the reference transient simulation, under the effect of all applied stresses.

by the seasonal variability of net groundwater flow $Q_{in} - Q_{out}$. Assessing groundwater–lake exchanges is therefore a key element in the overall understanding of gravel pit lake hydrology. The simulated seasonal distribution of the lake water balance components over a hydrological year supposed to start in October is presented in Figure 8, where positive values indicate fluxes recharging the pit lake. During the wet season, water storage in the lake is provided by net influx of groundwater and direct precipitations, in proportions that will depend on local climate, hydrogeological conditions and gravel pit lake hydraulic properties. During the dry season, the surface water evaporation is mainly compensated by the release of water stored during the preceding high-flow period, with an additional groundwater supply, at the end of the dry period in the baseline case or in the case of a completely clogged gravel pit (C_4).

5. Conclusion

The theoretical numerical case studies, conducted in this work under steady-state and transient regimes for a single gravel pit lake, illustrate the diversity of the situations that can be encountered under real-world conditions. They are useful for understanding the mechanisms that govern the temporal and spatial occurrence of groundwater–gravel pit lake interactions. The intensity of their exchanges is one of the particularities of these man-made lakes, which distinguishes them from natural lakes, although the

importance of this process is increasingly recognised even for the latter [e.g., Hokanson et al., 2022]. The gravel pit lake water level and its changes are primarily dependent on the variability of the groundwater contribution, while the balance between precipitation and evaporation plays a secondary role. The significant amount of groundwater through-flow, combined with the small size of the open pits, results in short residence times. Low values, ranging from a few days to one and a half years, are indeed generally compiled for gravel pits [Schanen, 1998, Weilhartner et al., 2012]. This has implications for the nutrient budget of the gravel pit lake and hence, their ecology and the effective management of these aquatic ecosystems. Accurate spatial and temporal quantification of groundwater inflow and outflow to the lake is a prerequisite for estimating the mass balance of its dissolved components.

Despite the interannual variability due to surface water evaporation is generally outweighed by the through-flow of groundwater, it is still a potential sink term for the aquifer system. More investigation is needed to obtain valid estimations of the magnitude and seasonal distribution of open water evaporation in the particular case of gravel pit lakes. In this respect, state-of-the-art thermodynamic lake models [Ottlé et al., 2020] or isotope mass balance models [Gibson, 2002] should prove useful in estimating the evaporation losses. A generalisation of studies on gravel pit lakes to any type of climatic context is also awaited, as well as a broad assessment

of how groundwater-gravel pit lake interactions may be modified as a result of climate change, following the pioneer work of Mollema and Antonellini [2016]. Given their small size, it is expected that gravel pit lakes will have a more sensitive short-term response to seasonal events than to low-frequency climatic events such as droughts, but this needs to be checked against the geographical context of each site.

Assessing the response of the gravel pit lake-aquifer system to changes in climate conditions and land use may require further modelling developments to take into account a wider range of processes such as a more comprehensive description of vertical flows in the vadose zone, whether to better estimate infiltration and evapotranspiration processes or additional delays in water transfer to the aquifer. Also, there is less understanding of how extreme events, such as flash floods or droughts, may influence this behaviour [Cross *et al.*, 2014] and additional coupling of the subsurface to the surface would be useful in this respect. This is indeed one of the limitations of the simple modelling approach we have developed within the CAWAQS platform, as well as the simplification of solving the flow equation only for a confined aquifer for the moment. In this latter case, this leads in particular to a slight overestimation of the flows exchanged with the shallow aquifer (of the order of +5%) at the expense of the deep aquifer (−10%), as compared to the results of an additional baseline run carried out using LAK-MODFLOW in unconfined mode. Greater numerical stability and ease of deployment at the scale of a real case study with multiple water bodies are however expected.

The next step is to use this mathematical tool for modelling purposes in such a regional case study. Although gravel pit lakes are becoming an increasingly common type of freshwater and their local impacts are regularly examined, they are more rarely studied on a regional scale. To fill this gap, we are currently developing an application in the alluvial plain of the Seine River, upstream of Paris. In the so-called Bassée region, a thousand small water bodies resulting from post-war sand and gravel extraction are scattered across the floodplain. The existence of numerous water level records on well-maintained sites, future accurate remote sensing of their temporal variations by the SWOT satellite, and the present numerical code will be of great benefit in deciphering the cumulative effect of a multitude of gravel pits

of different shape and size in a heterogeneous hydrogeological environment. Such a combination of tools will also be useful in monitoring water resources in strategic areas where water and aggregate resources coexist.

Conflicts of interest

The authors declare no competing financial interest.

Dedication

The manuscript was written by AJ. SW developed the first version of the code and TV updated it, under the supervision of AJ. FC participated in the sensitivity analysis conducted by AJ. NF provided access to CAWAQS and expertise. All authors have given approval to the final version of the manuscript.

Acknowledgements

This work was funded by the Centre National d'Etudes Spatiales (CNES) through the TOSCA-SPAWET programme, with additional support from the PIREN-Seine programme. The authors warmly thank the two referees whose valuable comments helped to clarify the manuscript.

References

- Apaydin, A. (2012). Dual impact on the groundwater aquifer in the Kazan Plain (Ankara, Turkey): Sand-gravel mining and over-abstraction. *Environ. Earth Sci.*, 65(1), 241–255.
- Bendixen, M., Best, J., Hackney, C., and Iversen, L. L. (2019). Time is running out for sand. *Nature*, 571(7763), 29–31.
- Bendixen, M., Iversen, L. L., Best, J., Franks, D. M., Hackney, C. R., Latrubesse, E. M., and Tusting, L. S. (2021). Sand, gravel, and UN Sustainable Development Goals: Conflicts, synergies, and pathways forward. *One Earth*, 4(8), 1095–1111.
- Bessière, H., Klinka, T., and Saplairoles, M. (2013). Evaluation de l'impact sur la ressource en eau souterraine de l'exploitation de granulat dans le milieu alluvionnaire de l'Ariège. Technical Report RP-61982-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RP-61982-FR>.

- Blanchard, F., Keime, M.-P., and Lansiard, M. (1991). Etude du colmatage et de sa cinétique de formation à l'interface gravière/nappe. Technical Report RR-32248-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RR-32248-FR>.
- Botta, S., Comoglio, C., Quaglino, A., and Torchia, A. (2009). Implementation of environmental management systems in the extraction of construction aggregates from gravel pit lakes. *Am. J. Environ. Sci.*, 5(4), 526–535.
- Cheng, X. and Anderson, M. P. (1994). Simulating the influence of lake position on groundwater fluxes. *Water Resour. Res.*, 30(7), 2041–2049.
- Cross, I. D., McGowan, S., Needham, T., and Pointer, C. M. (2014). The effects of hydrological extremes on former gravel pit lake ecology: Management implications. *Fundam. Appl. Limnol.*, 185(1), 71–90.
- Cuthbert, M. O. (2014). Straight thinking about groundwater recession. *Water Resour. Res.*, 50(3), 2407–2424.
- Czernichowski-Lauriol, I. (1998). Etude bibliographique sur l'impact des gravières sur les crues de rivières. Technical Report RR-40022-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RR-40022-FR>.
- Darmendrail, D. (1986). Colmatage et effet filtre des berges lors de l'alimentation des nappes alluviales par les cours d'eau (synthèse bibliographique). Technical Report 86-SGN-371-EAU, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/86-SGN-371-EAU>.
- de Marsily, G. and Tardieu, B. (2018). Stratégie d'utilisation des ressources du sous-sol pour la transition énergétique française : les métaux rares. Technical report, Académie des Sciences, Académie des Technologies, Paris, France, <https://www.academie-sciences.fr/fr/Rapports-ouvrages-avis-et-recommandations-de-l-Academie/utilisation-des-ressources-du-sous-sol-pour-la-transition-energetique.html>.
- Durbec, A. (1986). *Sectorisation des berges des ballastières en eaux : application à l'étude des échanges hydrodynamiques avec la nappe phréatique d'Alsace, au nord de Strasbourg*. PhD thesis, Université de Strasbourg 1, <http://www.theses.fr/1986STR13082>.
- Eberentz, P. and Rinck, G. (1987). Impact qualitatif des carrières en eau sur les nappes souterraines. Rapport de synthèse. Technical Report 87-SGN-567-HNO-ALS, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/87-SGN-567-HNO-ALS>.
- El-Zehairy, A. A., Lubczynski, M. W., and Gurwin, J. (2018). Interactions of artificial lakes with groundwater applying an integrated MODFLOW solution. *Hydrogeol. J.*, 26(1), 109–132.
- Flipo, N. (2005). *Modélisation intégrée des transferts d'azote dans les aquifères et les rivières : application au bassin du Grand Morin*. PhD thesis, Ecole Nationale des Mines de Paris, <http://www.theses.fr/2005ENMP1300>.
- Fouché, O., Brun, J., and Nasri, B. (2020). Urban lakes: From lack of regard to smart deal? In Gourbesville, P. and Caignaert, G., editors, *Advances in Hydroinformatics*, pages 685–699. Springer Singapore, Singapore.
- Genereux, D. and Bandopadhyay, I. (2001). Numerical investigation of lake bed seepage patterns: Effects of porous medium and lake properties. *J. Hydrol.*, 241(3), 286–303.
- Gibson, J. J. (2002). Short-term evaporation and water budget comparisons in shallow Arctic lakes using non-steady isotope mass balance. *J. Hydrol.*, 264(1), 242–261.
- Gravost, M. (1988). Interactions entre les carrières et les eaux souterraines et superficielles. Bilan des connaissances techniques. Technical Report 87-SGN-391-PAC, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/87-SGN-391-PAC>.
- Green, J. A., Pavlish, J. A., Merritt, R. G., and Leete, J. L. (2005). Hydraulic Impacts of Quarries and Gravel Pits. Technical report, Minnesota Department of Natural Resources, Division of Waters, Minnesota, USA, https://www.researchgate.net/profile/Jeffrey-Green-7/publication/349379109_Hydraulic_Impacts_of_Quarries_and_Gravel_Pits/links/602d590d4585158939b05b73/Hydraulic-Impacts-of-Quarries-and-Gravel-Pits.pdf.
- Harbaugh, A. W. (2005). MODFLOW-2005, the US Geological Survey Modular Ground-Water Model: the Ground-Water Flow Process. Technical Report 6-A16, US Department of the Interior, US Geological Survey, Reston, VA, USA, <http://pubs.er.usgs.gov/publication/tm6A16>.
- Hatva, T. (1994). Effect of gravel extraction on groundwater. In *IAHS Publications-Series of Pro-*

- ceedings and Reports-Intern. Assoc. Hydrological Sciences*, volume 222, pages 427–434.
- Hayashi, M. and van der Kamp, G. (2021). Chapter 9 – Water level changes in ponds and lakes: The hydrological processes. In Johnson, E. A. and Miyanishi, K., editors, *Plant Disturbance Ecology*, pages 321–351. Academic Press, Cambridge, MA, USA, 2nd edition.
- Hindák, F. and Hindáková, A. (2003). Diversity of cyanobacteria and algae of urban gravel pit lakes in Bratislava, Slovakia: a survey. *Hydrobiologia*, 506(1), 155–162.
- Hokanson, K. J., Rostron, B. J., Devito, K. J., Hopkinson, C., and Mendoza, C. A. (2022). Landscape controls of surface-water/groundwater interactions on shallow outwash lakes: How the long-term groundwater signal overrides interannual variability due to evaporative effects. *Hydrogeol. J.*, 30(1), 251–264.
- Ioannidou, D., Sonnemann, G., and Suh, S. (2020). Do we have enough natural sand for low-carbon infrastructure? *J. Ind. Ecol.*, 24(5), 1004–1015.
- Jazayeri, A., Werner, A. D., and Cartwright, N. (2021). Partially penetrating lake-aquifer interaction in a laboratory-scale tidal setting. *J. Hydrol.*, 603, article no. 127080.
- Kattner, E., Schwarz, D., and Maier, G. (2000). Eutrophication of gravel pit lakes which are situated in close vicinity to the river Donau: Water and nutrient transport. *Limnologica*, 30(3), 261–270.
- Kidmose, J., Engesgaard, P., Nilsson, B., Laier, T., and Looms, M. C. (2011). Spatial distribution of seepage at a flow-through lake: Lake Hampen, Western Denmark. *Vadose Zone J.*, 10(1), 110–124.
- Koehnken, L. and Rintoul, M. (2018). Impacts of Sand Mining on Ecosystem Structure, Process and Biodiversity in Rivers. Technical report, World Wildlife Fund International, Gland, Switzerland, https://wwfeu.awsassets.panda.org/downloads/sand_mining_impacts_on_world_rivers_final.pdf.
- Kondolf, G. M. (1997). Hungry water: Effects of dams and gravel mining on river channels. *Environ. Manage.*, 21(4), 533–551.
- Kuchovský, T., Říčka, A., and Červenková, J. (2008). Impact of gravel pits on ground water: Case study of gravel pits near the Mohelnice City, Czech Republic. In *Proceedings of 10th International Mine Water Assoc Congress, Karlovy Vary, Czech Republic*, pages 69–72. Technical University of Ostrava, Czech Republic, https://www.imwa.info/docs/imwa_2008/IMWA2008_069_Kuchovsky.pdf.
- Labarthe, B. (2016). *Quantification des échanges nappe-rivière au sein de l'hydrosystème Seine par modélisation multi-échelle*. PhD thesis, Université Paris Sciences et Lettres, <http://www.theses.fr/2016PSLEM090>.
- Lu, C., Zhang, B., He, X., Cao, G., Sun, Q., Yan, L., Qin, T., Li, T., and Li, Z. (2021). Simulation of lake-groundwater interaction under steady-state flow. *Groundwater*, 59(1), 90–99.
- Maliva, R. G., Coulibaly, K., Guo, W., and Missimer, T. M. (2010). Simulations of impacts of sand and rock mining on Florida coastal plain water resources. *Mine Water Environ.*, 29(4), 294–300.
- Marsland, P. A. and Hall, D. H. (1989). Gravel extraction and water resources management of the Denge Gravel Aquifer, Kent, England. In *Groundwater Management: Quantity and Quality (Proceedings of the Benidorm Symposium, October 1989)*, IAHS Publication No. 188. IAHS Publ.
- Mason, I. M., Guzkowska, M. A. J., Rapley, C. G., and Street-Perrott, F. A. (1994). The response of lake levels and areas to climatic change. *Clim. Change*, 27(2), 161–197.
- Masse-Dufresne, J., Barbecot, F., Baudron, P., and Gibson, J. (2021). Quantifying floodwater impacts on a lake water budget via volume-dependent transient stable isotope mass balance. *Hydrol. Earth Syst. Sci.*, 25(6), 3731–3757.
- Mazenc, B., Jean, P., and Roussel, P. (1990). Modélisation des impacts hydrauliques des gravières en amont de La Fère. Technical Report RR-30626-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RR-30626-FR>.
- Mead, R. (1995). The Direct and Cumulative Effects of Gravel Mining on Groundwater with Thurston County, Washington. Technical report, Environmental Health Division, Groundwater Management Program, Thurston County Public Health and Social Services Department, Olympia, WA, USA.
- Merritt, M. L. and Konikow, L. F. (2000). Documentation of a computer program to simulate lake-aquifer interaction using the MODFLOW groundwater flow model and the MOC3D solute-transport model. Technical Report 4167, US Department of the Interior, US Geological Survey, Reston, VA, USA.
- Michalek, T. (2001). *Quantifying impacts to a floodplain groundwater system from large-scale*

- sand and gravel mining*. Master's thesis, University of Montana, <https://scholarworks.umt.edu/etd/8154>.
- Mimoun, D. (2004). *Spatialisation de l'information : une aide à l'analyse hydraulique et paysagère développée lors de la réhabilitation des sites post-industriels - Cas des réaménagements des gravières en eau en milieu alluvionnaire*. PhD thesis, Ecole Nationale Supérieure des Mines de Saint-Etienne, Université Jean Monnet Saint-Etienne, <http://www.theses.fr/2004EMSE0022>.
- Mollema, P. N. and Antonellini, M. (2016). Water and (bio)chemical cycling in gravel pit lakes: A review and outlook. *Earth-Sci. Rev.*, 159, 247–270.
- Morgan-Jones, M., Bennett, S., and Kinsella, J. V. (1984). The hydrological effects of gravel winning in an area west of London, United Kingdom. *Groundwater*, 22(2), 154–161.
- Muellegger, C., Weilhartner, A., Battin, T. J., and Hofmann, T. (2013). Positive and negative impacts of five Austrian gravel pit lakes on groundwater quality. *Sci. Total Environ.*, 443, 14–23.
- Nadeau, S., Rosa, E., Cloutier, V., Daigneault, R.-A., and Veillette, J. (2015). A GIS-based approach for supporting groundwater protection in eskers: Application to sand and gravel extraction activities in Abitibi-Témiscamingue, Québec, Canada. *J. Hydrol. Reg. Stud.*, 4, 535–549.
- OECD (2019). *Global Material Resources Outlook to 2060: Economic Drivers and Environmental Consequences*. OECD Publishing, Paris, France.
- Otlé, C., Bernus, A., Verbeke, T., Pétrus, K., Yin, Z., Biancamaria, S., Jost, A., Desroches, D., Pottier, C., Perrin, C., de Lavenne, A., Flipo, N., and Rivière, A. (2020). Characterization of SWOT water level errors on Seine reservoirs and La Bassée gravel pits: Impacts on water surface energy budget modeling. *Remote Sens.*, 12(18), article no. 2911.
- Panel, L. (1991). *Modélisation hydrodynamique de l'influence des exploitations de granulats sur la nappe du Perthois (Marne)*. Technical Report RR-32543-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RR-32543-FR>.
- Peaudecerf, P. (1975). Effets des gravières sur le comportement hydrodynamique des nappes d'eau souterraines. *La Houille Blanche*, 2–3, 133–140.
- Peckenham, J. M., Thornton, T., and Whalen, B. (2009). Sand and gravel mining: Effects on ground water resources in Hancock county, Maine, USA. *Environ. Geol.*, 56(6), 1103–1114.
- Peduzzi, P. (2014). Sand, rarer than one thinks. *Environ. Dev.*, 11, 208–218.
- Sandercocock, P. and Ladson, A. (2014). *Review of Floodplain Mining Impacts and Risks*. Technical report, Jacobs and Moroka, Naremburn, Australia, https://www.gbcma.vic.gov.au/downloads/Quarries_on_the_Goulburn_Floodplain/Jacobs_and_Moroka_2014_Review_of_floodplain_mining_and_risks.pdf.
- Saplaïroles, M., Desprats, J.-E., Delpont, G., and Bourguignon, A. (2007). *Evaluation de l'impact sur la ressource en eaux souterraines de l'exploitation de granulats dans le milieu alluvionnaire de la Garonne (Haute-Garonne)*. Technical Report RP-55673-FR, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/RP-55673-FR>.
- Schanen, O. (1998). *Analyse et modélisation de l'impact hydrodynamique et biogéochimique des lacs de gravières sur la nappe alluviale du val de Seine*. PhD thesis, Université Pierre et Marie Curie Paris 6, <http://www.theses.fr/1998PA066321>.
- Schanen, O., Bendjoudi, H., Levassor, A., and Fustec, E. (1998). Estimation of groundwater gravel pit lake interface flows by water balance optimization. *C. R. Acad. Sci. Ser. 2 a Sci. Terre Planet./Earth Planet. Sci.*, 326, 107–112.
- Seelen, L. M. S., Teurlincx, S., Bruinsma, J., Huijsmans, T. M. F., van Donk, E., Lürling, M., and de Senerpont Domis, L. N. (2021). The value of novel ecosystems: Disclosing the ecological quality of quarry lakes. *Sci. Total Environ.*, 769, article no. 144294.
- Shrestha, N., Mittelstet, A. R., Gilmore, T. E., Zlotnik, V., and Neale, C. M. (2021). Effects of drought on groundwater-fed lake areas in the Nebraska Sand Hills. *J. Hydrol. Reg. Stud.*, 36, article no. 100877.
- Sinoquet, C. (1987). *Impacts d'une ballastière en eau sur la qualité des eaux souterraines : cas de deux ballastières alsaciennes et modélisation mathématique appliquée aux échanges hydrodynamiques et hydrothermiques*. PhD thesis, Université de Strasbourg 1, <http://www.theses.fr/1987STR13111>.
- Smerdon, B. D., Mendoza, C. A., and Devito, K. J. (2012). The impact of gravel extraction on groundwater dependent wetlands and lakes in the Boreal Plains, Canada. *Environ. Earth Sci.*, 67(5), 1249–1259.

- Søndergaard, M., Lauridsen, T. L., Johansson, L. S., and Jeppesen, E. (2018). Gravel pit lakes in Denmark: Chemical and biological state. *Sci. Total Environ.*, 612, 9–17.
- Sverdrup, H. U., Koca, D., and Schlyter, P. (2017). A simple system dynamics model for the global production rate of sand, gravel, crushed rock and stone, market prices and long-term supply embedded into the WORLD6 model. *BioPhys. Econ. Res. Qual.*, 2(2), 8.
- Vandenbeusch, M. (1975). Nappe alluviale de la basse plaine de la Garonne dans la région toulousaine. Influence gravières-captages. Technical Report 75-SGN-132-MPY, BRGM, Orléans, France, <http://ficheinfoterre.brgm.fr/document/75-SGN-132-MPY>.
- Vucic, J. M., Cohen, R. S., Gray, D. K., Murdoch, A. D., Shuvo, A., and Sharma, S. (2019). Young gravel-pit lakes along Canada's Dempster Highway: How do they compare with natural lakes? *Arct. Antarct. Alp. Res.*, 51(1), 25–39.
- Weilhartner, A., Muellegger, C., Kainz, M., Mathieu, E., Hofmann, T., and Battin, T. J. (2012). Gravel pit lake ecosystems reduce nitrate and phosphate concentrations in the outflowing groundwater. *Sci. Total Environ.*, 420, 222–228.
- Wilson, I. G. (1984). *The effects of gravel extraction on groundwater hydrology*. PhD thesis, University of Oxford, <https://ora.ox.ac.uk/objects/uuid:1147ef12-7cac-4a2c-a63b-7fd54ed5cc11>.
- Winter, T. C. (1976). Numerical Simulation Analysis of the Interaction of Lakes and Ground Water. Technical Report 1001, US Government Printing Office, Washington, DC, USA.
- Wrobel, J. (1980). Wechselbeziehungen zwischen Baggerseen und Grundwasser in gut durchlässigen Schottern. *GWF Wasser/Abwasser*, 121(4), 165–173.
- Zhan, S., Song, C., Wang, J., Sheng, Y., and Quan, J. (2019). A global assessment of terrestrial evapotranspiration increase due to surface water area change. *Earth Future*, 7(3), 266–282.
- Zhang, B., Zheng, X., Zheng, T., Xin, J., Sui, S., and Zhang, D. (2019). The influence of slope collapse on water exchange between a pit lake and a heterogeneous aquifer. *Front. Environ. Sci. Eng.*, 13(2), article no. 20.
- Zhao, G., Li, Y., Zhou, L., and Gao, H. (2022). Evaporative water loss of 1.42 million global lakes. *Nat. Commun.*, 13(1), article no. 3686.