

## Noise Assessment and Control: Paper ICA2016-723

# Low frequency noise and disturbance assessment methods: A brief literature overview and a new proposal

Marco Caniato<sup>a</sup>, Federica Bettarello<sup>b</sup>, Fausti Patrizio<sup>c</sup>, Lucia Marsich<sup>a</sup>, Alessio Ferluga<sup>a</sup>,  
Chiara Schmid<sup>a</sup>

<sup>(a)</sup> University of Trieste, Trieste, Italy, mcaniato@units.it

<sup>(b)</sup> Acusticamente designers team, Conegliano, Italy, fbettarello@acusticamente.eu

<sup>(c)</sup> University of Ferrara, Ferrara, Italy, fsp@unife.it

### Abstract

Several studies have presented the effects of environmental noise on communities, focusing the attention on the sleeping time events. The noise introduced into a dwelling is mostly evaluated using the A-weighted sound pressure level ( $L_{Aeq}$ ) as the only parameter to determine the perceived disturbance. Nevertheless, if noise is produced by activities or sources characterised by a low frequency contribution, the measurement of  $L_{Aeq}$  underestimates the real disturbance, in particular during sleeping time. The aim of this contribution is to analyse the low frequency disturbance phenomenon into technical and scientific literature and to investigate if any possible objective method is present in order to assess noise disturbance inside dwellings.

**Keywords:** assessment; low frequency noise; objective method

---

---

## Low frequency noise and disturbance assessment methods: a brief literature overview and a new proposal

### 1 Introduction

Low frequency noise (LFN) is mostly related to complaints, often associated to intense, pulsing and annoying effects. At the same time the sufferers perceive these sounds in a different way from instruments or other people and these aspects could cause misunderstandings. Existing and consolidated assessment methods are widely based on the A-weighted sound pressure level measurements. But this parameter leads to an underestimation of mid and low frequencies [1]-[4].

The causes of such suffering are not completely clear and many cases study have been not explained yet. Wavelength, propagating paths, vibrational or airborne (or both) nature and often low sound pressure levels make the measurement very difficult since many uncertainties are presents and not always explicable. In particular Benton [4] pointed out that the quantification of each of these aspects is often complicated by the combination of significant “individual differences”.

Therefore, an objective assessment is of paramount importance, but it has to solve a tricky question: how is it possible to measure a sound which is clearly perceived by only one or two people whether the others can even heard it?

Furthermore, as clearly stated by Moorhouse et al. [5] the perceived loudness of low frequency sounds increases rapidly with increasing acoustic energy and so low frequency sounds just above the threshold of hearing can be perceived as loud, even uncomfortably loud.

According to Di et al. [6] the A-weighted sound pressure level could not provide a good identification of disturbance in subjective response. Shepad et al. [7] described how LFN effects are less recognized when compared to the noise at low frequencies; they also highlighted the difference in the degree of annoyance caused by exposure to low, medium or high frequency noise at the same A-weighted sound pressure levels. Jabben and Verheijen discussed the possibility that the complaints are caused by a lower insulation provided by walls and façades.

As described, the LFN causes, propagations and effects are not clear and need to be deeply investigated yet. Though, a brief overview is thereby provided taking in to account what literature mentions on these topics.

## 2 Frequency range and thresholds

### 2.1 Low frequency vs. infrasound

There is not a clear and defined identification of the LFN frequency range. Some authors and standards use the frequency range of 10 Hz to 100 Hz [9] - [10], while other refers of a wider range [11]- [13] since sources present different emission trends [14]. In these second range the infrasound are also included; but a clear definition of which are the infrasound is not present, since every paper describe and define its own sort. Nevertheless the IEC standard [15] defines LFN as the frequency below the low limit audible sound (about 16 Hz). However, Watanabe and Moller [16] has reported that a sound down to 1.5 Hz is audible in an acoustic chamber if its level is higher enough.

### 2.2 Hearing thresholds

Benton [4] reported a comparison between the Watanabe and Moller threshold and the ISO 226: 2003 [17] one: as shown in Figure 1, the two trends are very similar.

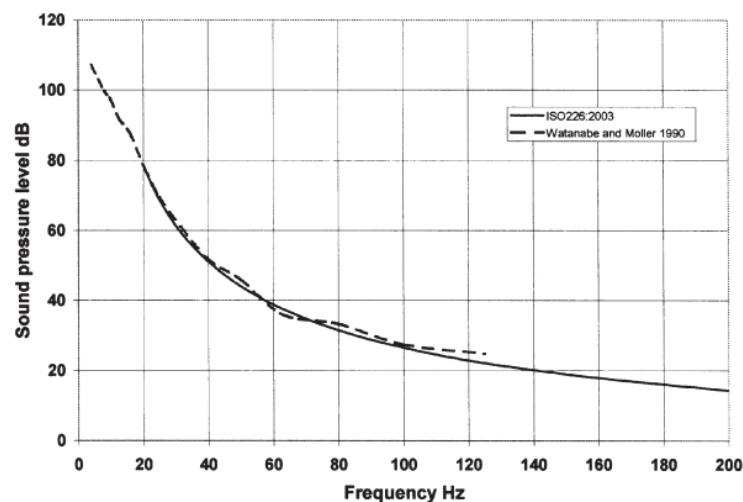


Figure 1 – low frequency thresholds [4]

Though, as Leventhall [18] highlighted, there is no evidence that infrasound are inaudible and there is no limit between these and “sounds”.

Leventhall et. al [19] have explained the effects of aging on hearing sensitivity. The statistics of hearing loss related to the age are contained in ISO 7029 [20] which considers the 125 Hz band as the minimum. The standards highlight how the hearing loss reduces as the frequency get lower and the results summarized in table I [19] show how at low frequency the difference between young and old people is very restricted.

The difference in hearing sensitivity between old and young people is verified just at medium and high frequencies but not in low frequency range. This could be explained by the fact that low frequencies are heard by both chest and hears [1].

Table 1 – low frequency hearing threshold for old and young people [19]

Frequency Hz	Otologically unselected population 50 - 60 years old		Otologically selected young adults (ISO 226:1987)	
	50% Level dB	10% Level dB	50% Level dB	10% Level dB
10	103	92	96	89
12.5	99	88	92	85
16	95	84	88	81
20	85	74	78	71
25	75	64	66	59
31.5	66	55	59	52
40	58	46	51	43
50	51	39	44	36
63	45	33	38	30
80	39	27	32	24
100	34	22	27	19
125	29	18	22	15
160	25	14	18	11
200	22	10	15	7

### 2.3 Hearing vs. annoyance

In previous paragraph a very brief literature overview have been presented. A very important question now has to be asked: is an audible noise disturbing? It is enough to define as annoyance a perceived sound?

Lenventhall [18] explained that the emotions greatly influence the final response. The sensitisation to a noise may enhance the perceived noise causing different effects on people. As Schnupp and Kacelnick reported [21], plasticity is included in brain skills. So a huge exposure to particular frequency stimuli may lead to improved discrimination ability and an expansion of the cortical area response. As a consequence, if people are exposed to low frequency noise, they may develop an aversion to it, causing an enhanced hearing sensitivity.

### 2.4 The use of dB(A)

The single value of A-weighted sound pressure level is sometimes used as annoyance threshold: the WHO guidelines [21] propose a health-based limit for night time exposure inside dwellings; the Italian law [23] provides LAeq limits in order to asses annoyance in day time and night time periods inside and outside buildings, analysing the tonal components at low frequency range (below 100 Hz).

## 3 Frequency assessment methods

The assessment criteria are generally based on the overcoming of a specific threshold.

For traffic noise, Miedema and Oudshoorn [25] connected annoyance with noise, focusing on transportation noise using DNL and DEN values.

---

For noise produced by fixed sources Mirowska [11] reported a robust and detailed method, used as legal requirement in Poland. In this criterion the 1/3 octave band comparison between the background noise and the disturbing noise is requested. Then, the latter one is compared to a given threshold which has not to be exceeded.

Jakobsen [26] focused on the 10 Hz – 160 Hz bandwidth and used a logarithmic summation of these 1/3 octave bands. The measurements must be performed in three different positions and the final value is obtained by averaging the measurements including assessment of vibrations disturbance.

Roberts [27] has used the same Jakobsen's parameters [26] but has considered different thresholds for disco music sources.

Caniato et al. [13] proposed a harmonized method based on the exceeding of a disturbance threshold using very strict measurement guidelines.

Standard DIN 45680:1997 [28] and the following draft [29] describe a first check of the measured noise using a comparison between  $L_{Ceq}$  and  $L_{Aeq}$  parameters. Then a weighting method is applied and the use of an exceeding given threshold is prescribed in order to assess the disturbance.

## 4 Discussion and new proposal

Even if several objective methods exist and in some case their application is required by the law, the measurements are limited in results as they only deal with one part of the disturbing phenomenon.

On the other hand it is necessary to have a comparable, reproducible and international method to assess whether the disturbance is present or not. Without this criterion, even if it handles with average population behaviour and some people may not be included it would not be possible to understand, to assess and consequently to design any of the several low frequency sources needed for our lives.

So, unlike some authors state [18], [19], the need to provide an objective result, for example in lawsuit or complaints, using robust measurement method is a matter of fact. Low frequency disturbance is an issue that should be managed both in environmental and in building acoustics [30], [31], since neighbourhood noise in dwellings is the first cause of argue.

During the years, many scientists proposed different solution and thresholds (see Figure 2) and recently and average of the average (comparable methods) was proposed [13]. This latter method aims at the average of individual behaviour and sensitivity, taken for granted that this is the only way to include as many people as possible.

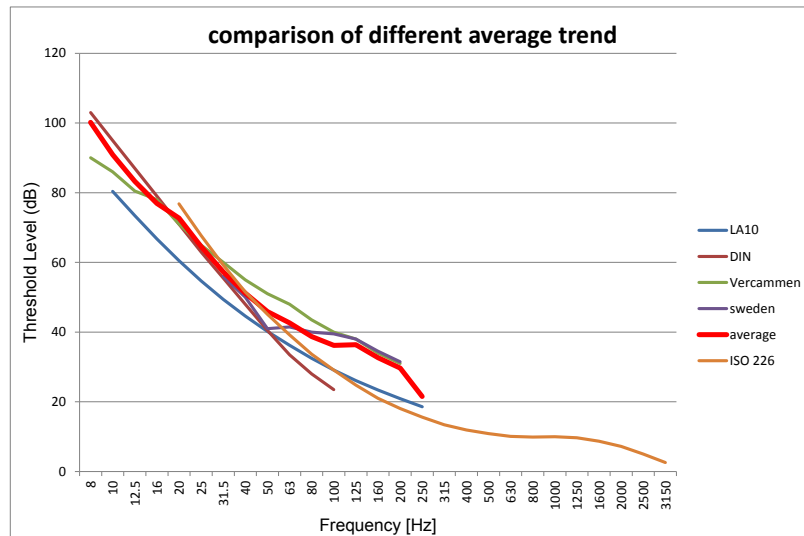


Figure 2 – frequency thresholds [13]

Strickt criteria and guidelines are needed in order to perform reproducible and robust measurements, so a new proposal was developed according to [13]:

1) Noise should be measured both inside the dwelling where the disturbance is higher and at the source. If the source signal is stable enough, then this measurement can be carried out separately. If the 1/3 octave bands trend of the former is comparable with the latter (also a composition of frequencies due to many sources), then this method can be used, according to [32]. The source measurements have to be carried out at a distance of 1 meter from the highest emitting point. If the noise source is composite (industrial plant) then the receiver should be placed in a spot equally distant from the different sources in a normal direction starting from the focal point of the overall surface. If this is not possible (close walls, irregular shape) the instrument needs to be placed closer to the surface, remaining in a perpendicular direction starting from the focal point.

2) The residual noise (source(s) off) should be measured in the same period of the day and week before or after the noise source is used.

3) The residual noise should be compared with the disturbing noise. If the difference (in 1/3 octave band analysis) is higher than 6 dB according to [6], the disturbance can be evaluated using following steps.

4) The measured disturbing noise within the dwellings should be compared with the average threshold. If the former exceeds, the following two different scenarios must be considered:

- a. If it is night time (from 22 to 7 h), if the receivers are children up to the age of 3 or people with serious illnesses (all day long), if the receivers are in hospitals or schools or buildings where silence is needed (all day long), then the excess of the threshold confirms the existence of the disturbance. Night time period (22-7) represents the typical and average sleeping time of children and workers.

- b. If none of the above conditions applies, the excess has to be equal to or higher than 3 dB according to [23] in any 1/3 octave band.

*Measurement guidelines:*

- 1) A minimum of three different 15-minute measurements has to be averaged. If the noise is shorter, then multiple receivers are needed (3 minimum) with at least 1 minute measurement time each. The microphone(s) needs to be 50 cm away from each other. If the noise source(s) is not constant (e.g. concert, short and repeated HVAC cycle etc.) and the related residual noise is shorter than 2 minutes, then the measures have to be post-processed in order to compute only the disturbing noise and to exclude the residual noise. The minimum sampling step should be set to 1 second. The described time ranges are based on the authors' measurement experience related to the development of this study and concern the minimum time lapse within whom the sound event could be considered robust and reliable.
- 2) At the same time an instrument must be placed near the source(s) in order to acquire the frequency trend. If the signal is stable enough, then this measurement can be carried out separately (before or after those in the dwelling).
- 3) No other person except the technician(s) must be present during the measurements. All the external acoustic events are to be taken into account and post-processed to avoid any outer interference.
- 4) All doors and windows must be closed.
- 5) The measurements must be carried out in closed rooms such as dining room, living room, bedroom, etc. No corridors, storerooms, bathrooms smaller than 8 square meters (minimum area for repeatable measurements, taking into account furniture, room shape etc.) should be considered.

*providing results:*

- 1) Report measurement methodology
- 2) Identify irrelevant acoustic events during measurement operation and do not consider them while assessing the disturbance
- 3) Report name, type and certification of the instrumentation
- 4) Describe the source type and report the frequency and trend.
- 5) Attach pictures of the measurements and sources
- 6) Report the 1/3 octave band assessment trend that indicates if and where the presence of a noise disturbance is confirmed
- 7) Propose possible solutions

## 5 Final remarks

Low frequency noise is considered as one of the first issue to be solved worldwide. As a consequence, many researchers have tried to determine objective methods to assess whether a disturbance is present or not.

A brief literature overview was presented concerning the low frequency noise phenomenon, the human hearing and the method to assess the disturbance.

The goal of this paper is to start a discussion and inform stakeholders in the drafting of new standards or legislation, or in the integration of existing legal requirements. A new objective method is proposed, built on robust and scientific criteria that should replace the current widely used procedures and their subjective interpretation.

### References

- [1] Persson, K., Björkman, M., And Rylander, R., Loudness, Annoyance and dBA in Evaluating Low Frequency Sounds, *Journal of Low Frequency Noise And Vibration*, Vol. 9, No. 1, 1990
- [2] Vercaemmen M.L.S., Low-frequency noise limits, *Journal of low frequency noise and vibrations*, 11 (1992), pp. 7-13
- [3] Vercaemmen M.L.S., Setting limits for low frequency noise, *Journal of low frequency noise and vibrations*, 8 (1989), pp. 105-108” if the proceedings are only available in electronic version).
- [4] S. Benton, The Central Role of Interpersonal Conflict in Low Frequency Noise Annoyance, *Journal of Low Frequency Noise, Vibration and Active Control* March 2007 vol. 26 no. 1 1-14.
- [5] Moorhouse A.T., Waddington D.C., Adams M.D., A procedure for the assessment of low frequency noise complaints, *J Acoust Soc Am.* 2009 Sep;126(3):1131-41. doi: 10.1121/1.3180695
- [6] Di, Guo-Qing; Lin, Qi-Li; Zhao, Hang-Hai; Guo, Yan-Jie, Proposed Revision to Emission Limits of Structure-Borne Noise from Fixture Transmitted into Room: An Investigation of People's Annoyance, *Acta Acustica united with Acustica*, Volume 97, Number 6, November/December 2011, pp. 1034-1040(7)
- [7] Adel M. Shehap, Hany A. Shawky, Tarek M. El-Basheer, Study and Assessment of Low Frequency Noise in Occupational Settings, *Archives of Acoustics*. Volume 41, Issue 1, Pages 151–160, ISSN (Online) 2300-262X, DOI: 10.1515/aoa-2016-0015, February 2016
- [8] J. Jabben, E. Verheijen, Options for Assessment and Regulation of Low Frequency Noise, *Journal of Low Frequency Noise Vibration and Active Control* 31(4):225-238 December 2012
- [9] DIN 45680 – Measurement and evaluation of low-frequency noise immissions in the neighbourhood, 1997
- [10] Draft DIN 45680, Measurement and evaluation of low-frequency noise immissions, 2013
- [11] Mirowska M.J., Evaluation of low-frequency noise in dwellings. New Polish Recommendations, *Journal of Low Frequency Noise, Vibration And Active Control*, Vol. 20, No. 2 (2001), pp 69-74
- [12] Jakobsen, J., Danish Guidelines on Environmental Low Frequency Noise, Infrasound and Vibration, *Journal of Low Frequency Noise, Vibration And Active Control*, Vol. 20, No. 3 (2001), pp 141-148
- [13] M. Caniato; F. Bettarello, C. Schmid, P. Fausti, Assessment criterion for indoor noise disturbance in the presence of low frequency sources, Volume 113, 1 December 2016, Pages 22–33, DOI 10.1016/j.apacoust.2016.06.001



- [14]Caniato M., Bettarello F., Taffarel M., Sound power level of speaking people, Proceedings of Meetings on Acoustics, Volume 19, 2013, Article number 040026
- [15]IEC (1994): 60050-801:1994 International Electrotechnical Vocabulary – Chapter 801: Acoustics and electroacoustics.
- [16]Watanabe, T., and Møller, H. (1990): Low frequency hearing thresholds in pressure field and free field. Journal of Low Frequency Noise Vibration and Active Control, Vol. 9, No. 3, 1990, p. 106-115
- [17]ISO 226:2003 Acoustics -- Normal equal-loudness-level contours
- [18]G. Leventhall, Low Frequency Noise. What we know, what we do not know, and what we could like to know, Journal of Low Frequency Noise Vibration and Active Control, Vol. 28 No. 2 2009
- [19]Leventhall. H.G., Benton, S. and Robertson, D. Coping, Strategies for Low Frequency Noise, Journal of Low Frequency Noise Vibration and Active Control, Vol. 27 No. 1 2008
- [20]ISO 7029:2000, Acoustics -- Statistical distribution of hearing thresholds as a function of age
- [21]Schnupp, J. W. H., and Kacelnick, O. Cortical plasticity: Learning from cortical reorganisation. Current Biology 12, 144-146, 2002
- [22]World Health Organisation, (1999), 'Guidelines for Community Noise', World Health Organisation, Geneva
- [23]National Italian Law D.P.C.M. 14-11-97, Determination of the limit values of noise sources, G.U. n. 280, 1-12-97.
- [24]Schnupp, J. W. H., and Kacelnick, O. Cortical plasticity: Learning from cortical reorganisation. Current Biology 12, 144-146, 2002
- [25]Miedema, H.M.E., Oudshoorn, C.G.M., 2001,. Annoyance from transportation noise: relationships with exposure metrics DNL and DENL and their confidence intervals. Environ. Health Perspect. 109, 4 (April)
- [26]Jakobsen, J., Danish Guidelines on Environmental Low Frequency Noise, Infrasound and Vibration, Journal of Low Frequency Noise, Vibration And Active Control, Vol. 20, No. 3 (2001), pp 141-148
- [27]Roberts. C., Ecoaccess guideline for assessment of low frequency noise, " in Proceedings of ACOUSTICS 2004, Gold Coast, Australia, November 2004
- [28]DIN 45680 – Measurement and evaluation of low-frequency noise immissions in the neighbourhood, 1997
- [29]Draft DIN 45680, Measurement and evaluation of low-frequency noise immissions, 2013
- [30]Bettarello F., Fausti P., Baccan V. and Caniato M., "Impact Sound Pressure Level Performances of Basic Beam Floor Structures", Journal of Building Acoustics, Volume 17, No.4, 2010, pp. 305-316, ISSN 1351-010X, DOI 10.1260/1351-010X.17.4.305.
- [31]Caniato M., Bettarello F., Marsich L., Ferluga A., Sbaizero O., Schmid C., Time-depending performance of resilient layers under floating floors, Construction and Building Materials 102, 226-232
- [32] Cocchi A., Fausti P., Piva S., Experimental characterisation on the low frequency noise annoyance arising from industrial plants, Journal of low frequency noise and vibration, vol.11, No. 4, (1992), pp. 124-132