



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Conversion of C6 and C5 sugars in undetoxified wet exploded bagasse hydrolysates using *Scheffersomyces (Pichia) stipitis* CBS6054

Biswas, Rajib; Uellendahl, Hinrich; Ahring, Birgitte Kiær

Published in:
A M B Express

DOI (link to publication from Publisher):
[10.1186/2191-0855-3-42](https://doi.org/10.1186/2191-0855-3-42)

Publication date:
2013

Document Version
Early version, also known as pre-print

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Biswas, R., Uellendahl, H., & Ahring, B. K. (2013). Conversion of C6 and C5 sugars in undetoxified wet exploded bagasse hydrolysates using *Scheffersomyces (Pichia) stipitis* CBS6054. *A M B Express*, 3(42).
<https://doi.org/10.1186/2191-0855-3-42>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

ORIGINAL ARTICLE

Open Access

Conversion of C₆ and C₅ sugars in undetoxified wet exploded bagasse hydrolysates using *Scheffersomyces (Pichia) stipitis* CBS6054

Rajib Biswas^{1,2}, Hinrich Uellendahl¹ and Birgitte K Ahring^{1,2*}

Abstract

Sugarcane bagasse is a potential feedstock for cellulosic ethanol production, rich in both glucan and xylan. This stresses the importance of utilizing both C₆ and C₅ sugars for conversion into ethanol in order to improve the process economics. During processing of the hydrolysate degradation products such as acetate, 5-hydroxymethylfurfural (HMF) and furfural are formed, which are known to inhibit microbial growth at higher concentrations. In the current study, conversion of both glucose and xylose sugars into ethanol in wet exploded bagasse hydrolysates was investigated without detoxification using *Scheffersomyces (Pichia) stipitis* CBS6054, a native xylose utilizing yeast strain. The sugar utilization ratio and ethanol yield (Y_{p/s}) ranged from 88-100% and 0.33-0.41 ± 0.02 g/g, respectively, in all the hydrolysates tested. Hydrolysate after wet explosion at 185°C and 6 bar O₂, composed of mixed sugars (glucose and xylose) and inhibitors such as acetate, HMF and furfural at concentrations of 3.2 ± 0.1, 0.4 and 0.5 g/l, respectively, exhibited highest cell growth rate of 0.079 g/l/h and an ethanol yield of 0.39 ± 0.02 g/g sugar converted. *Scheffersomyces stipitis* exhibited prolonged fermentation time on bagasse hydrolysate after wet explosion at 200°C and 6 bar O₂ where the inhibitors concentration was further increased. Nonetheless, ethanol was produced up to 18.7 ± 1.1 g/l resulting in a yield of 0.38 ± 0.02 g/g after 82 h of fermentation.

Keywords: *Scheffersomyces (Pichia) stipitis*; Cellulosic ethanol; Sugarcane bagasse; Wet explosion pretreatment; Inhibitors; Xylose fermentation

Introduction

In recent years, ethanol production from renewable sources has received increased attention in a world of dwindling fossil fuels reserves along with the environmental concerns. Commercial production of bioethanol is mostly driven by starch- or sucrose-containing feedstocks such as corn, sugarcane, wheat by fermentation with *Saccharomyces cerevisiae* (Wheals et al. 1999). Non-food feedstocks, however, such as lignocellulosic materials including agricultural wastes such as bagasse hold significant potential and have been identified as suitable feedstock sources for ethanol production (Lynd et al. 1991). Lignocellulose based ethanol processes require pretreatment as a first step followed by enzymatic hydrolysis

of carbohydrates (Ahring et al. 1996; Margeot et al. 2009). Unlike the hydrolysis of starch- and sugar-based feedstock that results primarily in hexoses, lignocellulose is composed of cellulose and hemicellulose, resulting in both hexoses (C₆) and pentoses (C₅) sugars (Rubin 2008). An efficient pretreatment strategy along with the fermentation of C₆ and C₅ sugars are keys to bring cellulosic ethanol to commercial reality.

Sugarcane bagasse (SCB), the residual plant material of sugarcane, is one of the most abundant lignocellulosic feedstocks suitable for ethanol production (Cardona et al. 2010; Pandey et al. 2000). In addition, its on-site availability at sugarcane-based ethanol process plants is advantageous for large-scale processing. Currently the bagasse generated after sucrose extraction from sugarcane is incinerated to power the plant operation (Shi et al. 2012). SCB is primarily composed of cellulose (40-45%), hemicelluloses (30-35%) and lignin (20-30%) (Cardona et al. 2010). Cellulose is a D-glucose polymer while hemicellulose

* Correspondence: bka@tricity.wsu.edu

¹Section for Sustainable Biotechnology, Aalborg University Copenhagen, Copenhagen, Denmark

²Center for Bioproducts and Bioenergy, Washington State University, 2710 University Drive, Richland, WA 99354-1671, USA

predominantly consists of D-xylose, a five-carbon sugar (Girio et al. 2010; Jeffries et al. 2007; Skoog and Hahn-Hägerdal 1990). An appropriate pretreatment is essential for efficient enzymatic saccharification (Ahring et al. 1996). Various pretreatment methods have shown the potential to disrupt the cell wall structure of SCB to facilitate the enzymatic hydrolysis of the polysaccharides (Cardona et al. 2010; Martin et al. 2007). Wet explosion is a thermochemical pretreatment method, where biomass is treated at high temperature and pressure. Typically an oxidizing agent such as elemental oxygen or H₂O₂ is added to help disrupt the cell wall structure, and solubilize hemicellulose and lignin. The process is terminated by sudden pressure release to a subsequent flash tank (Ahring and Munck 2006; Rana et al. 2012). In previous studies, the potential of wet explosion pretreatment of bagasse to facilitate saccharification at low enzyme dosage was demonstrated (Biswas et al. unpublished). The oxidative pretreatment strategy was found to improve the cellulose conversion to glucose in the subsequent enzymatic hydrolysis, as well as producing high xylose yields through solubilization of hemicellulose. However, during the processing of hydrolysate for subsequent microbial fermentation, degradation products such as acetate, 5-hydroxymethylfurfural (HMF), furfural will be formed to various degree known to inhibit the microbial growth and product yields at higher concentration (Bellido et al. 2011; Nigam 2001a; Palmqvist and Hahn-Hägerdal 2000).

The importance of utilizing all hydrolyzed sugar monomers into ethanol for improving process economics is self-evident. *Saccharomyces cerevisiae* is the most commonly used yeast for industrial ethanol fermentation, only capable of glucose fermentation. Some naturally occurring yeast such as *Scheffersomyces stipitis*, *Candida shehatae*, and *Pachysolen tannophilus* are able to ferment both hexoses and pentoses to ethanol. Among the xylose fermenting yeasts, *Scheffersomyces stipitis* seems to be the most promising strain for industrial application due to its high ethanol yield. In addition, this organism is able to ferment most of the sugars glucose, xylose, mannose, galactose and cellobiose (Agbogbo and Coward-Kelly 2008). However, previous studies have shown arabinose is only utilized by *S. stipitis* for cell growth but not for ethanol production (Nigam 2001b). Furthermore, *S. stipitis* also has the natural ability to metabolize some of the sugar degradation compounds present in the hydrolysate after pretreatment (Almeida et al. 2008; Wan et al. 2012). The sensitivity of *Scheffersomyces stipitis* to inhibitors found in lignocellulose hydrolysate has been reported elsewhere (Bellido et al. 2011; Delgenes et al. 1996).

Inhibitory compounds, such as acetic acid, HMF and furfural are produced in different concentrations depending on the pretreatment severity and can inhibit the growth of yeast cell and thus lower the yield and productivity of

ethanol fermentation. It was previously reported that prolonged incubation helps to acclimatize *Scheffersomyces stipitis* to these toxic compounds (Delgenes et al. 1996). In the present study, we investigated conversion of both hexose and pentose sugars in the enzymatic hydrolysates of wet exploded sugarcane bagasse without detoxification of the inhibitors to study cell growth and ethanol yields by *S. stipitis* CBS6054. We further compared the cell growth and yields using bagasse xylose hydrolysate containing only xylose with lower concentrations of the inhibitors. The kinetics of cell growth in the hydrolysates compared to synthetic media was also assessed.

Materials and methods

Yeast strain and inoculum preparation

S. stipitis CBS6054 was obtained from the American Type Culture Collection (ATCC) and was preserved at -80°C in the Bioproducts, Sciences and Engineering Laboratory (BSEL), Washington State University (WSU), USA. The organism was cultivated in a media previously described elsewhere (Agbogbo and Wenger 2006, 2007). A mixture of yeast extract, urea, peptone and xylose (YUPX) in the respective proportions of 1.7, 2.27, 6.65 and 20.0 g/l was filter sterilized (0.22 µm) and used as source of nutrient. 250 ml sterilized Erlenmeyer baffled flasks were used and inoculation was done aseptically. The inoculated medium was incubated in a shake incubator (The Lab Companion IS-971 (R/RF) Floor Model Incubated Shaker, GMI Inc., USA) at 30°C and agitation speed of 140 rpm for 48 h. Microaerobic conditions were maintained by using foam plugs on the Erlenmeyer flasks (Identi-Plugs®, Jaece Industries, Inc., NY). *S. stipitis* cells were harvested towards the end of the exponential growth phase by centrifugation at relative centrifugal force (RCF) 3824 × g for 10 minutes. The harvested cells were washed twice and resuspended in sterilized distilled water in the desired cell concentration and served as inoculum.

Wet explosion pretreatment

Wet explosion pretreatment was performed using the WSU pretreatment pilot plant for disrupting the lignocellulosic matrix and fractionating the lignin and hemicellulosic components as previously described (Rana et al. 2012). Sugarcane bagasse was added to the 10 l pretreatment reactor as wet slurry with 16% dry matter concentration, containing 640 g of oven dried bagasse and 3343 g of tap water. The reactor was hermetically closed, 6 bar of O₂ was then purged into the reactor with the headspace of 6 l and the reactor was heated to the desired temperature. Reaction time was 10 minutes at the desired temperature and pressure. Three suitable pretreatment conditions were chosen based on preliminary results on enzymatic hydrolysis of wet exploded bagasse (Table 1). Higher enzyme efficiency and recovery of both glucose and xylose were obtained

under condition B followed by condition C, while condition A was found suitable for especially xylose recovery and formation of inhibitors such as weak acid is minimal. Therefore, condition A was chosen for a control condition to obtain hydrolysate contained mostly xylose.

Preparation of hydrolysate from wet exploded bagasse

Xylose hydrolysate after SSF

A liquid fraction (A_X) containing mostly xylose as fermentable sugar was obtained after simultaneous saccharification and fermentation (SSF) of wet exploded bagasse at condition A (Tables 1 and 2). *Saccharomyces cerevisiae* was used for removing the fermentable glucose for an incubation period of 162 hours. Same enzyme loading of 12.4 mg enzyme protein (EP)/g cellulose at $10.1 \pm 0.1\%$ dry matter was used for the SSF. Since only glucose is utilized by the strain, the remaining liquid fraction after the SSF contained mostly xylose as fermentable sugar. After the fermentation was completed, ethanol produced during SSF was removed by vacuum distillation and the liquid fraction rich in xylose (A_X) was separated for further use.

Hydrolysate with mixed sugars after enzymatic hydrolysis

After pretreatments under condition B and C (Table 1), enzymatic hydrolysis was carried out on the whole wet exploded material (slurry) without any solid–liquid separation. For saccharification, a mixture of the two commercial enzymes Cellic[®] CTec2 and Cellic[®] HTec2 (Novozymes, USA) were used in a ratio of 85:15 (% v/v), respectively, with the enzyme loading of 12.4 enzyme protein (EP)/g cellulose at $10.1 \pm 0.1\%$ dry matter. The enzyme protein (EP) content of Cellic[®] CTec2 and Cellic[®] HTec2 determined prior to enzymatic hydrolysis were 279 ± 8 and 251 ± 12 mg EP/ml, respectively. Enzymatic hydrolysate B_{GX} and C_{GX} were obtained from enzymatic hydrolysis of the pretreated samples under condition B and C, respectively (Table 2). Hydrolysates were always filter sterilized (0.2 μ m, Millipore, USA) prior to inoculation.

Shake flask fermentation Shake flask fermentation was conducted in duplicates with the hydrolysates (Table 2) under same conditions as previously described. Filter sterilized synthetic medium S_{GX} , S_G and S_X were prepared using commercial sugar(s) (Fisher Chemical, USA) contained

glucose + xylose, glucose and xylose, respectively, with the concentration as depicted in Table 2. Erlenmeyer baffled flasks were used with a volume of 50 ml. Adjustment of pH to 6.0 ± 0.5 was performed for hydrolysates with 1 M NaOH whenever this was needed to ensure a pH of at least 6.0. Each flask contained 30 ml of hydrolysate or sugars solution (glucose and/or xylose in DI water), 1 ml of nutrient solution and 1 ml of inoculum (initial cell concentration 1 g/l). Nutrient solution was prepared by dissolving 4.25 g of yeast extract, 5.68 g of urea and 16.40 g of peptone in 23.68 ml of water to reach a volume of 50 ml. All fermentation flasks were supplemented with sufficient carbon sources (i.e., hydrolysate or commercial sugar) and nutrients to produce equivalent amount of cell mass and to exhibit similar growth rates under the favorable conditions ensured. The flasks were incubated for 106 hours except for hydrolysate C_{GX} which was incubated for 174 hours. 2 ml of sample was withdrawn after 0, 6, 12, 24, 36, 48, 58, 82, 106 and 174 hours (in case of hydrolysate C_{GX}) for analysis of sugar and inhibitor concentrations, cell concentration and pH.

Analytical methods Cell concentrations were determined by optical density (OD) measurement of the cells using spectrophotometer (Jenway 6405 UV/Visible, NJ, USA) system at 600 nm (1 OD = 0.17 g/l of dry cells). Glucose, xylose, arabinose, acetic acid, ethanol, HMF and furfural were quantified by HPLC on an Aminex HPX-87H column (Bio-Rad, Hercules, USA) at 60°C with 4 mM H_2SO_4 as an eluent with a flow rate of 0.6 ml/min. HPLC was equipped with refractive index and UV visible detector. All samples were filtered through a 0.45 μ m PTFE membrane (Acrodisc[®] Syringe Filters, 13 mm, Pall[®] Life Sciences, USA) prior to HPLC analysis. The pH was monitored using InLab[®] Micro combination pH electrode (precision ± 0.001 pH).

Results

Effects of inhibitors on sugar utilization and ethanol yields

The main parameters measured for the fermentation by *Scheffersomyces stipitis* CBS6054 on the different hydrolysates and control media are displayed in Table 3. Sugar utilization, ethanol yield, inhibitor concentration, pH and growth kinetics of hydrolysates B_{GX} and C_{GX} are presented in Figures 1 and 2, respectively.

The sugar utilization ratio and ethanol yield ($Y_{p/s}$) ranged from 88–100% and $0.33\text{--}0.41 \pm 0.02$ g/g, respectively, in all the hydrolysates and controls tested. The ethanol yields ($Y_{p/s}$) of hydrolysate A_X , B_{GX} and C_{GX} were 0.41 ± 0.02 , 0.39 ± 0.02 and 0.38 ± 0.02 g/g, respectively. Ethanol yields were higher when using hydrolysates after pretreatment than control substrates, i.e., commercial sugars (Table 3).

Table 1 Wet explosion pretreatment conditions applied on sugarcane bagasse with a treatment time of 10 minutes

Pretreatment	Temperature, °C	O ₂ used (bar)	pH		Dry matter,%	
			Initial	Final	Initial	Final
A	170	6	5.85	3.12	16.0	15.5
B	185	6	5.85	3.05	16.0	16.2
C	200	6	5.85	2.93	16.0	14.0

Table 2 Composition (g/l) of the substrates used for fermentation by *Scheffersomyces (Pichia) stipitis*

Substrate	Initial sugar concentration		Initial inhibitor concentration		
	Glucose	Xylose	Acetic acid	HMF	Furfural
A _X ^a	0.0	14.7 ± 0.0	1.0 ± 0.0	1.2 ± 0.0	0.4 ± 0.0
B _{GX} ^b	17.3 ± 0.5	9.6 ± 0.2	3.2 ± 0.1	0.4 ± 0.0	0.5 ± 0.0
C _{GX} ^c	42.8 ± 0.8	6.3 ± 0.0	6.9 ± 0.1	1.2 ± 0.0	0.8 ± 0.0
S _{GX} ^d	6.1 ± 0.0	15.2 ± 0.0	0.0	0.0	0.0
S _G ^d	27.2 ± 0.5	0.0	0.0	0.0	0.0
S _X ^d	0.0	25.6 ± 0.4	0.0	0.0	0.0

^a hydrolysate after pretreatment at condition A and the simultaneous saccharification and fermentation (SSF) using *Saccharomyces cerevisiae*.

^b hydrolysate after pretreatment at condition B and enzymatic hydrolysis.

^c hydrolysate after pretreatment at condition C and enzymatic hydrolysis.

^d respective commercial sugar (granular powder) was used as control substrate, Fisher Chemical, USA.

The fermentation of xylose alone, after pretreatment at condition A (170°C, 6 bar O₂) and SSF, took 58 h to convert 100% sugar (Table 3), which is longer than that of mixed sugars in the hydrolysate B_{GX} after pretreatment condition B (185°C, 6 bar O₂), which took 36 h (Figure 1A). Both glucose and xylose were converted for the hydrolysates B_{GX} and C_{GX} obtained after the pretreatment and enzymatic hydrolysis of SCB, containing inhibitors in comparatively higher concentrations among others. Fermentation of enzymatic hydrolysate C_{GX} after pretreatment at condition C (200°C, 6 bar O₂) resulted in a prolonged fermentation time of 82 h with initial lag phase of 12 h (Figure 2A). The delay in sugar conversion is likely due to the presence of inhibitors such as acetate, HMF and furfural at the concentrations of 6.9 ± 0.1, 1.2 and 0.8 g/l, respectively. Nonetheless, ethanol concentration was found to be 18.7 ± 1.1 g/l after 82 h of incubation. While *S. stipitis* adapted to the inhibitors, the fermentation was completed with an ethanol yield of 0.38 ± 0.02 g/g at 82 h. Although the utilization of sugars was limited to 88% within this time, sugar conversion was found to be 95% after 174 h of fermentation.

Taking into consideration that no detoxification was performed except the adjustment of pH with NaOH to

6.0 ± 0.5, it was found that the fermentation was only inhibited in bagasse hydrolysate C_{GX} after pretreatment at condition C (200°C, 6 bar O₂). Acetic acid was converted in all fermentation experiments especially with hydrolysate B_{GX} and C_{GX} resulting an increase in pH (Agbogbo and Wenger 2007). After 82 h of fermentation, 100% acetic acid was metabolized in hydrolysate B_{GX} (Figure 1B). Hence, for the hydrolysate C_{GX}, it took 174 h to bring the acetic acid concentration to 1.3 g/l from 6.9 ± 0.1 g/l (Figure 2B). Moreover, both HMF and furfural were utilized by *S. stipitis* CBS6054 within the first 12 hours of fermentation for hydrolysate B_{GX} and C_{GX}.

Effects of inhibitors on cell growth

When comparing the growth kinetics of *Scheffersomyces stipitis* CBS6054 in Figures 1C and 2C, the initial cell concentration of 1 g/l increased for all hydrolysates and grew to various final cell concentrations on the different hydrolysate medium. The highest amount of cell mass (g/l) produced in mixed sugars hydrolysate B_{GX} after 106 h of incubation was 4.02 ± 0.02, while 3.34 ± 0.02 and 3.52 ± 0.09 in hydrolysate A_X and hydrolysate C_{GX}, respectively (Table 3).

Cell mass production was higher in all hydrolysates than found in synthetic medium (S_{GX}, S_G and S_X). Exponential growth was observed for hydrolysate A_X and B_{GX} (Figure 1C) during the initial 48 h without any noticeable lag phase. Cell mass in hydrolysate A_X and B_{GX} after 48 h were measured to 2.81 and 3.52 g/l, respectively. On the other hand, no cell growth was observed in hydrolysate C_{GX} within the first 12 h (Figure 2C).

The highest cell growth rate of 0.079 g/l/h was found in hydrolysate B_{GX} followed by 0.064 g/l/h in synthetic media S_G (Table 3). Acetic acid concentrations in the hydrolysates A_X, B_{GX} and C_{GX} were 1.0 ± 0.0, 3.2 ± 0.1 and 6.9 ± 0.1 g/l, respectively (Table 2).



Discussion

To realize the industrial ethanol production from hydrolysis of pretreated lignocellulose, it is essential to obtain strains capable of converting all the major sugars as well as

Table 3 Summaries of fermentation results at highest ethanol concentration time points using *Scheffersomyces (Pichia) stipitis*

Substrate	Fermentation time, (f)h	Ethanol, g/l	Sugar utilized, %	Y _{p/s} [*] , g/g	Cell growth rate, g/l/h	Cell mass, g/l at (f)h	g/l at 106 h	pH at (f)h
A _X	58	6.1 ± 0.0	100 ± 0.0	0.41 ± 0.02	0.043	2.81 ± 0.02	3.34 ± 0.02	5.5 ± 0.0
B _{GX}	36	10.4 ± 0.2	100 ± 0.0	0.39 ± 0.02	0.079	3.31 ± 0.00	4.02 ± 0.02	6.7 ± 0.0
C _{GX}	82	18.7 ± 1.1	88 ± 0.0	0.38 ± 0.02	0.049	3.16 ± 0.00	3.52 ± 0.09	6.2 ± 0.0
S _{GX}	76	8.2 ± 0.0	100 ± 0.0	0.39 ± 0.00	0.045	2.48 ± 0.00	2.69 ± 0.00	6.6 ± 0.0
S _G	36	10.1 ± 0.1	99 ± 0.8	0.37 ± 0.00	0.064	2.33 ± 0.05	2.72 ± 0.04	6.0 ± 0.3
S _X	82	8.5 ± 0.2	100 ± 0.0	0.33 ± 0.01	0.051	2.81 ± 0.03	2.94 ± 0.05	5.3 ± 0.1

* Y_{p/s} = ethanol yield coefficient, was calculated as the grams of ethanol produced per grams of sugar converted.

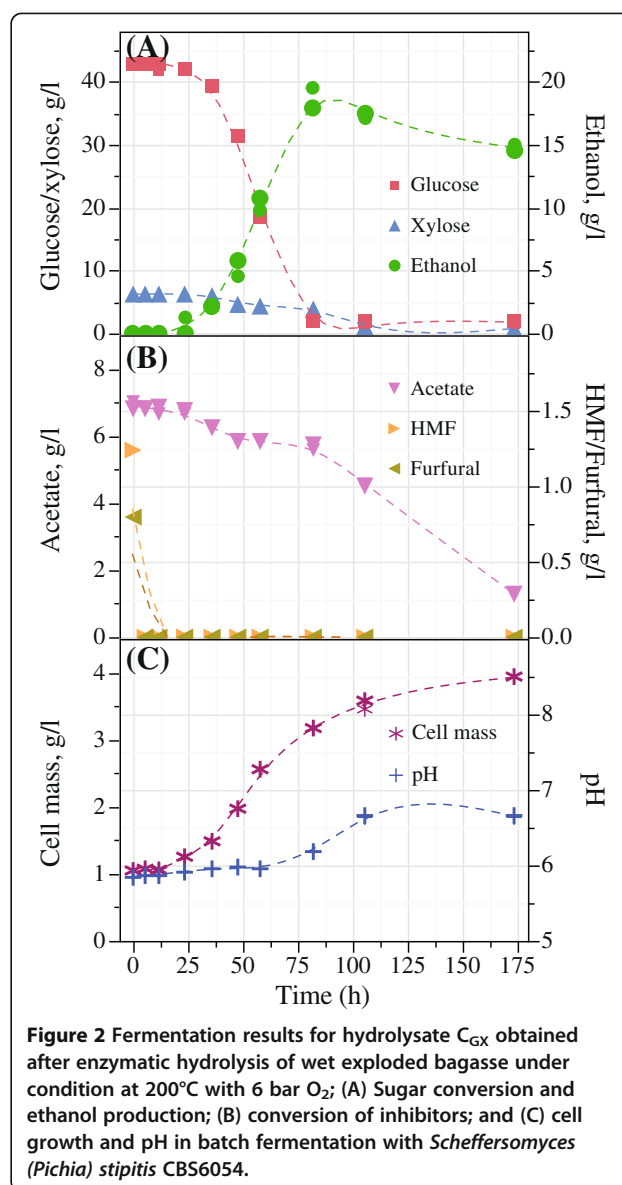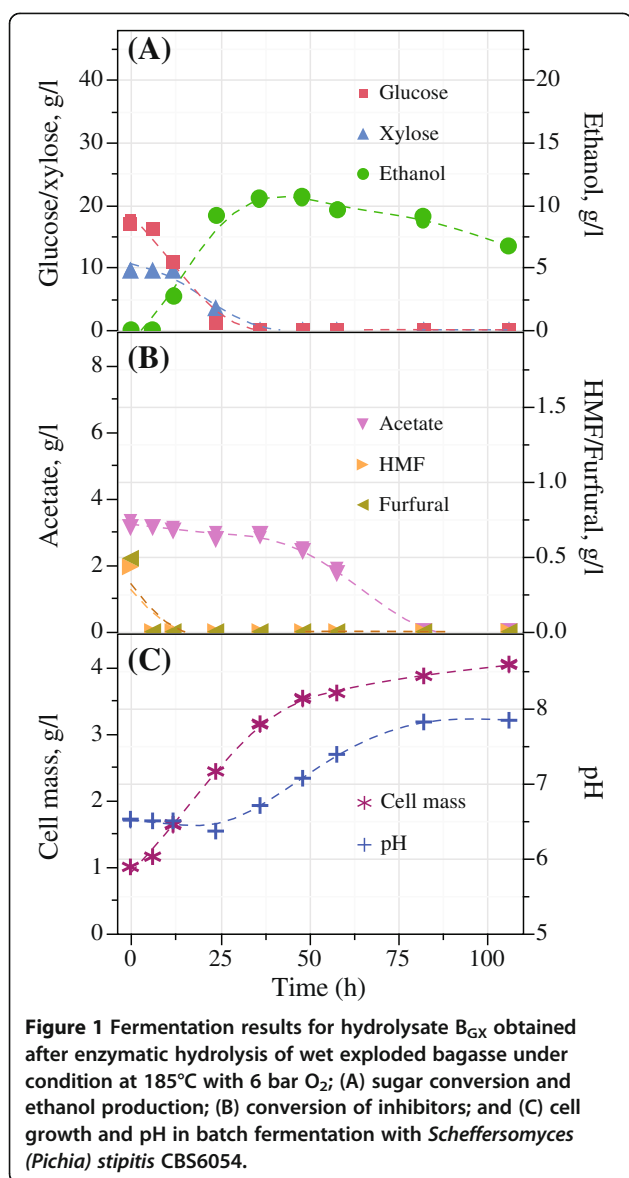

being able to cope with the inhibitors present as sugar degradation product in the hydrolysate. Our present work demonstrates that the native strain *Scheffersomyces (Pichia) stipitis* CBS6054 is suitable for ethanol fermentation of both glucose and xylose present in hydrolysates of wet exploded bagasse without the need for detoxification, achieving substantial ethanol yields. The ethanol yield from xylose in the hydrolysate after pretreatment at 170°C with 6 bar O_2 and SSF was 0.41 ± 0.02 g/g while a yield of 0.39 ± 0.02 g/g was achieved for the fermentation of glucose and xylose in the hydrolysate after pretreatment at 185°C with 6 bar O_2 and enzymatic hydrolysis of wet exploded bagasse. The yields are in agreement with the results found in corn stover hemicellulose hydrolysate with similar inhibitor concentrations using *Scheffersomyces (Pichia) stipitis* CBS6054 (Agbogbo and Wenger 2007). Our results are comparable

to those observed with adapted *S. stipitis* strains (Nigam 2001a,b). The utilization of glucose was more rapid than for xylose in the different hydrolysates. This similar observation in assimilation of sugars has been reported elsewhere (Agbogbo and Wenger 2007; Bellido et al. 2011; Nigam 2001a). In the presence of both glucose and xylose (B_{GX} , C_{GX}), conversion of glucose started prior to xylose conversion. In mixed substrate fermentation, significant xylose utilization is initiated by *Scheffersomyces (Pichia) stipites* once glucose concentration in the medium is below 20 g/l (Agbogbo et al. 2006).

Conversion of glucose and xylose was not completely inhibited for the hydrolysates B_{GX} and C_{GX} in the presence of known inhibitors such as acetate, HMF and furfural. Our study shows that the favorable growth condition for cell mass production is likely due to the mixed sugars, where

glucose is converted more readily than xylose. Our results compare favorably with previous reports on fermentation of sugarcane bagasse hydrolysate (Rudolf et al. 2008). In contrast, Bellido et al. (2011) found that xylose was not utilized in 168 h of fermentation experiments using *Scheffersomyces (Pichia) stipitis* DSM3651 on filtered hydrolysate of steam exploded wheat straw using the whole slurry with acetate, HMF and furfural concentrations at 1.52, 0.05 and 0.14 g/l, respectively. Acetic acid is released from the esterified form of arabinoxylans during the processing of lignocellulose hydrolysate. The cleavage of the acetyl group occurs when lignocellulose undergoes high temperature, oxidation treatment and even in enzymatic hydrolysis process we further see a liberation of acetic acid. Previous studies showed the yeast cell growth is inhibited at an acetic acid concentration of about 2–5 g/l (Bellido et al. 2011; Nigam 2001a). Acetic acid is a weak acid having high pKa value of 4.75 (25°C) at zero ionic strength. pKa value refers to the pH value at which buffering capacity of the acid is highest and the concentration of dissociated and undissociated form of the acid are equal (Palmqvist and Hahn-Hägerdal 2000). The risk of inhibition due to liposoluble diffusion of undissociated weak acid across the plasma membrane can be reduced by increasing the pH (Palmqvist and Hahn-Hägerdal 2000). Therefore, favorable pH for the fermentation of the hydrolysates containing acetic acid will be between 5.5 and 6.5. Our study suggests that acetic acid can be utilized by *S. stipitis* as a substrate at a lower concentration that may not be inhibitory for cell growth at starting pH between 6.0 and 6.5. A similar observation of acetic acid conversion by *Scheffersomyces (Pichia) stipitis* was also reported (Agbogbo and Wenger 2007) during fermentation of corn stover hydrolysate. The product formed from acetic acid metabolism by *S. stipitis* CBS6054 is unknown. HMF and furfural are produced during the processing of hydrolysate, by degradation of hexose and pentose sugars, respectively. Apparently, the tested concentration levels of HMF and furfural were not affecting the fermentation and growth of *S. stipitis* CBS6054. Yeasts including *S. stipitis* can metabolize furfural to furfuryl alcohol and the enzyme NADH- dependent yeast alcohol dehydrogenase (ADH) is responsible for the reduction (Huang et al. 2009). In the present investigation, HMF and furfural were completely metabolized by the strain before significant utilization of sugars started. This was also previously reported by others (Almeida et al. 2008; Wan et al. 2012) and indicates that *S. stipitis* CBS6054 is readily capable of converting HMF and furfural in the tested lignocellulose hydrolysate from sugarcane bagasse. Cell growth was highest (0.079 g/l/h) in hydrolysate containing mixed sugars and inhibitors such as acetate, HMF and furfural at concentrations of 3.2 ± 0.1 , 0.4 and 0.5 g/l, respectively, indicating that the processing of bagasse

hydrolysate under this condition will not inhibit the growth of *S. stipitis*.

A lag phase of 12 hours is observed in the fermentation of C_{GX} hydrolysate. This lag phase is possibly due to a higher concentration of inhibitor in hydrolysate C_{GX} such as acetate (6.9 ± 0.1 g/l), HMF (1.2 g/l) and furfural (0.8 g/l). Similar observation was also reported by others (Agbogbo and Wenger 2007; Sreenath and Jeffries 2000). Although *S. stipitis* exhibited prolonged fermentation time for the hydrolysate processed at 200°C with 6 bar O₂ containing the inhibitors at higher concentration, ethanol concentration up to 18.7 ± 1.1 g/l was obtained with an ethanol yield of 0.38 ± 0.02 g/g after 82 h. However, after adaptation to the hydrolysate C_{GX} within 12 h, exponential growth was observed. The performance was significantly improved shortly after 12 h of incubation. This lag phase can be overcome in a continuous process using initial high cell density and also by recycling the cells adapted to the inhibitors (Bellido et al. 2011).

Competing interests

The authors declare that they have no competing interests.

Acknowledgment

The authors would like to express gratitude to the Strategic Research Council for support to the Biorefinery project which has funded this work. We further thank Jens Iversen for technical input for the fermentation.

Received: 6 May 2013 Accepted: 20 July 2013

Published: 29 July 2013

References

- Agbogbo F, Coward-Kelly G (2008) Cellulosic ethanol production using the naturally occurring xylose-fermenting yeast, *Pichia stipitis*. *Biotechnol Lett* 30:1515–1524
- Agbogbo F, Wenger K (2006) Effect of pretreatment chemicals on xylose fermentation by *Pichia stipitis*. *Biotechnol Lett* 28:2065–2069
- Agbogbo F, Wenger K (2007) Production of ethanol from corn stover hemicellulose hydrolyzate using *Pichia stipitis*. *J Ind Microbiol Biot* 34:723–727
- Agbogbo FK, Coward-Kelly G, Torry-Smith M, Wenger KS (2006) Fermentation of glucose/xylose mixtures using *Pichia stipitis*. *Process Biochem* 41:2333–2336
- Ahring B, Munck J (2006) Method for treating biomass and organic waste with the purpose of generating desired biologically based products. Patent. WO 2006/032282 A1
- Ahring B, Jensen K, Nielsen P, Bjerre A, Schmidt A (1996) Pretreatment of wheat straw and conversion of xylose and xylan to ethanol by thermophilic anaerobic bacteria. *Bioresource Technol* 58:107–113
- Almeida J, Modig T, Röder A, Lidén G, Gorwa-Grauslund M (2008) *Pichia stipitis* xylose reductase helps detoxifying lignocellulosic hydrolysate by reducing 5-hydroxymethyl-furfural (HMF). *Biotechnol Biofuels* 1:12
- Bellido C, Bolado S, Coca M, Lucas S, González-Benito G, García-Cubero MT (2011) Effect of inhibitors formed during wheat straw pretreatment on ethanol fermentation by *Pichia stipitis*. *Bioresource Technol* 102:10,868–10,874
- Cardona C, Quintero J, Paz I (2010) Production of bioethanol from sugarcane bagasse: status and perspectives. *Bioresource Technol* 101:4754–4766
- Delgenes J, Moletta R, Navarro J (1996) Effects of lignocellulose degradation products on ethanol fermentations of glucose and xylose by *Saccharomyces cerevisiae*, *Zymomonas mobilis*, *Pichia stipitis*, and *Candida shehatae*. *Enzyme Microb Tech* 19:220–225
- Girio F, Fonseca C, Carvalheiro F, Duarte L, Marques S, Bogel-Lukasik R (2010) Hemicelluloses for fuel ethanol: a review. *Bioresource Technol* 101:4775–4800
- Huang C, Lin T, Guo G, Hwang W (2009) Enhanced ethanol production by fermentation of rice straw hydrolysate without detoxification using a newly adapted strain of *pichia stipitis*. *Bioresource Technol* 100:3914–3920

- Jeffries T, Grigoriev I, Grimwood J, Laplaza J, Aerts A, Salamov A, Schmutz J, Lindquist E, Dehal P, Shapiro H, Jin Y, Passoth V, Richardson P (2007) Genome sequence of the lignocellulose-bioconverting and xylose-fermenting yeast *Pichia stipitis*. *Nat Biotechnol* 25:319–326
- Lynd L, Cushman J, Nichols R, Wyman C (1991) Fuel ethanol from cellulosic biomass. *Science* 251:1318–1323
- Margeot A, Hahn-Hägerdal B, Edlund M, Slade R, Monot F (2009) New improvements for lignocellulosic ethanol. *Curr Opin Biotech* 20:372–380
- Martin C, Klinke H, Thomsen A (2007) Wet oxidation as a pretreatment method for enhancing the enzymatic convertibility of sugarcane bagasse. *Enzyme Microb Tech* 40:426–432
- Nigam J (2001a) Ethanol production from hardwood spent sulfite liquor using an adapted strain of *Pichia stipitis*. *J Ind Microbiol Biot* 26:145–150
- Nigam J (2001b) Ethanol production from wheat straw hemicellulose hydrolysate by *Pichia stipitis*. *J Biotechnol* 87:17–27
- Palmqvist E, Hahn-Hägerdal B (2000) Fermentation of lignocellulosic hydrolysates. II: inhibitors and mechanisms of inhibition. *Bioresource Technol* 74:25–33
- Pandey A, Soccol C, Nigam P, Soccol V (2000) Biotechnological potential of agro-industrial residues. I: sugarcane bagasse. *Bioresource Technol* 74:69–80
- Rana D, Rana V, Ahiring BK (2012) Producing high sugar concentrations from loblolly pine using wet explosion pretreatment. *Bioresource Technol* 121:61–67
- Rubin E (2008) Genomics of cellulosic biofuels. *Nature* 454:841–845
- Rudolf A, Baudel H, Zacchi G, Hahn-Hägerdal B, Lidén G (2008) Simultaneous saccharification and fermentation of steam-pretreated bagasse using *Saccharomyces cerevisiae* TMB3400 and *Pichia stipitis* CBS6054. *Biotechnol Bioeng* 99:783–790
- Shi J, Yang Q, Lin L, Zhuang J, Pang C, Xie T, Liu Y (2012) The structural changes of the bagasse hemicelluloses during the cooking process involving active oxygen and solid alkali. *Carbohydr Res* 359:65–69
- Skoog K, Hahn-Hägerdal B (1990) Effect of oxygenation on xylose fermentation by *Pichia stipitis*. *Appl Environ Microb* 56:3389–3394
- Sreenath H, Jeffries T (2000) Production of ethanol from wood hydrolyzate by yeasts. *Bioresource Technol* 72:253–260
- Wan P, Zhai D, Wang Z, Yang X, Tian S (2012) Ethanol Production from Nondetoxified Dilute-Acid Lignocellulosic Hydrolysate by Cocultures of *Saccharomyces cerevisiae* Y5 and *Pichia stipitis* CBS6054. *Biotechnol Res Int*:1–6
- Wheals A, Basso L, Alves D, Amorim H (1999) Fuel ethanol after 25 years. *Trends Biotechnol* 17:482–487

doi:10.1186/2191-0855-3-42

Cite this article as: Biswas et al.: Conversion of C₆ and C₅ sugars in undetoxified wet exploded bagasse hydrolysates using *Scheffersomyces (Pichia) stipitis* CBS6054. *AMB Express* 2013 3:42.

Submit your manuscript to a SpringerOpen[®] journal and benefit from:

- Convenient online submission
- Rigorous peer review
- Immediate publication on acceptance
- Open access: articles freely available online
- High visibility within the field
- Retaining the copyright to your article

Submit your next manuscript at ► springeropen.com