

Biohydrogen production through dark fermentation from waste biomass: Current status and future perspectives on biorefinery development

Tinku Casper D' Silva^{a,1,*}, Sameer Ahmad Khan^{a,1}, Subodh Kumar^a, Dushyant Kumar^a, Adya Isha^a, Saptashish Deb^a, Saurabh Yadav^a, Biju Illathukandy^{a,b}, Ram Chandra^a, Virendra Kumar Vijay^a, Paruchuri M.V. Subbarao^c, Zoltán Bagi^d, Kornél L. Kovács^d, Liang Yu^e, Bhushan P. Gandhi^f, Kirk T. Semple^f

^a Biogas Production, Enrichment and Bottling Laboratory, Centre for Rural Development and Technology, Indian Institute of Technology Delhi, Hauz Khas, New Delhi 110 016, India

^b Department of Mechanical Engineering, Government Engineering College, Kozhikode 673 005, Kerala, India

^c Department of Mechanical Engineering, Indian Institute of Technology Delhi, Hauz Khas, New Delhi 110 016, India

^d Department of Biotechnology, Department of Oral Biology and Experimental Dentistry, University of Szeged, Hungary

^e Department of Biological Systems Engineering, Washington State University, Pullman, WA 99164, USA

^f Lancaster Environment Centre, Library Avenue, Lancaster University, Lancaster LA1 4YQ, UK

ARTICLE INFO

Keywords:

Biohydrogen production
Biorefinery concept
Dark fermentation
Biohydrogen purification
Biohydrogen storage

ABSTRACT

Green and clean hydrogen production has become a significant focus in recent years to achieve sustainable renewable energy fuel needs. Biohydrogen production through the dark fermentation (DF) process from organic wastes is advantageous with its environmentally friendly, energy-efficient, and cost-effective characteristics. This article elucidates the viability of transforming the DF process into a biorefinery system. Operational pH, temperature, feeding rate, inoculum-to-substrate ratio, and hydrogen partial pressure and its liquid-to-gas mass transfer rate are the factors that govern the performance of the DF process. Sufficient research has been made that can lead to upscaling the DF process into an industrial-scale technology. However, the DF process cannot be upscaled at the current technology readiness level as a stand-alone technology. Hence, it requires a downstream process (preferably anaerobic digestion) to improve energy recovery efficiency and economic viability. The article also discusses the possible hydrogen purification and storage techniques for achieving fuel quality and easy accessibility. The article further tries to unfold the opportunities, challenges, and current scenario/future research directions to enhance hydrogen yield and microbial metabolism, depicting the commercialization status for biorefinery development. Finally, the current progress gaps and policy-level loopholes from the Indian perspective are highlighted by analyzing the strengths, weaknesses, opportunities, and threats.

1. Introduction

Based on the United Nations' 7th and 13th sustainable development goals of "affordable and clean energy and climate action," most nations

are targeting towards adopting renewable energy production to fulfill the energy demand. Hydrogen is the cleanest fuel available on earth, with no environmental harm. It possesses the highest energy content (~120–145 MJ/kg) [1] and can be produced through different routes

Abbreviations: AD, Anaerobic digestion; ASBR, Anaerobic sequencing batch reactor; C/N ratio, Carbon-to-nitrogen ratio; CDC, Carbide-derived carbon; COD, Chemical oxygen demand; COF, Covalent organic frameworks; CSABR, Continuous stirred anaerobic bioreactor; CSTR, Continuous stirred tank reactor; CW, Cardboard waste; DF, Dark fermentation; DOE, Department of Energy; FW, Food waste; HRT, Hydraulic retention time; ISR, Inoculum-to-substrate ratio; LCA, Life cycle analysis; LH₂, Liquid hydrogen; LOHC, Liquid organic hydrogen carriers; MOF, Metal-organic frameworks; NADH, Nicotinamide adenine dinucleotide + hydrogen; NFOR, Nicotinamide adenine dinucleotide + hydrogen: ferredoxin oxidoreductase; OFMSWs, Organic fraction of municipal solid wastes; P2M, Power to methane; PHAs, Polyhydroxyalkanoates; PSA, Pressure swing adsorption; SOFC, Solid oxide fuel cells; SWOT, Strengths, weaknesses, opportunities, and threats; TEA, Techno-economic analysis; TPD, tonnes per day; TS, Total solids; TSA, Temperature swing adsorption; VS, Volatile solids.

* Corresponding author.

E-mail addresses: casperdsilva23@gmail.com, Tinku.Casper.Dsilva@rdat.iitd.ac.in (T.C. D' Silva).

¹ Tinku C. D' Silva and Sameer A. Khan have equal contributions

<https://doi.org/10.1016/j.fuel.2023.128842>

Received 24 July 2022; Received in revised form 15 March 2023; Accepted 28 May 2023

0016-2361/© 2023 Elsevier Ltd. All rights reserved.

(Fig. 1a). By 2050, the global hydrogen market is expected to reach up to \$1.6 trillion [2,3]. Based on the methods used for production, hydrogen is classified into different categories as described through the colour codes (Fig. 1b) [4–7]. Biohydrogen production from organic waste biomass has more prospects in terms of economic viability and environmental sustainability [8–10]. Among them, the DF process is more advantageous with no photosynthetic reactions involved and can be applied in a simple reactor design. Additionally, the DF process can potentially yield maximal biohydrogen yield with lower input energy [11,12].

Despite having all the positive attributes, the development of the DF process is still limited to laboratory and pilot-scale studies [13]. There are still engineering gaps between the laboratory-scale upscaling of the DF technology to an industrial full-scale biorefinery system. Various studies have intensively discussed the concept of the DF process and the basics involved [12–17]. Review articles that dealt with comprehensive information on the different hydrogen production, upgradation, and storage techniques have also been published. However, those studies

possess limited knowledge of biohydrogen production through DF, its upgradation, and storage for biorefinery development [18,19]. This article tries to comprehensively review the topics of biohydrogen production, upgradation, and storage as an integrated biorefinery system. Initially, the basic principles and governing factors of DF are discussed, followed by the methods to improve the quality of biohydrogen produced for fuel applications through various biohydrogen purification and storage techniques. Finally, multiple aspects pertaining to developing a biorefinery concept, techno economics, environmental sustainability, recent advances, future research directions, and policy interventions in context with the Indian scenario are also discussed.

2. Literature review methodology

Research on biohydrogen production through DF has been picking up its pace substantially. The Scopus data was first assessed for writing this review article, which was retrieved from the database using the keywords DF, biohydrogen production, two-stage anaerobic digestion

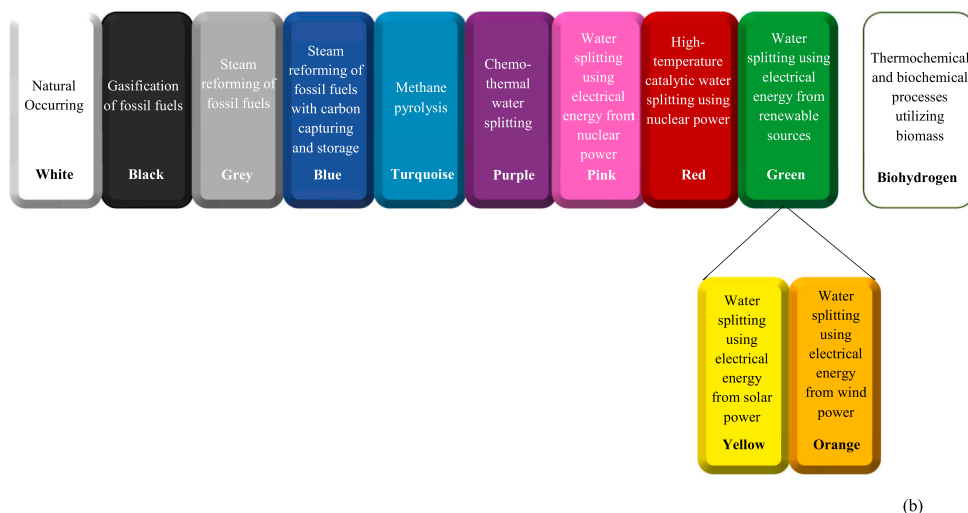
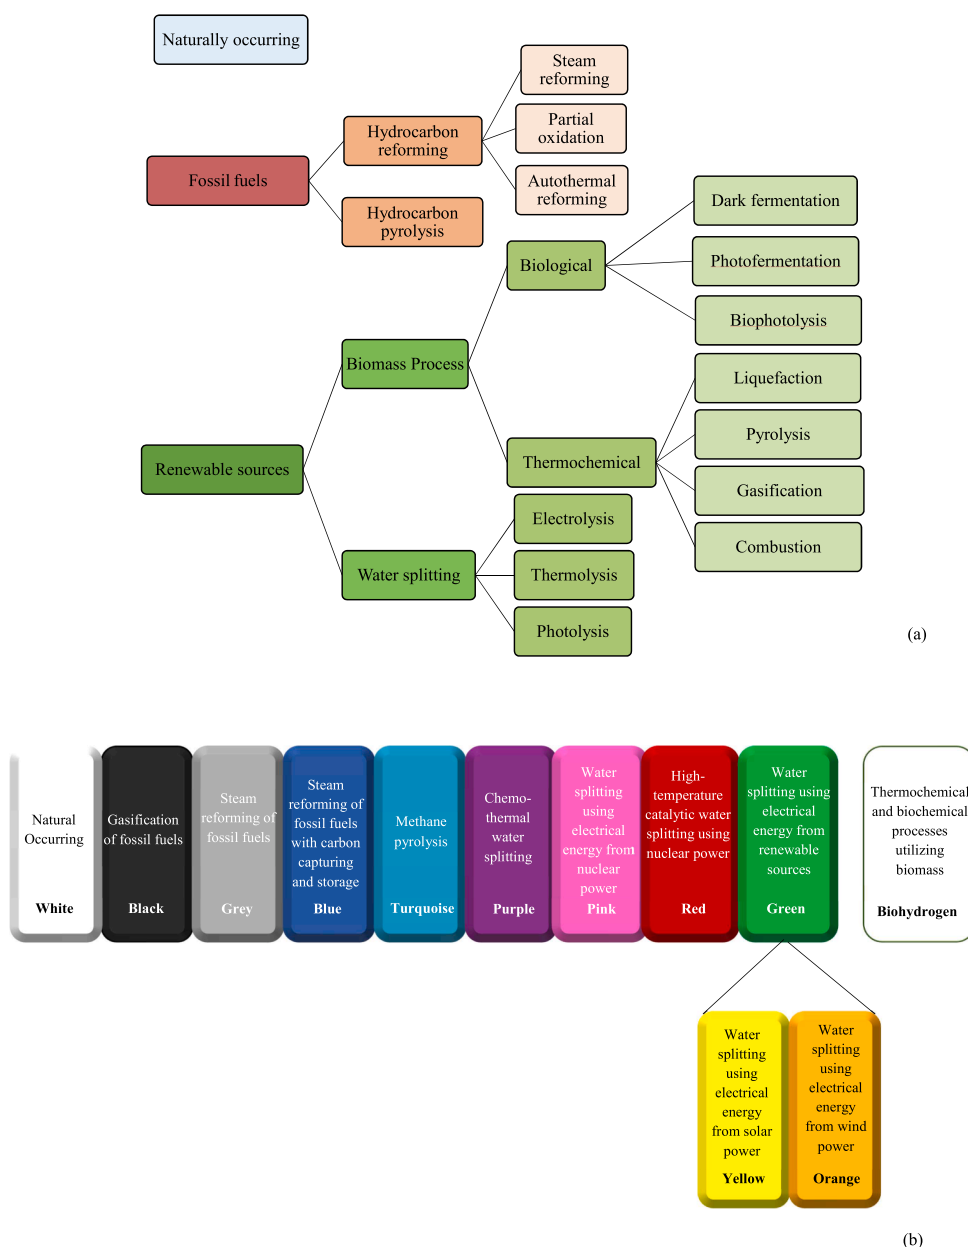


Fig. 1. (a, b). Available hydrogen production methods [1] (a) and colour classification (b).

(AD), biohydrogen upgradation/purification, storage, and biohydrogen biorefinery concept. As shown in Fig. 2a, Scopus data revealed more than 3,100 publications, including research/review articles, books, book chapters, conference proceedings, dissertation thesis, web information, etc. About 252 publications were shortlisted for further reviewing according to the list's relevance, year, and content details (Fig. 2b). The publication years of the shortlisted articles were 2018 to 2022 (39%), 2013 to 2017 (29%), 2008 to 2012 (18%), 2003 to 2007 (10%) and older than the year 2002 (4%). A significant proportion of literature published in the last decade reflects the importance of reviewing these articles and consolidating the findings from these studies.

3. Dark fermentation process

3.1. Principle and general concept

It is well understood that anaerobic fermentation of organic substrates, using specific microbes for biohydrogen production, is called dark fermentation. A wide range of organic substrates rich in carbohydrates, proteins, lipids, and cellulose/hemicellulose contents are used for producing biohydrogen through DF [20,21]. Fig. 3 depicts these pathways involved in biohydrogen production from glucose. Biohydrogen production depends on the essential enzymes, hydrogenases. It is to be noted that the nitrogenase enzyme complex also displays hydrogenase activity [22,23]. The hydrogenase enzymes catalyze the hydrogen molecules into protons and electrons. The hydrogenase enzymes are classified into three groups: (a) [Ni-Fe]-hydrogenase, (b) [Fe-Fe]-hydrogenase, and (c) [Fe]-hydrogenase [24].










These enzymes take part in two major pathways of DF. First is the acetate pathway that theoretically yields around 4 mol of H₂ per mol of glucose. Second, the butyrate pathway produces 2 mol of H₂ per mol of glucose [12,25–27]. At the initial stages of the DF process, nicotinamide adenine dinucleotide + hydrogen (NADH) is formed by the oxidation of the organic substrates into pyruvate. It may be utilized by microbial species having NADH: ferredoxin oxidoreductase (NFOR), producing reduced ferredoxin [15,28,29]. Later, pyruvate is converted into acetyl-CoA and formate by pyruvate formate lyase or acetyl-CoA and reduced ferredoxin via pyruvate-ferredoxin oxidoreductase (PFOR), producing H₂ [30,31].

In the process of glucose glycolysis, excess production of NADH would be occurred because of limited electron transport chain in fermentative bacteria. Usually, NADH/NAD⁺ ratio is sufficiently maintained through oxidation of NADH and H⁺ into NAD⁺ during acidogenesis stage. The inadequate oxidation of NADH results in surplus NADH, and H⁺. The fermentative bacteria attempts to oxidize the excess NADH producing hydrogen to maintain regular metabolism [32]. Other than that, during acetogenesis, acidogenic bacteria (e.g., *Syntrophomonas wolfei*, *Syntrophobacter wolini* etc.) could convert propionic acid, butyric acid, ethanol, and other organics into acetic acid and hydrogen [33–36]. For cellulosic and hemicellulosic materials, the arabinose, xylose, glucose, and galactose form glyceraldehyde-3-P and further get converted to pyruvate and follow the same pathway as in the case of glucose and more information is available in Bhatia et al. [37].

In the case of complex materials, the pathway for biohydrogen production is via the deamination of amino acids (proteins) and β-oxidation of long-chain fatty acids (lipids). Hydrogen could be also generated via two different pathways from the degradation of pyruvate, an important intermediate produced from the glycolysis of carbohydrates and deamination of amino acids. The degradation of pyruvate produces acetyl-CoA via decarboxylate with reduced ferredoxin produced, which donate electrons to protons for generating hydrogen. This pathway is predominantly used for hydrogen production by *Clostridium* sp [38]. On the other hand, facultative anaerobes, such as *Enterobacter* and *Klebsiella* takes the formate cleavage pathway [39,40]. However, emulsified lipids may hinder the mass transfer between the microbes and other utilizable metabolites during lipid degradation. The microbial metabolism for

biohydrogen production through protein and lipid degradation are well explained in Dong et al. [20], Fu et al. [41] and Xiao et al. [42].

Nonetheless, the uncontrolled production of acids beyond a permissible limit can adversely affect the DF process and the H₂ yield due to the sensitivity of hydrogenases to low pH. Microbial intermediate products are produced during metabolic activities apart from acetic acid and butyric acids such as ethanol, fumaric, lactic, propionic acids, and polyhydroxy butyrate. The overall set of reactions involved in the DF reaction can be represented as given below in the Eqs. (1)–(11) for glucose glycolysis pathway [12,26].



Notably, biomass conversion to biohydrogen through DF completely depends on microbial activity. The contribution of anaerobes such as *Bacillus*, *Klebsiella*, *Enterobacter*, *Clostridium*, etc., for biohydrogen production, has been well-known in the laboratory and full-scale DF microbiota [43–46]. Researchers have used pure microbial cultures or mixed cultures to enrich the specific hydrogen-producing microbial species [47]. Another method is to pre-treat the mixed culture consortia primarily to inhibit the hydrogen-consuming bacteria, such as homoacetogens, hydrogenotrophic methanogens, lactic acid-producing bacteria, propionate-producing bacteria, and sulfate reducers [12]. Hence, diverse pretreatment techniques such as physical (heat shock, ultrasonication, ultraviolet irradiation, aeration, freeze, and thaw, etc.) and chemical (pH pretreatment, chemical activation, and inhibition) are applied [47]. Further, the pretreated inoculum having hydrogen-producing consortia is enriched using macro and micronutrients consisting of trace elements (Fe, Mg, Mo, Ca, Na, Zn, Si, Cu, etc.) [48,49]. The metal ions such as Fe⁺, Ni⁺, Mg²⁺, Cu⁺ and Zn⁺ have been shown to positively affect the Ni-Fe, Fe-Fe hydrogenase, and Acetyl-CoA synthase enzymatic activities [50]. The continuous feeding of macro and micronutrients flourishes the activity of hydrogen-producing bacteria in a parental reactor, which can be used further in inoculating DF reactors [51]. However, a long-term operation of the DF reactor may prevail in conditions suitable for culturing hydrogen-producing bacteria. Thus, a lower hydraulic retention time (HRT) is preferable, i.e., below 4 days (on average, even below 2 days), and a high feeding rate must be maintained [12,52].

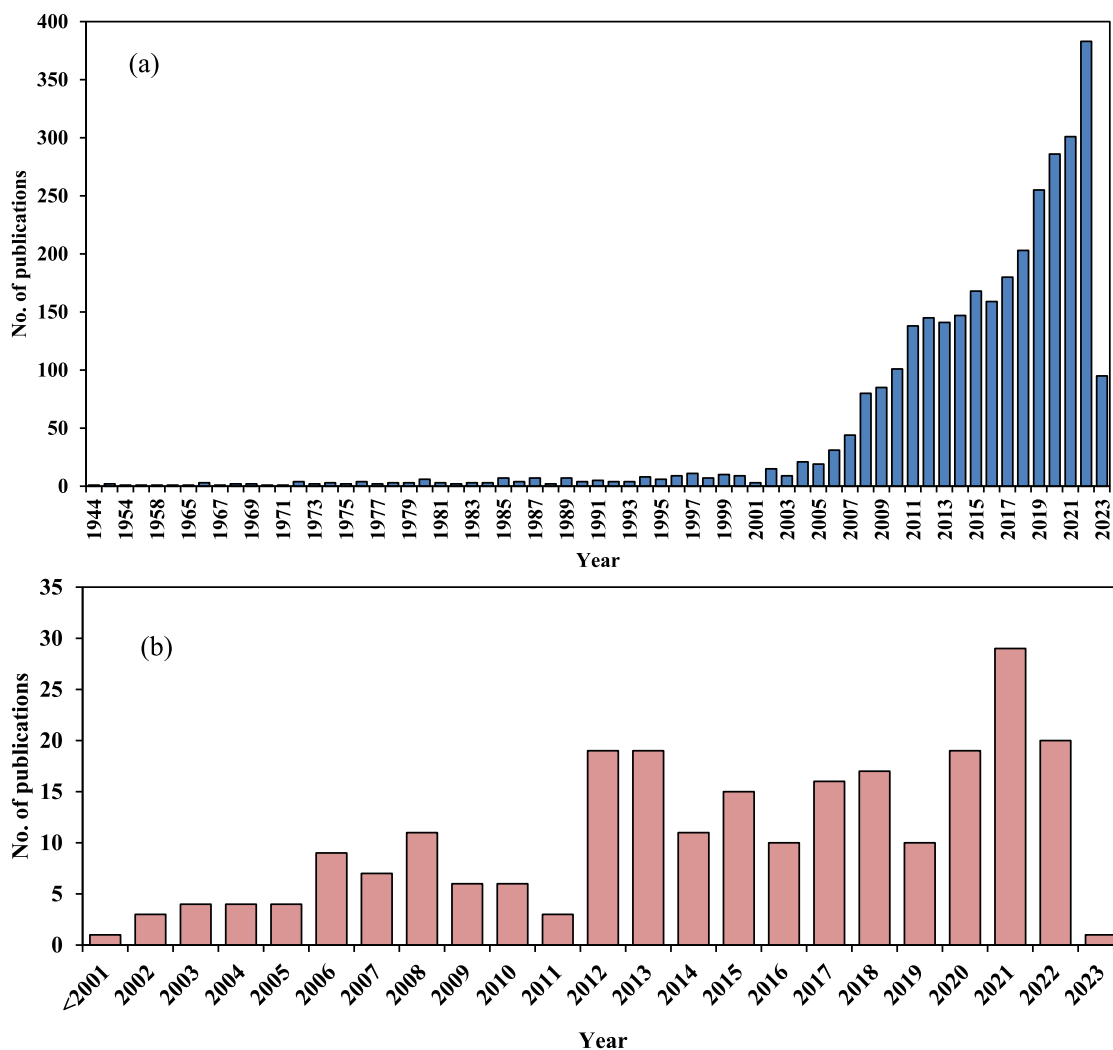


Fig. 2. Research evolution over dark fermentation and two-stage anaerobic digestion (a) and the publication year of selected publications (b) (Scopus data, dated 13th March 2023).

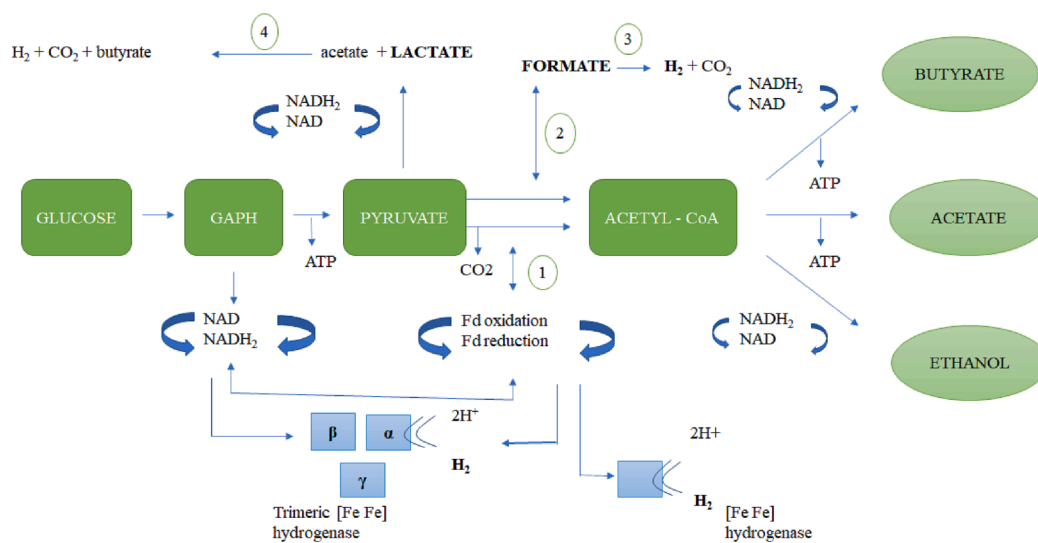


Fig. 3. Pathways involved in the DF process using glucose for biohydrogen production.

3.2. Suitable feedstocks, characteristics, and biohydrogen production potential

The biohydrogen production rate and yield depend majorly on the type and characteristics of the substrates/feedstocks used. It can vary from the organic fraction of municipal solid wastes (OFMSWs), wastewater sludges, and livestock waste to industrial wastes and effluents. This section discusses the different waste biomasses used for biohydrogen production and their characteristics. Biomass consists of various macromolecules such as carbohydrates, proteins, lipids, cellulose and hemicellulosic contents that can be utilized for dark fermentation microbial metabolism for biohydrogen production. Table 1 shows the theoretical biohydrogen potential of various molecules available in biomass resources. However, the experimental yields were noted to be much lower than the theoretical yield since the metabolic pathways vary according to the microbes involved and the operational conditions [53] the protein and lipids face the challenge of reduced degradation and lower biohydrogen production due to the low carbon-to-nitrogen (C/N) ratio for proteins [54] and the high C/N ratio for lipids [55] and their complex molecular structures. The biohydrogen production potential of carbohydrate-rich wastes is thus observed to be 20 times higher than that of protein-rich wastes [56].

Biohydrogen yields of various waste biomass through the DF process are summarized in Table 2. One such biomass is the OFMSWs, which can be further classified according to their origin, such as food processing industries, wholesale markets, restaurants/canteens, households, etc. [57]. The OFMSWs are rich in polysaccharides, such as cellulose, hemicellulose, starch, lipids, proteins, etc. These wastes are promising and potential sources for biohydrogen production due to their abundant availability at a cheaper cost. The OFMSWs have been reported to have a hydrogen yield of 14 – 238 mL/g. substrate of hydrogen through DF process [57–59].

Organic matter-rich wastewater from various industries such as palm oil and olive oil mill, brewery, and dairy can also be utilized for biohydrogen production [29]. Hence, the biohydrogen yield of wastewater from different industries, such as sugar, starch, beverage, palm oil mill, etc., have been investigated [58,60–68]. Besides the conventional carbohydrate-rich wastes, byproducts from other biofuel production processes were also explored for biohydrogen production. Glycerol, the primary by-product of biodiesel production, is an example that possesses a biohydrogen production potential of up to 7 mmol/g. glycerol. This was much higher compared to the other substrates such as glucose (2 mmol/g. glucose), galactose (2 mmol/g. galactose), gluconate (1 mmol/g. gluconate), sorbitol (5 mmol/g. sorbitol), mannitol (5 mmol/g. mannitol) and fructose (2 mmol/g. fructose) using the facultative anaerobic bacterial strain of *Enterobacter aerogenes* [39].

Plant-originated non-food/feed residues such as straws, stems, stalks, leaves, energy crops, processed wastes, etc. can also be used for biohydrogen production. Besides the agricultural residues, all energy plants (willow, poplar, miscanthus) and waste from the paper and wood industries can be used for biohydrogen production [69]. Eskicioglu et al. [70] observed potential substrates in lignocellulosic biomass subjected to hydrothermal pretreatment. The lignocellulosic biomass can be enlisted as sorghum, fir bark, corn stover, rice, and wheat straw. However, other substrates such as edible and non-edible de-oiled cakes, seeds of invasive and wildy growing plants/trees, various agricultural biomasses, etc., reported good methane yields during AD [71–78], could also be investigated for assessing biohydrogen potential through DF.

Animal manure-based biohydrogen production using the DF process has also been studied [79–81]. Recently, liquid swine manure was examined for continuous biohydrogen production at different dilution rates of 0.5 to 2%. The liquid swine manure was mixed with 10 g glucose/L to balance the carbon and nitrogen ratio and reduce ammonia inhibition. Thus, liquid-based substrates are also suitable for biohydrogen production but have lower HRTs (less than 1d) than solid biomass to obtain maximum biohydrogen production [82]. Besides the

above-mentioned organic sources, sewage sludge has also been investigated for biohydrogen production due to the rich composition of peptides and carbohydrates [83,84]. However, the presence of methane-forming microbes in animal manure and sewage sludge limits its usage in DF without effectively inhibiting the metabolic pathways of hydrogen-consuming bacteria [47,85].

In general, biohydrogen yield relies on the solubilization efficiency of the substrates used. Easily soluble substrates such as fruits, vegetable wastes, starchy materials, and different wastewaters could result in enhanced hydrolytic rate and subsequently in improved biohydrogen production. In contrast, for lignocellulosic biomass prior pretreatment is required to rupture the complex lignocellulosic structure and enhance the accessibility of microbes to the biomass. [86]. Different pretreatment methods could be adopted, from mechanical, chemical, and thermal to biological, with variants and combinations available and are extensively reported and reviewed elsewhere [57]. Co-fermentation of different biomass is also a preferred strategy to enhance the biohydrogen yield and maintain the process parameters so that the co-substrates complement each other during DF. Recently, Silva et al. [87] evaluated the hydrogen yield of food waste with glycerol as a co-substrate at a mixing ratio of 1 – 3%. Co-fermentation with 3% glycerol improved the biohydrogen yield by two-fold the yield of food waste alone [87]. Tarazona et al. [88] optimized that a maximal biohydrogen yield can be obtained if the carbohydrate to protein to lipid ratio in substrates is maintained as 1:0.4:0.4 (15, 6, and 6 g/L, respectively). This is where the role of co-fermentation strategy arises where different substrates can be fermented together for generating maximum hydrogen production. A wide variety of substrates suitable for biohydrogen production has been enlisted in detail by Hay et al. [53]. Nevertheless, the biohydrogen yield from all the enlisted substrates generally relies on the operational configuration and other governing factors. The following section highlights how different operational parameters govern the biohydrogen yield and production rate by controlling the biochemical processes.

3.3. Key factors involved

3.3.1. pH

Several process parameters affect the DF process. These include pH, temperature, HRT, feeding rate, hydrogen partial pressure, etc. [29,51,112]. Among them, the pH value is a primary DF process parameter. The pH maintained in the DF process controls the enzymatic and microbial activity involved. Moreover, an appropriate hydrogen ion concentration regulates microorganisms' metabolic pathways, morphology, and cell structure. This directly influences the hydrogen yield and the metabolic pathways/metabolic by-products involved (e.g., organic acids such as acetic, lactic, butyric, and propionic acids). The excess organic acid production reduces the slurry's operational pH inside the reactor. A pH level below the value of 5 can directly affect the intracellular pH limiting the activity of the microbes involved. According to Li and Chen [113], an initial pH of around 7 to 7.5 is optimal for the DF of corn stover pretreated by steam explosion. A study has reported that based on the substrates, the optimal initial pH can vary accordingly, e.g., livestock wastes, agricultural wastes, and food wastes have an optimal initial pH of 7.0, 6.5 – 7.0, and 5.0 – 6.0 values, respectively [114]. Nevertheless, operational pH may be different from the initial pH, depending on the biochemical process involved. It is reported that DF requires an optimal operational pH in the range of 5.0 to 7.0 for optimal microbial growth and activity [115].

3.3.2. Temperature

The hydrogen yield of the DF process is also governed by the operational temperature. Compared to mesophilic temperature, the thermophilic conditions have been advantageous for biohydrogen yield [116] and volatile fatty acids (VFAs) production due to improved thermodynamics and enzymatic activity [117–119]. Biohydrogen yields of 33.16 mL/g. volatile solids (VS) were achieved at thermophilic

Table 1

Theoretical biohydrogen production potential of various monomers and macromolecules [20,37].

Monomer/ Macromolecule	Theoretical biohydrogen yield per mol of monomer/ macromolecule	Theoretical biohydrogen yield per gram of monomer/ macromolecule
Glucose	4 mol	498 mL
Xylose	3.33 mol	497 mL
Mannitol	5 mol	615 mL
Glycerol	3 mol	730 mL
Carbohydrates*	8 mol	996 mL
Proteins	2 mol	105 mL
Lipids	2 mol	56 mL
Cellulose	2 mol	276 mL
Hemicellulose	2 mol	339 mL

*Theoretical biohydrogen yield of carbohydrates was considered twice the amount of glucose yield.

The molecular weight of macromolecules considered: Glucose: 180 g/mol, Xylose: 150 g/mol, Mannitol: 182 g/mol, Glycerol: 92 g/mol, Proteins: 425 g/mol, Lipids: 800 g/mol, Cellulose: 162 g/mol, and Hemicellulose: 132 g/mol. A molar volume of 22.4 L/mol was considered.

conditions (55°C); meanwhile, the mesophilic operation (37°C) yielded 30.36 mL/g. VS from rice crop residues at a 10% total solids (TS) feeding rate [120]. A more recent study reported a very low biohydrogen yield of 2.13 mL/g. VS during mesophilic conditions (which could be due to the varied microbial routes involved) and 64 mL/g VS under thermophilic conditions at a feeding rate of 6% TS [121]. The study claimed that the thermophilic conditions stimulate the microbes involved resulting in increased biohydrogen and VFAs production compared to mesophilic conditions. As a result, the study observed higher butyric acid rate production under thermophilic conditions.

On the contrary, Azbar et al. [61] have reported a lower biohydrogen production at thermophilic conditions (8 mmol/g. COD) than in mesophilic conditions (9 mmol/g. COD) from cheese whey wastewater. Similarly, in another study, the hydrogen yields were reported to be better at lower mesophilic temperatures (25°C), and hydrogen productivity was higher at higher mesophilic temperatures (40°C) while fermenting marine macroalgae (*S. japonica*) [122]. A maximum hydrogen yield of 179 mL/g. VS was obtained within 5 days of operation using the prescribed macroalgae at a feeding rate of 35 g/L. The contradiction between the results could be due to the difference in the inoculum, operational conditions, substrate characteristics, and reactor configurations or the competition of hydrogen-consuming microbial consortia. However, the researchers have mostly recommended thermophilic conditions over mesophilic conditions for better biohydrogen and VFAs productivity. Other benefits of maintaining thermophilic conditions are improved substrate degradation, increased hydrogenase enzymatic activity, and decreased growth of hydrogen-consuming bacteria (hydrogenotrophic methanogens, homoacetogens, and associated acetoclastic methanogenic activity) [123]. But the major constraint with the thermophilic biohydrogen production through DF is energy efficiency, a detailed discussion is given in section 5.3.

3.3.3. Substrate concentration or feeding rate

The substrate concentration or the feeding rate is crucial for the DF process. A higher feeding rate is generally prescribed in the literature to keep active acidogenesis/fermentation consistent. A daily feeding rate as low as 1% TS can yield moderate hydrogen productivity; however, a higher substrate feeding rate may enhance hydrogen production. At a feeding rate of 1% TS, Wu and Chang [80] have reported a hydrogen yield of ~ 3 mol H₂/mol sucrose. Likewise, the DF of glucose has produced 1.84 mol H₂/mol glucose at 1% TS [81]. The VFAs are known to impact both productivity and hydrogen yield. Liu and Shen [124] investigated the performance of batch reactors at varied substrate (starch) concentrations of 2 to 32 g/L. The study observed a maximum hydrogen yield of 194 mL H₂/g starch at a 2 g starch/L concentration.

Table 2

Various waste biomass and their biohydrogen production potential through dark fermentation.

Substrate	Reactor configuration and operational conditions	Biohydrogen yield (mL/ g _{substrate})	References
<i>Organic fraction of municipal solid waste</i>			
Food waste (pasta, bread, fruit, vegetable, fish, and meat)	Batch, Temperature: 36 °C	25	[89]
Residential home food waste	Batch, Temperature: 50 °C, pH: 7.5	14	[90]
Fruit waste	Batch	179	[91]
Date fruit waste	Batch, Temperature: 37 °C, pH: 6.5	239	[92]
Kitchen waste	Inclined plug flow reactor, pH: 5.5	10	[59]
Kitchen garbage	Continuous stirred tank reactor (CSTR), Temperature: 55 °C, pH: 5.0	25	[93]
<i>Industrial waste and effluents</i>			
Palm oil mill effluent	Batch, Temperature: 38 °C, pH: 5.9	108	[58]
Brewery plant wastewater	Batch, Temperature: 35 °C, pH: 5.5	249	[62]
Waste glycerol	Upflow anaerobic sludge blanket reactor (UASB), Temperature: 37 °C, pH: 5.5	78	[65]
Citric acid wastewater	UASB, Temperature: 36 °C, pH: 7.0	104	[68]
Cassava starch wastewater	Batch, Temperature: 30 °C, pH: 5.5	196	[66]
<i>Agricultural/agro-industrial/energy crop wastes</i>			
Corn stover	CSTR, Temperature: 55 °C	61	[94]
Agave bagasse	CSTR, Temperature: 55 °C, pH: 7.0	121	[95]
Cashew apple bagasse	Batch, Temperature: 38 °C	336	[96]
Untreated rice straw	Batch, Temperature: 75 °C, pH: 7.5	51	[97]
Untreated rice straw	Batch, Temperature: 55 °C, 6.5	25	[98]
Untreated Wheat straw	Batch, Temperature: 60 °C, pH: 7.0	79	[99]
Untreated barley hulls	Batch, Temperature: 60 °C	24	[100]
Untreated Switchgrass	Batch, Temperature: 65 °C	310	[101]
Untreated cornstalk	Batch, Temperature: 35 °C, pH: 6.5	87	[102]
Untreated sugarcane bagasse	Batch, Temperature: 70 °C	252	[86]
Untreated corn leaves	Batch, Temperature: 70 °C	224	[86]
Delignified wood fibers	Batch, Temperature: 60 °C	288	[103]
Untreated soyabean straw	Batch, Temperature: 35 °C, pH: 7.0	5	[104]
Wheat straw (pretreated with white-rot fungi)	Batch, Temperature: 40 °C, pH: 6.5	79	[105]
Corn stalk (pretreated with fungi)	Batch, Temperature: 60 °C, pH: 7.0	80	[106]
Rice straw (pretreated with)	Batch, Temperature: 75 °C, pH: 7.5	60	[107]

(continued on next page)

Table 2 (continued)

Substrate	Reactor configuration and operational conditions	Biohydrogen yield (mL/g _{substrate})	References
NH ₄ OH & H ₂ SO ₄) Animal waste			
Cattle wastewater	Batch, Temperature: 45 °C, pH: 5.5	278 mL/g chemical oxygen demand (COD)	[108]
Liquid swine manure	Anaerobic sequencing batch reactor (ASBR), Temperature: 37 °C, pH: 5.0	203 mL/g glucose	[82]
Dairy manure	Continuous stirred anaerobic bioreactor (CSABR), Temperature: 36 °C	14 mL/g DM	[109]
Cattle manure	Batch, Temperature: 78 °C	8	[110]
Buffalo sludge	Batch, Temperature: 39 °C, pH: 7.0	1	[111]

Furthermore, as the starch concentration increased to 32 g/L, the hydrogen yield decreased to 86 mL H₂/g starch. The hydrogen production rate differed from the hydrogen yield profile. The hydrogen production rate recorded a maximum of 237 mL/g VSS. d at 24 g/L, while further reduced at 32 g/L. De Amorim et al. [94] noted similar observations while treating glucose at a concentration of 2 g/L at an HRT of 2 h. The studies have suggested that there is a narrow line of substrate concentration to minimize the gap between hydrogen yield and production rate. Solid-state fermentation is also a feasible strategy for efficient hydrogen production that reduces the requirement for water and the volumetric working capacity of the reactor at higher loading (>15% TS). However, a significant load increase may give rise to technical issues such as clogging in the case of full-scale applications and hence require sophisticated system design.

3.3.4. Hydraulic retention time

The hydrolysis rate of the substrates that advance the biochemical process is influenced by the initial substrate characteristics, the feeding rate, and the time given for sufficient substrate degradation (Fig. 4a). Thus, the HRT is a parameter that influences the production of various VFAs and the H₂ production. Moreover, multiple studies have utilized HRT to control the growth of hydrogen-consuming bacteria (homoacetogens and hydrogenotrophic methanogens) and acetoclastic methanogens inside the DF reactor. This can be done because hydrogen-producing bacteria grow faster than hydrogen-consuming bacteria. The lower HRT reduces the proliferation of hydrogen-consuming bacteria and also could result in washout under continuous operation conditions, hence a better hydrogen production rate [12,52].

Although lower HRTs improve the biohydrogen yield and production rate, optimizing HRT always depends upon the substrate to be treated. Since DF involves several biochemical processes, HRT alone cannot be decisive in the fate of the DF reactor performance [125]. Thus, some researchers have investigated the combined effects of HRT with operational pH and temperature. Hyperthermophilic (70 °C) operation of DF-based CSTR treating domestic organic wastes yielded a stable biohydrogen production of 21 mL H₂/g VS_{added} at a pH value of 5.5 and HRT of 3 d, even though the maximum yield obtained was 107 mLH₂/g. VS_{added} at a pH value of 7 [126]. In another study treating glycerol in a CSTR, Silva-Illanes et al. [127] observed that HRT influenced hydrogen yield and production rate more than pH. At an optimal HRT of 12 h and pH of 5.5, the study recorded 0.58 mol of hydrogen per mole of glycerol.

In contrast, a lower HRT of 2 h disrupted the microbial activity due to lower microbial abundance (volatile suspended solids) while treating galactose, which optimized a better hydrogen yield at an HRT of 6 h in a continuous reactor [128]. Another study reported a tolerance level of

1.5 h HRT while treating glucose [129]. The pH and temperature influence the nitrogenase and hydrogenase enzymatic activities, affecting the biohydrogen yield. The nitrogenase activity increased at a temperature of around 30 °C and pH around 7.1 – 7.3, while hydrogenase enzymatic activity was observed to be optimal at a higher temperature, in the range of 55–70 °C with pH in the range of 6.5–7.5 [10].

3.3.5. Hydrogen partial pressure

The continuous biohydrogen production might increase hydrogen partial pressure inside the DF reactor. The solubility of hydrogen in the aqueous environment is extremely poor (Henry's law constant of 7.8×10^{-4} mol/L. atm). This may positively affect the hydrogen production rate further since it has been reported that the lower partial pressure enables the hydrogen mass transfer from the aqueous phase to the gaseous phase at ease as per Henry's law [130,131]. The excess hydrogen hampers the oxidation and reduction of ferredoxin by hydrogenase, affecting hydrogen production [132]. According to Lee et al. [133], reducing the hydrogen partial pressure enhances hydrogen productivity. The study noticed that at a permissible limit of H₂ partial pressure, a maximal hydrogen yield of 5 mol H₂/mol sucrose was achieved with a production efficiency of 56%. Correspondingly, a reduction in hydrogen partial pressure from 760 mmHg to 380 mmHg achieved a maximum yield of 3.9 mol H₂/mol_{glucose} (51% increase) [131]. Later, Junghare et al. [134] claimed increased production yield at an H₂ partial pressure of 76 mmHg relative to 254 mmHg. The claim was supported by Beckers et al. [135], who reported lower hydrogen yields at a partial pressure of 135 mmHg and a substantial increase at negative atmospheric pressure (668 mmHg). Hence, the hydrogen partial pressure should be maintained closer to atmospheric pressure, as shown in Fig. 4 (b). Various researchers have suggested an external stirring or applying gas permeable membranes, or vacuum pumps to remove dissolved H₂ from the mixed liquor and improve liquid-to-gas mass transfer [133,136]. The best way to maintain the partial pressure of hydrogen could be to transfer the produced gas from the reactor to another collection tank at regular intervals [12,52].

3.3.6. Inoculum

The type of microbial culture used for the DF start-up process is crucial in hydrogen productivity. Certain obligate and facultative anaerobes have been found to support biohydrogen production during DF [19]. Pure cultures of robust hydrogen-producing bacteria are generally recommended for DF start-ups, although DF is expensive under sterile conditions. Thus, using mixed culture directly or under selection pressure, i.e., inhibiting hydrogen-consuming bacteria, is also recommended [12]. Alternatively, direct use of acidogenic culture is also a possibility [137]. Hence, anaerobic digestates, sewage sludge, and other anaerobic effluents are also suggested as good sources of hydrogen-producing microbes required to start the DF process.

The inoculation of the DF reactor using anaerobic granular sludge has been highly beneficial, yielding better biohydrogen and providing a protective environment against sudden environmental shocks and changes. The inoculum type also assists the oxidation–reduction potential directly involved with bioprocesses carried out by the microorganisms [138]. Thus, an optimal value exists for the inoculum-to-substrate ratio (ISR) based on the substrate type utilized. Lower ISR reduces the fermentation activity, whereas higher ISR increases the inter-microbial competition, which could eventually lead to the growth inhibition of the hydrogen-producing microbial cells [51]. A maximal biohydrogen yield of 62.5 mL H₂/g VS was achieved in a DF reactor treating OFMSW under the optimized conditions of 6 g VS/L d feeding rate, 55 °C temperature, and ISR of 0.5 for an operational period of 4 d. The ISR of 0.25 resulted in a low hydrogen yield relative to the results at an ISR of 0.5 [51]. This is because of the competition within the microbial community, which may result in an incomplete substrate-to-hydrogen conversion. It could also be due to the change in the type of fermentation. For instance, if the substrate loading is increased (lower

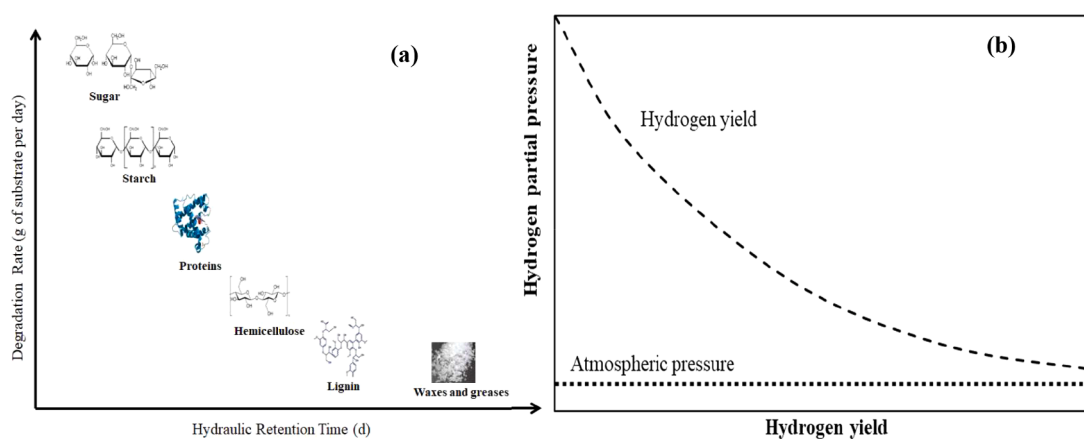


Fig. 4. Effect of different substrate composition degradation rates in relation to HRT (a) and effect of hydrogen partial pressure on hydrogen yield (b).

ISR) then due to the higher rate of substrate consumption, the rate of acid production will be higher. The higher rate of acid production will in turn result in a faster drop in the pH with pH being lower for lower ISR. This lower pH in turn affects the microbial community characteristics, probably favoring the predominant occurrence of lactic acid fermentation with low or no H_2 production.

Increasing the ISR beyond 0.5 might negatively impact hydrogen production. Higher ISR implies high microbial biomass concentration limited substrate accessibility within the reactor, thus limiting the substrate consumption rate. It is also conceivable that the fast-growing hydrogen-consuming microorganisms predominate the microbial community under those conditions. Alavi-Borazjani et al. [51] suggested that substrate concentration is the predominant factor governing the DF process parameters, followed by ISR and temperature.

In addition, the overall efficiency of the DF system is directly governed by the initial microbial enrichment and long-term natural shift in the microbiome involved [139]. It has been validated that there should be a permissible limit, i.e., 2.5:1.0, between the abundance of hydrogen-producing microbes to the lactate-producing microbes. pH is the primary controlling parameter for this microbial shift, e.g., long term fermentation of non-sterile food waste in a continuous reactor inoculated using *Clostridium butyricum* sp. has been reported with a microbial shift towards *Klebsiella* sp., *Straphylococcus* sp., *Enterobacter* sp., *Lactococcus* sp. and *Acinetobacter* sp. [140]. An increase in the optimal ratio could disrupt the system's efficiency, adversely affecting biohydrogen production. A review article by García-Depraect et al. [141] suggests that although lactate-producing microbes are regarded as one of the most common root causes for performance failure in DF systems, they can also support enhancement in hydrogen production. This generally occurs when there is a positive interaction between the hydrogen-producing microbes and the lactate-producing microbes. For example, Cheng et al. [142] observed that the lactate-producing bacterial species *Bifidobacterium* sp. enhanced the hydrolysis of the substrate (starch), releasing VFAs favorable for hydrogen-producing bacterial species of *Clostridium* sp. However, there is more need to explore the bio-mechanism between these interspecies activities for deducing its applicability in the DF process.

Apart from that, it is known that the inoculum to be used for the startup of the DF reactor is expected to be enriched in hydrogen-producing bacteria, either spore-forming bacteria such as *Clostridium* species, known as conventional hydrogen producers, or non-spore-forming hydrogen producers microbes such as *Firmicutes* and *Prevotella* species [143]. Along with *Clostridium* species (*Clostridium butyricum*, *Clostridium pasteurianum*, and *Clostridium beijerinckii*, etc.), *Enterobacter aerogenes* species are also known for giving high biohydrogen yield [144,145]. *Enterobacter aerogenes* yielded 24.7 mL/L h at an optimum concentration of 32.5 g/L cheese whey at 31°C and 6.5 pH [145].

Clostridium butyricum has outranked other species for giving a better biohydrogen production rate from glucose (3.90 mL H_2 /g glucose at 10 g/L of glucose) [144]. Most recently, Campos et al. [146] utilized four lignocellulosic plant-based microbial communities, i.e., *Clostridium*, *Lactobacillus*, *Enterobacter*, and *Pichia* (fungus), through a consolidated bioprocessing approach. In the study, at a feeding rate of 10 g/L d, the fermentation of lignocellulosic biomass such as corn stover, wheat straw, sugarcane bagasse, and agave bagasse produced a hydrogen yield of up to 2.5 L H_2 /kg d. Likewise, another method of inoculum development using immobilization and natural fermentation without external inoculation was established by Liete et al. [147] and later used by Fernandes et al. [148] and Zavala-Méndez et al. [149]. The cited studies have used either synthetic or real agro-industrial wastewater for natural inoculum development in anaerobic packed bed reactors within one week of operation. Dauplain et al. [150] investigated the role of utilizing untreated activated sludge collected from a full-scale wastewater treatment plant as an inoculum for the DF process treating seven different substrates of corn silage, Tunisian dates (pitted), sorghum, OFMSWs, microalgae (*Scenedesmus quadricauda* and *Pediastrum*), sewage sludge (from same inoculum source), and food waste. The enriched indigenous bacterial consortia consisting of *Clostridial* and *Enterobacter* sp. had a stronger influence on the overall biohydrogen yield irrespective of the substrate used.

In general, the microbial consortia for the DF process could be developed and stabilized through an appropriate selection of inoculum for start-up, reactor configuration, packing materials, HRT, and feeding rate [139]. Another strategy that could be followed is the inoculation of the specific active inoculum consisting of hydrogen-producing species at regular intervals. Researchers commonly named this strategy as bio-augmentation, in which the hydrogen-producing microbial consortia are inoculated inside the DF reactor at a given point of time, thereby making their way towards increasing the hydrogen yield. The mechanism behind this strategy is that adding inoculum at regular intervals reinforces the active hydrogen-producing species to dominate inside the reactor over a long-term operational period [151]. Deep insights into the microbiological aspects of DF are available in Dzulkarnain et al. [152]. Table 3 shows the optimal operating conditions for the DF process developed from this study.

4. Biohydrogen as an energy fuel: opportunities and challenges in upgrading and storage techniques

4.1. Biohydrogen polishing and upgrading

From reviewing various literature, it was understood that the biohydrogen produced from the DF process consists of incombustible gas such as CO_2 and trace amounts of hydrogen sulfide, moisture, etc.

Hence, hydrogen enrichment/upgrading is as crucial as its sustainable production. It is also to be noted that H_2 can be further utilized as energy fuel in specific applications only if the purity is at least around 99.99% [153]. Even though no studies have claimed biohydrogen upgradation from the DF process so far, hydrogen produced from other conventional techniques has been subjected to various hydrogen upgradation methods. The primary impurity to be eliminated from the biohydrogen mixture is CO_2 , so these methods could also be applicable for biohydrogen upgradation. Fig. 5a depicts the various hydrogen purification techniques available and Table 4 shows the comparison between them. They can be generally classified into two according to the upgradation principle adopted: (a) physical and (b) chemical. At present, physical purification techniques such as pressure swing adsorption (PSA), temperature swing adsorption (TSA), cryogenic and membrane separation techniques are generally considered the established upgradation technologies in chemical and petrochemical refineries [154–156]. The PSA technology is commonly used to separate hydrogen from SMR off-gas mixture (Fig. 5b). This technology can lower the concentrations of unwanted impurities within the permissible level and is reported to achieve a maximum H_2 upgrading of up to 99.99% from the off-gas mixture that contains a trace amount of impurities. Since PSA is entirely dependent upon the compressibility of the gas components at different pressures, the performance of the technology is governed by factors such as inlet pressure, purge gas pressure, and gas composition. Hence, PSA could only be utilized for biohydrogen production if optimized to remove excess carbon dioxide from the gas mixture. Otherwise, pre-treating the gas mixture is a prerequisite to removing the hydrogen sulfide and moisture before feeding it into the PSA reactor.

Similar to PSA, TSA is also a technology that could reduce the concentration of impurities in the gas mixture. The principle of TSA is based on the adsorption of gas molecules through increasing temperature. However, in the case of TSA, the slow heating and cooling rates require more cycles per unit of gas mixture for enhanced removal performance. Thus, applying TSA is even more restricted for removing the gas impurities at low concentrations than PSA.

On the other hand, cryogenic distillation technology is an alternative widely applicable technology for separating gas mixtures. In the cryogenic process, the gas mixture is separated by maintaining a low temperature, thus utilizing the varied boiling temperature characteristics of the components of the gas mixtures. Since biohydrogen is known for its highly volatile nature and impurities such as carbon dioxide, an additional component of the methane wash column is required to eliminate these gas mixtures. Methane wash columns are known to remove the carbon dioxide from gas mixture efficiently comprising hydrogen, carbon dioxide, and carbon monoxide [157]. The major challenge with the cryogenic separation is that the hydrogen recovery performance has been moderate, with a maximum recovery of 95%. Moreover, the PSA and cryogenic separation technologies are either cost- or energy-intensive.

In another approach, membrane separation of the gas mixture has been widely recommended for its low energy consumption, low cost, and suitability for continuous operation, as shown in Fig. 5(c) [158]. In membrane separation, direct production and separation of gas mixtures are possible using membrane-based reactors. The membranes are flexible enough to be fixed inside the specially designed reactors and only pass the required gas molecules from the mixture. Membrane-based reactors are known for reduced investment costs, improved selective separation, and upgrading performance [159]. Membrane-based reactors have improved performance during hydrogen production through SMR at high temperatures and pressure [160]. At the same time, eliminating CO_2 from the biogas mixture obtained from the DF requires modifications since the biological process is closer to ambient environmental conditions. Hence, specific membranes (e.g., polymers) must generally be manufactured according to the biogas composition and characteristics, with improved resistance to impurities, economic viability, longevity, and robust design. Zeolite-based membrane system

Table 3

Optimal operating conditions for the DF process (developed from the cited literature in section 3.3 and Table 2).

Parameter	Optimal range
pH	5.0–7.0
Temperature	Mesophilic: 25 – 40 °C, Thermophilic: 55 – 70 °C
Daily feeding rate	Liquid state fermentation: > 1% TS – 10% TS Solid state fermentation: >15% TS – 20% TS
Hydraulic retention time	For liquid wastes: > 1.5 h – < 12 h For solid wastes: 1 to 3 d
Hydrogen partial pressure	Closer to atmospheric pressure
ISR	~ 0.50*
Inoculum type	Thermally or chemically pretreated anaerobically treated effluents/digestate or pure culture of obligate or facultative anaerobes

*This will depend upon the substrate utilized.

has been employed in a study by Sanchez et al. [9] for a DF-based bio-refinery system.

Recently, membrane-based systems with novel materials or modified versions of existing membranes have been employed to improve the selective separation of hydrogen gas or impurities [153,161–163]. Upscaling the process requires flexible and affordable membrane modules to separate the biohydrogen produced through DF effectively. The liquid-to-gas mass transfer rate is insufficient in membrane-based systems, which can affect the performance of the DF reactor. Thus, effective, and continuous withdrawal of biohydrogen in membrane-based systems is expected with sufficient liquid-to-gas mass transfer efficiency. More detailed information regarding liquid-to-gas transfer efficiency and its effects on the DF process for biohydrogen production and purification are available in Nemestóthy et al. [164].

The biological process of microalgae-based CO_2 absorption has also become a promising technique for hydrogen upgradation. During photosynthesis, the microalgae metabolize the CO_2 and thus upgrade the gas mixture. A closed-loop cycle of biohydrogen, biogas, and simultaneous microalgal growth and biogas upgradation can be developed through this technique [165]. However, the major disadvantage of this technique is that photosynthesis results in the production of O_2 , which is dangerous and requires sophisticated equipment for the timely separation of H_2 . All these technologies have also been reported to purify the biomethane from a biogas mixture [166,167]. Thus, it could also play an instrumental role in the purification of biohydrogen.

4.2. Biohydrogen storage and transport

Succeeding the biohydrogen upgradation, the hydrogen gas at the outlet will be high in purity for further applications. However, the concern is with its storage and transportation, which has been a rapidly developing topic in recent years. Various agencies and institutes investigated the possibilities of feasible hydrogen storage systems. The United States Department of Energy (DOE) has set the target for an on-board hydrogen storage system, considering the physical properties of volumetric and gravimetric densities, and cost economics, as mentioned in Table 5. Another parameter that must be standardized is the fueling time, i.e., the time taken to store the hydrogen in a vehicle. It was estimated that the fueling time should be less than 3 min. for filling hydrogen fuel in the vehicle to run a distance of 450 km [168].

Numerous developments have been made to use hydrogen for fuel applications, improving its storage capacity. This was based on considering two critical characteristics of the hydrogen molecule: specific energy and energy density. Pure hydrogen fuel has a high heating value of 120 MJ/kg, almost three times that of gasoline, having 44 MJ/kg. A lower density and volumetric energy density make hydrogen storage impossible under normal temperature and pressure conditions, which questions its economic feasibility. Thus, a cost-effective hydrogen

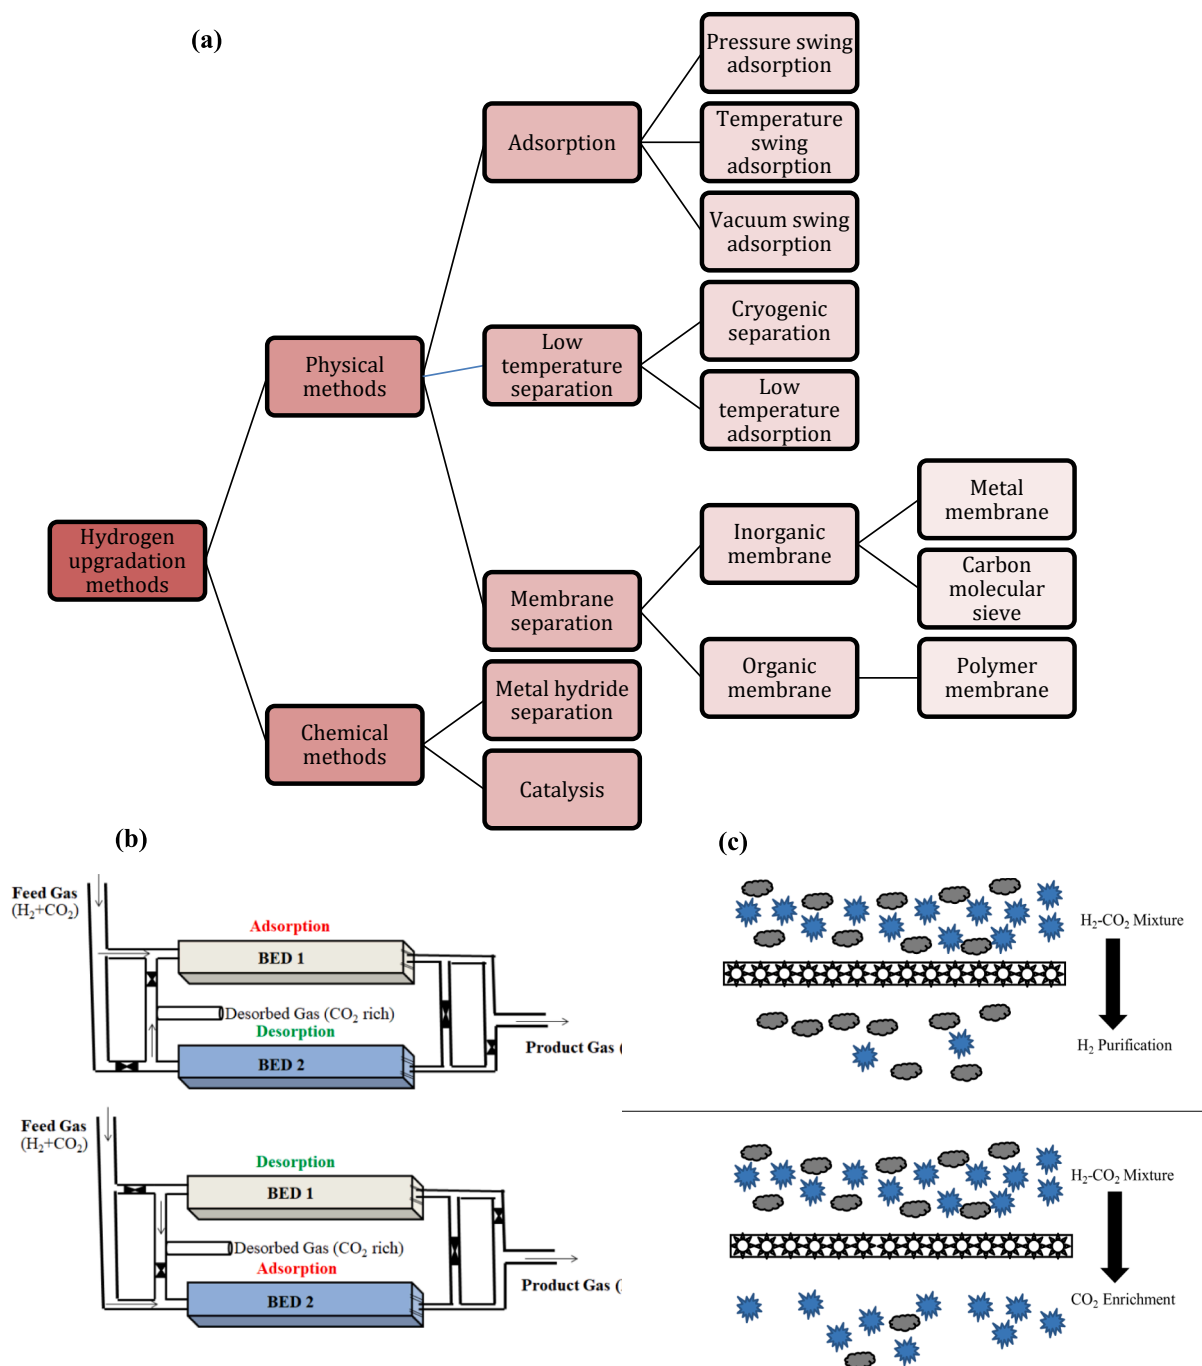


Fig. 5. Hydrogen upgradation methods (a), PSA technology concept (b), and membrane separation technology concept (c).

storage method is what researchers are aiming for. Currently, there are various hydrogen storage technologies based on different principles, as summarized in Fig. 6. Broadly, it can be categorized into three: (1) Physical methods, in which hydrogen is stored in its purest form, either liquid or compressed gas, without any chemical bonding; (2) Adsorption, where hydrogen is adsorbed or adhered by weak Van Der Waal's force on the surface of an adsorbent with high surface area; (3) Absorption, where hydrogen atom form a strong chemical bond with another element [168–172].

4.2.1. Physical methods

4.2.1.1. Compressed hydrogen. Storing hydrogen at high pressures, generally called compressed hydrogen, is the physical way to store the

hydrogen gas in a high-pressure vessel (10,000 psi). For vehicular or mobile applications, it is beneficial that the fuel should have a high energy density, be cheaper, lighter, and suitable for onboard delivery systems. Compressing the hydrogen at higher pressure parallelly increases gravimetric and volumetric energy density. Shortly this storing pressure is expected to be increased to 70 MPa or 700 bar or higher, and maybe up to 1000 bar for vehicular applications. Hydrogen density increases from 0.1 to 40 g/L when pressure increases from 1 to 700 bar, while volumetric energy density increases from 0.0033 to 1.32 kWh/L [168,171,174]. Currently, there are five types of pressure vessels for compressed gas storage, as shown in Table 6. Type I is the metallic type, and storage pressure is 20–30 MPa, which is used in most industrial applications, but it has a low gravimetric density of about 1% (0.01 kg H₂/kg system). Type II has higher storage than type 1 due to partial

Table 4
Comparison of major hydrogen purification technologies.

Upgradation technique	Principle	Performance	Benefits	Drawbacks
Pressure swing adsorption	Based on physical adsorption	Moderate	<ul style="list-style-type: none"> No requirement of water No requirement of chemicals 	<ul style="list-style-type: none"> Removal of H₂S required Complex system High investment cost
Temperature swing adsorption	Based on temperature-based adsorption	Moderate	<ul style="list-style-type: none"> No requirement of chemicals No requirement of water 	<ul style="list-style-type: none"> Removal of H₂S required Extended no. of cycle operation Complex system High investment cost
Membrane separation	Permeation	High	<ul style="list-style-type: none"> Compact and simple process No requirement of chemical 	<ul style="list-style-type: none"> Removal of H₂S required High investment cost
Cryogenic separation	Compression and condensation	High	<ul style="list-style-type: none"> No requirement of chemicals The fuel at the outlet is available in a compressed state, hence can be directly stored 	<ul style="list-style-type: none"> Removal of H₂S required High investment cost High energy demand
Microalgae-based absorption	Photosynthesis	Moderate	<ul style="list-style-type: none"> Simple and economical Microalgal biomass could be further utilized for biofuel production No requirement of chemicals 	<ul style="list-style-type: none"> Performance is dependent upon photosynthetic rate and microalgae growth rate Simultaneous production of H₂ and O₂ during photosynthesis requiring sophisticated separation technologies enhances additional costs

carbon fiber covering, whereas Type IV uses polymer liner and has better gravimetric performance [168]. Compressed hydrogen is used in nearly 80% of hydrogenation processes worldwide for storage and transportation. It is stored between 200 and 500 bar in cylinders or bundle tubes on tube trailers and transported on trucks. The amount of hydrogen that can be stored in the trailer at 200 bar is 420 kg. This capacity increases to 666 kg of hydrogen using composite material. At 500 bar, the jumbo trailer can store up to 1100 kg of hydrogen [168,174].

Vehicles such as Hyundai Tucson and Toyota Mirai have variants consisting of compressed hydrogen technology with a volume capacity of 140 L and 122,4 L. Among them, Toyota Mirai has a hydrogen storage capacity of 5,7 wt% [174]. These vehicles can store hydrogen at 70 MPa in a full tank, covering a distance of 426 km and 500 km, respectively. Although a simple technology, the compression process is gravimetrically and volumetrically inefficient. Energy consumption during isothermal compression from 0.1 MPa to 80 MPa is 2.21 kWh/kg. In another scenario, it is mentioned that power consumed during pressurizing the hydrogen gas at 700 bar is 10% of the energy content of the gas [168,169].

4.2.1.2. Liquefied hydrogen. Liquefying the gaseous fuel or hydrogen is another way to increase the volumetric energy density and capacity. On liquefaction of hydrogen at 1 atm and 20 K, volumetric capacity reaches 70 g/L, whereas compressed hydrogen at 350 bar and 700 bar is 24 g/L and 40 g/L, respectively. Liquid hydrogen (LH₂) tanks consist of metallic double-walled containers with a vacuum between the walls for thermal insulation. The LH₂ can be stored in a more efficient way for large volumes. The LH₂ is successfully transported through trucks with a capacity of 60,000 L. The main application for LH₂ is in space and flight, where volumetric capacity and gravimetric density are more important than power consumption. The required power for liquefaction is nearly

35% of the energy content of stored hydrogen. The worldwide installed capacity of the liquefaction plants is 355 tonnes per day (TPD). The world's largest liquefaction plant has a 34 TPD capacity. The main issue is boil-off hydrogen (above 20 K temperature, LH₂ starts to boil and convert to gas), even in highly insulated tanks. This can create dangerous situations in closed spaces. [168,170,172].

4.2.1.3. Cryo-compressed hydrogen. This technology combines cryogenic and compression, which lessens energy losses. In this method, hydrogen is pressurized between 250 and 350 atm at cryogenic temperature because hydrogen gas becomes denser than LH₂ above 15 MPa and near liquefaction temperature. The volumetric density can reach up to 87 g/L at a pressure of 240 bar and a temperature of 20 K [168,170,175]. Cryo-compressed hydrogen at 276 bar and 20 K exceeds DOE 2017 target as it provides a gravimetric density of 5.8 wt% and 43 g H₂/L. Researchers from the Lawrence Livermore National Laboratory, United States showed that the longest drive recorded with cryo-compressed hydrogen is 660 miles on a single tank. No evaporative loss was recorded when the vehicle was parked for 8 d [170]. Manufacturing cost decreased to 8\$/kWh from \$12/kWh for a system equipped with 10.4 kg of usable hydrogen [176].

4.2.1.4. Adsorbent-based storage system. Physical adsorption or adsorbent-based storage system is a reversible process where gas and solid particles interact through Van Der Waals forces. Various materials are used for hydrogen storage based on adsorption. Most materials are carbon-based materials such as activated carbons, activated carbon fibers, fullerenes, carbon nanotubes, carbon nanofibers, carbide-derived carbons, graphite, graphene, etc. Other porous materials used for hydrogen storage are zeolites, metal-organic frameworks (MOF), covalent organic frameworks, and polymers of intrinsic microporosity.

Table 5
The year-wise target set for the on-board hydrogen storage system by USDOE [170,173] (Also retrieved from: <https://www.energy.gov/eere/fuelcells/hydrogen-storage>).

Target for storage system	Volumetric density		Gravimetric density		Cost	Operating conditions	
	kWh/L system	kgH ₂ /L system	kWh/kg system	kg H ₂ /kg system		\$/kWh	Pressure (MPa) (min./max.)
2010 (target set in 2003)	1.5	0.045	2	0.060	4	0.4/10	-40/85
2015 (target set in 2003)	2.7	0.081	3	0.090	2	0.3/10	-40/85
2010 (target set in 2009)	0.9	0.028	1.5	0.045	-	0.5/1.20	-40/85
2015 (target set in 2009)	1.3	0.040	1.8	0.055	-	0.3/1.20	-40/85
2017	1.3	0.040	1.8	0.055	12	-	-
2020	1.0	0.030	1.5	0.045	10	-	-
Ultimate (2020)	1.7	0.030	2.2	0.065	8	0.3/1.20	-40/95-100

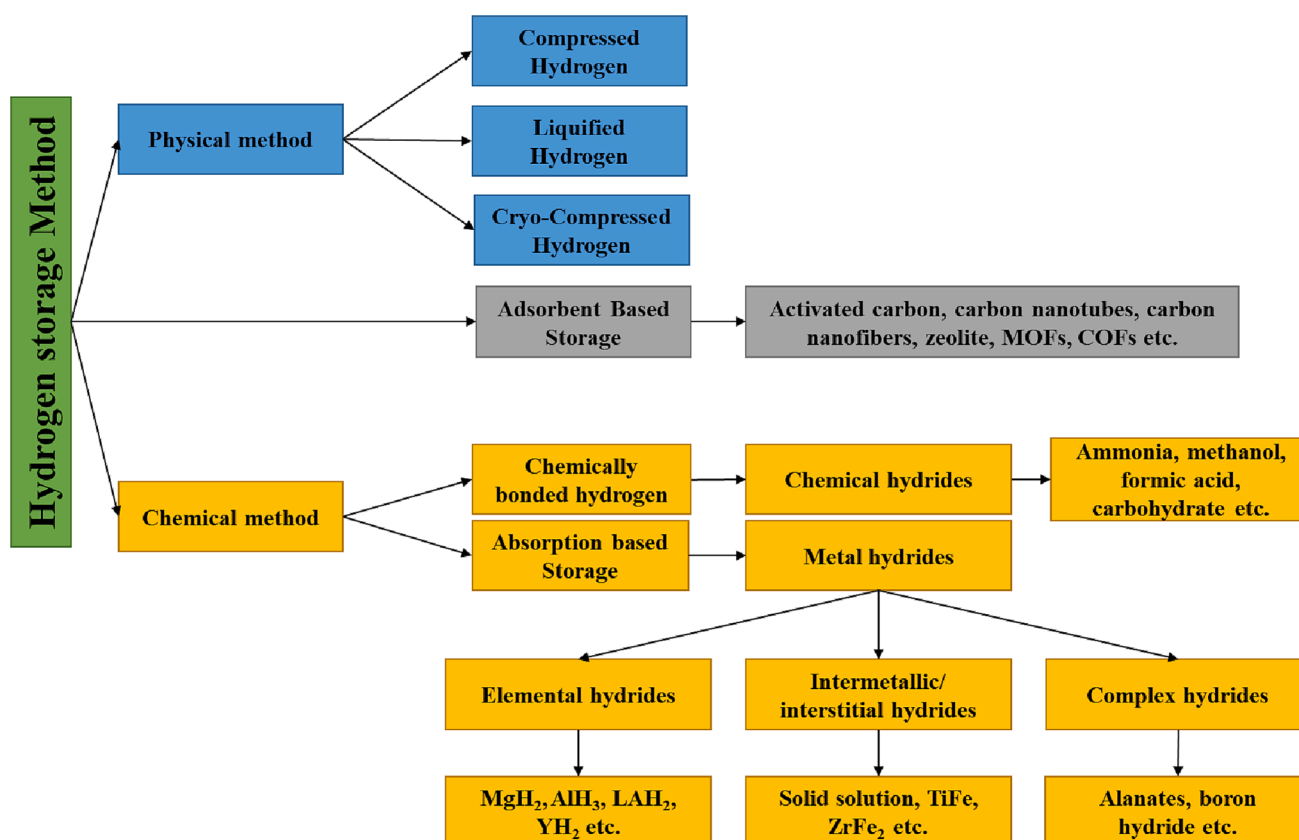


Fig. 6. Various technologies for hydrogen storage (taken from [168]).

Some of these materials have good hydrogen storage capacity, fast kinetics, and better reversibility [168,175,177,178].

Activated carbon has adsorption capacities in the range of 1–7 wt% at 77 K at 1–20 bar pressure. At ambient temperature with a pressure between 2 and 4 bar, gravimetric capacities come down in the 2–3 % range. Super activated carbon at 77 K and 296 K stores up to 5 wt% and 1.3 wt% respectively. Casa-Lillo et al. [179] studied hydrogen storage capacity on activated carbon or carbon fiber up to a pressure of 70 MPa. The highest value for hydrogen adsorption capacity was 1 wt% at 10 MPa. Carbon nanotubes provide high-density hydrogen storage with about 5–10 wt% [168]. Gupta et al. [180] found carbon nanofibers adsorbed about 17 wt% of hydrogen at 12 MPa at room temperature. Dillon et al. [181] worked with single-walled carbon nanotubes containing less than 0.2 % nanotubes, showing the adsorption capacity for hydrogen of 5 and 10 wt%. Another work by Chambers et al. [182] was performed on carbon nanofiber. In the study, the authors manufactured herringbone carbon nanofiber, which showed a hydrogen adsorption capacity of 67.55 wt% and 53.68 wt% on platelet carbon nanofiber at room temperature and pressure of 11.2 MPa. Romanos et al. [183] used a nanoporous graphene monolith for hydrogen storage and achieved a gravimetric storage capacity of 10.7 g H₂/ kg material. Carbon is obtained by separating it from metal carbide, known as carbide-derived

carbon (CDC) [177]. Singer et al. [184] developed CDC using Poly-tetrafluoroethylene for adsorbing hydrogen gas. The study achieved excess hydrogen adsorption volumetric capacity of 21 g/L with a total volumetric capacity of 29 g/L at 77 K, and 4 MPa. Yeon et al. [185] prepared the CDC using ceramic-titanium carbide plates, showing that hydrogen was adsorbed with a volumetric capacity of 35 g/L at –196 °C and 60 bar.

Hydrogen can also be stored using an electrochemical technique. Electrochemical hydrogen storage values are in the range of 0.27 – 6.1 wt%. In this technique, the electrodes are made from a mixture of carbon, metals, and organic binder. This electrode is then cathodically charged with hydrogen, and hydrogen is obtained anodically [178]. Other carbon material fullerenes, such as C₆₀ buckyballs, exhibited no hydrogen storage capability; theoretically, the chances of forming HC₆₀ complexes are very narrow [178]. Dillon et al. [181] performed a theoretical study on scandium and fullerene. The result showed that scandium could bind to the twelve five-membered rings in C₆₀. The predicted hydrogen capacity for reversible systems was approximately 7 wt% with C₆₀[ScH₂(H₂)₄]₁₂ complex between scandium and fullerene. Komatsu et al. [186] encapsulated the hydrogen molecule in a fullerene C₆₀. Covalent organic frameworks (COF) are held by covalent bonds (C–C, C–O, B–O, Si–C) with high porosity and low crystal density. These

Table 6

Pressure vessel types (taken from [168]).

Type	I	II	III	IV	V
Material	Complete metallic	Metallic enclosure with some fiber overwrap	full composite over-wrap with a metallic liner	full composite over-wrap, polymer liner, and metal boss	Complete composite
Pressure limit	≤ 50 MPa	Not limited	≤ 45 MPa	≤ 100 MPa	Under consideration
Suitable Application	Stationary	Stationary	Industrial and vehicular	Vehicles for industrial purposes (at high pressures)	–

have crystalline frameworks with high surface area. These can be either 3D or 2D structures, and 3D structures have 3 times the storing capacity of the 2D structure. COF-102 with 3D structure shows a gravimetric capacity of 9.95 wt% at 77 K and 100 bar. In place of phenylene, using diphenyl (COF-102-2), triphenyl (COF-102-3), naphthalene (COF-102-4), and pyrene (COF-102-5), COF-102-3 can achieve an adsorption capacity between 6.5 and 26.7 wt% at 77 to 300 K and 100 bars [171].

Besides carbon material, MOF and zeolites are also being investigated for hydrogen storage. After observing more than 4000 MOF, it was concluded that the range of the specific surface area of zeolite is 3100 – 4800 m²/gm. MOF-5 (Zn₄O (BDC)₃ (where BDC is 1,4-benzene dicarboxylate) has a hydrogen adsorption capacity of 4.5 wt% at the cryogenic condition and 1 wt% at the ambient condition of 1 bar and 20 bar, respectively [187,188]. It has been reported that the hydrogen uptake capacity of materials such as MOF-5 and IRMOF-8 can be increased upto 8 times by dissociative chemisorption [168]. Zeolite can be defined as crystalline aluminosilicate with evenly distributed pre-size and refined structure. Hydrogen encapsulation, i.e., hydrogen is forced into the porous structure of zeolite at a high pressure of 900 bar, and temperature can reach up to 3500 C. The system can be enclosed at room temperature [187]. Langmi et al. [189] have worked with four zeolites, i.e., NaA, NaX, NaY, and NaCsRHO, for hydrogen adsorption. NaY showed the highest specific surface area of 725 m²/g and had a hydrogen capacity of 1.81 wt% at 15 bar and –196 °C.

4.2.2. Chemical methods

This storage system is based on bond formation with hydrogen; it can be either an ionic, covalent, or metallic bond. Two major hydrogen storage technologies based on bond formation are chemical hydride and metal hydride-based storage systems. Absorption and desorption processes are included to make the system's overall operation reversible. Various techniques, such as thermolysis, hydrolysis, and ammonolysis, are employed to desorb hydrogen. These techniques require additional system components and reduce the hydrogen density [168].

4.2.2.1. Chemically bonded hydrogen. Chemical hydrides store hydrogen by forming a chemical bond, and hydrogen can be generated through a chemical reaction. Some papers suggest that metal hydride comes under the category of chemical hydrides. Others represent it as a non-metal hydride. Some consider chemical hydride as the material used for hydrogen storage that cannot be regenerated. Here non-metal hydrides are treated as chemical hydrides. The most crucial difference is that chemical hydrides are in a liquid state under normal conditions. This simplifies the transport and storage, and mass transfer can be observed during the hydrogenation and dehydrogenation processes. Material that stores hydrogen is ammonia, ammonia borane, formic acid, methanol, carbohydrates, synthetic hydrocarbon, and liquid organic hydrogen carriers (LOHC) [168,171,172,176]. Ammonia has 17.8 wt% or 10.7 kg H₂/100 L hydrogen storage density. Ammonia borane has a slightly high hydrogen content of 19.6 wt% [168]. Formic acid has 53 g/L hydrogen content at room temperature and atmospheric pressure with a gravimetric density of 4.3 wt%. Carbohydrates (polymeric C₆H₁₀O₅) can be hydrogen carriers with 14.8 wt% capacity on complete conversion [171]. Gaseous hydrocarbons (C₁ – C₃) and liquid hydrocarbons (C₄ – C₁₀) can both be used for hydrogen production through auto thermal reforming and steam reforming and partial oxidation reforming with some by-products [176]. The simplest alcohol, methanol, contains hydrogen 12.5 wt% and 99 kgH₂/m³ gravimetrically and volumetrically, respectively. The most common LOHC types are methylcyclohexane and toluene, dibenzyl toluene and perhydrodibenzyl toluene and N-ethyl carbazole and dodecahydro-N- ethyl carbazole with 6.1 wt%, 6.2 wt%, and 5.8 wt% of gravimetric hydrogen, respectively [172].

4.2.2.2. Absorption-based storage system. Some metals can absorb

hydrogen at low temperatures and moderate pressure. Metal hydrides are formed when transition metal and their alloys react with gaseous hydrogen to form metal hydrides. The advantage of this system is that it is the safest technique to store hydrogen at low operating temperatures. On the other hand, the major disadvantages are that the onboard hydrogen storage system is quite heavy, has low reversibility, and requires high dehydrogenation temperature. Metal-based hydrides are categorized into elemental, intermetallic, and complex hydrides [98,168].

Elemental hydrides are promising hydrogen storage materials derived from metals such as Mg, Na Li, Ca, and Al. These hydrides include one metal with hydrogen, best described with the MH_x formula, where M is a metal [176]. MgH₂ has a gravimetric density of 7.6 wt% whereas Magnesium based alloys show nearly 5 wt% of hydrogen storage capacity [168,175]. Aluminium hydride or alane (AlH₃) have 10.1 wt% gravimetric and 7.47 kg H₂/100 L volumetric hydrogen storage capacities, but due to instability, it is stored at high pressure, which is in the range of GPa. Other elemental hydrides are LAH₂, YH₂, and ZrH₂, which are stable, whereas NiH and FeH are unstable and require high pressure [168].

Intermetallic compounds or interstitial hydride contains at least two metals along with hydrogen. They can absorb and desorb hydrogen under mild conditions [176]. The general formula for interstitial hydride is A_xB_yH_z, various forms being A_xB_y are AB, AB₂, A₂B, A₃B, AB₅, and A₂B₇, where A and B are transition or earth metals. The material TiFe shows hydrogen absorption up to 1.9% with the possibility of reversibility. ZrFe₂ has 1.7 wt% of hydrogen storage capacity at 20 °C. Solid solution alloys are also used for hydrogen storage and are generally based on vanadium, which is also included in this category. It shows a gravimetric density of 4 wt% [168].

Complex metal hydrides contain metallic cations and anionic groups that make partial covalent bonds with hydrogen [168,176]. Under this category, amide-hydride (e.g., LiNH₂) system, Alanates (e.g., LiAlH₄), borohydrides (e.g., LiBH₄), and some metal amine complexes (M (NH₃)_nX_m, where M is a cation and X is anion) are included [98,168]. Lithium nitride (Li₃N) has been utilized to store a maximum hydrogen capacity of 11.5 wt% of gravimetric density and 7.35 kg H₂/100 L of volumetric density and dehydrogenate successfully. Lithium borohydride (LiBH₄) has a complicated hydrogenation process and high decomposition temperature but with a gravimetric storage capacity of 18.5 wt% at room temperature. Lithium alanate (LiAlH₄) at high pressure and temperature shows 10.6 wt% of hydrogen storing capacity [168].

5. Evaluating the sustainable application of the dark fermentation process as a biorefinery

5.1. Biorefinery concept

The scalability of DF-based biorefinery relies on the biohydrogen productivity and subsequent utilization of the derived VFAs. Bio-electrochemical systems, microbial fuel cells, photo fermentation, etc., are recent technologies evaluated as a downstream process for utilizing the VFAs [190]. The decision to select the post-utilization of VFAs could be based on the microbes used and the primary composition of the VFAs produced. For example, if the acetate-based pathway is involved in the DF process, AD could be the go-to downstream technology to utilize VFAs to produce biogas [19]. If the butyrate-based pathway is engaged, the solventogenic process could be followed where the VFAs are converted to acetone, butanol, and ethanol in the ratio of 3:6:1 [191]. However, the solventogenic process involves energy and cost-intensive recovery and purification processes that may disrupt the overall techno-economics. Thus, with the current technology readiness level, AD technology is more feasible for establishing the DF-based biorefinery system.

The integration of the DF process with AD has several advantages.

The process can produce biohydrogen and biomethane simultaneously. These biofuels can be utilized separately or as a combination named biohythane. In addition, excess hydrogen can even be used for in-situ microbial methane enrichment through two-stage AD. Such a concept has been discussed by D' Silva et al. [12]. Integration of in-situ microbial methane enrichment with the DF process has been discussed further in section 6. Moreover, two-stage AD has been known for its better biomass degradation efficiency at a higher feeding rate [192]. In addition, the performance of the two-stage AD can be consistently maintained by strategizing specific operational conditions separately for DF and AD reactors [193–197].

A possible concept of two-stage AD for easily soluble substrates (kitchen wastes and other substrates rich in carbohydrates) is represented in Fig. 7. However, lignocellulosic biomass can also be treated using two-stage AD. The difference in treating lignocellulosic biomass using two-stage AD is the pretreatment requirement, which may also require higher HRT and lower feeding rate than easily soluble materials. The research on two-stage AD is currently focused on long-term operation, techno-economics, energy efficiency, and strategizing operation and maintenance and process monitoring [63,198].

5.2. Pilot-scale experiences

The commercial viability of a process can only be validated through pilot-scale experiences. This includes the viability in terms of energy and mass balances, techno-economics, and life cycle analysis. In addition, it is also essential to solve some practical challenges such as collection, transportation, and storage of substrates to be treated, material handling and operation and maintenance, and developing a proper process workflow [199,200]. Even though there have been various types of bioreactors developed and investigated, such as CSTR, anaerobic fluidized bed reactor, anaerobic sequencing batch reactor, up-flow anaerobic sludge blanket (UASB), and membrane bioreactor in lab-scale studies [13], the CSTR mainly was preferred as the DF under mesophilic conditions in pilot-scale studies with pH maintained around 4.5–6.5 [201]. The pH is maintained by adding acid/alkali chemicals at regular intervals, or the effluent from the methanogenic reactor is recirculated again to the DF reactor [193]. This approach is more suitable for the two-stage AD system that has been inoculated by mixed cultures. Such an approach has been strategized from the concept of 'mixed culture biotechnology' developed by Kleerebezem and Van Loosdrecht [202]. Through this concept, unknown mixed cultures are used for the bioprocess development of the DF process based on natural selection by controlling the operational conditions or by using natural inoculum from diverse sources.

The DF reactor was initially inoculated using the anaerobic digestate pretreated thermally or chemically to inhibit hydrogen-consuming microbes and generally kept under thermophilic conditions. These temperature ranges help hydrolysis and abridge the microbial activity suitable for biohydrogen production [203]. So far, based on the experiences from pilot-scale studies, Ueno et al. [204] observed that 1 kg of COD equivalent available in the substrate was transformed to biohydrogen, i.e., about 1 kg of COD equivalent is required to produce 3.7 to 6.6 m³ of biohydrogen (1.5 to 2.4 mol H₂/mol. hexose) at an HRT between 0.6 and 1.2 d.

Different from that, recently, a pilot-scale DF study of 10 m³ capacity (CSTR) situated at the Indian Institute of Technology Kharagpur, India treating cane molasses and groundnut de-oiled cake together has reported a maximum hydrogen yield of 16.2 mol hydrogen per kg of COD removed (which is equivalent to 0.4 m³ of H₂ per kg of COD) [43]. However, the study has observed much-improved performance in the pilot-scale reactor than in the bench-scale reactor (50 L capacity). At the same time, earlier, a two-stage AD plant (UASB-based DF reactor with a working capacity of 0.4 m³ and anaerobic digester with an operational capacity of 2.5 m³) was developed, namely "Innovative Hydrogenation & Methanation Technology (HyMeTek)" at Feng Chia University,

Taiwan [205]. The system treating food industry wastewater (60 g COD/L) has reported a hydrogen production rate of 3 m³/m³. d and a yield of 1.5 mol hydrogen/mol hexose at an HRT of 9 h and a methane production rate of 0.86 m³/m³. d and yield of 27 to 56 mL/g. The study also suggested expanding the downstream processes, such as carbon-capturing using a membrane bioreactor for treating the digested effluent and a microalgal photobioreactor to capture the carbon dioxide from the gaseous mixture produced from the DF. This way, the AD plants improve the functionality and zero carbon emission targets from the biorefinery concept.

5.3. Energy recovery

Energy recovery is a governing factor for the techno-economic feasibility of a system. A major benefit of integrating the DF process with AD is the maximal energy recovery compared to single-stage AD, irrespective of the type of feedstock used and operational parameters [125,206,207]. The authors of the cited literature reported an increased methane yield between 11 and 21% for two-stage AD over single-stage AD. The total energy recovered from the substrate in the form of H₂ has been reported as around 41% for the acetate pathway and 27% for other mixed culture pathways. Exergy analysis of the proposed biorefinery concept will be instrumental in identifying the irreversible processes within the system. So far, various studies have only investigated energy efficiency based on the energy value of hydrogen and methane.

The total energy recovered from the two-stage AD can be determined by calculating the energy produced in the form of hydrogen and methane. About 1.8 MJ/kg. VS_{added} of hydrogen and 12.3 MJ/kg. VS_{added} of methane (a total energy recovery of 14.21 MJ/kg. VS_{added}) was recovered in a two-stage AD treating manure and market wastes which were 8–43% higher energy recovery than one-stage [208]. Likewise, a total energy recovery of 7.1 MJ/kg. VS_{added} was achieved in a two-stage AD-treating alkali (NaOH) -pretreated wheat straw [209]. However, the study observed no significant difference between one-stage and two-stage AD systems. The results were 3% higher energy recovery than one stage system treating alkali-pretreated wheat straw and 23% higher energy than one stage treating untreated wheat straw. In another study, a 19% increase in energy yield was observed in a two-stage AD treating (1.64 MJ) thin stillage compared to single-stage AD (1.38 MJ) [207]. At the same time, Luo et al. [210] reported a stabilized two-stage AD at a feeding rate of 0.05 kg VS/ Ld treating stillage. Total energy of 11.8 MJ/kg was recovered from the system, with about 0.7 MJ/kg from biohydrogen production and 12.4 MJ/kg from biomethane production. A higher total energy yield of 22 MJ/kg. VS (H₂ yield of 76 L/kg. VS and CH₄ yield of 598 L/kg. VS) was obtained during the two-stage AD of food waste [57].

Fu et al. [211] investigated the performance of two-stage AD treating vinasse. The study obtained a cumulative hydrogen and methane yield of 14.8 and 274 L/kg. VS_{substrate} with energy recovery of 10.54 MJ/kg VS (13% higher than single-stage AD). A hydrogen yield of 106 L/kg VS and a methane co-production efficiency of 125% were achieved in a two-stage system during the co-digestion of food waste, corn straw, and chicken manure [212]. Ramos et al. [213] simulated upscaling estimation for a two-stage AD system treating vinasse wastewater. According to the study, the best scenario for treating the vinasse wastewater is maintaining thermophilic conditions for the acidogenic reactor and mesophilic conditions for the methanogenic reactor, achieving a maximum energy yield of 7 MJ/kg COD_{removed}.

However, some researchers have disagreed with these claims [214]. From their studies, they have observed that there are no significant differences in overall energy recovery between one-stage and two-stage AD systems. The common root cause being suggested is the accumulation of intermediate metabolites such as VFAs, phenols, amino acids, ketones, and amines which makes the two-stage system inefficient. The low pH effluent consisting of a high concentration of intermediate

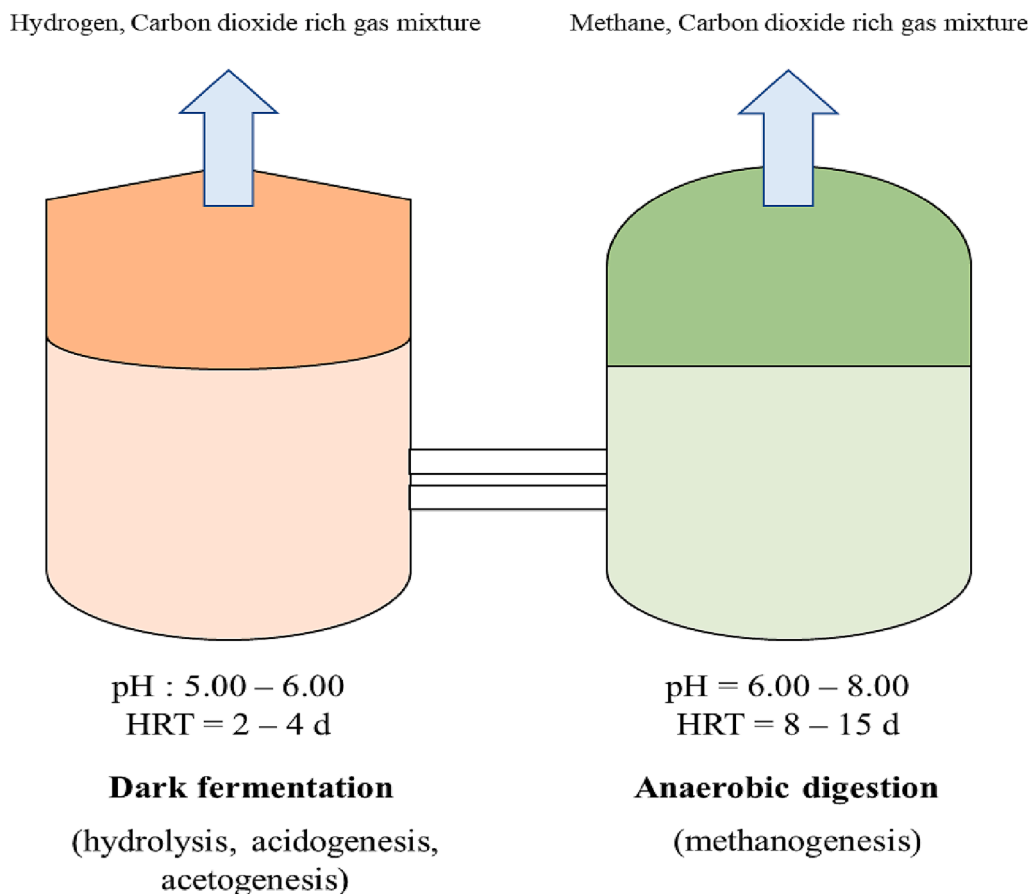


Fig. 7. The concept of two-stage AD [52].

metabolites from the DF reactor may weaken the microbial activity and diversity in methanogenic reactors. Therefore, process efficiency and stability must be ensured to recover higher energy from two-stage AD. It is generally directly linked with the substrate type, feeding rate, HRT, bioreactor used, and energy input required for the operation [215,216].

5.4. Techno-economic analysis (TEA)

The techno-economics of any biorefinery system depends on the profit from the output over the investment. Thus, it relies on how biohydrogen and biomethane fuels produced are applied. Hsu et al. [217] evaluated the techno-economics of such a biorefinery concept by treating condensed molasses in a DF reactor with a working capacity of 50 m³ and an anaerobic digester having a capacity of 300 m³, followed by chemical scrubbing for biogas purification and recovering hydrogen, methane, and carbon dioxide. The techno-economic analysis (TEA) showed that the internal rate of return of the system was 33%, with a payback period of about 3.2 years. More recently, Mahmud et al. [218] studied the techno-economics of a two-stage AD for treating palm oil mill effluent, having a plant capacity of 700 m³ (for DF) and 7000 m³ (for AD). The plant was designed for thermophilic conditions (50°C) at an HRT of 1 d for DF and 10 days for AD. The TEA projected a payback period of 8 years, a return on investment of 20%, an internal rate of return of 21.50%, and a net present value of around 46.25 million USD. The study also recommended that the substrate quality and selling price of the fuel products influence the dynamics in the economics of the proposed two-stage AD system. Bastidas-Oyanedel and Schmidt [219] compared the TEA of food waste valorization through single-stage and two-stage AD systems. Within a timeframe of 20 years, the return on investment increased from 36% to 73%, and payback time was reduced from 15 years to 8 years in two-stage AD systems. Sanchez et al. [9]

showed that the biohydrogen production cost from DF of agricultural wastes is between 2.30 and 2.50. Similarly, hydrogen production through DF using food waste cost 0.54 – 3.20 USD/m³ [13,50,220]. The reported production cost of biohydrogen from various substrates is summarized in Table 7.

Integrating the DF process with AD might reduce the overall production cost of biohydrogen. Moreover, the studies suggested that solely producing hydrogen from DF through waste biomass is influenced by the substrate cost, system establishment cost, and cost inclusive of collection, transportation, and distribution. Since waste biomass is available cheaply, the substrate cost can be vastly reduced. Rajendran et al. [221] have calculated that the two-stage AD requires only a 3% excess capital investment compared to single-stage AD for a 1000–1100 m³ working volume digester. Moreover, the techno-economics of a two-stage biorefinery system is mainly governed by several factors such as reactor configuration, hydrogen/methane productivity, transportation, collection, processing, and pretreatment of the substrate and substrate quantity to be treated, plant capacity, energy input required, etc. [221,222].

Table 7
Cost economics of biohydrogen production through the DF process.

Substrate type	Biohydrogen production cost (USD/m ³)	References
Food wastes	2.70	[13]
Food wastes	0.54	[223]
Food wastes	3.20	[50]
Molasses	1.80	[220]
Agricultural wastes	2.70	[224]
Beverage wastewater	2.70	
Agricultural wastes (wheat straw)	2.30–2.50	[9]

However, DF-based biorefineries can be feasible over conventional techniques only if economic and environmental benefits are considered [9].

5.5. Life cycle analysis (LCA)

Life cycle analysis (LCA) is an essential factor that determines the fate of an industrial-scale biorefinery establishment. One study has evaluated the environmental concerns involved in the two-stage biorefinery concept for two different substrates, i.e., food waste and wheat straw, and compared it with single-stage AD and diesel-based energy generation [225]. The study observed that a two-stage biorefinery could remarkably reduce the associated environmental problems (carcinogens and ecotoxicity). They also reported that the two-stage hydrogen and methane-producing biorefinery concept using wheat straw increases the energy returns over a single-stage AD process. Isola et al. [226] investigated the LCA of a portable two-stage AD treating food waste (FW) and cardboard waste (CW) (at the best co-digestion (FW: CW) ratio of 65:35). The portable two-stage AD exhibited performance equivalent to full-scale reactors yielding 37% COD of energy in the form of biogas. The study cited that the primary contributing parameter for the life cycle of a two-stage AD is the temporal variation of the feedstock. Likewise, Coats et al. [227] evaluated the LCA of a two-stage AD coupled with algae production. The study analysed that the system can substantially reduce the greenhouse gas emissions contributing to climate change by up to 60% compared to the anaerobic lagoon process. Sun et al. [228] studied the LCA of biohythane production through two-stage AD treating microalgae. The study found that the net greenhouse gas emissions of biohythane production consisting of upgradation, energy, and nutrient recovery systems were 18% higher than that of a system without a hydrogen fermentation system. Apart from energy recovery, the study recommended that nutrient recovery is an essential component that must be considered in a biorefinery concept to improve the LCA of a two-stage AD system. Schramm, [229] investigated the LCA of a two-stage

AD-treating OFMSWs. The results from the study indicated that the DF process treating OFMSWs initially provided a better energy balance for the whole system. Further, the utilization of VFAs in the succeeding AD reactor delivers the lowest impact on the environment per kJ of energy produced than the conventional AD systems. Very recently, Camacho et al. [230] claimed that the substrate treated is the major parameter that governs the carbon neutrality of the overall DF biorefinery system. The study found that it is much more energy-positive and sustainable to utilize the sugar beet molasses as a suitable feedstock for hydrogen production than cheese whey and co-fermentation of wine vinasses and wastewater treatment plant sludge. The outcome of all the studies, in general, was that the energy and nutrient recovery along with almost equivalent greenhouse emissions paved way for considering two-stage AD as a sustainable way to treat waste biomass over conventional AD.

6. Recent advances and future research directions

Dark fermentation for biohydrogen production is an exciting topic with huge prospects. However, the stability and long-term operation of the process still pose challenges [18]. Microbiological investigations using mixed culture inoculum to initiate the DF process are to be targeted further for fast start-up and long-term sustainable operation. Most recent biohydrogen potential investigations are based on batch study assessments. More long-term continuous studies are required for further development of the biorefinery concept. The feasibility of integrating microbial fuel cells, photo fermentation, microalgal ponds, and bio-electrochemical systems with the two-stage AD need to be investigated further [231,232]. This might make the biorefinery system more reliable and enhance the synthesis of various products. For example, producing biobutanol apart from biohydrogen and biomethane [209,210] or improving both fuels' productivity [233,234].

The future concept of a microalgae-based biorefinery unit is shown in Fig. 8 [231,233]. Integrated DF and photofermentation techniques are not economically viable as of current research developments, as per

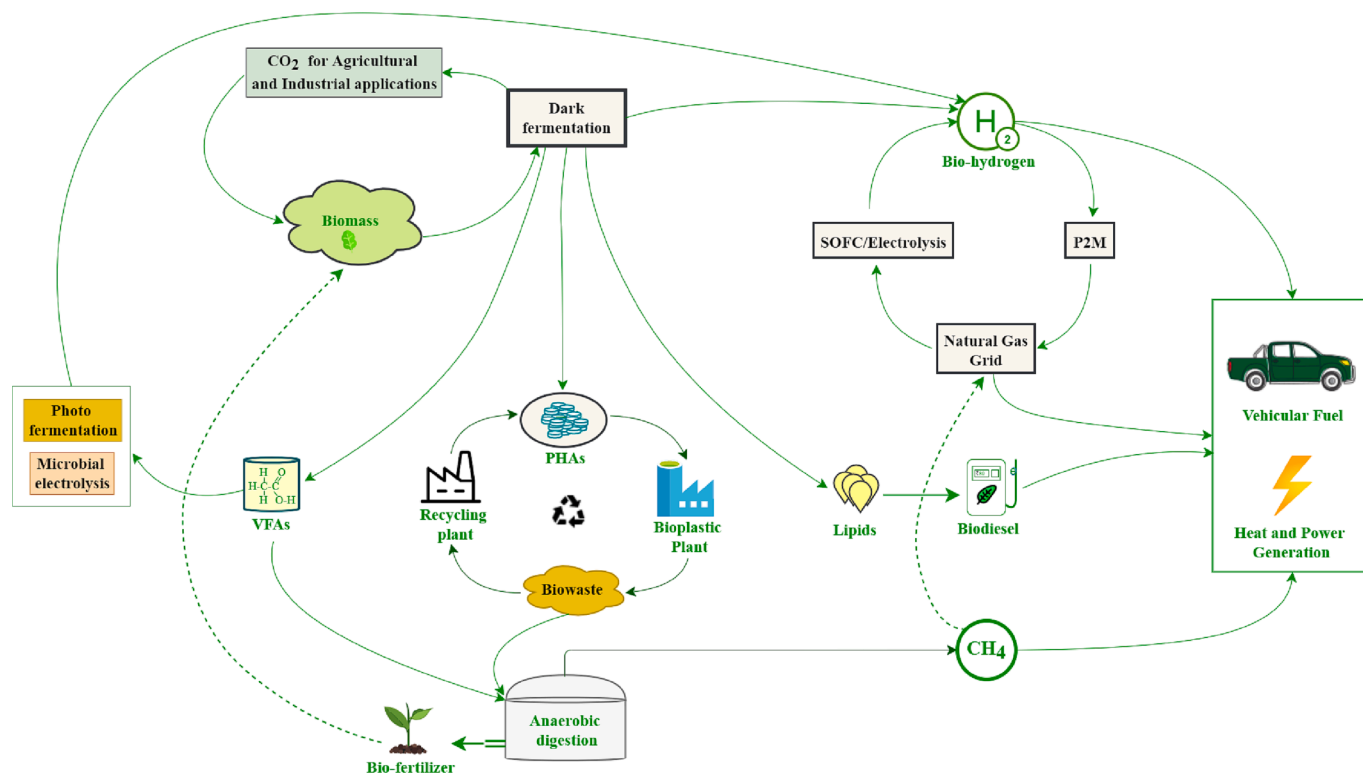


Fig. 8. Integration of different biofuel and biochemical recovery technologies with two-stage AD biorefineries (adapted and modified from Sittthikitpanya et al. [233]).

Ahmad et al. [235] and Urbaniec et al. [236]. The study by Ahmad et al. examined the possibility of treating liquid pineapple wastes through DF and photo fermentation for biohydrogen production. The results indicated that a rate of interest between 2 and 20% varies the payback period between 9.90 to greater than 20 years, which is not reasonably feasible in terms of investment. However, there have been reports of better techno-economic viability of DF plants integrated with polylactic acid fermentation [219]. With different findings being reported by various researchers, more investigations to optimize such concepts with respect to product yield, techno-economics, and life cycle analysis are required for conclusive validations. As in Fig. 8, interventions of different processes for producing various value-added products, such as polyhydroxyalkanoates (PHAs), biodiesel, biobutanol, acetic acids, etc., may reduce the investment cost and thus improve economic viability.

Researchers have recently utilized various strategies, such as adding biochar, nanoparticles, etc., to improve the biohydrogen yield and microbial metabolism [13,237]. Nanoparticles (NPs), specifically inorganic nanoparticles such as nickel, titanium oxide, silver, and iron, have enhanced biohydrogen production [238]. However, the dosage quantity must be optimized according to the substrate type and inoculum. On the other hand, some researchers have incorporated carbon materials such as biochar, hydrochar, etc., produced from various substrates into the DF process. These carbon materials, rich in microbial abundance and activity-enhancing properties such as porosity, high specific surface area, neutral pH, and trace elements, have been reported to boost the hydrolysis and acidogenesis rates, subsequently supporting biohydrogen production [237]. Different trace elements, such as Fe^{2+} could stimulate the Fe-based hydrogenase reactions during the DF, resulting in biohydrogen production [239], but this requires further investigation.

In the case of upgradation techniques, water scrubbing technology has been neglected for biohydrogen purification. However, regarded as having much more economical and less environmental effects for biomethane upgrading [240], biohydrogen purification through water scrubbing could be a solution that can be further researched. Biohythane is a suitable fuel that could be directly used as a vehicular fuel. Hence, two-stage AD could be focused on producing biohythane. It can be directly utilized as an alternative to compressed natural gas, especially in vehicles that improve upgraded biomethane energy density enhancing its applicability. Still, the challenge is that the economical and environmentally friendly purification and storage systems are lacking and require much research focus shortly. The separated bio- CO_2 could be utilized for agricultural crop production, harvested crop storage, other industrial applications, etc. Kumar et al. [241] have successfully demonstrated using bio- CO_2 for wheat grain storage. The results suggest that bio- CO_2 enhanced shelf life and controlled pests.

Recently, Adlak et al. and Khan et al. have successfully stored enriched biomethane in activated carbon-filled cylinders at lower pressures (<70 bar) [242–244]. The same concept may be adaptable to hydrogen storage, as discussed in section 4.2.1.4 but requires extensive investigation for biorefinery development. The large-scale H_2 storage and transport systems are underdeveloped, expensive, and energy intensive. Another way to solve biohydrogen storage and transportation problems involves converting biohydrogen to methane. A massive advantage of utilizing methane as a storage and transport medium is the existence of efficient and advanced storage and transport pipeline systems already developed. Hydrogenotrophic methanogens reduce the carbon dioxide (CO_2) to CH_4 when appropriate reducing power, i.e., H_2 or low redox potential electrons, are available. The energy conversion of H_2 and CO_2 into CH_4 is called Power-to-Methane (P2M) [245].

P2M could be achieved in two ways: (a) within the AD reactor called in-situ P2M, or (b) in a separate AD reactor, i.e., ex-situ P2M, or in combination. The key methanogens involved depend on how the P2M process is achieved, i.e., mixed anaerobic communities are required for in-situ P2M. At the same time, pure cultures are essential for ex-situ P2M, which could be enriched from full-scale anaerobic digestion plants [246,247]. Further, the converted methane from H_2 could be

Table 8

SWOT analysis of the two-stage anaerobic digestion-based biorefinery concept according to this review.

Strength	Weaknesses	Opportunities	Threats
<ul style="list-style-type: none"> Abundant availability of waste biomass Eco-friendly and sustainable technology compared to other techniques Simple, adaptable technology with less complexity 	<ul style="list-style-type: none"> Collection, transportation, and segregation of the waste biomass resources Adopting the technology without downstream technologies is not feasible economically Start-up and long-term stable operation require rigorous optimization methods Lack of adequate pilot-scale experiences Low productivity in terms of energy recovery 	<ul style="list-style-type: none"> Achieving the hydrogen and methane fuel demand together More research and developments (collaborations and partnerships) within the countries between academic institutions and industries and between the countries. Valorization of biohydrogen, biocarbon dioxide, biomethane, VFAs, and bio-slurry replacing conventional energy fuels/chemical fertilizers Proper treatment of waste biomass contributes to sustainable waste management 	<ul style="list-style-type: none"> Varied performance based on substrate composition and type, inoculum type, and microbes involved Lack of policy framework promoting "biohydrogen" production Lack of economical techniques for hydrogen purification, storage, and transportation.


either utilized directly to replace natural gas or converted back to hydrogen. The pathway for methane to hydrogen conversion could be methane-electricity generation-water electrolysis [248] or through methane reforming using solid oxide fuel cells (SOFC) [249]. This could minimize the requirement for hydrogen-based storage and transport systems and avail the already available natural gas-based storage and transport systems as an alternative reducing the huge initial investment costs and the overall carbon footprint. The concept can be instrumental for the future "low carbon hydrogen transport." However, these concepts, including biohydrogen upgradation, storage, transport, P2M, and SOFC technologies, are still at primary scale investigations and require extensive pilot-scale evaluations, TEA, and LCA studies.

7. Policy interventions for introducing biohydrogen into the energy fuel market: An Indian perspective

Hydrogen production is necessary to mitigate greenhouse gas emissions, tackle climate change issues, and minimize the overutilization of fossil fuels. So far, the existing hydrogen production techniques are more based upon SMR or else with electrolysis-dependent systems. Especially the developed countries (primarily Western countries) have initiated indigenous hydrogen production, fulfilling energy security and tackling climate change [250]. Afro-Asian countries need to pick up their pace in adopting hydrogen as a clean fuel through various international/national policy developments and tie-ups. Recently, Govt. of India unveiled a National Hydrogen Mission to build India as a global hub in hydrogen production. The mission aims to achieve "green hydrogen" production focusing on energy self-reliance, self-sufficiency, and clean energy transition.

Renewable hydrogen production through the biological process of

(a)

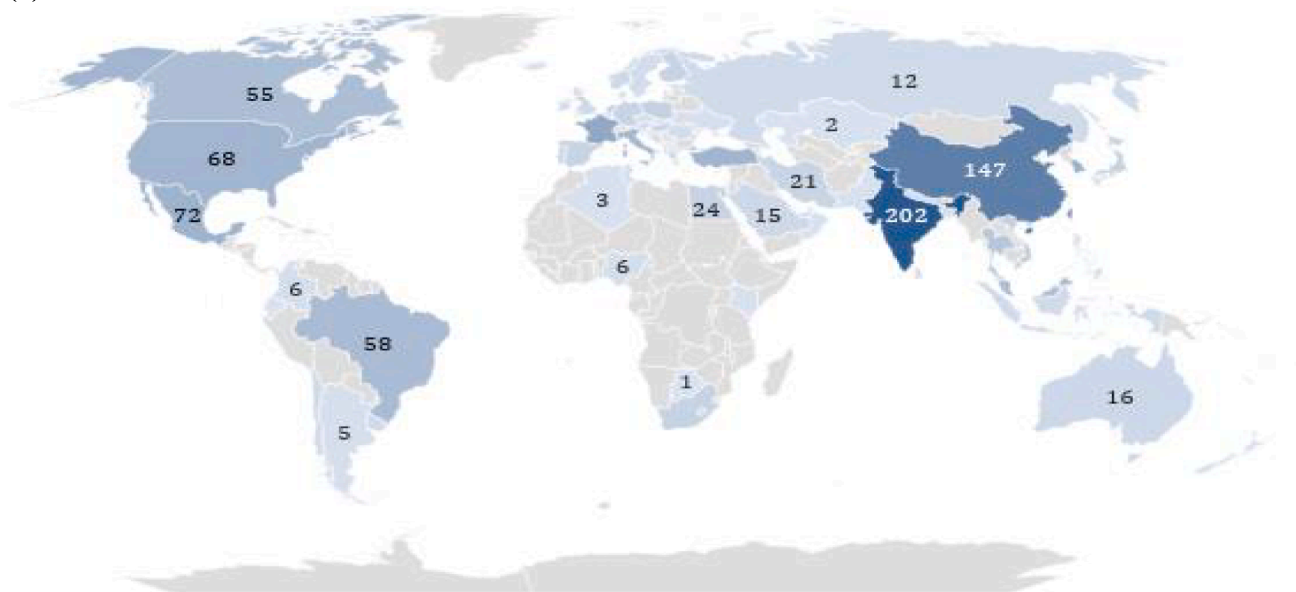

(b)

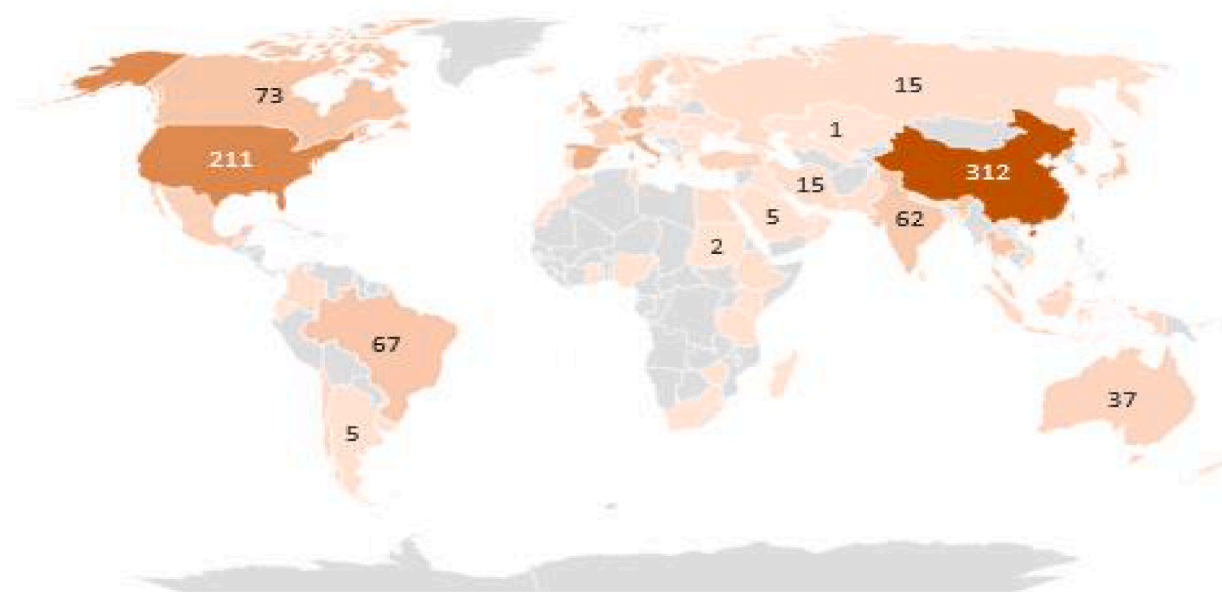


Fig. 9. Research across the world over dark fermentation (a) and two-stage anaerobic digestion (b) (Scopus data, dated 28th April 2022).

DF, bio photolysis, and photo fermentation should also get the attention it deserves in the “Green hydrogen” platform with its benefits. This makes the self-reliant biohydrogen production and increases the green growth and jobs that the National hydrogen mission aims to. In addition, the National Hydrogen Mission can be merged with the missions such as Swachh Bharat Abhiyaan (a solid waste management scheme) and Sustainable Alternative towards Sustainable Transportation (SATAT) (a clean vehicular energy scheme based on compressed biomethane), making it engaged in more widened perspectives along with solid waste management, clean energy, and transportation. Capacity building across the nation is crucial and decisive from a political, technical, and economical aspect for successfully establishing biorefineries along with other hydrogen production technologies.

The decisions may be considered after the conclusive evidence

elucidated from the managerial decision-making approaches such as strengths, weaknesses, opportunities, and threats (SWOT) analysis [16,251]. Likewise, Das et al. [252] conducted a SWOT analysis to determine the feasibility of the biological biogas upgradation systems. Similarly, Table 8 shows the SWOT analysis results for the two-stage AD-based biorefinery concept discussed in this review article. From Fig. 9(a, b), it can be seen that the research publications from different countries on biohydrogen production through DF and two-stage AD. Asian countries have been primarily interested in research developments on these topics. However, there is a lack of knowledge dissemination or collaboration between the countries specifically working on DF and two-stage AD, as seen in Fig. 9(a, b). Hence, more international partnerships and industrial symbiosis are required to boost the development of biorefinery concepts, which depend highly on intergovernmental decisions

and policy frameworks. Moreover, the enlisted weaknesses and threats must be adequately addressed.

8. Conclusions

Tapping the biohydrogen from waste biomass through DF possesses immense potential globally. Still limited to the laboratory and pilot-scale studies, there is a push to develop biorefinery concepts based on DF. Thus, research has focused over the last two decades on investigating the potential of DF for biohydrogen production. From this review, several notable conclusions were elucidated as given below:

- There is a requirement for long-term studies at a pilot-scale level based on DF from various waste biomass for stable operation, by-product production, and microbiological aspects, which is still lacking.
- Microbial consortia used for DF startup are crucial for biohydrogen productivity and VFAs production.
- Biorefinery concepts solely based on DF are not viable for upscaling regarding techno-economics and biomass utilization.
- So far, two-stage AD stands out as the most suitable option for simultaneous biohydrogen and biomethane production even though other technologies, such as photo fermentation, bioelectrochemical systems, etc., are being investigated lately. The research on the latter technologies must be established regarding technical and economic feasibility and life cycle analysis.
- Two-stage AD can utilize the waste biomass resources to the maximum potential in terms of energy recovery, techno-economics, and life cycle analysis.
- The effect of adding nanomaterials and other bio-additives to the DF and AD reactor requires more investigations at pilot-scale studies in terms of performance, environmental sustainability, and techno-economics.
- Hydrogen purification and storage require further investigation into sustainable and cheaper mechanisms with lesser complexity.
- Biohydrogen production requires a synergistic push from a policy aspect, developing more international collaborations, industrial-academia symbiosis, etc.

CRedit authorship contribution statement

Tinku Casper D' Silva: Conceptualization, Writing – original draft. **Sameer Ahmad Khan:** Writing – original draft. **Subodh Kumar:** Writing – review & editing. **Dushyant Kumar:** Writing – review & editing. **Adya Isha:** Writing – review & editing. **Saptashish Deb:** Writing – review & editing. **Saurabh Yadav:** Writing – review & editing. **Biju Illathukandy:** Writing – review & editing. **Ram Chandra:** Supervision, Funding acquisition, Resources, Writing – review & editing. **Virendra Kumar Vijay:** Supervision, Resources. **Paruchuri M.V. Subbarao:** Supervision. **Zoltán Bagi:** Writing – review & editing, Resources. **Kornél L. Kovács:** Supervision, Writing – review & editing, Resources. **Liang Yu:** Writing – review & editing. **Bhushan P. Gandhi:** Writing – review & editing. **Kirk T. Semple:** Supervision, Writing – review & editing.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

Data will be made available on request.

Acknowledgments

Authors R.C. and V.K.V. acknowledge the funding received from the Indo-Hungarian Joint Project by the Department of Science and Technology (DST) India through “Hydrogenotrophic Anaerobic Biotechnological System for Enrichment of Biogas (HABSEB) Technology for Power and Vehicular Fuel Applications” (Grant No. DST/INT > HUN/P-21/2020(G)). K.L.K. acknowledges the Hungarian twin part of the bilateral collaboration project 2019-2.1.13-TÉT-IN-2020-00016, funded by Hungary’s National Research, Development, and Innovation Office (NKFIH). Hungarian Research Fund OTKA supported Z.B. (FK123902). T.C.D. and S.A.K. are thankful to the Indian Institute of Technology Delhi for providing the institute fellowship. S.D. and S.Y. also acknowledge their funding received from Prime Minister’s Research Fellowship (PMRF), Ministry of Education, Govt. of India.

References

- [1] Herkowiak M, Łaska-Ziejka B, Myczko A, Wrzesińska-Jędrusiak E. Problems of hydrogen doping in the methane fermentation process and of energetic use of the gas mixture. *Appl Sci* 2021;11. <https://doi.org/10.3390/app11146374>.
- [2] Dou Y, Sun L, Ren J, Dong L. Opportunities and future challenges in hydrogen economy for sustainable development. Elsevier Ltd; 2017. <https://doi.org/10.1016/B978-0-12-811132-1.00010-9>.
- [3] Liguori S, Kian K, Buggy N, Anzelmo BH, Wilcox J. Opportunities and challenges of low-carbon hydrogen via metallic membranes. *Prog Energy Combust Sci* 2020; 80. <https://doi.org/10.1016/j.pecs.2020.100851>.
- [4] Hermesmann M, Müller TE. Green, turquoise, blue, or grey? Environmentally friendly hydrogen production in transforming energy systems. *Prog Energy Combust Sci* 2022;90:100996. <https://doi.org/10.1016/j.pecs.2022.100996>.
- [5] National Grid. The hydrogen colour spectrum 2022.
- [6] Baghel P, Sakhiya AK, Kaushal P. Influence of temperature on slow pyrolysis of Prosopis Juliflora: an experimental and thermodynamic approach. *Renew Energy* 2021;185. <https://doi.org/10.1016/j.renene.2021.12.053>.
- [7] Sahoo SS, Vijay VK, Chandra R, Kumar H. Production and characterization of biochar produced from slow pyrolysis of pigeon pea stalk and bamboo. *Clean Eng Technol* 2021. <https://doi.org/10.1016/j.clet.2021.100101>.
- [8] Ganeshan Prabakaran, Kondusamy Dhamodharan, Sanjaykumar Nageshwari Krishnamoorthy, Kumar Deepak, Juneja Ankita, Paramasivan Balasubramanian, Nithin N, Raju KR. How does techno-economic analysis and lifecycle assessment help in commercializing biohydrogen supply chain? *Fuel* 2023;341:127601. <https://doi.org/10.1016/j.fuel.2023.127601>.
- [9] Sanchez A, Ayala OR, Hernandez-Sanchez P, Valdez-Vazquez I, de León-Rodríguez A. An environment-economic analysis of hydrogen production using advanced biorefineries and its comparison with conventional technologies. *Int J Hydrogen Energy* 2020;45:27994–8006. <https://doi.org/10.1016/j.ijhydene.2020.07.135>.
- [10] Sampath P, Brijesh RKR, Reddy CV, Shetti NP, Kulkarni RV, et al. Biohydrogen production from organic waste – a review. *Chem Eng Technol* 2020;43:1240–8. <https://doi.org/10.1002/ceat.201900400>.
- [11] Jain R, Panwar NL, Jain SK, Gupta T, Agarwal C, Meena SS. Bio-hydrogen production through dark fermentation: an overview. *Biomass Convers Biorefinery* 2022. <https://doi.org/10.1007/s13399-022-03282-7>.
- [12] D' Silva TC, Isha A, Chandra R, Vijay VK, Subbarao PMV, Kumar R, et al. Enhancing methane production in anaerobic digestion through hydrogen assisted pathways – a state-of-the-art review. *Renew Sustain Energy Rev* 2021;151: 111536. <https://doi.org/10.1016/j.rser.2021.111536>.
- [13] Brar KK, Cortez AA, Pellegrini VOA, Amulya K, Polikarpov I, Magdoulis S, et al. An overview on progress, advances, and future outlook for biohydrogen production technology. *Int J Hydrogen Energy* 2022. <https://doi.org/10.1016/j.ijhydene.2022.01.156>.
- [14] Elbeshbishy E, Dhar BR, Nakhla G, Lee HS. A critical review on inhibition of dark biohydrogen fermentation. *Renew Sustain Energy Rev* 2017;79:656–68. <https://doi.org/10.1016/j.rser.2017.05.075>.
- [15] Singh T, Alhazmi A, Mohammad A, Srivastava N, Haque S, Sharma S, et al. Integrated biohydrogen production via lignocellulosic waste: opportunity, challenges & future prospects. *Bioresour Technol* 2021;338:125511. <https://doi.org/10.1016/j.biortech.2021.125511>.
- [16] Qyyum MA, Ismail S, Ni SQ, Ihsanullah I, Ahmad R, Khan A, et al. Harvesting biohydrogen from industrial wastewater: production potential, pilot-scale bioreactors, commercialization status, techno-economics, and policy analysis. *J Clean Prod* 2022;340:130809. <https://doi.org/10.1016/j.jclepro.2022.130809>.
- [17] Kumar Gupta S, Kumari S, Reddy K, Bux F. Trends in biohydrogen production: major challenges and state-of-the-art developments. *Environ Technol (United Kingdom)* 2013;34:1653–70. <https://doi.org/10.1080/09593330.2013.822022>.
- [18] Castelló E, Nunes Ferraz-Junior AD, Andreani C, Anzola-Rojas M del P, Borzacconi L, Buitrón G, et al. Stability problems in the hydrogen production by dark fermentation: possible causes and solutions. *Renew Sustain Energy Rev* 2020;119. <https://doi.org/10.1016/j.rser.2019.109602>.

- [19] Chandrasekhar K, Lee YJ, Lee DW. Biohydrogen production: strategies to improve process efficiency through microbial routes. *Int J Mol Sci* 2015;16:8266–93. <https://doi.org/10.3390/ijms16048266>.
- [20] Dong L, Zhenhong Y, Yongming S, Xiaoying K, Yu Z. Hydrogen production characteristics of the organic fraction of municipal solid wastes by anaerobic mixed culture fermentation. *Int J Hydrogen Energy* 2009;34:812–20. <https://doi.org/10.1016/j.ijhydene.2008.11.031>.
- [21] Yang G, Hu Y, Wang J. Biohydrogen production from co-fermentation of fallen leaves and sewage sludge. *Bioresour Technol* 2019;285:121342. <https://doi.org/10.1016/j.biortech.2019.121342>.
- [22] Najafpour GD, Shahavi MH, Neshat SA. Assessment of biological Hydrogen production processes: a review. *IOP Conf Ser Earth Environ Sci* 2016;36. <https://doi.org/10.1088/1755-1315/36/1/012068>.
- [23] Mishra P, Krishnan S, Rana S, Singh L, Sakinah M, Ab WZ. Outlook of fermentative hydrogen production techniques: an overview of dark, photo and integrated dark-photo fermentative approach to biomass. *Energy Strateg Rev* 2019;24:27–37. <https://doi.org/10.1016/j.esr.2019.01.001>.
- [24] Ogata HWL. *Bioenergetics Theory and Components | Hydrogenases Structure and Function*. *Encycl. Biol. Chem.* III, Elsevier; 2021, p. 66–73. <https://doi.org/10.1016/B978-0-12-809633-8.21396-4>.
- [25] Islam AKMK, Dunlop PSM, Hewitt NJ, Lenihan R, Brandoni C. Bio-hydrogen production from wastewater: a comparative study of low energy intensive production processes. *Clean Technol* 2021;3:156–82. <https://doi.org/10.3390/cleantechnol3010010>.
- [26] Sarangi PK, Nanda S. Biohydrogen production through dark fermentation. *Chem Eng Technol* 2020;43:601–12. <https://doi.org/10.1002/ceat.201900452>.
- [27] Sekoai PT, Daramola MO. Effect of metal ions on dark fermentative biohydrogen production using suspended and immobilized cells of mixed bacteria. *Chem Eng Commun* 2018;205:1011–22. <https://doi.org/10.1080/00986445.2018.1428958>.
- [28] Pandey A, Sinha P, Pandey A. Hydrogen production by sequential dark and photofermentation using wet biomass hydrolysate of *Spirulina platensis*: response surface methodological approach. *Int J Hydrogen Energy* 2021;46:7137–46. <https://doi.org/10.1016/j.ijhydene.2020.11.205>.
- [29] Preethi UT, Rajesh Banu J, Gunasekaran M, Kumar G. Biohydrogen production from industrial wastewater: An overview. *Bioresour Technol Rep* 2019;7:100287. <https://doi.org/10.1016/j.biteb.2019.100287>.
- [30] Sağır E, Hallenbeck PC. Photofermentative hydrogen production. *Biohydrogen* 2015;141–57. <https://doi.org/10.1016/b978-0-444-64203-5.00006-x>.
- [31] Zhou J, Olson DG, Lanahan AA, Tian L, Murphy SJL, Lo J, et al. Physiological roles of pyruvate ferredoxin oxidoreductase and pyruvate formate-lyase in *Thermoanaerobacterium saccharolyticum* JW/SL-YS485. *Biotechnol Biofuels* 2015;8:1–14. <https://doi.org/10.1186/s13068-015-0304-1>.
- [32] Tanisho S, Kamiya N, Wakao N. Hydrogen evolution of *Enterobacter aerogenes* depending on culture pH: mechanism of hydrogen evolution from NADH by means of membrane-bound hydrogenase. *BBA - Bioenerg* 1989;973:1–6. [https://doi.org/10.1016/S0005-2728\(89\)80393-7](https://doi.org/10.1016/S0005-2728(89)80393-7).
- [33] Hutňan M, Mrafková L, Drtil M, Derco J. Methanogenic and nonmethanogenic activity of granulated sludge in anaerobic baffled reactor. *Chem Pap* 1999;53:374–8.
- [34] Van Lier JB, Grolle KCF, Frijters CTMJ, Stams AJM, Lettinga G. Effects of acetate, propionate, and butyrate on the thermophilic anaerobic degradation of propionate by methanogenic sludge and defined cultures. *Appl Environ Microbiol* 1993;59:1003–11. <https://doi.org/10.1128/aem.59.4.1003-1011.1993>.
- [35] Fox P, Pohland FG. Anaerobic treatment applications and fundamentals: substrate specificity during phase separation. *Water Environ Res* 1994;66:716–24. <https://doi.org/10.2175/wer.66.5.8>.
- [36] Wang Q, Kuninobu M, Ogawa HI, Kato Y. Degradation of volatile fatty acids in highly efficient anaerobic digestion. *Biomass Bioenergy* 1999;16:407–16. [https://doi.org/10.1016/S0961-9534\(99\)00016-1](https://doi.org/10.1016/S0961-9534(99)00016-1).
- [37] Bhatia SK, Jagtap SS, Bedekar AA, Bhatia RK, Rajendran K, Pugazhendhi A, et al. Renewable biohydrogen production from lignocellulosic biomass using fermentation and integration of systems with other energy generation technologies. *Sci Total Environ* 2021;765:144429. <https://doi.org/10.1016/j.scitotenv.2020.144429>.
- [38] Thauer RK, Jungermann K, Decker K. Energy conservation in chemotrophic anaerobic bacteria. *Bacteriol Rev* 1977;41:100–80. <https://doi.org/10.1128/mmb.41.1.100-180.1977>.
- [39] Nakashimada Y, Rachman MA, Kakizono T, Nishio N. Hydrogen production of *Enterobacter aerogenes* altered by extracellular and intracellular redox states. *Int J Hydrogen Energy* 2002;27:1399–405. [https://doi.org/10.1016/S0360-3199\(02\)00128-3](https://doi.org/10.1016/S0360-3199(02)00128-3).
- [40] Lee HS, Salerno MB, Rittmann BE. Thermodynamic evaluation on H₂ production in glucose fermentation. *Environ Sci Technol* 2008;42:2401–7. <https://doi.org/10.1021/es702610v>.
- [41] Fu Q, Wang D, Li X, Yang Q, Xu Q, Ni BJ, et al. Towards hydrogen production from waste activated sludge: principles, challenges and perspectives. *Renew Sustain Energy Rev* 2021;135:110283. <https://doi.org/10.1016/j.rser.2020.110283>.
- [42] Xiao N, Chen Y, Chen A, Feng L. Enhanced bio-hydrogen production from protein wastewater by altering protein structure and amino acids acidification type. *Sci Rep* 2014;4:1–9. <https://doi.org/10.1038/srep03992>.
- [43] Balachandrar G, Varanasi JL, Singh V, Singh H, Das D. Biological hydrogen production via dark fermentation: a holistic approach from lab-scale to pilot-scale. *Int J Hydrogen Energy* 2020;45:5202–15. <https://doi.org/10.1016/j.ijhydene.2019.09.006>.
- [44] Pugazhendhi A, Kumar G, Sivagurunathan P. Microbiome involved in anaerobic hydrogen producing granules: a mini review. *Biotechnol Rep* 2019;21:e00301.
- [45] Kucharska K, Rybarczyk P, Holowacz I, Łukajtis R, Glinka M, Kamiński M. Pretreatment of lignocellulosic materials as substrates for fermentation processes. *Molecules* 2018;23:1–32. <https://doi.org/10.3390/molecules23112937>.
- [46] Bagi Z, Maroti J, Maroti G, Kovacs KL. Enzymes and microorganisms for biohydrogen production. *Curr Biochem Eng* 2014;1:106–16. <https://doi.org/10.2174/2212711901999140618110310>.
- [47] Wong YM, Wu TY, Juan JC. A review of sustainable hydrogen production using seed sludge via dark fermentation. *Renew Sustain Energy Rev* 2014;34:471–82. <https://doi.org/10.1016/j.rser.2014.03.008>.
- [48] Zhang J, Wang Q. Buffering and nutrient effects of white mud from ammonia-soda process on thermophilic hydrogen fermentation from food waste. *Int J Hydrogen Energy* 2013;38:13564–71. <https://doi.org/10.1016/j.ijhydene.2013.08.047>.
- [49] Akinbomi J, Taherzadeh MJ. Evaluation of fermentative hydrogen production from single and mixed fruit wastes. *Energies* 2015;8:4253–72. <https://doi.org/10.3390/en8054253>.
- [50] Dinesh GK, Chauhan R, Chakma S. Influence and strategies for enhanced biohydrogen production from food waste. *Renew Sustain Energy Rev* 2018;92:807–22. <https://doi.org/10.1016/j.rser.2018.05.009>.
- [51] Alavi-Borazjani SA, Tarelho LA da C, Capela MI. Parametric optimization of the dark fermentation process for enhanced biohydrogen production from the organic fraction of municipal solid waste using Taguchi method. *Int J Hydrogen Energy* 2021;46:21372–82. <https://doi.org/10.1016/j.ijhydene.2021.04.017>.
- [52] Srisowmeya G, Chakravarthy M, Nandhini DG. Critical considerations in two-stage anaerobic digestion of food waste – a review. *Renew Sustain Energy Rev* 2020;119:109587. <https://doi.org/10.1016/j.rser.2019.109587>.
- [53] Hay JXW, Wu TY, Juan JC, Jahim JM. Biohydrogen production through photo fermentation or dark fermentation using waste as a substrate: overview, economics, and future prospects of hydrogen usage. *Biofuels Bioprod Biorefining* 2013;7:334–52. <https://doi.org/10.1002/BBB>.
- [54] Xia A, Cheng J, Lin R, Liu J, Zhou J, Cen K. Sequential generation of hydrogen and methane from glutamic acid through combined photo-fermentation and methanogenesis. *Bioresour Technol* 2013;131:146–51. <https://doi.org/10.1016/j.biortech.2012.12.009>.
- [55] Valenzuela BR, Valenzuela BA. Overview about lipid structure. *Lipid Metab* 2013;1:3–20.
- [56] Lay JJ, Fan KS, Chang LJ, Ku CH. Influence of chemical nature of organic wastes on their conversion to hydrogen by heat-shock digested sludge. *Int J Hydrogen Energy* 2003;28:1361–7. [https://doi.org/10.1016/S0360-3199\(03\)00027-2](https://doi.org/10.1016/S0360-3199(03)00027-2).
- [57] Rafieenia R, Pivato A, Lavagnolo MC. Effect of inoculum pre-treatment on mesophilic hydrogen and methane production from food waste using two-stage anaerobic digestion. *Int J Hydrogen Energy* 2018;43:12013–22. <https://doi.org/10.1016/j.ijhydene.2018.04.170>.
- [58] Azman NF, Abdesahian P, Al-Shorgani NKN, Hamid AA, Kalil MS. Production of hydrogen energy from dilute acid-hydrolyzed palm oil mill effluent in dark fermentation using an empirical model. *Int J Hydrogen Energy* 2016;41:16373–84. <https://doi.org/10.1016/j.ijhydene.2016.05.085>.
- [59] Jayalakshmi S, Joseph K, Sukumaran V. Bio hydrogen generation from kitchen waste in an inclined plug flow reactor. *Int J Hydrogen Energy* 2009;34:8854–8. <https://doi.org/10.1016/j.ijhydene.2009.08.048>.
- [60] Assawamongkolsiri T, Reungsang A, Plangkang P, Sittijunda S. Repeated batch fermentation for photo-hydrogen and lipid production from wastewater of a sugar manufacturing plant. *Int J Hydrogen Energy* 2018;43:3605–17. <https://doi.org/10.1016/j.ijhydene.2017.12.119>.
- [61] Azbar N, Dokgöz FT, Keskin T, Eltem R, Korkmaz KS, Gezgin Y, et al. Comparative evaluation of bio-hydrogen production from cheese whey wastewater under thermophilic and mesophilic anaerobic conditions. *Int J Green Energy* 2009;6:192–200. <https://doi.org/10.1080/15435070902785027>.
- [62] Chu CY, Tung L, Lin CY. Effect of substrate concentration and pH on biohydrogen production kinetics from food industry wastewater by mixed culture. *Int J Hydrogen Energy* 2013;38:15849–55. <https://doi.org/10.1016/j.ijhydene.2013.07.088>.
- [63] Liu CM, Zheng JL, Wu SY, Chu CY. Fermentative hydrogen production potential from washing wastewater of beverage production process. *Int J Hydrogen Energy* 2016;41:4466–73. <https://doi.org/10.1016/j.ijhydene.2015.08.079>.
- [64] Mamimin C, Jehlee A, Saelor S, Prasertsan P, O-Thong S. Thermophilic hydrogen production from co-fermentation of palm oil mill effluent and decanter cake by *Thermoanaerobacterium thermosaccharolyticum* PSU-2. *Int J Hydrogen Energy* 2016;41:21692–701. <https://doi.org/10.1016/j.ijhydene.2016.07.152>.
- [65] Reungsang A, Sittijunda S, O-Thong S. Bio-hydrogen production from glycerol by immobilized *Enterobacter aerogenes* ATCC 13048 on heat-treated UASB granules as affected by organic loading rate. *Int J Hydrogen Energy* 2013;38:6970–9. <https://doi.org/10.1016/j.ijhydene.2013.03.082>.
- [66] Sittijunda S, Pattra S. Evaluation of different pretreatment methods to prepare an inoculum for bio-hydrogen production from cassava starch wastewater. *KKU Res J* 2016;21:81–92.
- [67] Xie L, Dong N, Wang L, Zhou Q. Thermophilic hydrogen production from starch wastewater using two-phase sequencing batch fermentation coupled with UASB methanogenic effluent recycling. *Int J Hydrogen Energy* 2014;39:20942–9. <https://doi.org/10.1016/j.ijhydene.2014.10.049>.
- [68] Yang H, Shao P, Lu T, Shen J, Wang D, Xu Z, et al. Continuous bio-hydrogen production from citric acid wastewater via facultative anaerobic bacteria. *Int J Hydrogen Energy* 2006;31:1306–13. <https://doi.org/10.1016/j.ijhydene.2005.11.018>.

- [69] Kumar G, Bakonyi P, Periyasamy S, Kim SH, Nemestóthy N, Bélafi-Bakó K. Lignocellulose biohydrogen: practical challenges and recent progress. *Renew Sustain Energy Rev* 2015;44:728–37. <https://doi.org/10.1016/j.rser.2015.01.042>.
- [70] Eskicioglu C, Monlau F, Barakat A, Ferrer I, Kaparaju P, Trably E, et al. Assessment of hydrothermal pretreatment of various lignocellulosic biomass with CO₂ catalyst for enhanced methane and hydrogen production. *Water Res* 2017; 120:32–42. <https://doi.org/10.1016/j.watres.2017.04.068>.
- [71] Chandra R, Vijay VK, Subbarao PMV, Khura TK. Production of methane from anaerobic digestion of jatropha and pongamia oil cakes. *Appl Energy* 2012;93: 148–59. <https://doi.org/10.1016/j.apenergy.2010.10.049>.
- [72] Chandra R, Takeuchi H, Hasegawa T. Methane production from lignocellulosic agricultural crop wastes: a review in context to second generation of biofuel production. *Renew Sustain Energy Rev* 2012;16:1462–76. <https://doi.org/10.1016/j.rser.2011.11.035>.
- [73] Kumar S, Paritosh K, Pareek N, Chawade A, Vivekanand V. De-struction of major Indian cereal crop residues through chemical pretreatment for improved biogas production: an overview. *Renew Sustain Energy Rev* 2018;90:160–70. <https://doi.org/10.1016/j.rser.2018.03.049>.
- [74] Jha B, Chandra R, Vijay VK, Subbarao PMV, Isha A. Utilization of de-oiled rice bran as a feedstock for renewable biomethane production. *Biomass Bioenergy* 2020;140:105674. <https://doi.org/10.1016/j.biombioe.2020.105674>.
- [75] Jha B, Isha A, Trivedi A, Chandra R, Subbarao PMV. Anaerobic co-digestion of rice straw and de-oiled rice bran for biomethane production. *Energy Rep* 2021;7: 704–10. <https://doi.org/10.1016/j.egyr.2021.01.032>.
- [76] Vijay V, Subbarao PMV, Chandra R. Study on interchangeability of seed based feedstocks for biogas production in multi-feeding mode. *Clean Eng Technol* 2020. <https://doi.org/10.1016/j.clet.2020.100011>.
- [77] Vijay V, Subbarao PMV, Chandra R. Identification of potential waste seeds of wildy growing tree species for the production of biogas. *Environ Sci Pollut Res* 2020. <https://doi.org/10.1007/s11356-020-08012-y>.
- [78] Chaudhary VP, Chandra R, Denis DM, Isha A, D'Silva TC. Agri-biomass-based bio-energy supply model: an inclusive sustainable and circular economy approach for a self-resilient rural India. *Biofuels Bioprod Biorefining* 2022;1–13. <https://doi.org/10.1002/bbb.2373>.
- [79] Tang T, Chen Y, Liu M, Du Y, Tan Y. Effect of pH on the performance of hydrogen production by dark fermentation coupled denitrification. *Environ Res* 2022;208. <https://doi.org/10.1016/j.envres.2021.112663>.
- [80] Wu KJ, Chang JS. Batch and continuous fermentative production of hydrogen with anaerobic sludge entrapped in a composite polymeric matrix. *Process Biochem* 2007;42:279–84. <https://doi.org/10.1016/j.procbio.2006.07.021>.
- [81] Xing D, Ren N, Wang A, Li Q, Feng Y, Ma F. Continuous hydrogen production of auto-aggregated *Ethanoligenens harbinense* YUAN-3 under non-sterile condition. *Int J Hydrogen Energy* 2008;33:1489–95. <https://doi.org/10.1016/j.ijhydene.2007.09.038>.
- [82] Wu X, Zhu J, Dong C, Miller C, Li Y, Wang L, et al. Continuous biohydrogen production from liquid swine manure supplemented with glucose using an anaerobic sequencing batch reactor. *Int J Hydrogen Energy* 2009;34:6636–45. <https://doi.org/10.1016/j.ijhydene.2009.06.058>.
- [83] Wang CC, Chang CW, Chu CP, Lee DJ, Chang BV, Liao CS. Producing hydrogen from wastewater sludge by *Clostridium bifermentans*. *J Biotechnol* 2003;102: 83–92. [https://doi.org/10.1016/S0168-1656\(03\)00007-5](https://doi.org/10.1016/S0168-1656(03)00007-5).
- [84] Boboescu IZ, Gherman VD, Mirel I, Pap B, Tengölics R, Rákhely G, et al. Simultaneous biohydrogen production and wastewater treatment based on the selective enrichment of the fermentation ecosystem. *Int J Hydrogen Energy* 2014; 39:1502–10. <https://doi.org/10.1016/j.ijhydene.2013.08.139>.
- [85] Cai M, Liu J, Wei Y. Enhanced biohydrogen production from sewage sludge with alkaline pretreatment. *Environ Sci Technol* 2004;38:3195–202. <https://doi.org/10.1021/es0349204>.
- [86] Ivanova G, Rákhely G, Kovács KL. Thermophilic biohydrogen production from energy plants by *Caldicellulosiruptor saccharolyticus* and comparison with related studies. *Int J Hydrogen Energy* 2009;34:3659–70. <https://doi.org/10.1016/j.ijhydene.2009.02.082>.
- [87] Silva FMS, Oliveira LB, Mahler CF, Bassin JP. Hydrogen production through anaerobic co-digestion of food waste and crude glycerol at mesophilic conditions. *Int J Hydrogen Energy* 2017;42:22720–9. <https://doi.org/10.1016/j.ijhydene.2017.07.159>.
- [88] Tarazona Y, Vargas A, Quijano G, Moreno-Andrade I. Influence of the initial proportion of carbohydrates, proteins, and lipids on biohydrogen production by dark fermentation: a multi-response optimization approach. *Int J Hydrogen Energy* 2022;47:30128–39. <https://doi.org/10.1016/j.ijhydene.2022.01.193>.
- [89] Alibardi L, Cossu R. Composition variability of the organic fraction of municipal solid waste and effects on hydrogen and methane production potentials. *Waste Manag* 2015;36:147–55. <https://doi.org/10.1016/j.wasman.2014.11.019>.
- [90] Pan J, Zhang R, El-Mashad HM, Sun H, Ying Y. Effect of food to microorganism ratio on biohydrogen production from food waste via anaerobic fermentation. *Int J Hydrogen Energy* 2008;33:6968–75. <https://doi.org/10.1016/j.ijhydene.2008.07.130>.
- [91] Mahato RK, Kumar D, Rajagopalan G. Biohydrogen production from fruit waste by *Clostridium* strain BOH3. *Renew Energy* 2020;153:1368–77. <https://doi.org/10.1016/j.renene.2020.02.092>.
- [92] Rambabu K, Show PL, Bharath G, Banat F, Naushad M, Chang JS. Enhanced biohydrogen production from date seeds by *Clostridium thermocellum* ATCC 27405. *Int J Hydrogen Energy* 2020;45:22271–80. <https://doi.org/10.1016/j.ijhydene.2019.06.133>.
- [93] Chu CF, Xu KQ, Li YY, Inamori Y. Hydrogen and methane potential based on the nature of food waste materials in a two-stage thermophilic fermentation process. *Int J Hydrogen Energy* 2012;37:10611–8. <https://doi.org/10.1016/j.ijhydene.2012.04.048>.
- [94] Cheng XY, Liu CZ. Hydrogen production via thermophilic fermentation of cornstalk by *Clostridium thermocellum*. *Energy Fuel* 2011;25:1714–20. <https://doi.org/10.1021/ef2000344>.
- [95] Montiel-Corona V, Palomo-Briones R, Razo-Flores E. Continuous thermophilic hydrogen production from an enzymatic hydrolysate of agave bagasse: Inoculum origin, homoacetogenesis and microbial community analysis. *Bioresour Technol* 2020;306:123087. <https://doi.org/10.1016/j.biortech.2020.123087>.
- [96] Silva JS, Mendes JS, Correia JAC, Rocha MVP, Micoli L. Cashew apple bagasse as new feedstock for the hydrogen production using dark fermentation process. *J Biotechnol* 2018;286:71–8. <https://doi.org/10.1016/j.jbiotec.2018.09.004>.
- [97] Nguyen TAD, Kim KR, Kim MS, Sim SJ. Thermophilic hydrogen fermentation from Korean rice straw by *Thermotoga neapolitana*. *Int J Hydrogen Energy* 2010; 35:13392–8. <https://doi.org/10.1016/j.ijhydene.2009.11.112>.
- [98] Chen CC, Chuang YS, Lin CY, Lay CH, Sen B. Thermophilic dark fermentation of untreated rice straw using mixed cultures for hydrogen production. *Int J Hydrogen Energy* 2012;37:15540–6. <https://doi.org/10.1016/j.ijhydene.2012.01.036>.
- [99] Cao GL, Zhao L, Wang AJ, Wang ZY, Ren NQ. Single-step bioconversion of lignocellulose to hydrogen using novel moderately thermophilic bacteria. *Biotechnol Biofuels* 2014;7:1–13. <https://doi.org/10.1186/1754-6834-7-82>.
- [100] Magnusson L, Islam R, Sparling R, Levin D, Cicek N. Direct hydrogen production from cellulose waste materials with a single-step dark fermentation process. *Int J Hydrogen Energy* 2008;33:5398–403. <https://doi.org/10.1016/j.ijhydene.2008.06.018>.
- [101] Talluri S, Raj SM, Christopher LP. Consolidated bioprocessing of untreated switchgrass to hydrogen by the extreme thermophile *Caldicellulosiruptor saccharolyticus* DSM 8903. *Bioresour Technol* 2013;139:272–9. <https://doi.org/10.1016/j.biortech.2013.04.005>.
- [102] Zhang JN, Li YH, Zheng HQ, Fan YT, Hou HW. Direct degradation of cellulose biomass to bio-hydrogen from a newly isolated strain *Clostridium sartagoforme* FZ11. *Bioresour Technol* 2015;192:60–7. <https://doi.org/10.1016/j.biortech.2015.05.034>.
- [103] Levin DB, Islam R, Cicek N, Sparling R. Hydrogen production by *Clostridium thermocellum* 27405 from cellulose biomass substrates. *Int J Hydrogen Energy* 2006;31:1496–503. <https://doi.org/10.1016/j.ijhydene.2006.06.015>.
- [104] Han H, Wei L, Liu B, Yang H, Shen J. Optimization of biohydrogen production from soybean straw using anaerobic mixed bacteria. *Int J Hydrogen Energy* 2012; 37:13200–8. <https://doi.org/10.1016/j.ijhydene.2012.03.073>.
- [105] Zhi Z, Wang H. White-rot fungal pretreatment of wheat straw with *Phanerochaete chrysosporium* for biohydrogen production: simultaneous saccharification and fermentation. *Bioprocess Biosyst Eng* 2014;37:1447–58. <https://doi.org/10.1007/s00449-013-1117-x>.
- [106] Zhao L, Cao GL, Wang AJ, Ren HY, Dong D, Liu ZN, et al. Fungal pretreatment of cornstalk with *Phanerochaete chrysosporium* for enhancing enzymatic saccharification and hydrogen production. *Bioresour Technol* 2012;114:365–9. <https://doi.org/10.1016/j.biortech.2012.03.076>.
- [107] Show KY, Lee DJ, Tay JH, Lin CY, Chang JS. Biohydrogen production: current perspectives and the way forward. *Int J Hydrogen Energy* 2012;37:15616–31. <https://doi.org/10.1016/j.ijhydene.2012.04.109>.
- [108] Tang GL, Huang J, Sun ZJ, Tang QQ, Yan CH, Liu GQ. Biohydrogen production from cattle wastewater by enriched anaerobic mixed consortia: influence of fermentation temperature and pH. *J Biosci Bioeng* 2008;106:80–7. <https://doi.org/10.1263/jbb.106.80>.
- [109] Xing Y, Li Z, Fan Y, Hou H. Biohydrogen production from dairy manures with acidification pretreatment by anaerobic fermentation. *Environ Sci Pollut Res* 2010;17:392–9. <https://doi.org/10.1007/s11356-009-0187-4>.
- [110] Yilmazel YD, Duran M. Biohydrogen production from cattle manure and its mixtures with renewable feedstock by hyperthermophilic *Caldicellulosiruptor* *besicii*. *J Clean Prod* 2021;292:125969. <https://doi.org/10.1016/j.jclepro.2021.125969>.
- [111] Chiarriotti A, Crisà A. Bio-hydrogen production from buffalo waste with rumen inoculum and metagenomic characterization of bacterial and archaeal community. *Front Sustain Food Syst* 2018;2:1–10. <https://doi.org/10.3389/fsufs.2018.00013>.
- [112] Sivagurunathan P, Kumar G, Mudhoo A, Rene ER, Saratale GD, Kobayashi T, et al. Fermentative hydrogen production using lignocellulose biomass: an overview of pre-treatment methods, inhibitor effects and detoxification experiences. *Renew Sustain Energy Rev* 2017;77:28–42. <https://doi.org/10.1016/j.rser.2017.03.091>.
- [113] Li D, Chen H. Biological hydrogen production from steam-exploded straw by simultaneous saccharification and fermentation. *Int J Hydrogen Energy* 2007;32: 1742–8. <https://doi.org/10.1016/j.ijhydene.2006.12.011>.
- [114] Guo XM, Trably E, Latrille E, Carre H, Steyer JP. Hydrogen production from agricultural waste by dark fermentation: a review. *Int J Hydrogen Energy* 2010; 35:10660–73. <https://doi.org/10.1016/j.ijhydene.2010.03.008>.
- [115] Li C, Fang HHP. Fermentative hydrogen production from wastewater and solid wastes by mixed cultures. *Crit Rev Environ Sci Technol* 2007;37:1–39. <https://doi.org/10.1080/10643380600729071>.
- [116] Ivanova G, Rákhely G, Kovács KL. Hydrogen production from biopolymers by *Caldicellulosiruptor saccharolyticus* and stabilization of the system by immobilization. *Int J Hydrogen Energy* 2008;33:6953–61. <https://doi.org/10.1016/j.ijhydene.2008.08.058>.

- [117] Gallipoli A, Braguglia CM, Gianico A, Montecchio D, Pagliaccia P. Kitchen waste valorization through a mild-temperature pretreatment to enhance biogas production and fermentability: kinetics study in mesophilic and thermophilic regimen. *J Environ Sci (China)* 2020;89:167–79. <https://doi.org/10.1016/j.jes.2019.10.016>.
- [118] Xiao B, Dai Q, Yu X, Yu P, Zhai S, Liu R, et al. Effects of sludge thermal-alkaline pretreatment on cationic red X-GRL adsorption onto pyrolysis biochar of sewage sludge. *J Hazard Mater* 2018;343:347–55. <https://doi.org/10.1016/j.jhazmat.2017.10.001>.
- [119] Xiao B, Qin Y, Wu J, Chen H, Yu P, Liu J, et al. Comparison of single-stage and two-stage thermophilic anaerobic digestion of food waste: performance, energy balance and reaction process. *Energy Convers Manag* 2018;156:215–23. <https://doi.org/10.1016/j.enconman.2017.10.092>.
- [120] Sattar A, Arslan C, Ji C, Sattar S, Umair M, Sattar S, et al. Quantification of temperature effect on batch production of bio-hydrogen from rice crop wastes in an anaerobic bio reactor. *Int J Hydrogen Energy* 2016;41:11050–61. <https://doi.org/10.1016/j.ijhydene.2016.04.087>.
- [121] Chen H, Wu J, Huang R, Zhang W, He W, Deng Z, et al. Effects of temperature and total solid content on biohydrogen production from dark fermentation of rice straw: performance and microbial community characteristics. *Chemosphere* 2022;286:131655. <https://doi.org/10.1016/j.chemosphere.2021.131655>.
- [122] Kidanu WG, Trang PT, Yoon HH. Hydrogen and volatile fatty acids production from marine macroalgae by anaerobic fermentation. *Biotechnol Bioprocess Eng* 2017;22:612–9. <https://doi.org/10.1007/s12257-017-0258-1>.
- [123] Saravanan A, Senthil Kumar P, Khoo KS, Show PL, Femina Carolin C, Fetcia Jackulin C, et al. Biohydrogen from organic wastes as a clean and environment-friendly energy source: production pathways, feedstock types, and future prospects. *Bioresour Technol* 2021;342:126021. <https://doi.org/10.1016/j.biortech.2021.126021>.
- [124] Liu G, Shen J. Effects of culture and medium conditions on hydrogen production from starch using anaerobic bacteria. *J Biosci Bioeng* 2004;98:251–6. [https://doi.org/10.1016/s1389-1723\(04\)00277-4](https://doi.org/10.1016/s1389-1723(04)00277-4).
- [125] Liu D, Liu D, Zeng RJ, Angelidaki I. Hydrogen and methane production from household solid waste in the two-stage fermentation process. *Water Res* 2006;40:2230–6. <https://doi.org/10.1016/j.watres.2006.03.029>.
- [126] Liu D, Zeng RJ, Angelidaki I. Effects of pH and hydraulic retention time on hydrogen production versus methanogenesis during anaerobic fermentation of organic household solid waste under extreme-thermophilic temperature (70°C). *Biotechnol Bioeng* 2008;100:1108–14. <https://doi.org/10.1002/bit.21834>.
- [127] Silva-Illanes F, Tapia-Venegas E, Schiappacasse MC, Trably E, Ruiz-Filippi G. Impact of hydraulic retention time (HRT) and pH on dark fermentative hydrogen production from glycerol. *Energy* 2017;141:358–67. <https://doi.org/10.1016/j.energy.2017.09.073>.
- [128] Kumar G, Sivagurunathan P, Park JH, Park JH, Park HD, Yoon JJ, et al. HRT dependent performance and bacterial community population of granular hydrogen-producing mixed cultures fed with galactose. *Bioresour Technol* 2016;206:188–94. <https://doi.org/10.1016/j.biortech.2016.01.104>.
- [129] Pugazhendhi A, Anburajan P, Park JH, Kumar G, Sivagurunathan P, Kim SH. Process performance of biohydrogen production using glucose at various HRTs and assessment of microbial dynamics variation via q-PCR. *Int J Hydrogen Energy* 2017;42:27550–7. <https://doi.org/10.1016/j.ijhydene.2017.06.184>.
- [130] Bastidas-Oyanedel JR, Mohd-Zaki Z, Zeng RJ, Bernet N, Pratt S, Steyer JP, et al. Gas controlled hydrogen fermentation. *Bioresour Technol* 2012;110:503–9. <https://doi.org/10.1016/j.biortech.2012.01.122>.
- [131] Mandal B, Nath K, Das D. Improvement of biohydrogen production under decreased partial pressure of H₂ by *Enterobacter cloacae*. *Biotechnol Lett* 2006;28:831–5. <https://doi.org/10.1007/s10529-006-9008-8>.
- [132] Chong KYHTWT and RTC. A checklist of the total vascular plant flora of Singapore native, naturalised and cultivated species. 2009.
- [133] Lee KS, Oh IH. Addendum to α -Cyclomorph phase transition and thermal stability in squaric acid (H₂C₄O₄) \cdot nH₂O; by K.-S. Lee et al. [*J. Phys. Chem. Solids* 73 (2012) 890]. *J Phys Chem Solids* 2012;73:1404–5. <https://doi.org/10.1016/j.jpccs.2012.07.007>.
- [134] Junghare M, Subudhi S, Lal B. Improvement of hydrogen production under decreased partial pressure by newly isolated alkaline tolerant anaerobe, *Clostridium butyricum* TM-9A: optimization of process parameters. *Int J Hydrogen Energy* 2012;37:3160–8. <https://doi.org/10.1016/j.ijhydene.2011.11.043>.
- [135] Beckers L, Hilgismann S, Masset J, Hamilton C, Thonart P. Effects of hydrogen partial pressure on fermentative biohydrogen production by a chemotropic *Clostridium* bacterium in a new horizontal rotating cylinder reactor. *Energy Procedia* 2012;29:34–41. <https://doi.org/10.1016/j.egypro.2012.09.006>.
- [136] Jung KW, Cho SK, Yun YM, Shin HS, Kim DH. Rapid formation of hydrogen-producing granules in an up-flow anaerobic sludge blanket reactor coupled with high-rate recirculation. *Int J Hydrogen Energy* 2013;38:9097–103. <https://doi.org/10.1016/j.ijhydene.2013.05.059>.
- [137] Kumari S, Das D. Improvement of biohydrogen production using acidogenic culture. *Int J Hydrogen Energy* 2017;42:4083–94. <https://doi.org/10.1016/j.ijhydene.2016.09.021>.
- [138] Barca C, Ranava D, Bauzan M, Ferrasse JH, Giudici-Orticoni MT, Soric A. Fermentative hydrogen production in an up-flow anaerobic biofilm reactor inoculated with a co-culture of *Clostridium acetobutylicum* and *Desulfovibrio vulgaris*. *Bioresour Technol* 2016;221:526–33. <https://doi.org/10.1016/j.biortech.2016.09.072>.
- [139] Detman A, Chojnacka A, Błaszczak M, Kaźmierczak W, Piotrowski J, Sikora A. Biohydrogen and biomethane (Biogas) production in the consecutive stages of anaerobic digestion of molasses. *Polish J Environ Stud* 2017;26:1023–9. <https://doi.org/10.15244/pjoes/68149>.
- [140] Kanchanasuta S, Prommeeant P, Boonapatcharone N, Pisutpaisal N. Stability of *Clostridium butyricum* in biohydrogen production from non-sterile food waste. *Int J Hydrogen Energy* 2017;42:3454–65. <https://doi.org/10.1016/j.ijhydene.2016.09.111>.
- [141] García-Depraet O, Castro-Muñoz R, Muñoz R, Rene ER, León-Becerril E, Valdez-Vazquez I, et al. A review on the factors influencing biohydrogen production from lactate: the key to unlocking enhanced dark fermentative processes. *Bioresour Technol* 2021;324. <https://doi.org/10.1016/j.biortech.2020.124595>.
- [142] Cheng CH, Hung CH, Lee KS, Liao PY, Liang CM, Yang LH, et al. Microbial community structure of a starch-feeding fermentative hydrogen production reactor operated under different incubation conditions. *Int J Hydrogen Energy* 2008;33:5242–9. <https://doi.org/10.1016/j.ijhydene.2008.05.017>.
- [143] Cabrol L, Marone A, Tapia-Venegas E, Steyer JP, Ruiz-Filippi G, Trably E. Microbial ecology of fermentative hydrogen producing bioprocesses: useful insights for driving the ecosystem function. *FEMS Microbiol Rev* 2017;41:158–81. <https://doi.org/10.1093/femsre/fuw043>.
- [144] Hu CC, Giannis A, Chen CL, Qi W, Wang JY. Comparative study of biohydrogen production by four dark fermentative bacteria. *Int J Hydrogen Energy* 2013;38:15686–92. <https://doi.org/10.1016/j.ijhydene.2013.03.131>.
- [145] Rao R, Basak N. Optimization and modelling of dark fermentative hydrogen production from cheese whey by *Enterobacter aerogenes* 2822. *Int J Hydrogen Energy* 2021;46:1777–800. <https://doi.org/10.1016/j.ijhydene.2020.10.142>.
- [146] Ayala-Campos OR, Sanchez A, Rebollar EA, Valdez-Vazquez I. Plant-associated microbial communities converge in fermentative hydrogen production and form a core microbiome. *Int J Hydrogen Energy* 2022;47:20049–63. <https://doi.org/10.1016/j.ijhydene.2022.04.155>.
- [147] Leite JAC, Fernandes BS, Pozzi E, Barboza M, Zaiat M. Application of an anaerobic packed-bed bioreactor for the production of hydrogen and organic acids. *Int J Hydrogen Energy* 2008;33:579–86. <https://doi.org/10.1016/j.ijhydene.2007.10.009>.
- [148] Fernandes BS, Saavedra NK, Maintinguer SI, Sette LD, Oliveira VM, Varesche MBA, et al. The effect of biomass immobilization support material and bed porosity on hydrogen production in an upflow anaerobic packed-bed bioreactor. *Appl Biochem Biotechnol* 2013;170:1348–66. <https://doi.org/10.1007/s12010-013-0262-7>.
- [149] Zavala-Méndez M, Vargas A, Carrillo-Reyes J. Maximization of bio-hydrogen production from winery vinasses using on-line feedback control. *Int J Hydrogen Energy* 2022;47:33259–71. <https://doi.org/10.1016/j.ijhydene.2022.07.196>.
- [150] Dauptain K, Trably E, Santa-Catalina G, Bernet N, Carrere H. Role of indigenous bacteria in dark fermentation of organic substrates. *Bioresour Technol* 2020;313:123665. <https://doi.org/10.1016/j.biortech.2020.123665>.
- [151] Argun H, Dao S. Bio-hydrogen production from waste peach pulp by dark fermentation: effect of inoculum addition. *Int J Hydrogen Energy* 2017;42:2569–74. <https://doi.org/10.1016/j.ijhydene.2016.06.225>.
- [152] Dzulkarmin ELN, Audu JO, Wan Dagang WRZ, Abdul-Wahab MF. Microbiomes of biohydrogen production from dark fermentation of industrial wastes: current trends, advanced tools and future outlook. *Bioresour Bioprocess* 2022;9. <https://doi.org/10.1186/s40643-022-00504-8>.
- [153] Du Z, Liu C, Zhai J, Guo X, Xiong Y, Su W, et al. A review of hydrogen purification technologies for fuel cell vehicles. *Catalysts* 2021;11:1–19. <https://doi.org/10.3390/catal11030393>.
- [154] Davila-Vazquez G, Alatríste-Mondragón F, de León-Rodríguez A, Razo-Flores E. Fermentative hydrogen production in batch experiments using lactose, cheese whey and glucose: influence of initial substrate concentration and pH. *Int J Hydrogen Energy* 2008;33:4989–97. <https://doi.org/10.1016/j.ijhydene.2008.06.065>.
- [155] Ibeh B, Gardner C, Terman M. Separation of hydrogen from a hydrogen/methane mixture using a PEM fuel cell. *Int J Hydrogen Energy* 2007;32:908–14. <https://doi.org/10.1016/j.ijhydene.2006.11.017>.
- [156] Zhu X, Li S, Shi Y, Cai N. Recent advances in elevated-temperature pressure swing adsorption for carbon capture and hydrogen production. *Prog Energy Combust Sci* 2019;75:100784. <https://doi.org/10.1016/j.peccs.2019.100784>.
- [157] Adhikari S, Fernando S. Hydrogen membrane separation techniques. *Ind Eng Chem Res* 2006;45:875–81. <https://doi.org/10.1021/ie050644l>.
- [158] Ashik UPM, Wan Daud WMA, Abbas HF. Production of greenhouse gas free hydrogen by thermocatalytic decomposition of methane - a review. *Renew Sustain Energy Rev* 2015;44:221–56. <https://doi.org/10.1016/j.rser.2014.12.025>.
- [159] Gallucci F, Fernandez E, Corengia P, van Sint AM. Recent advances on membranes and membrane reactors for hydrogen production. *Chem Eng Sci* 2013;92:40–66. <https://doi.org/10.1016/j.ces.2013.01.008>.
- [160] Mendes D, Mendes A, Madeira LM, Iulianelli A, Sousa J, Basile MA. The water-gas shift reaction: from conventional catalytic systems to Pd-based membrane reactors—a review. *Asia-Pacific J Chem Eng* 2010;5:111–37. <https://doi.org/10.1002/apj>.
- [161] Qiao Z, Wang Z, Yuan S, Wang J, Wang S. Preparation and characterization of small molecular amine modified PVAm membranes for CO₂/H₂ separation. *J Membr Sci* 2015;475:290–302. <https://doi.org/10.1016/j.memsci.2014.10.034>.
- [162] Rabiee H, Soltanah M, Mousavi SA, Ghadimi A. Improvement in CO₂/H₂ separation by fabrication of poly(ether-b-amide6)/glycerol triacetate gel membranes. *J Membr Sci* 2014;469:43–58. <https://doi.org/10.1016/j.memsci.2014.06.026>.
- [163] Wang H, Paul DR, Chung TS. Surface modification of polyimide membranes by diethylenetriamine (DETA) vapor for H₂ purification and moisture effect on gas

- permeation. *J Memb Sci* 2013;430:223–33. <https://doi.org/10.1016/j.memsci.2012.12.008>.
- [164] Nemestóthy N, Bélafi-Bakó K, Bakonyi P. Enhancement of dark fermentative H₂ production by gas separation membranes: a review. *Bioresour Technol* 2020;302. <https://doi.org/10.1016/j.biortech.2020.122828>.
- [165] Meier L, Pérez R, Azócar L, Rivas M, Jeison D. Photosynthetic CO₂ uptake by microalgae: an attractive tool for biogas upgrading. *Biomass Bioenergy* 2015;73:102–9. <https://doi.org/10.1016/j.biombioe.2014.10.032>.
- [166] Chandra R, Isha A, Kumar S, Khan SA, Subbarao PMV, Vijay VK, Chandel AK, Chaudhary VP. Potentials and challenges of biogas upgradation as liquid biomethane. In: Balaguruswamy, N, Chandel A, editors. *Biogas Prod.*, Springer, Cham; 2021, p. 307–28. https://doi.org/10.1007/978-3-030-58827-4_14.
- [167] Sahota S, Shah G, Ghosh P, Kapoor R, Sengupta S, Singh P, et al. Review of trends in biogas upgradation technologies and future perspectives. *Bioresour Technol Reports* 2018;1:79–88. <https://doi.org/10.1016/j.biteb.2018.01.002>.
- [168] Hassan IA, Ramadan HS, Saleh MA, Hissel D. Hydrogen storage technologies for stationary and mobile applications: review, analysis and perspectives. *Renew Sustain Energy Rev* 2021;149:111311. <https://doi.org/10.1016/j.rser.2021.111311>.
- [169] Zhou L. Progress and problems in hydrogen storage methods. *Renew Sustain Energy Rev* 2005;9:395–408. <https://doi.org/10.1016/j.rser.2004.05.005>.
- [170] Hwang HT, Varma A. Hydrogen storage for fuel cell vehicles. *Curr Opin Chem Eng* 2014;5:42–8. <https://doi.org/10.1016/j.coche.2014.04.004>.
- [171] Niaz S, Manzoor T, Pandith AH. Hydrogen storage: materials, methods and perspectives. *Renew Sustain Energy Rev* 2015;50:457–69. <https://doi.org/10.1016/j.rser.2015.05.011>.
- [172] Andersson J, Grönkvist S. Large-scale storage of hydrogen. *Int J Hydrogen Energy* 2019;44:11901–19. <https://doi.org/10.1016/j.ijhydene.2019.03.063>.
- [173] Pukazhselvan D, Kumar V, Singh SK. High capacity hydrogen storage: basic aspects, new developments and milestones. *Nano Energy* 2012;1:566–89. <https://doi.org/10.1016/j.nanoen.2012.05.004>.
- [174] Sinigaglia T, Lewiski F, Santos Martins ME, Mairesse Siluk JC. Production, storage, fuel stations of hydrogen and its utilization in automotive applications—a review. *Int J Hydrogen Energy* 2017;42:24597–611. <https://doi.org/10.1016/j.ijhydene.2017.08.063>.
- [175] Faye O, Szpunar J, Eduok U. A critical review on the current technologies for the generation, storage, and transportation of hydrogen. *Int J Hydrogen Energy* 2022;47:13771–802. <https://doi.org/10.1016/j.ijhydene.2022.02.112>.
- [176] Durbin DJ, Malardier-Jugroot C. Review of hydrogen storage techniques for on board vehicle applications. *Int J Hydrogen Energy* 2013;38:14595–617. <https://doi.org/10.1016/j.ijhydene.2013.07.058>.
- [177] Lozano-Castelló D, Suárez-García F, Linares-Solano Á, Cazorla-Amorós D. Advances in hydrogen storage in carbon materials. *Renew Hydrog Technol Prod Purification Storage Appl Saf* 2013;269–91. <https://doi.org/10.1016/B978-0-444-56352-1.00012-X>.
- [178] Ströbel R, Garche J, Moseley PT, Jörissen L, Wolf G. Hydrogen storage by carbon materials. *J Power Sources* 2006;159:781–801. <https://doi.org/10.1016/j.jpowsour.2006.03.047>.
- [179] De La Casa-Lillo MA, Lamari-Darkrim F, Cazorla-Amorós D, Linares-Solano A. Hydrogen storage in activated carbons and activated carbon fibers. *J Phys Chem B* 2002;106:10930–4. <https://doi.org/10.1021/jp014543m>.
- [180] Gupta BK, Tiwari RS, Srivastava ON. Studies on synthesis and hydrogenation behaviour of graphitic nanofibres prepared through palladium catalyst assisted thermal cracking of acetylene. *J Alloys Compd* 2004;381:301–8. <https://doi.org/10.1016/j.jallcom.2004.03.094>.
- [181] Dillon AC, Whitney E, Engtrakul C, Curtis CJ, O'Neill KJ, Parilla PA, et al. Novel organometallic fullerene complexes for vehicular hydrogen storage. *Phys Status Solidi Basic Res* 2007;244:4319–22. <https://doi.org/10.1002/psb.200776157>.
- [182] Chambers A, Park C, Baker NMB RTK. Hydrogen storage in platelet graphite nanofibers. *J Physical Chem B* 1998;102:4253–6. <https://doi.org/10.1021/jp980114l>.
- [183] Romanos J, Barakat F, Abou DS. Nanoporous graphene monolith for hydrogen storage. *Mater Today Proc* 2018;5:17478–83. <https://doi.org/10.1016/j.matpr.2018.06.052>.
- [184] Singer JP, Mayergoyz A, Portet C, Schneider E, Gogotsi Y, Fischer JE. Enhanced volumetric hydrogen storage capacity of porous carbon powders by forming peels or pellets. *Microporous Mesoporous Mater* 2008;116:469–72. <https://doi.org/10.1016/j.micromeso.2008.05.005>.
- [185] Yeon SH, Knoke I, Gogotsi Y, Fischer JE. Enhanced volumetric hydrogen and methane storage capacity of monolithic carbide-derived carbon. *Microporous Mesoporous Mater* 2010;131:423–8. <https://doi.org/10.1016/j.micromeso.2010.02.002>.
- [186] Komatsu K, Murata M, Murata Y. Encapsulation of molecular hydrogen in fullerene C60 by organic synthesis. *Science* (80-) 2005;307:238–40. <https://doi.org/10.1126/science.1106185>.
- [187] Bhattacharyya R, Mohan S. Solid state storage of hydrogen and its isotopes: an engineering overview. *Renew Sustain Energy Rev* 2015;41:872–83. <https://doi.org/10.1016/j.rser.2014.09.004>.
- [188] Rosi NL, Eckert J, Eddaoudi M, Vodak DT, Kim J, O'Keeffe M, et al. Hydrogen storage in microporous metal-organic frameworks. *Science* (80-) 2003;300:1127–9. <https://doi.org/10.1126/science.1083440>.
- [189] Langmi HW, Walton A, Al-Mamouri MM, Johnson SR, Book D, Speight JD, et al. Hydrogen adsorption in zeolites A, X, Y and RHO. *J Alloys Compd* 2003;356–357:710–5. [https://doi.org/10.1016/S0925-8388\(03\)00368-2](https://doi.org/10.1016/S0925-8388(03)00368-2).
- [190] Toledo-Alarcon J, Capson-Tojo G, Marone A, Paillet F, Junior ADFN, Chatellard L, et al. Basics of bio-hydrogen production by dark fermentation. *Bioreact Microb Biomass Energy Convers*, Springer Singapore 2018:199–220. <https://doi.org/10.1007/978-981-10-7677-0>.
- [191] Niemistö J, Saavalainen P, Pongrácz E, Keiski RL. Biobutanol as a potential sustainable biofuel - assessment of lignocellulosic and waste-based feedstocks. *J Sustain Dev Energy, Water Environ Syst* 2013;1:58–77. <https://doi.org/10.13044/j.sdewes.2013.01.0005>.
- [192] Shuizhou Ke, Zhou HPFH Shi. Applications of two-phase anaerobic degradation in industrial wastewater treatment. *Int J Environ Pollut* 2005;65–80.
- [193] Cavinato C, Giuliano A, Bolzonella D, Pavan P, Cecchi F. Bio-hythane production from food waste by dark fermentation coupled with anaerobic digestion process: a long-term pilot scale experience. *Int J Hydrogen Energy* 2012;37:11549–55. <https://doi.org/10.1016/j.ijhydene.2012.03.065>.
- [194] Wang D, Ai P, Yu L, Tan Z, Zhang Y. Comparing the hydrolysis and biogas production performance of alkali and acid pretreatments of rice straw using two-stage anaerobic fermentation. *Biosyst Eng* 2015;132:47–55. <https://doi.org/10.1016/j.biosystemseng.2015.02.007>.
- [195] Shen F, Yuan H, Pang Y, Chen S, Zhu B, Zou D, et al. Performances of anaerobic co-digestion of fruit & vegetable waste (FW) and food waste (FW): Single-phase vs. two-phase. *Bioresour Technol* 2013;144:80–5. <https://doi.org/10.1016/j.biortech.2013.06.099>.
- [196] Yu L, Zhao Q, Ma J, Frear C, Chen S. Experimental and modeling study of a two-stage pilot scale high solid anaerobic digester system. *Bioresour Technol* 2012;124:8–17. <https://doi.org/10.1016/j.biortech.2012.08.088>.
- [197] Tyagi VK, Fdez-Güelfo LA, Zhou Y, Álvarez-Gallego CJ, Garcia LIR, Ng WJ. Anaerobic co-digestion of organic fraction of municipal solid waste (OFMSW): progress and challenges. *Renew Sustain Energy Rev* 2018;93:380–99. <https://doi.org/10.1016/j.rser.2018.05.051>.
- [198] Rajagopal R, Massé DI, Singh G. A critical review on inhibition of anaerobic digestion process by excess ammonia. *Bioresour Technol* 2013;143:632–41. <https://doi.org/10.1016/j.biortech.2013.06.030>.
- [199] Lin CY, Wu SY, Lin PJ, Chang JS, Hung CH, Lee KS, et al. A pilot-scale high-rate biohydrogen production system with mixed microflora. *Int J Hydrogen Energy* 2011;36:8758–64. <https://doi.org/10.1016/j.ijhydene.2010.07.115>.
- [200] Lin CY, Lay CH, Sen B, Chu CY, Kumar G, Chen CC, et al. Fermentative hydrogen production from wastewaters: a review and prognosis. *Int J Hydrogen Energy* 2012;37:15632–42. <https://doi.org/10.1016/j.ijhydene.2012.02.072>.
- [201] Ren N, Li J, Li B, Wang Y, Liu S. Biohydrogen production from molasses by anaerobic fermentation with a pilot-scale bioreactor system. *Int J Hydrogen Energy* 2006;31:2147–57. <https://doi.org/10.1016/j.ijhydene.2006.02.011>.
- [202] Kleerebezem R, van Loosdrecht MC. Mixed culture biotechnology for bioenergy production. *Curr Opin Biotechnol* 2007;18:207–12. <https://doi.org/10.1016/j.copbio.2007.05.001>.
- [203] Shin HS, Youn JH, Kim SH. Hydrogen production from food waste in anaerobic mesophilic and thermophilic acidogenesis. *Int J Hydrogen Energy* 2004;29:1355–63. <https://doi.org/10.1016/j.ijhydene.2003.09.011>.
- [204] Ueno Y, Fukui H, Goto M. Operation of a two-stage fermentation process producing hydrogen and methane from organic waste. *Environ Sci Technol* 2007;41:1413–9. <https://doi.org/10.1021/es062127f>.
- [205] Tapia-Venegas E, Ramirez-Morales JE, Silva-Illanes F, Toledo-Alarcón J, Paillet F, Escudie R, et al. Biohydrogen production by dark fermentation: scaling-up and technologies integration for a sustainable system. *Rev Environ Sci Biotechnol* 2015;14:761–85. <https://doi.org/10.1007/s11157-015-9383-5>.
- [206] Luo G, Xie L, Zou Z, Wang W, Zhou Q. Evaluation of pretreatment methods on mixed inoculum for both batch and continuous thermophilic biohydrogen production from cassava stillage. *Bioresour Technol* 2010;101:959–64. <https://doi.org/10.1016/j.biortech.2009.08.090>.
- [207] Nasr N, Elbeshbishy E, Hafez H, Nakhla G, Hesham El, Naggar M. Comparative assessment of single-stage and two-stage anaerobic digestion for the treatment of stillage. *Bioresour Technol* 2012;111:122–6. <https://doi.org/10.1016/j.biortech.2012.02.019>.
- [208] Schievano A, Tenca A, Lonati S, Manzini E, Adani F. Can two-stage instead of one-stage anaerobic digestion really increase energy recovery from biomass? *Appl Energy* 2014;124:335–42. <https://doi.org/10.1016/j.apenergy.2014.03.024>.
- [209] Monlau F, Kaparaju P, Trably E, Steyer JP, Carrere H. Alkaline pretreatment to enhance one-stage CH₄ and two-stage H₂/CH₄ production from sunflower stalks: mass, energy and economical balances. *Chem Eng J* 2015;260:377–85. <https://doi.org/10.1016/j.cej.2014.08.108>.
- [210] Luo G, Xie L, Zhou Q, Angelidaki I. Enhancement of bioenergy production from organic wastes by two-stage anaerobic hydrogen and methane production process. *Bioresour Technol* 2011;102:8700–6. <https://doi.org/10.1016/j.biortech.2011.02.012>.
- [211] Fu SF, Xu XH, Dai M, Yuan XZ, Guo RB. Hydrogen and methane production from vinasse using two-stage anaerobic digestion. *Process Saf Environ Prot* 2017;107:81–6. <https://doi.org/10.1016/j.psep.2017.01.024>.
- [212] Zhu X, Yellezuome D, Liu R, Wang Z, Liu X. Effects of co-digestion of food waste, corn straw and chicken manure in two-stage anaerobic digestion on trace element bioavailability and microbial community composition. *Bioresour Technol* 2022;346:126625. <https://doi.org/10.1016/j.biortech.2021.126625>.
- [213] Ramos LR, Lovato G, Rodrigues JAD, Silva EL. Anaerobic digestion of vinasse in fluidized bed reactors: process robustness between two-stage thermophilic-thermophilic and thermophilic-mesophilic systems. *J Clean Prod* 2021;314. <https://doi.org/10.1016/j.jclepro.2021.128066>.
- [214] Schievano A, Tenca A, Scaglia B, Merlino G, Rizzi A, Daffonchio D, et al. Two-stage vs single-stage thermophilic anaerobic digestion: comparison of energy production and biodegradation efficiencies. *Environ Sci Technol* 2012;46:8502–10. <https://doi.org/10.1021/es301376n>.

- [215] Isha A, D'Silva TC, Subbarao PMV, Chandra R, Vijay VK. Stabilization of anaerobic digestion of kitchen wastes using protein-rich additives: study of process performance, kinetic modelling and energy balance. *Bioresour Technol* 2021;337:125331. <https://doi.org/10.1016/j.biortech.2021.125331>.
- [216] Isha A, Kumar S, Jha B, Subbarao PMV, Chandra R, Vijay VK. Development of stabilization methods using a pilot scale anaerobic digester for seasonal variations in kitchen wastes for improved methane production with zero breakdowns. *Clean Eng Technol* 2020;1:100015. <https://doi.org/10.1016/j.clet.2020.100015>.
- [217] Hsu CW, Li YC, Chu CY, Liu CM, Wu SY. Feasibility evaluation of fermentative biomass-derived gas production from condensed molasses in a continuous two-stage system for commercialization. *Int J Hydrogen Energy* 2014;39:19389–93. <https://doi.org/10.1016/j.ijhydene.2014.07.171>.
- [218] Mahmood SS, Jahim JM, Abdul PM, Luthfi AAI, Takriff MS. Techno-economic analysis of two-stage anaerobic system for biohydrogen and biomethane production from palm oil mill effluent. *J Environ Chem Eng* 2021;9:105679. <https://doi.org/10.1016/j.jece.2021.105679>.
- [219] Bastidas-Oyanedel JR, Schmidt JE. Increasing profits in food waste biorefinery—a techno-economic analysis. *Energies* 2018;11. <https://doi.org/10.3390/en11061551>.
- [220] Han W, Liu Z, Fang J, Huang J, Zhao H, Li Y. Techno-economic analysis of dark fermentative hydrogen production from molasses in a continuous mixed immobilized sludge reactor. *J Clean Prod* 2016;127:567–72. <https://doi.org/10.1016/j.jclepro.2016.04.055>.
- [221] Rajendran K, Mahapatra D, Venkatraman AV, Muthuswamy S, Pugazhendhi A. Advancing anaerobic digestion through two-stage processes: Current developments and future trends. *Renew Sustain Energy Rev* 2020;123:109746. <https://doi.org/10.1016/j.rser.2020.109746>.
- [222] Rajendran K, Murthy GS. Techno-economic and life cycle assessments of anaerobic digestion – a review. *Biocatal Agric Biotechnol* 2019;20:101207. <https://doi.org/10.1016/j.cbab.2019.101207>.
- [223] Han W, Fang J, Liu Z, Tang J. Techno-economic evaluation of a combined bioprocess for fermentative hydrogen production from food waste. *Bioresour Technol* 2016;202:107–12. <https://doi.org/10.1016/j.biortech.2015.11.072>.
- [224] Li YC, Liu YF, Chu CY, Chang PL, Hsu CW, Lin PJ, et al. Techno-economic evaluation of biohydrogen production from wastewater and agricultural waste. *Int J Hydrogen Energy* 2012;37:15704–10. <https://doi.org/10.1016/j.ijhydene.2012.05.043>.
- [225] Patterson T, Esteves S, Dinsdale R, Guwy A, Maddy J. Life cycle assessment of biohydrogen and biomethane production and utilisation as a vehicle fuel. *Bioresour Technol* 2013;131:235–45. <https://doi.org/10.1016/j.biortech.2012.12.109>.
- [226] Isola C, Sieverding HL, Asato CM, Gonzalez-Estrella J, Litzen D, Gilcrease PC, et al. Life cycle assessment of portable two-stage anaerobic digestion of mixed food waste and cardboard. *Resour Conserv Recycl* 2018;139:114–21. <https://doi.org/10.1016/j.resconrec.2018.08.008>.
- [227] Coats ER, Searcy E, Feris K, Shrestha D, McDonald AG, Briones A, et al. An integrated two-stage anaerobic digestion and biofuel production process to reduce life cycle GHG emissions from US dairies. *Biofuels Bioprod Biorefining* 2012;6:246–56. <https://doi.org/10.1002/bbb.1408>.
- [228] Sun C, Xia A, Liao Q, Fu Q, Huang Y, Zhu X. Life-cycle assessment of biohythane production via two-stage anaerobic fermentation from microalgae and food waste. *Renew Sustain Energy Rev* 2019;112:395–410. <https://doi.org/10.1016/j.rser.2019.05.061>.
- [229] Schramm JS. Life cycle assessment of bioH₂ and biogas produced from the OFMSW in a two-stage configuration. Universidade Nova de Lisboa 2020.
- [230] Camacho CI, Estévez S, Conde JJ, Feijoo G, Moreira MT. Dark fermentation as an environmentally sustainable WIN-WIN solution for bioenergy production. *J Clean Prod* 2022;374. <https://doi.org/10.1016/j.jclepro.2022.134026>.
- [231] Wirth R, Lakatos G, Maróti G, Bagi Z, Minárovics J, Nagy K, et al. Exploitation of algal-bacterial associations in a two-stage biohydrogen and biogas generation process Philippe Soucaille. *Biotechnol Biofuels* 2015;8:1–14. <https://doi.org/10.1186/s13068-015-0243-x>.
- [232] Patel SKS, Das D, Kim SC, Cho BK, Kalia VC, Lee JK. Integrating strategies for sustainable conversion of waste biomass into dark-fermentative hydrogen and value-added products. *Renew Sustain Energy Rev* 2021;150:111491. <https://doi.org/10.1016/j.rser.2021.111491>.
- [233] Sitthikitpanya N, Sittijunda S, Khamtib S, Reungsang A. Co-generation of biohydrogen and biochemicals from co-digestion of *Chlorella* sp. biomass hydrolysate with sugarcane leaf hydrolysate in an integrated circular biorefinery concept. *Biotechnol Biofuels* 2021;14:1–16. <https://doi.org/10.1186/s13068-021-02041-6>.
- [234] Toledo-Cervantes A, Villafán-Carranza F, Arreola-Vargas J, Razo-Flores E, Méndez-Acosta HO. Comparative evaluation of the mesophilic and thermophilic biohydrogen production at optimized conditions using tequila vinasses as substrate. *Int J Hydrogen Energy* 2020;45:11000–10. <https://doi.org/10.1016/j.ijhydene.2020.02.051>.
- [235] Ahmad SI, Rashid R, Hashim Z, Meng CC, Lun CK, Jumaatuden DMH, et al. Economic study on biohydrogen production from liquid pineapple waste. *Clean Technol Environ Policy* 2022. <https://doi.org/10.1007/s10098-022-02282-5>.
- [236] Urbaniec K, Grabarczyk R. Hydrogen production from sugar beet molasses - a techno-economic study. *J Clean Prod* 2014;65:324–9. <https://doi.org/10.1016/j.jclepro.2013.08.027>.
- [237] Khan SA, D' Silva TC, Kumar S, Chandra R, Vijay VK, Misra A. Mutually trading off biochar and biogas sectors for broadening biomethane applications: A comprehensive review. *J Clean Prod* 2021;318:128593. <https://doi.org/10.1016/j.jclepro.2021.128593>.
- [238] Kumar G, Mathimani T, Rene ER, Pugazhendhi A. Application of nanotechnology in dark fermentation for enhanced biohydrogen production using inorganic nanoparticles. *Int J Hydrogen Energy* 2019;44:13106–13. <https://doi.org/10.1016/j.ijhydene.2019.03.131>.
- [239] Srivastava N, Srivastava M, Abd Allah EF, Singh R, Hashem A, Gupta VK. Biohydrogen production using kitchen waste as the potential substrate: a sustainable approach. *Chemosphere* 2021;271:129537. <https://doi.org/10.1016/j.chemosphere.2021.129537>.
- [240] Kapoor R, Subbarao PMV, Vijay VK, Shah G, Sahota S, Singh D, et al. Factors affecting methane loss from a water scrubbing based biogas upgrading system. *Appl Energy* 2017;208:1379–88. <https://doi.org/10.1016/j.apenergy.2017.09.017>.
- [241] Kumar H, Vijay VK, Subbarao PMV, Chandra R. Studies on the application of bio-carbon dioxide as controlled atmosphere on pest management in wheat grain storage. *J Stored Prod Res* 2022;95:101911. <https://doi.org/10.1016/j.jspr.2021.101911>.
- [242] Khan S, Adlak K, Kakati U, Chandra R, Vijay VK. Comparative study of enriched biogas bottling cylinder in the presence of distinct filler at low pressure. *3rd Int Conf Recent Adv BIO-ENERGY Res* 2022.
- [243] Adlak K, Chandra R, Vijay VK, Pant KK. Physicochemical activation and palletisation of *Azadirachta indica* wood carbons for increased biomethane adsorbed energy storage. *J Anal Appl Pyrolysis* 2021;155:105102. <https://doi.org/10.1016/j.jaap.2021.105102>.
- [244] Adlak K, Chandra R, Vijay VK, Pant KK. Suitability analysis of sustainable nanoporous adsorbents for higher biomethane adsorption and storage applications. *Int J Energy Res* 2022:1–15. <https://doi.org/10.1002/er.8182>.
- [245] Szuhaj M, Ács N, Tengölics R, Bodor A, Rákhely G, Kovács KL, et al. Conversion of H₂ and CO₂ to CH₄ and acetate in fed-batch biogas reactors by mixed biogas community: a novel route for the power-to-gas concept. *Biotechnol Biofuels* 2016; 9:1–14. <https://doi.org/10.1186/s13068-016-0515-0>.
- [246] Szuhaj M, Wirth R, Bagi Z, Maróti G, Rákhely G, Kovács KL. Development of stable mixed microbiota for high yield power to methane conversion. *Energies* 2021;14:1–17. <https://doi.org/10.3390/en14217336>.
- [247] Ács N, Szuhaj M, Wirth R, Bagi Z, Maróti G, Rákhely G, et al. Microbial community rearrangements in power-to-biomethane reactors employing mesophilic biogas digestate. *Front Energy Res* 2019;7:1–15. <https://doi.org/10.3389/fenrg.2019.00132>.
- [248] Lecker B, Illi L, Lemmer A, Oechsner H. Biological hydrogen methanation – a review. *Bioresour Technol* 2017;245:1220–8. <https://doi.org/10.1016/j.biortech.2017.08.176>.
- [249] Wasajja H, Saadabadi SA, Illathukandy B, Lindeboom REF, van Lier JB, Vellayani AP. The effect of H₂S on internal dry reforming in biogas fuelled solid oxide fuel cells. *Energy Sci Eng* 2022;10:374–83. <https://doi.org/10.1002/ese3.1021>.
- [250] Kovalenko N, Hutsol T, Kovalenko V, Glowacki S, Kokovikhin S, Dubik V, et al. Hydrogen production analysis: prospects for Ukraine. *Agric Eng* 2021;25:99–114. <https://doi.org/10.2478/agriceng-2021-0008>.
- [251] Adar E. Prioritizing novel wastewater-to-hydrogen production technologies based on different decision-making approaches. *Clean Technol Environ Policy* 2021;23: 2615–26. <https://doi.org/10.1007/s10098-021-02176-y>.
- [252] Das J, Ravishanker H, Lens PNL. Biological biogas purification: Recent developments, challenges and future prospects. *J Environ Manage* 2022;304: 114198. <https://doi.org/10.1016/j.jenvman.2021.114198>.