



Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Journal homepage:
https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/index
ISSN: 2289-7879



Eyring-Powell Hybrid Nanofluid with Radiative Heat Flux: Case Over a Shrinking Sheet

Ahlam Aljabali¹, Abdul Rahman Mohd Kasim^{1,*}, Najiyah Safwa Khashi'ie², Iskandar Waini², Noor Amalina Nisa Ariffin³

¹ Centre for Mathematical Sciences, Universiti Malaysia Pahang Al-Sultan Abdullah, Lebuhraya Tun Razak, Gambang 26300, Pahang, Malaysia

² Fakulti Teknologi Kejuruteraan Mekanikal dan Pembuatan, Universiti Teknikal Malaysia Melaka, Hang Tuah Jaya, Durian Tunggal, Melaka 76100, Malaysia

³ College of Computing, Informatics and Mathematics, Universiti Teknologi MARA, Pahang Branch, Jengka Campus, 26400, Pahang, Malaysia

ARTICLE INFO

Article history:

Received 11 August 2023

Received in revised form 20 October 2023

Accepted 31 October 2023

Available online 15 November 2023

Keywords:

Eyring-Powell; radiation; hybrid nanofluid; shrinking sheet; bvp4c

ABSTRACT

This study investigates the radiative heat flux effect on Eyring-Powell hybrid nanofluid together with analysis thermal passing towards a shrinking sheet containing $Ag - MgO$ nanoparticles. The proposed mathematical model respected to the boundary condition is converted to the similarity equations by adopting the suitable transformations. In order to reduce the complexity of model, the similarity equations are then computed by applying the bvp4c function in MATLAB software. Outcomes reveal the thermal performance is upgraded in dispersing the nanoparticle to the base fluid, and it is marked under hybrid nanoparticles consideration. The presence of Eyring-Powell, radiation and shrinking parameters are the controller parameter in regulatory the shear stress and thermal performance of the fluid.

1. Introduction

The study involving heat transport is currently at its peak due to its prominence in industries and several engineering claims. Water, oil, and glycol are typically utilised in applications although they are poor sources of heat transfer due to their truncated thermal conductivity. New fluids, such as nanofluids and nanoparticles, are being proposed to address this problem by improving thermal efficiency. A novel type of nanotechnology fluid known as a hybrid nanofluid is created by uniformly and stably suspending two or more different nanoparticles in a fluid's system. Since these particular nanofluids have better thermal properties compared to traditional fluids, they are being used in many technical and industrial applications. The design and optimization of an efficient system heavily depend on fluid flow and heat transfer [1]. As a result, by dispersing nanoparticles into fundamental fluids, scientists and engineers are able to produce sophisticated fluids so called "nanofluid". The heat conductivity of pure base fluids can be improved by this nanofluid. Choi and Eastman [2] are

* Corresponding author.

E-mail address: rahmanmohd@ump.edu.my

<https://doi.org/10.37934/arfmts.111.1.109121>

credited for being the first to add metallic nanoparticles to a base fluid in order to increase thermal conductivities and improve heat transmission in some real-world applications, such as refrigerators, air conditioners, microelectronic devices, microcomputer processors, etc. Since then, nanofluids have been employed more effectively. Hwang *et al.*, [3] presented a theoretical study of natural convection for heat transfer features in a quadrilateral permeable heated surface with water as the base fluid and nanoparticles being alumina oxide. Due to the progressive research in nanofluids, this fluid is widely employed for a variety of applications, including the cooling of nuclear reactors, the cooling of machinery and automobiles, the cooling of electronic devices, biomedicine, etc. [4]. The development is continued by further investigation numerically and experimentally from various angles. For instance, Tiwari and Das [5] proposed the mathematical models of nanofluids to examine the behaviour of the nanofluids while taking into account the impact of the solid volume fractions of nanoparticles. The finite volume method was used to numerically solve the governing equations. Numerous factors have been taken into account when studying nanofluid flow, including the flow in a rectangular enclosure, the effects of magnetic fields, chemical reactions and viscous dissipation effects, and the effects of activation energy [6-11]. Regular nanofluids have limitations in improving the thermal properties of fluid. These days, hybrid nanofluids, which are sophisticated heat transfer fluids made by two nanoparticles are proof to improve heat transmission [12,13]. Devi and Devi [14] compared the properties of heat transmission between hybrid and conventional nanofluids. They found for the presence of a magnetic field, the hybrid nanofluid has a higher heat transfer rate than the conventional nanofluid. Many researchers are keen to work toward hybrid nanofluids due to the advantages of hybrid nanofluid's characteristics. As an illustration, Waini *et al.*, [15] described the effects of Cu-Al₂O₃ and heat transmission over a permeable moving sheet. The MHD flow across a vertical flat plate embedded with combined convective was investigated by Zainal *et al.*, [16]. For a certain case of fluid flow problem, dual solutions are developed. For example, the topic of the flow of combined convective transport filled by hybrid nanofluids moving over a vertical porous surface was examined by Waini *et al.*, [17]. It is revealed in a given set of buoyancy parameters; several dual solutions were discovered. Additionally, the boundary layer separates more slowly when hybrid nanoparticles are used. Thermal progress of a non-Newtonian hybrid nanofluid flow with temporal stability analysis was introduced by Khashi'ie *et al.*, [18]. Other reports on the dual solutions of hybrid nanofluid can be found in Waini *et al.*, [19-21].

In the theory of fluid mechanics, the flow of non-Newtonian fluids has acquired a position of highest significance and growing curiosity. Non-Newtonian fluids are defined as substances that do not follow Newton's law of viscosity. The flow of blood, food products, and dental paste are just a few examples of non-Newtonian fluids. Numerous researchers have examined boundary layer flows of non-Newtonian fluids. It is assumed that the power law model accurately captures non-Newtonian behaviour. Despite being mathematically more challenging, the Eyring-Powell model has advantages over the power-law approach. First off, the power-law model is derived from the liquid's kinematic theory rather than an empirical relationship. Second, it accurately reduces Newtonian behaviour under high-shear stress. The momentum and heat transfer of a non-Newtonian Eyring-Powell fluid over a non-isothermal stretching sheet was reported by Prasad *et al.*, [22] utilising the asymptotic boundary conditions method while the non-Newtonian Eyring-Powell fluid across a stretching sheet has been explored by Javed *et al.*, [23]. Other established reports on the Eyring-Powell fluid are documented in Hayat *et al.*, [24,25], Krishna *et al.*, [26], and Aljabali *et al.*, [27,28].

The effects of heat radiation have been extensively studied. However, there aren't many results for counterparts of hybrid nanoparticles. Hayat *et al.*, [29] and Siddiq *et al.*, [30] considered the micropolar nanofluid embedded with radiation while Mishra *et al.*, [31] investigated MHD flow in the presence of thermal radiation by considering the stretching/shrinking sheet and discovered the

existence of numerous solutions. The rate of magnetic field and radiation strength could improve the thermal rate as mentioned by Babu and Sandeep [32]. Moreover, the Powell-Eyring hybrid nanofluid entropy analysis with the effects of linear thermal radiation and viscous dissipation is further explored by Aziz *et al.*, [33]. Recent publications on Powell-Eyring nanofluid can be found in Abu-Hamdeh *et al.*, [34], Ahmed *et al.*, [35], Muhammad *et al.*, [36], and Bhatti *et al.*, [37]. The investigation which offers dual solutions under the boundary layer region for different fluids and surfaces has become a hot topic among fluid mechanists and mathematicians. The challenge is to select the physical solution(s) from the range of potential options. Miklavčič and Wang [38] were among the first to explore the dual solution for the Newtonian fluid model. The developed flow field with the proper suction power was a factor in the development of dual similarity solutions. Multiple solutions (more than two) are possible in some circumstances, as discussed by Turkyilmazoglu [39], Lund *et al.*, [40], and Yahaya *et al.*, [41]. Furthermore, reported articles for analysis due to the shrinking surface under different fluid models are established in previous researches [42-48].

This study aims to contribute to the analysis of non-Newtonian hybrid Powell-Eyring nanofluids flow through a shrinking sheet with radiative heat flux. The current study, however, concentrates on the reflection of dual solutions. To the authors' knowledge, a very limited study is conducted on non-Newtonian hybrid Powell-Eyring nanofluid flow through a shrinking sheet embedded with radiative heat flux; as a result, this endeavor is noteworthy as an imminent reference for the chosen issue. The solution procedures involve the formulation of a governing equation which is deduced to a similarity equation before solving using the bvp4c function in the MATLAB software.

2. Methodology

The investigation aims to examine the features of the Eyring-Powell hybrid nanofluid flow over a shrinking sheet. The steady two-dimensional flow is considered with the surface velocity $u_w(x) = ax$ where a is a positive constant. Meanwhile, the radiative heat flux, $q_r = -(16\sigma^*/3k^*)(\partial T/\partial y)T_\infty^3$ with the mean absorption k^* and Stefan-Boltzmann σ^* is deliberated. Figure 1 demonstrates the geometric structure of the study case. The surface temperature is taking as $T_w(x) = T_\infty + T_0x$, for which T_0 and T_∞ are assumed to be a constant and constant ambient temperature respectively. The derivation of the Eyring-Powell hybrid nanofluid model is based on the principle of rate processes theory. This theory was proposed and explained by Powell and Eyring [49]. Meanwhile, because the hybrid nanofluid is generated as a stable compound, the size is uniform, and the agglomeration effect is excluded.

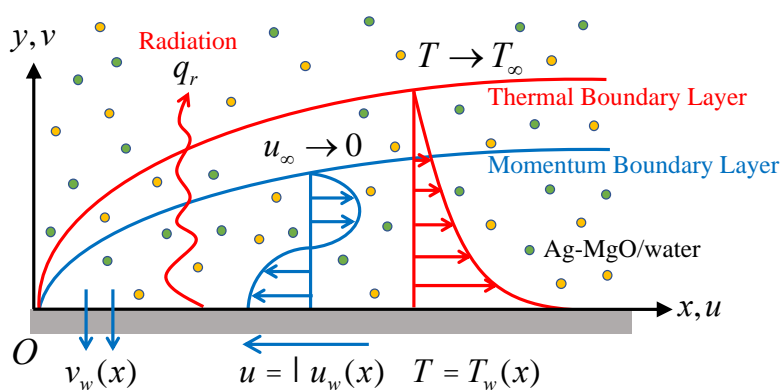


Fig. 1. Geometry of the physical problem

In Cartesian coordinate system, the governing boundary layer equations of the Eyring-Powell hybrid nanofluid can be stated as using the conventional boundary layer approximations for the continuity, momentum, and energy equations under the presumptions outlined above and depicting the fluid model can be conveyed as,

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \tag{1}$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\mu_{hmf}}{\rho_{hmf}} \frac{\partial^2 u}{\partial y^2} + \frac{1}{\rho_{hmf} \tilde{\beta} c^*} \left(\frac{\partial^2 u}{\partial y^2} \right) - \frac{1}{2 \rho_{hmf} \tilde{\beta} c^{*3}} \left(\frac{\partial u}{\partial y} \right)^2 \frac{\partial^2 u}{\partial y^2}, \tag{2}$$

$$(\rho c_p)_{hmf} \left(u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = \left(k_{hmf} + \frac{16 \sigma^* T_\infty^3}{3 k^*} \right) \frac{\partial^2 T}{\partial y^2}. \tag{3}$$

with the boundary conditions,

$$\begin{aligned} u &= \lambda u_w(x), \quad v = v_w, \quad T = T_w(x) \quad \text{at } y = 0, \\ u &\rightarrow 0, \quad T \rightarrow T_\infty \quad \text{as } y \rightarrow \infty. \end{aligned} \tag{4}$$

where (u, v) are the velocity components in (x, y) directions respectively, while the ρ_{hmf} is the density, μ_{hmf} defined as dynamic viscosity, c_p is the specific heat at constant pressure, $(\rho c_p)_{hmf}$ is the heat capacitance and k_{hmf} is thermal conductivity for the hybrid $Ag - MgO$ /water nanofluid, Further, $\beta = \beta_0 x^{-1}$ and $\delta = \delta_0 x$ are fluid parameters of the Eyring -Powell model with constant β_0 and δ_0 . Besides, the parameter λ is for the deformable plate such that $\lambda > 0$ stands for a stretching plate, $\lambda < 0$ indicates a shrinking plate and $\lambda = 0$ represents a static plat. While $v_w(x) = -S (av_f)^{1/2}$ denotes the constant mass velocity for the surface, and S is the suction/injection parameter such that $S > 0$ corresponds to the suction effect, $S < 0$ refers to the injection (fluid removal) effect. Table 1 displayed the characteristics of the water, Ag and MgO . The ϕ_1 and ϕ_2 signify Ag and MgO nanoparticles, respectively, where $\phi_{hmf} = \phi_1 + \phi_2$. On the other hand, the correlation of the studied fluid is provided in Table 2.

Table 1
 The thermophysical properties for the base fluid and nanoparticles [50,51]

Thermophysical Properties	Water	Ag	MgO
$\rho (kg / m^3)$	997.1	10500	3580
$c_p (J / kgK)$	4179	235	879
$k (W / mK)$	0.6130	429	30

Table 2
 Correlations of hybrid nanofluid [14,15,20]

Properties	Correlations
Dynamic Viscosity	$\mu_{hnf} = \frac{\mu_f}{(1 - \phi_{hnf})^{2.5}}$
Density	$\rho_{hnf} = (1 - \phi_{hnf})\rho_f + \phi_1\rho_{s1} + \phi_2\rho_{s2}$
Heat Capacity	$(\rho c_p)_{hnf} = (1 - \phi_{hnf})(\rho c_p)_f + \phi_1(\rho c_p)_{s1} + \phi_2(\rho c_p)_{s2}$
Thermal Conductivity	$\frac{k_{hnf}}{k_{bf}} = \left(\frac{\phi_1 k_{s1} + \phi_2 k_{s2} + 2k_{bf} + 2(\phi_1 k_{s1} + \phi_2 k_{s2}) - 2\phi_{hnf} k_{bf}}{\phi_{hnf}} \right)$

The governing Eq. (1) to (3) are in nonlinear partial differential equations (PDEs) form and due to its complexity, a practical transformation method namely similarity transformation is introduced to convert the PDEs into a simplified set of a nonlinear ordinary differential equation (ODEs). Thus, the relevant similarity transformations which applicable to simplify on Eq. (1) to Eq. (3) inclusive with the boundary conditions (4) are,

$$\eta = \left(\frac{a}{\nu_f} \right)^{1/2} y, \quad \psi = (a\nu_f)^{1/2} xf(\eta), \quad \theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty}, \quad (5)$$

where η defined as dimensionless similarity variable, and ψ is the stream function. The velocity component becomes,

$$u = \frac{\partial \psi}{\partial y} = axf'(\eta), \quad v = -\frac{\partial \psi}{\partial x} = -(a\nu_f)^{1/2} f(\eta) \quad (6)$$

which satisfied the continuity equation (1). Next, the momentum (2) and energy (3) equations become,

$$\frac{\mu_{hnf}}{\mu_f} f''' + \beta_1 f''' - \beta_1 \delta_1 (f'')^2 f''' + \frac{\rho_{hnf}}{\rho_f} (ff'' - f'^2) = 0, \quad (7)$$

$$\frac{1}{Pr} \frac{1}{(\rho c_p)_{hnf} / (\rho c_p)_f} \left(\frac{k_{hnf}}{k_f} + \frac{4}{3} R \right) \theta'' + f\theta' - f'\theta = 0. \quad (8)$$

with the boundary conditions,

$$f(0) = S, \quad f'(0) = \lambda, \quad \theta(0) = 1; \quad (9)$$

$$f'(\eta) \rightarrow 0, \quad \theta(\eta) \rightarrow 0 \quad \text{as } \eta \rightarrow \infty.$$

where a notation prime (') is derivative with respect to η , the Eyring -Powell fluid parameters β_1 and δ_1 , the radiation parameter R , the Prandtl number Pr , and the kinematic viscosity ν_f . These parameters can be defined as,

$$u = \frac{\partial \psi}{\partial y} = axf'(\eta), \quad v = -\frac{\partial \psi}{\partial x} = -(av_f)^{1/2} f(\eta) \quad (10)$$

The quantities of physical to be highlighted are in the form of the skin friction coefficient C_f and the local Nusselt number Nu_x

$$C_f = \frac{\tau_w}{\rho_f u_w^2(x)}, \quad Nu_x = \frac{xq_w}{k_f(T - T_\infty)}, \quad (11)$$

where τ_w and q_w are the wall shear stress and heat flux from the plate, respectively such that,

$$\tau_w = \left(\left(\mu_{hmf} + \frac{1}{\beta\delta} \right) \frac{\partial u}{\partial y} - \frac{1}{6\beta\delta} \left(\frac{\partial u}{\partial y} \right)^3 \right)_{y=0}, \quad q_w = -k_{hmf} \left(\frac{\partial T}{\partial y} \right)_{y=0} + (q_r)_{y=0} \quad (12)$$

Thus, one obtains,

$$C_f \text{Re}_x^{1/2} = \frac{\mu_{hmf}}{\mu_f} f''(0) + Mf''(0) - \frac{B}{3} Mf'''(0), \quad Nu_x \text{Re}_x^{-1/2} = - \left(\frac{k_{hmf}}{k_f} + \frac{4}{3} R \right) \theta'(0). \quad (13)$$

where $\text{Re}_x = (ax^2 / \nu_f)$ is the Reynolds number.

3. Results and Discussion

The formulation of the present model is started by reducing the complexity of governing equations using similarity variables. The obtained equations are then numerically solved by `bvp4c` function embedded in MATLAB software. This solution uses the limited difference Lobatto IIIa three-stage scheme and formula, where a set of initial guesses with the combination of suitable boundary layer thickness, η_∞ depends on the applied parameters. The correct results are obtained within the specified accuracy when the far-field boundary conditions are asymptotically satisfied and no error is generated from the MATLAB software. The procedures of this method are clearly discussed in Shampine *et al.*, [52]. The computations are carried out to study the effect of physical parameters involved likes Eyring-Powell fluid parameters β_1 and δ_1 , radiation parameter R , stretching/shrinking parameter λ , and nanoparticle volume fraction parameters ϕ_1 and ϕ_2 . The influences of the pertinent parameters are addressed graphically on the velocity distribution, temperature distribution, skin friction coefficient and also heat transfer rate. The validation procedures are done by comparing the values of $C_f \text{Re}_x^{1/2}$ with the established report by Javed *et al.*, [23] for regular fluid ($\phi_1 = \phi_2 = 0$) with various values of β_1 and δ_1 as clarified in Table 3, which designate the present outputs are valid. It can be concluded the developed codes for present study are acceptable and trustworthy. From the results shown, it can be concluded the parameters β_1 and δ_1 were the controlling parameters on the rate of $C_f \text{Re}_x^{1/2}$. However, it is noticed the presence β_1 and δ_1 give

the different impact where the increasing in β_1 reducing the $C_f Re_x^{1/2}$ but give contradict influence for growing in δ_1 .

Table 3

Comparison values of $C_f Re_x^{1/2}$ for various values of β_1 and δ_1 when $S=R=\phi_1=\phi_2=0$, and $\lambda=1$

δ_1	Javed <i>et al.</i> , [23]			Present Result		
	$\beta_1=0$	$\beta_1=0.2$	$\beta_1=0.4$	$\beta_1=0$	$\beta_1=0.2$	$\beta_1=0.4$
0.0	-1.0000	-1.0954	-1.1832	-1.000000	-1.095445	-1.183216
0.2	-1.0000	-1.0924	-1.1784	-1.000000	-1.092445	-1.178431
0.4	-1.0000	-1.0894	-1.1735	-1.000000	-1.089381	-1.173490

Figure 2 and Figure 3 captured the values of $C_f Re_x^{1/2}$ and $Nu_x Re_x^{-1/2}$ against ϕ_1 respectively. For these figures the sheet is taking as shrinking ($\lambda = -1$) and it can be seen for the fixed value of ϕ_2 , the value of $C_f Re_x^{1/2}$ are decreasing for larger value of ϕ_1 but shows contradict behavior in $Nu_x Re_x^{-1/2}$. Further, it is remarked the presence of strong ϕ_2 lessening the value of $C_f Re_x^{1/2}$ but improved the $Nu_x Re_x^{-1/2}$. On the other hand, the fluid without nanoparticle ($\phi_1 = \phi_2 = 0$) was observed to offer a higher value of $C_f Re_x^{1/2}$ and smaller value of $Nu_x Re_x^{-1/2}$ compare with the inclusive of nanoparticles. The conclusion we can draw from those output is the presence of nanoparticle *Ag* and *MgO* contributed significant impact to the fluid characteristics. Physically, the drag force drops by intensifying of nanoparticles concentration in the base fluid. Hence, the nanoparticle concentration compromises some resistance towards the drag force hence decreasing the skin friction. The increasing amount of nanoparticle concentration in the base fluid contributed in advanced conductivity of thermal. Additionally, the collision within the particles in the fluid flow dissipates the energy's rate and upsurges the inclusive temperature. It is also predicted the heat transfer rate of hybrid nanofluid escalate faster compared to conventional nanofluids (single particle).

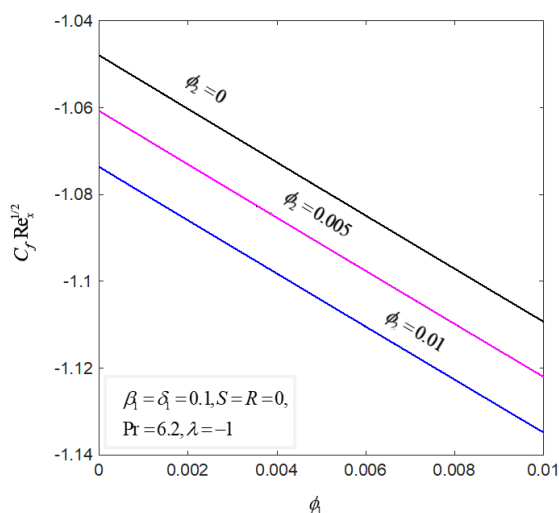


Fig. 2. Variation of $C_f Re_x^{1/2}$ against ϕ_1 and ϕ_2

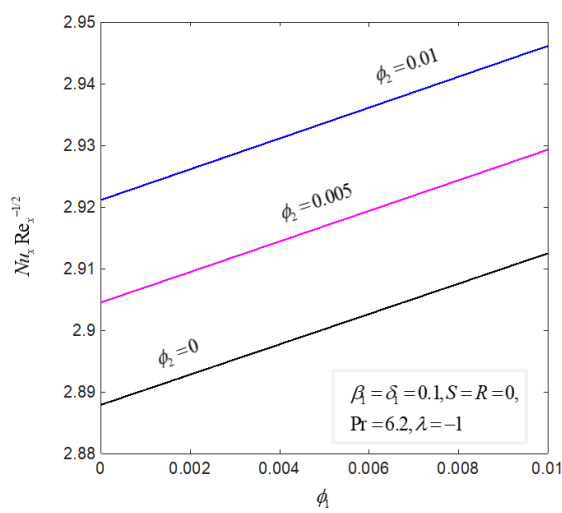


Fig. 3. Variation of $Nu_x Re_x^{-1/2}$ against ϕ_1 and ϕ_2

Variation of skin friction and Nusselt number against fluid parameter β_1 in shrinking environment can be perceived in Figure 4 and Figure 5. It can be seen that the rise of β_1 contributes smaller values of $C_f Re_x^{1/2}$ and greater quantity of $Nu_x Re_x^{-1/2}$. Physically, the larger values of β_1 generate hurdles to the shear-thinning rate which lessen the connection between fluid and surfaces. Hence it caused the minor drag forces. On the other hand, the raising in λ enhanced the values of $C_f Re_x^{1/2}$ significantly. However, for $\beta_1 = 0$ it is noticed the value of $C_f Re_x^{1/2}$ only increasing on the certain value of λ and later shows decreasing trend. Besides, it is detected the dual solutions for $C_f Re_x^{1/2}$ and $Nu_x Re_x^{-1/2}$ which attained up to some critical values of λ . The critical value reached up to $\lambda_{c1} = -1.2890$, $\lambda_{c2} = -1.1792$ and $\lambda_{c3} = -1.0856$ for $\beta_1 = 0, 0.1$ and 0.2 respectively. No other solutions were achieved beyond those mentioned critical value.

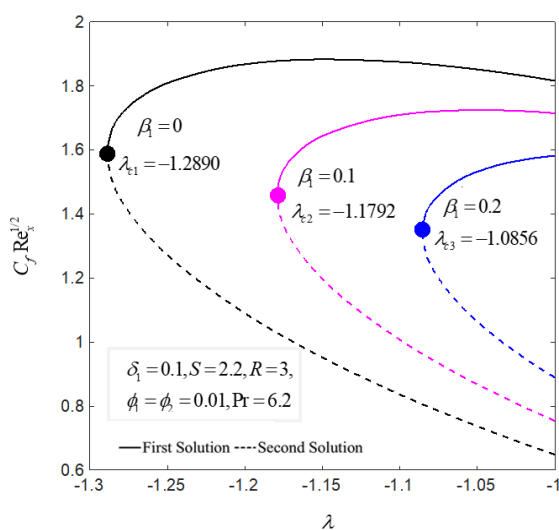


Fig. 4. Variation of $C_f Re_x^{1/2}$ against λ and β_1

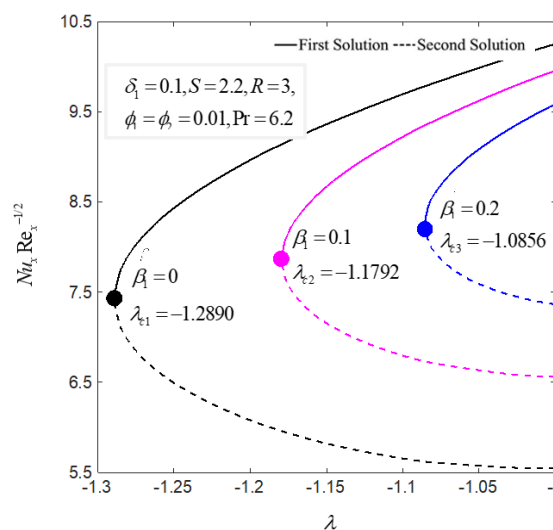


Fig. 5. Variation of $Nu_x Re_x^{-1/2}$ against λ and β_1

Graph in Figure 6 illustrated the behavior of $Nu_x Re_x^{-1/2}$ against the thermal radiation R and λ . At a fixed value of λ , it is apparently showing the quantity of $Nu_x Re_x^{-1/2}$ are reducing for strong rate of radiation. In this case, we can say the presence of radiation prevent the transfer of heat. According to the graph, this behavior happened on shrinking environment which is one of the factors contributing to this fallout. Besides that, the increasing in λ boost the quantity of $Nu_x Re_x^{-1/2}$. It is because, the shrinking environment of the sheet release the energy which contributed in heat transference of fluid. The dual solutions are acquired at $\lambda_c = -1.1792$. The existing dual solutions are supported by the temperature distributions as in Figure 7. It is clearly shows both solution (first and second) developed the temperature profile. The dual solutions are supported by the velocity and the temperature distribution as captured in Figure 8 and Figure 9. In the increasing pattern of the β_1 , the first solution of the velocity show deceleration while the second solution increasing. Meanwhile, the temperature distribution shown a contradicts behavior.

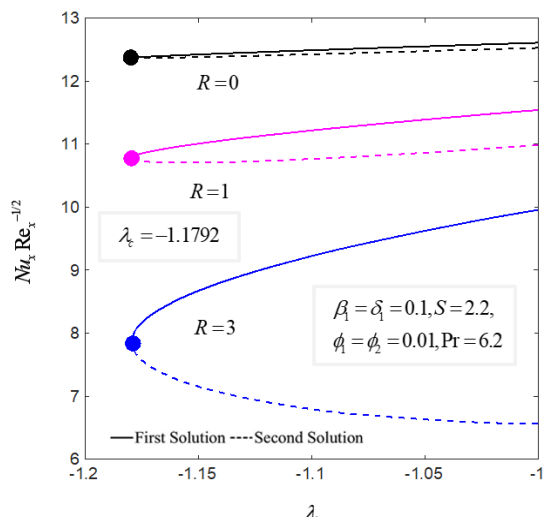


Fig. 6. Variation of $Nu_x Re_x^{-1/2}$ against λ and R

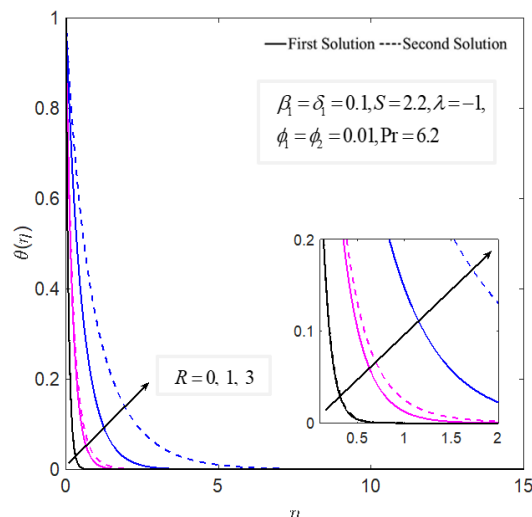


Fig. 7. Temperature profiles $\theta(\eta)$ against R

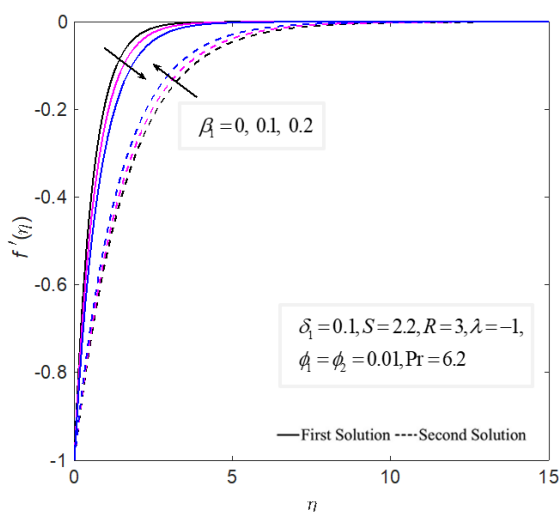


Fig. 8. Velocity profiles $f'(\eta)$ against β_1

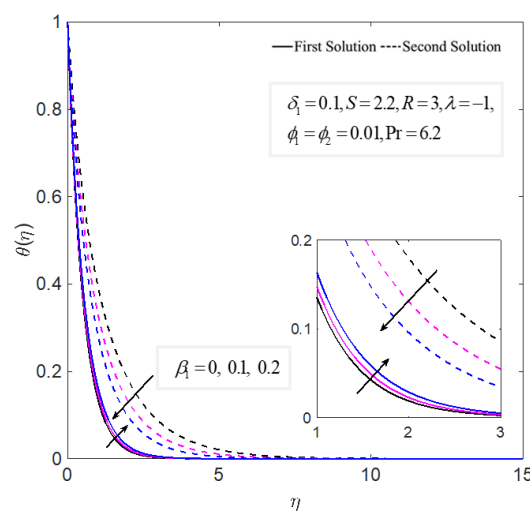


Fig. 9. Temperature profiles $\theta(\eta)$ against β_1

4. Conclusions

The present investigation focusses on compute numerical results for Eyring-Powell fluid filled with hybrid nanoparticle. The flow is taking moving over a shrinking sheet. The mathematical model was incorporated with the effect of thermal radiation and also shrinking environment. The limiting research is exposed for analysis due to Eyring-Powell hybrid nanofluid flow with radiative heat flux. The Physical variations pertinent parameters $\beta_1, \delta_1, R, \lambda, \phi_1$ and ϕ_2 are investigated and graphically illustrated for velocity, $f'(\eta)$, temperature $\theta(\eta)$, skin friction, $C_f Re_x^{1/2}$ and Nusselt number, $Nu_x Re_x^{-1/2}$. The conclusions from this study are:

- (i) The Eyring-Powell fluid with filled with $Ag - MgO$ /water is detected to offer enhanced thermal conductivity.
- (ii) In higher concentration of nanoparticles, the rate of heat transfer is developed.
- (iii) The augmentation of the nanoparticle volume fraction ϕ_2 (Ag) decreases the coefficient of skin friction but boost the heat transmission.

- (iv) For shrinking environment, non-unique (dual) solutions are discovered with different critical values for different values of β_1 .
- (v) Velocity profile $f'(\eta)$ lowers with the increasing values of β_1 (first solutions) and upsurge in second solution.
- (vi) Temperature distributions enhances with the increasing range of thermal radiation R and β_1 .

The present formulation can be implemented in the industrial application where it can be applied in improving the heat transfer frequency and discover the best material of certain processes.

Acknowledgement

The authors would like to thank Universiti Malaysia Pahang Al-Sultan Abdullah for providing financial support under PGRS220303.

References

- [1] Favre-Marinet, Michel, and Sedat Tardu. *Convective heat transfer: solved problems*. John Wiley & Sons, 2013.
- [2] Choi, S. U. S., and Jeffrey A. Eastman. *Enhancing thermal conductivity of fluids with nanoparticles*. No. ANL/MSD/CP-84938; CONF-951135-29. Argonne National Lab.(ANL), Argonne, IL (United States), 1995.
- [3] Hwang, Kyo Sik, Ji-Hwan Lee, and Seok Pil Jang. "Buoyancy-driven heat transfer of water-based Al_2O_3 nanofluids in a rectangular cavity." *International Journal of Heat and Mass Transfer* 50, no. 19-20 (2007): 4003-4010. <https://doi.org/10.1016/j.ijheatmasstransfer.2007.01.037>
- [4] Wong, Kaufui V., and Omar De Leon. "Applications of nanofluids: current and future." *Advances in Mechanical Engineering* 2 (2010): 519659. <https://doi.org/10.1155/2010/519659>
- [5] Tiwari, Raj Kamal, and Manab Kumar Das. "Heat transfer augmentation in a two-sided lid-driven differentially heated square cavity utilizing nanofluids." *International Journal of Heat and Mass Transfer* 50, no. 9-10 (2007): 2002-2018. <https://doi.org/10.1016/j.ijheatmasstransfer.2006.09.034>
- [6] Khanafer, Khalil, Kambiz Vafai, and Marilyn Lightstone. "Buoyancy-driven heat transfer enhancement in a two-dimensional enclosure utilizing nanofluids." *International Journal of Heat and Mass Transfer* 46, no. 19 (2003): 3639-3653. [https://doi.org/10.1016/S0017-9310\(03\)00156-X](https://doi.org/10.1016/S0017-9310(03)00156-X)
- [7] Oztop, Hakan F., and Eiyad Abu-Nada. "Numerical study of natural convection in partially heated rectangular enclosures filled with nanofluids." *International Journal of Heat and Fluid Flow* 29, no. 5 (2008): 1326-1336. <https://doi.org/10.1016/j.ijheatfluidflow.2008.04.009>
- [8] Hamad, M. A. A. "Analytical solution of natural convection flow of a nanofluid over a linearly stretching sheet in the presence of magnetic field." *International Communications in Heat and Mass Transfer* 38, no. 4 (2011): 487-492. <https://doi.org/10.1016/j.icheatmasstransfer.2010.12.042>
- [9] Kameswaran, P. K., M. Narayana, P. Sibanda, and P. V. S. N. Murthy. "Hydromagnetic nanofluid flow due to a stretching or shrinking sheet with viscous dissipation and chemical reaction effects." *International Journal of Heat and Mass Transfer* 55, no. 25-26 (2012): 7587-7595. <https://doi.org/10.1016/j.ijheatmasstransfer.2012.07.065>
- [10] Khan, Umair, A. Zaib, Ilyas Khan, and Kottakkaran Sooppy Nisar. "Activation energy on MHD flow of titanium alloy ($\text{Ti}_6\text{Al}_4\text{V}$) nanoparticle along with a cross flow and streamwise direction with binary chemical reaction and non-linear radiation: Dual Solutions." *Journal of Materials Research and Technology* 9, no. 1 (2020): 188-199. <https://doi.org/10.1016/j.jmrt.2019.10.044>
- [11] Waini, Iskandar, Anuar Ishak, and Ioan Pop. "Dufour and Soret effects on Al_2O_3 -water nanofluid flow over a moving thin needle: Tiwari and Das model." *International Journal of Numerical Methods for Heat & Fluid Flow* 31, no. 3 (2021): 766-782. <https://doi.org/10.1108/HFF-03-2020-0177>
- [12] Jana, Soumen, Amin Salehi-Khojin, and Wei-Hong Zhong. "Enhancement of fluid thermal conductivity by the addition of single and hybrid nano-additives." *Thermochimica Acta* 462, no. 1-2 (2007): 45-55. <https://doi.org/10.1016/j.tca.2007.06.009>
- [13] Suresh, S., K. P. Venkitaraj, P. Selvakumar, and M. Chandrasekar. "Synthesis of Al_2O_3 -Cu/water hybrid nanofluids using two step method and its thermo physical properties." *Colloids and Surfaces A: Physicochemical and Engineering Aspects* 388, no. 1-3 (2011): 41-48. <https://doi.org/10.1016/j.colsurfa.2011.08.005>

- [14] Devi, S. Suriya Uma, and S. P. Anjali Devi. "Numerical investigation of three-dimensional hybrid Cu-Al₂O₃/water nanofluid flow over a stretching sheet with effecting Lorentz force subject to Newtonian heating." *Canadian Journal of Physics* 94, no. 5 (2016): 490-496. <https://doi.org/10.1139/cjp-2015-0799>
- [15] Waini, Iskandar, Anuar Ishak, and Ioan Pop. "Flow and heat transfer of a hybrid nanofluid past a permeable moving surface." *Chinese Journal of Physics* 66 (2020): 606-619. <https://doi.org/10.1016/j.cjph.2020.04.024>
- [16] Zainal, Nurul Amira, Roslinda Nazar, Kohilavani Naganthran, and Ioan Pop. "Unsteady stagnation point flow of hybrid nanofluid past a convectively heated stretching/shrinking sheet with velocity slip." *Mathematics* 8, no. 10 (2020): 1649. <https://doi.org/10.3390/math8101649>
- [17] Waini, Iskandar, Anuar Ishak, Teodor Groşan, and Ioan Pop. "Mixed convection of a hybrid nanofluid flow along a vertical surface embedded in a porous medium." *International Communications in Heat and Mass Transfer* 114 (2020): 104565. <https://doi.org/10.1016/j.icheatmasstransfer.2020.104565>
- [18] Khashi'ie, Najiyah Safwa, Iskandar Waini, Abdul Rahman Mohd Kasim, Nurul Amira Zainal, Norihan Md Arifin, and Ioan Pop. "Thermal progress of a non-Newtonian hybrid nanofluid flow on a permeable Riga plate with temporal stability analysis." *Chinese Journal of Physics* 77 (2022): 279-290. <https://doi.org/10.1016/j.cjph.2022.03.019>
- [19] Waini, Iskandar, Najiyah Safwa Khashi'ie, Nurul Amira Zainal, Khairum Bin Hamzah, Abdul Rahman Mohd Kasim, Anuar Ishak, and Ioan Pop. "Magnetic Dipole Effects on Radiative Flow of Hybrid Nanofluid Past a Shrinking Sheet." *Symmetry* 15, no. 7 (2023): 1318. <https://doi.org/10.3390/sym15071318>
- [20] Waini, Iskandar, Najiyah Safwa Khashi'ie, Abdul Rahman Mohd Kasim, Nurul Amira Zainal, Khairum Bin Hamzah, Norihan Md Arifin, and Ioan Pop. "Unsteady magnetohydrodynamics (MHD) flow of hybrid ferrofluid due to a rotating disk." *Mathematics* 10, no. 10 (2022): 1658. <https://doi.org/10.3390/math10101658>
- [21] Waini, Iskandar, Abdul Rahman Mohd Kasim, Najiyah Safwa Khashi'ie, Nurul Amira Zainal, Anuar Ishak, and Ioan Pop. "Insight into Stability Analysis on Modified Magnetic Field of Radiative Non-Newtonian Reiner-Philippoff Fluid Model." *Journal of Applied and Computational Mechanics* 8, no. 2 (2022): 745-753.
- [22] Prasad, K. V., P. S. Datti, and B. T. Raju. "Momentum and heat transfer of a non-Newtonian Eyring-Powell fluid over a non-Isothermal stretching sheet." *International Journal of Mathematical Archive* 4, no. 1 (2013): 230-241.
- [23] Javed, Tariq, Nasir Ali, Zaheer Abbas, and Muhammad Sajid. "Flow of an Eyring-Powell non-Newtonian fluid over a stretching sheet." *Chemical Engineering Communications* 200, no. 3 (2013): 327-336. <https://doi.org/10.1080/00986445.2012.703151>
- [24] Hayat, Tasawar, Sadia Asad, Meraj Mustafa, and Ahmed Alsaedi. "Radiation effects on the flow of Powell-Eyring fluid past an unsteady inclined stretching sheet with non-uniform heat source/sink." *PLoS One* 9, no. 7 (2014): e103214. <https://doi.org/10.1371/journal.pone.0103214>
- [25] Hayat, T., S. Irfan Shah, B. Ahmad, and M. Mustafa. "Effect of slip on peristaltic flow of Powell-Eyring fluid in a symmetric channel." *Applied Bionics and Biomechanics* 11, no. 1-2 (2014): 69-79. <https://doi.org/10.1155/2014/867328>
- [26] Krishna, P. Mohan, N. Sandeep, J. V. Reddy, and V. Sugunamma. "Dual Solutions for Unsteady Flow of Powell-Eyring Fluid Past an Inclined Stretching Sheet." *Journal of Naval Architecture & Marine Engineering* 13, no. 1 (2016). <https://doi.org/10.3329/jname.v13i1.25338>
- [27] Aljabali, Ahlam, Abdul Rahman Mohd Kasim, Nur Syamilah Arifin, Noor Amalina Nisa Ariffin, Dennis Ling Chuan Ching, Iskandar Waini, Najiyah Safwa Khashi'ie, and Nurul Amira Zainal. "Two-Phase Flow of Eyring-Powell Fluid with Temperature Dependent Viscosity over a Vertical Stretching Sheet." *Mathematics* 10, no. 17 (2022): 3111. <https://doi.org/10.3390/math10173111>
- [28] Aljabali, Ahlam, Abdul Rahman Mohd Kasim, Nur Syamilah Arifin, Sharena Mohamad Isa, and Noor Amalina Nisa Ariffin. "Analysis of convective transport of temperature-dependent viscosity for non-newtonian erylng powell fluid: A numerical approach." *CMC-Computers Materials & Continua* 66, no. 1 (2021): 675-689. <https://doi.org/10.32604/cmc.2020.012334>
- [29] Hayat, T., M. Ijaz Khan, M. Waqas, A. Alsaedi, and Muhammad Imran Khan. "Radiative flow of micropolar nanofluid accounting thermophoresis and Brownian moment." *International Journal of Hydrogen Energy* 42, no. 26 (2017): 16821-16833. <https://doi.org/10.1016/j.ijhydene.2017.05.006>
- [30] Siddiq, M. K., A. Rauf, S. A. Shehzad, F. M. Abbasi, and M. A. Meraj. "Thermally and solutally convective radiation in MHD stagnation point flow of micropolar nanofluid over a shrinking sheet." *Alexandria Engineering Journal* 57, no. 2 (2018): 963-971. <https://doi.org/10.1016/j.aej.2017.01.019>
- [31] Mishra, M. R., Syed Modassir Hussain, O. D. Makinde, and G. S. Seth. "Stability analysis and multiple solutions of a hydromagnetic dissipative flow over a stretching/shrinking sheet." *Bulgarian Chemical Communications* 52, no. 2 (2020): 259-271.
- [32] Babu, M. Jayachandra, and N. Sandeep. "Effect of nonlinear thermal radiation on non-aligned bio-convective stagnation point flow of a magnetic-nanofluid over a stretching sheet." *Alexandria Engineering Journal* 55, no. 3 (2016): 1931-1939. <https://doi.org/10.1016/j.aej.2016.08.001>

- [33] Aziz, Asim, Wasim Jamshed, Taha Aziz, Haitham M. S. Bahaidarah, and Khalil Ur Rehman. "Entropy analysis of Powell-Eyring hybrid nanofluid including effect of linear thermal radiation and viscous dissipation." *Journal of Thermal Analysis and Calorimetry* 143 (2021): 1331-1343. <https://doi.org/10.1007/s10973-020-10210-2>
- [34] Abu-Hamdeh, Nidal H., Radi A. Alsulami, Muhyaddin J. H. Rawa, Mashhour A. Alazwari, Marjan Goodarzi, and Mohammad Reza Safaei. "A significant solar energy note on Powell-Eyring nanofluid with thermal jump conditions: Implementing Cattaneo-Christov heat flux model." *Mathematics* 9, no. 21 (2021): 2669. <https://doi.org/10.3390/math9212669>
- [35] Ahmed, Bilal, T. Hayat, F. M. Abbasi, and A. Alsaedi. "Mixed convection and thermal radiation effect on MHD peristaltic motion of Powell-Eyring nanofluid." *International Communications in Heat and Mass Transfer* 126 (2021): 105320. <https://doi.org/10.1016/j.icheatmasstransfer.2021.105320>
- [36] Muhammad, Taseer, Hassan Waqas, Shan Ali Khan, R. Ellahi, and Sadiq M. Sait. "Significance of nonlinear thermal radiation in 3D Eyring-Powell nanofluid flow with Arrhenius activation energy." *Journal of Thermal Analysis and Calorimetry* 143 (2021): 929-944. <https://doi.org/10.1007/s10973-020-09459-4>
- [37] Bhatti, Muhammad Mubashir, Kamel Al-Khaled, Sami Ullah Khan, Wathek Chamam, and Muhammad Awais. "Darcy-Forchheimer higher-order slip flow of Eyring-Powell nanofluid with nonlinear thermal radiation and bioconvection phenomenon." *Journal of Dispersion Science and Technology* 44, no. 2 (2023): 225-235. <https://doi.org/10.1080/01932691.2021.1942035>
- [38] Miklavčič, M., and C. Wang. "Viscous flow due to a shrinking sheet." *Quarterly of Applied Mathematics* 64, no. 2 (2006): 283-290. <https://doi.org/10.1090/S0033-569X-06-01002-5>
- [39] Turkyilmazoglu, M. "Dual and triple solutions for MHD slip flow of non-Newtonian fluid over a shrinking surface." *Computers & Fluids* 70 (2012): 53-58. <https://doi.org/10.1016/j.compfluid.2012.01.009>
- [40] Lund, Liaquat Ali, Zurni Omar, Ilyas Khan, Jawad Raza, El-Sayed M. Sherif, and Asiful H. Seikh. "Magnetohydrodynamic (MHD) flow of micropolar fluid with effects of viscous dissipation and joule heating over an exponential shrinking sheet: triple solutions and stability analysis." *Symmetry* 12, no. 1 (2020): 142. <https://doi.org/10.3390/sym12010142>
- [41] Yahaya, Rusya Iryanti, Norihan Md Arifin, Siti Suzilliana Putri Mohamed Isa, and Mohammad Mehdi Rashidi. "Magnetohydrodynamics boundary layer flow of micropolar fluid over an exponentially shrinking sheet with thermal radiation: Triple solutions and stability analysis." *Mathematical Methods in the Applied Sciences* 44, no. 13 (2021): 10578-10608. <https://doi.org/10.1002/mma.7432>
- [42] Waini, Iskandar, Nurul Amira Zainal, Najiyah Safwa Khashi'ie, Khairum Bin Hamzah, Abdul Rahman Mohd Kasim, Anuar Ishak, and Ioan Pop. "Mixed convection of MHD Reiner-Philippoff fluid flow past a vertical shrinking plate with radiative heat transfer." *Chinese Journal of Physics* 83 (2023): 325-336. <https://doi.org/10.1016/j.cjph.2023.04.001>
- [43] Yahaya, Rusya Iryanti, Norihan Md Arifin, and S. S. P. Mohamed Isa. "Stability analysis of MHD Carreau fluid flow over a permeable shrinking sheet with thermal radiation." *Sains Malaysiana* 48, no. 10 (2019): 2285-2295. <https://doi.org/10.17576/jsm-2019-4810-25>
- [44] Waini, Iskandar, Anuar Ishak, and Ioan Pop. "Hiemenz flow over a shrinking sheet in a hybrid nanofluid." *Results in Physics* 19 (2020): 103351. <https://doi.org/10.1016/j.rinp.2020.103351>
- [45] Yang, Dezhi, Muhammad Yasir, and Aamir Hamid. "Thermal transport analysis in stagnation-point flow of Casson nanofluid over a shrinking surface with viscous dissipation." *Waves in Random and Complex Media* (2021): 1-15. <https://doi.org/10.1080/17455030.2021.1972183>
- [46] Wahid, Nur Syahirah, Norihan Md Arifin, Najiyah Safwa Khashi'ie, Rusya Iryanti Yahaya, Ioan Pop, Norfifah Bachok, and Mohd Ezad Hafidz Hafidzuddin. "Three-dimensional radiative flow of hybrid nanofluid past a shrinking plate with suction." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 85, no. 1 (2021): 54-70. <https://doi.org/10.37934/arfm.85.1.5470>
- [47] Roy, Nepal Chandra, Anwar Hossain, and Ioan Pop. "Flow and heat transfer of MHD dusty hybrid nanofluids over a shrinking sheet." *Chinese Journal of Physics* 77 (2022): 1342-1356. <https://doi.org/10.1016/j.cjph.2021.12.012>
- [48] Rehman, Aqeel ur, and Zaheer Abbas. "Stability analysis of heat transfer in nanomaterial flow of boundary layer towards a shrinking surface: Hybrid nanofluid versus nanofluid." *Alexandria Engineering Journal* 61, no. 12 (2022): 10757-10768. <https://doi.org/10.1016/j.aej.2022.04.020>
- [49] Powell, Richard E., and Henry Eyring. "Mechanisms for the relaxation theory of viscosity." *Nature* 154 (1944): 427-428. <https://doi.org/10.1038/154427a0>
- [50] Ma, Yuan, Rasul Mohebbi, M. M. Rashidi, and Zhigang Yang. "MHD convective heat transfer of Ag-MgO/water hybrid nanofluid in a channel with active heaters and coolers." *International Journal of Heat and Mass Transfer* 137 (2019): 714-726. <https://doi.org/10.1016/j.ijheatmasstransfer.2019.03.169>

- [51] Ghalambaz, Mohammad, Ali Doostani, Ehsan Izadpanahi, and Ali J. Chamkha. "Conjugate natural convection flow of Ag-MgO/water hybrid nanofluid in a square cavity." *Journal of Thermal Analysis and Calorimetry* 139 (2020): 2321-2336. <https://doi.org/10.1007/s10973-019-08617-7>
- [52] Shampine, Lawrence F., Ian Gladwell, and Skip Thompson. *Solving ODEs with Matlab*. Cambridge University Press, 2003. <https://doi.org/10.1017/CBO9780511615542>