

SUBJECTIVE QUALITY in UNDERWATER ACOUSTIC NETWORKS

Dr. Javier Poncela




TELECOMMUNICATIONS TECHNOLOGIES
RESEARCH GROUP
UNIVERSITY OF MALAGA, SPAIN

Contents

1. Introduction
2. Underwater Acoustic Channel
3. Quality Assessment in Underwater Video


Introduction

- Oceans cover about 70 percent of the Earth's surface, and much of this vast resource remains to be explored
 - It is possible to chat from the International Space Station and make phone calls from the summit of Mount Everest, so why can't we check our email from the ocean floor?
- The volume below the sea surface has been traditionally ignored
 - It's a harsh environment that requires advanced technology
 - Resources are much easier to collect on the surface
 - Expansion has been possible without much effort
 - Even now, space resources look more tempting

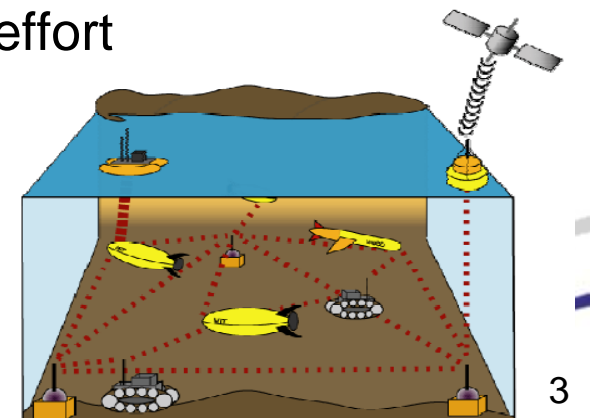

UAC Applications

- Scientific
 - Submarine life monitoring
 - Natural phenomena forecasting
- Industrial
 - Aquaculture
 - Exploitation of mineral resources
- Environmental
 - Pollution control
 - Climate parameters recording
- Safety
 - Search and rescue missions,
 - Communication between divers and vehicles

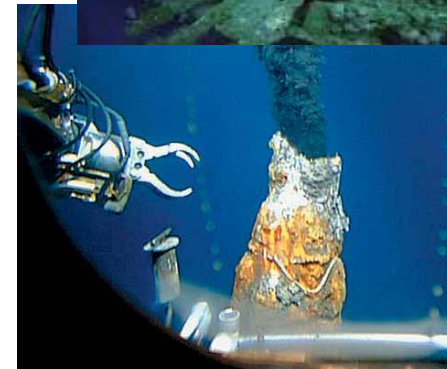

Málaga

- Phoenicians, Greeks, Romans, Arabs, ...
 - Multicultural city
- Metropolitan Area
> 700.000 people
- Important Airport & Harbour
- **Coastal City**



Wireless Underwater Waves

- Traditionally, underwater communication is achieved via cables
 - Cables are expensive and heavy-weighted: several tens or hundreds of meters
 - Movement constraints for vehicles and divers
 - Safety issues as cables may pose dangers
- ➔ Wireless underwater communications is a must




Wireless Underwater Waves

- Radio-Electromagnetic waves
 - EM waves do not travel well through thick electrical conductors like salt water
 - Strong absorption + Huge attenuation with distance

⇒ Only for very short range communications

- Optical communication
 - Blue-green region (450-550 nm)
 - + High bandwidth (~Mbps)
 - + Negligible delay
 - Short distance (<100 m)
 - Alignment of transmitter/receiver

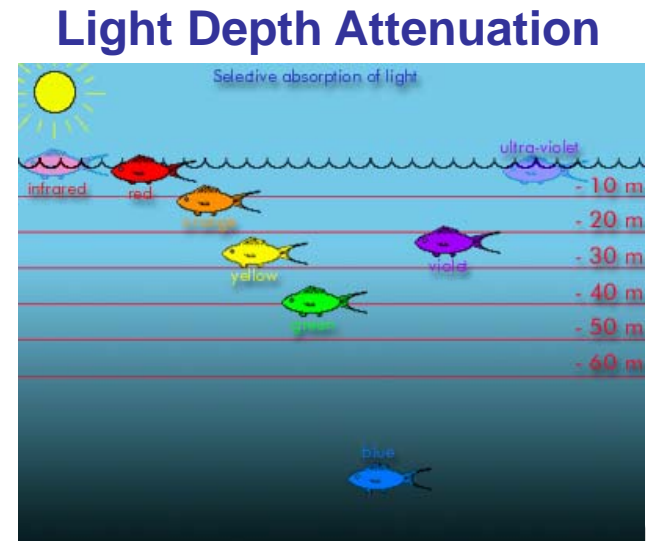

Underwater Acoustics

- Used by submarine fauna
- Frequency range: 1 Hz - 500 kHz
 - A 30 kHz frequency (ultrasound) = 6 GHz in air (microwave)
(wavelength = 5 cm)
- Negative propagation characteristics
 - Limited bandwidth: 8kHz to 48-78 kHz
 - Time-varying multipath propagation:
Reflections from surface, sea floor
 - Low speed of sound underwater: ~ 1500 m/s




Contents

1. Introduction
2. Underwater Acoustic Channel
3. Quality Assessment in Underwater Video


Underwater Acoustic Channel

- The underwater acoustic channel is affected by many factors
 - Salinity
 - Temperature
 - Seabed topology
 - Speed of sound
 - Surface wind-speed
 - ...
- This causes multi-paths, reverberation, Doppler, time-varying paths, ...
- The result: the communication channel has poor quality and high latency
 - Challenges are very different from terrestrial wireless

Propagation Speed

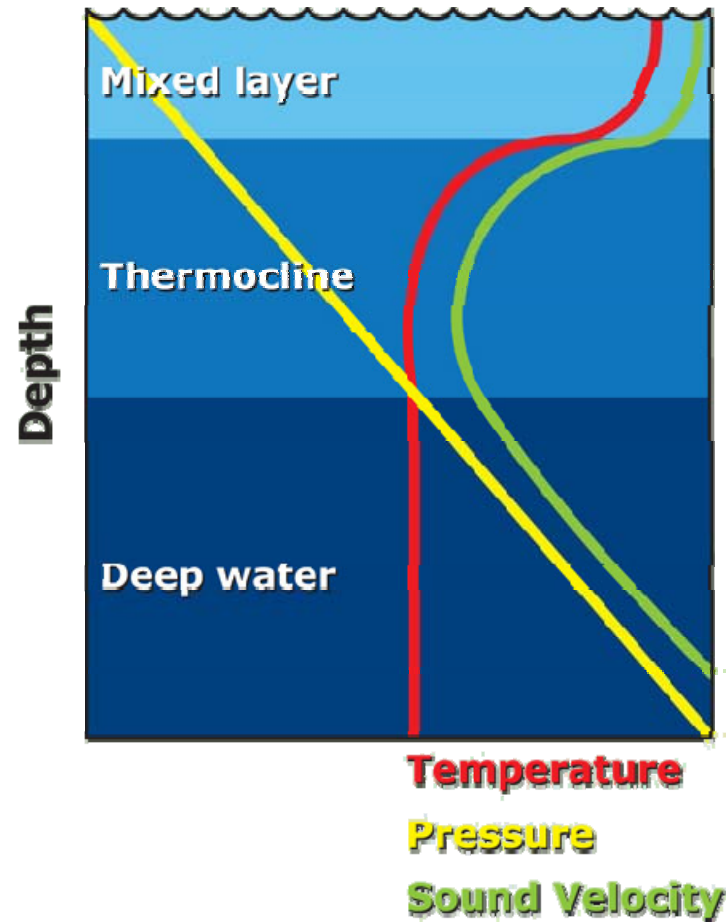


- Typical: 1500 m/s
Range: 1450m/s – 1540 m/s
- As depth increases, speed decreases
- After 500-600 meters the increasing pressure causes an increase in speed

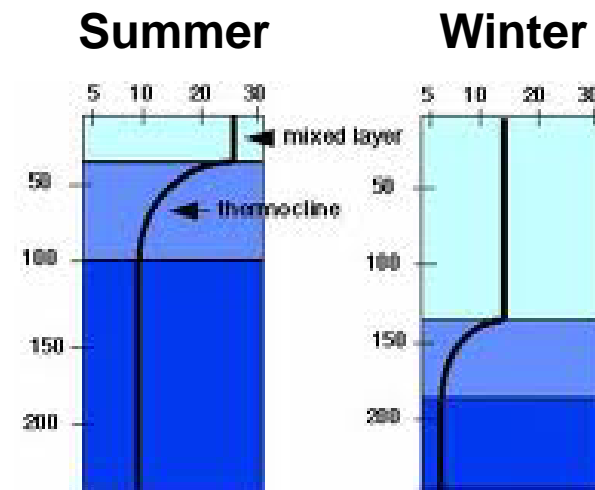

Scattering

- When the surface of the water is in movement, it causes a dispersal of the delays of the multiple reflections
- Time of coherence decreases
- Experimental measurements show that scattering increases with frequency, distance and wind speed

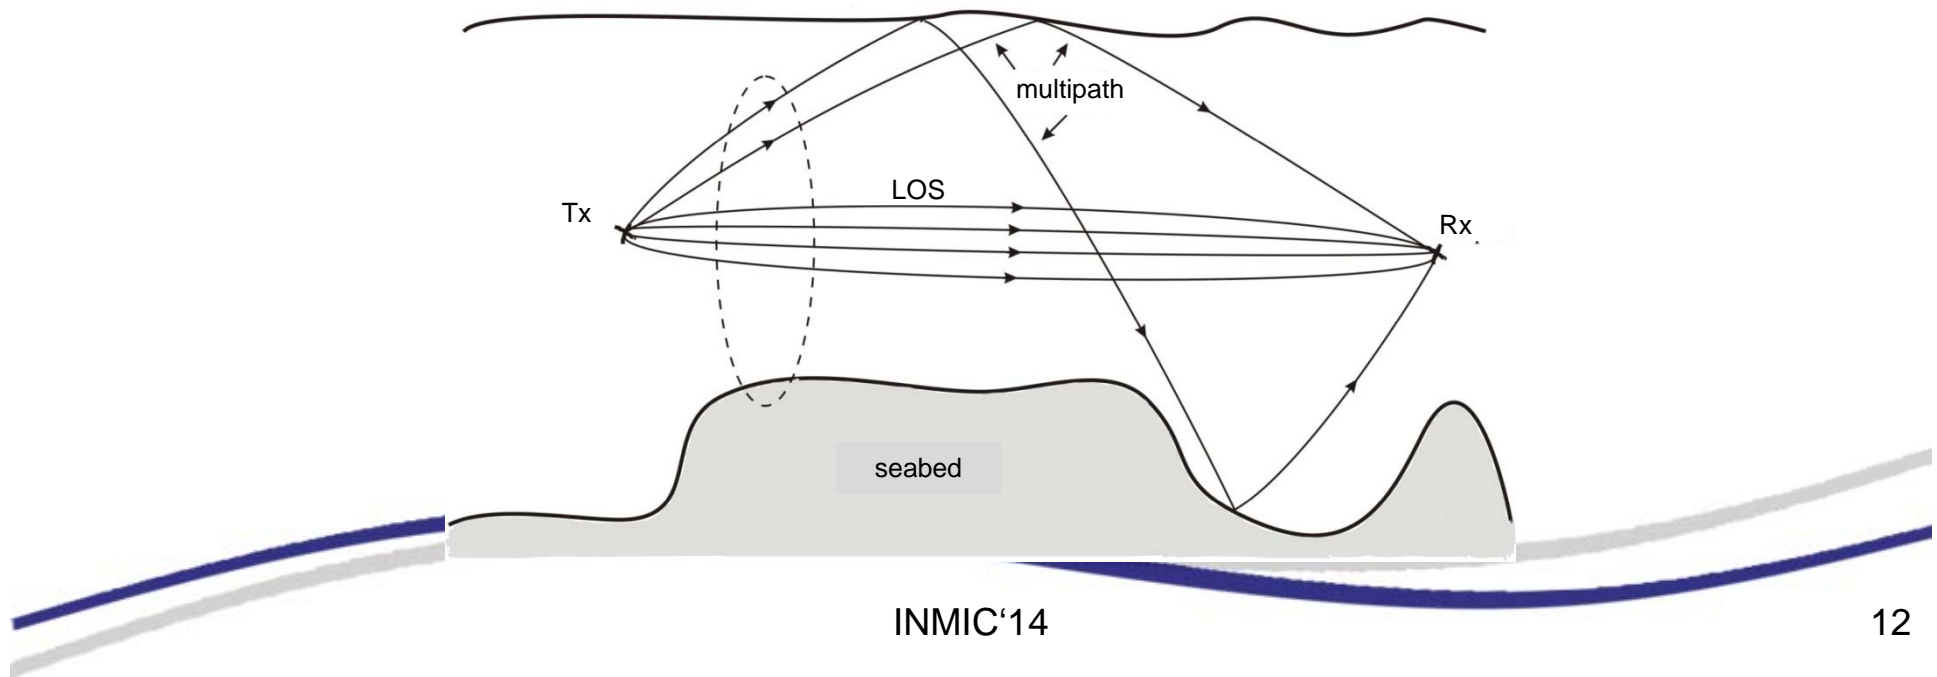

Bubbles are not So Funny


- Bubbles that appear on the surface may have a big influence on high frequency acoustic signals
- Effect: Increased attenuation of reflected signals
- Bubble density increases with wind speed
 - At 10 m/s, attenuation due to bubbles is up to 20 dB
- Bubbles underwater also create additional scattering



Noise


- Impacts the choice of carrier frequencies
- Natural and human-origin sources of noise:
waves, turbulences, animals, ships
- Frequency ranges
 - Low (< 10 Hz): seismic, storm, turbulences
 - Medium (50 ~ 300 Hz): ships
 - High (> 500 Hz): wind, cavitation, bubbles
- Discontinuous biological noise (in time and space)
- Decreasing power spectral density:
 < 10 Hz: 8 ~ 10 dB/octave Above 10 Hz: 5 dB/octave

Submarine Environment

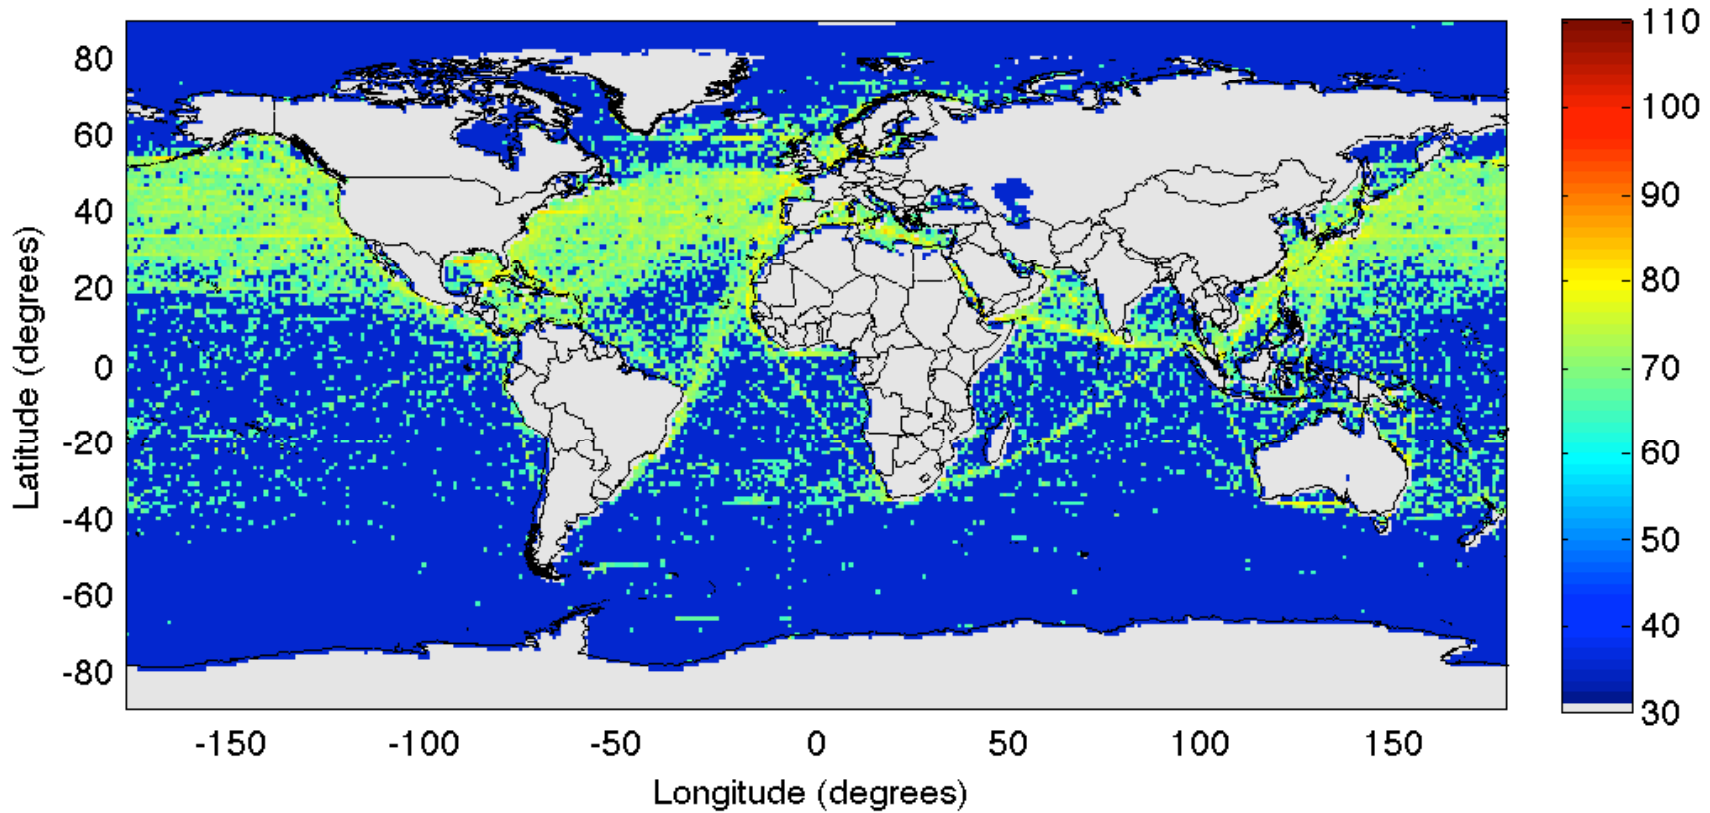

Global Shipping Noise at 200 Hz – Points of Origin
[*Ocean Acoustics Library*]

Submarine Environment

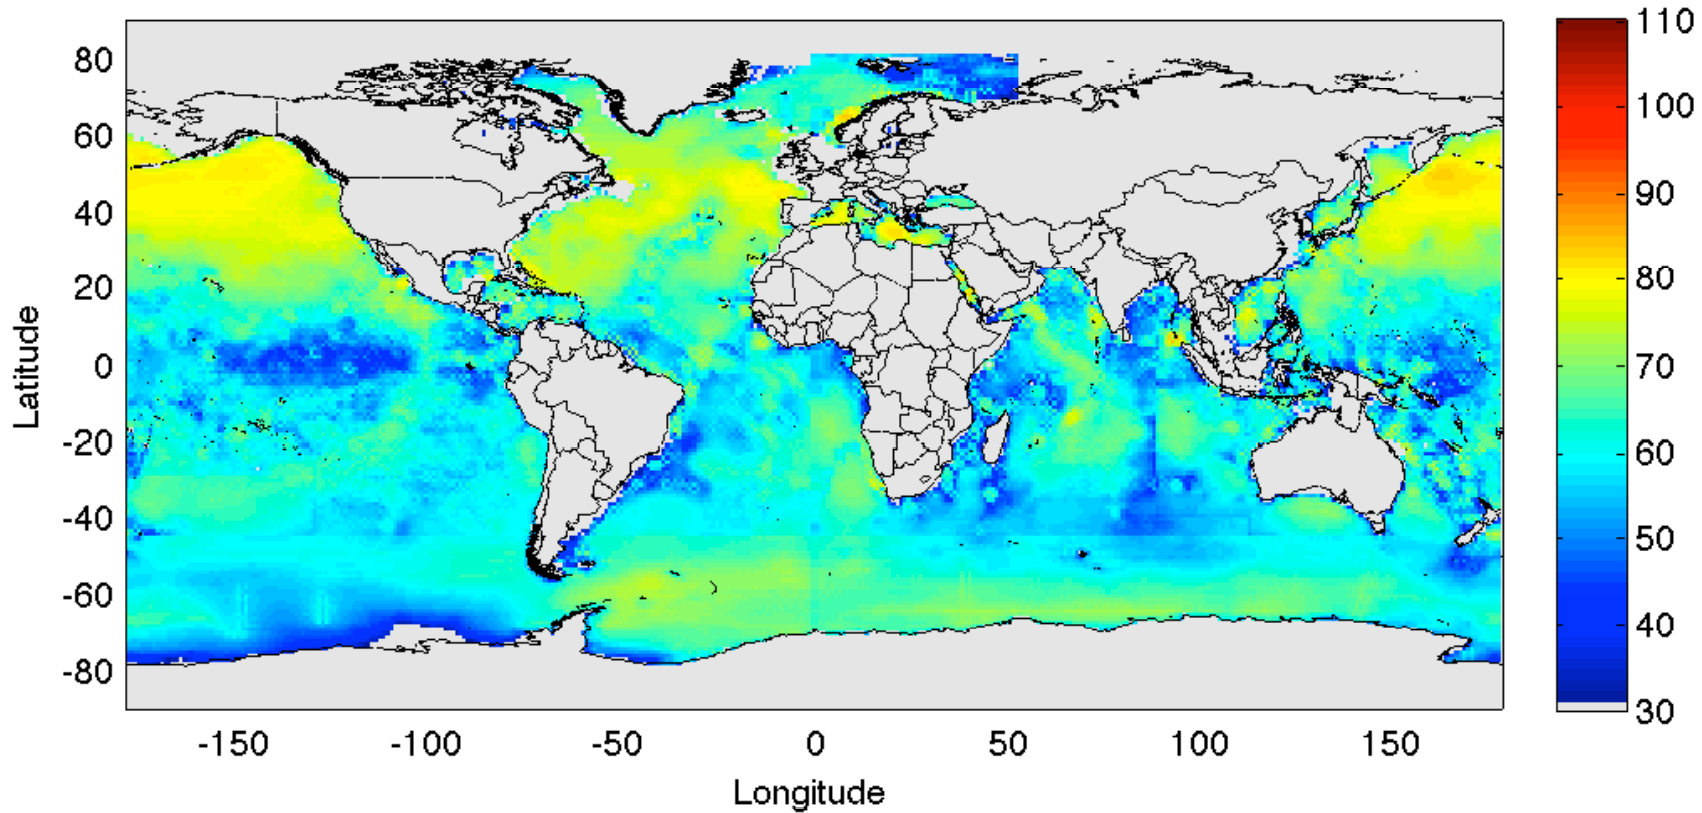

Global Shipping Noise at 200 Hz - Aggregate

[Ocean Acoustics Library]

Contents

1. Introduction
2. Underwater Acoustic Channel
3. Quality Assessment in Underwater Video

Motivations

- **Ocean scientists** often need not only sensor measures (temperature, salinity...) but also they **need to watch** underwater environments.
- **Images** from oceanic resources are currently **difficult** and **expensive** to obtain.
 - Exploration expeditions with divers or robots submerging with cameras are needed.
- **Video services in USNs** would allow to **reduce** these **costs**.



Problems and research targets

- **Main problem** for underwater video services is the **highly limited bitrate** available with current technology.
 - State of the art acoustic modems reach **31,2 kbps** peak data rate at physical layer.
- It is necessary to study if video services are possible and what **QoS** could be achieved in these **low bitrate conditions**.



ITU-T G.1070 model – Definition

- Mean Opinion Score (MOS) is a subjective parameter
 - Perceived quality is usually scored in a five rank scale.
- The only **ITU model** for **parametric** MOS estimation in **video services**.
 - Oriented to **video-conference** services but de-facto used for other services too.
- Network parameter as **variables** in the model:
 - Video coding **bitrate**.
 - **Frame rate**.
 - End to end loss rate for IP packets, (**packet loss**).
- Model also needs a set of **coefficients** depending on: video codec, resolution and screen size.

Subjective quality assessment

- ITU Recommendation for subjective video quality assessment for multimedia applications. It describes:
 - Source signal.
 - Test methods.
 - Evaluation procedures.
 - Statistical analysis and reporting of results.
- In **absolute category rating** (ACR) test method, several video sequences are presented to human viewers who score them within a qualitative scale.



Encoding - Experiment

- Configurations for video services need to be adapted to bitrate limitation.
- Since low frame rate video must be considered, both **still image sequence** transmission and **regular video encoding** are under study.

- Work settings:

Setting	Values	Unit
Resolution	320x180 160x90	px
Encoding	JPEG, JPEG2000 H.264	-
Frame rate	1-25	fps
Bitrate	6, 12	kbps

Conclusion

- Underwater channel is very unfriendly
- Terrestrial wireless techniques must be adapted
- Quality is not perceived by viewer the same way as in videoconferencing/TV
- Video, even with low resolution and fewer frames per second, is considered better than still images