

**TITLE:** ADVANCED RESEARCH CAPABILITIES FOR NEUTRON  
SCIENCE AND TECHNOLOGY: NEUTRON POLARIZERS FOR  
NEUTRON SCATTERING

**AUTHOR(S):** S.I. Penttila, P-23  
P.J. Delheij, TRIUMF  
M.R. Fitzsimmons, LANSCE-12  
T. Haseyama, Kyoto University  
G. Jones, NIST  
M. Leuschner, UNH  
V. Pomeroy, UNH  
D. Rich, Indiana University  
R.A. Robinson, LANSCE-12  
S.J. Seestrom, P-23  
M. Snow, Indiana University

**SUBMITTED TO:** LDRD final report

**MASTER**

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED 

**Los Alamos**  
NATIONAL LABORATORY

## DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

## **Advanced Research Capabilities for Neutron Science and Technology: Neutron Polarizers for Neutron Scattering**

Seppo I. Penttila (P-23), Paul J. Delheij (TRIUMF), Michael R. Fitzsimmons (LANSCE-12), Tomohito Haseyama (Kyoto University), Gordon Jones (NIST), Mark Leuschner (UNH), Vance Pomeroy (UNH), Dennis Rich (Indiana University), Robert A. Robinson (LANSCE-12)\*, Susan J. Seestrom (P-23), Mike Snow (Indiana University)

### **Abstract**

We describe work on the development of polarized gaseous  $^3\text{He}$  cells, which are intended for use as neutron polarizers. Laser diode arrays polarise Rb vapor in a sample cell and the  $^3\text{He}$  is polarised via collisions. We describe development and tests of such a system at LANSCE.

### **Background and Research Objectives**

Broad-band neutron polarizers are an essential technology for high powered spallation neutron sources like LANSCE, especially in the thermal energy range. Spin-polarized  $^3\text{He}$  is a very attractive technology. Although it has been used for many years in nuclear and particle physics, it has not yet reached maturity as a tool for neutron-scattering studies of condensed-matter system, and the intent of this LDRD project has been to transfer this technology and apply it to neutron scattering at LANSCE. Key targets are to get  $^3\text{He}$  polarisations in the 65% range within the environment of a neutron spectrometer, and obstacles to this task include available laser power at the right wavelength, depolarising processes with the cell walls, mechanical integrity of the cells themselves, the magnetic-field environment and so on. 65% is state of the art, and has been claimed by the Institut Laue Langevin Grenoble using a meta-stable  $^3\text{He}$  polarization method quite different from ours. But to date there have been no successful condensed-matter experiments using  $^3\text{He}$  polarizing filters, anywhere in the world.

\* P.I.: R. A. Robinson, e-mail: rrobinson@lanl.gov

## **Importance to LANL's Science and Technology Base and National R&D Needs**

The Neutron Laboratory at LANSCE is one of the key scientific facilities in the Laboratory portfolio, and it is now clear that any new national neutron sources will be accelerator-driven neutron sources rather than reactors. Key components in the success of these sources, including LANSCE, will be the availability of intense broad-band polarized neutron beams in the thermal energy range, and the ability to analyze scattered neutrons for their polarization over very large detector areas. This will impact work on magnetic materials in particular, as well as correlated-electron metals with enhanced magnetic susceptibilities. Further in the future there is the possibility of separating coherent from incoherent scattering, using polarized hydrogen to change its contrast in biological molecules and polymers, and the use of spin-precession methods for measurement of neutron energies.

## **Scientific Approach and Accomplishments**

### **1. Introduction**

Applications of polarized  $^3\text{He}$  technology range from high energy physics to biomedical science as can be learned from papers of the HELION97 workshop at Japan in 1997 [1]. The method for optical polarization of  $^3\text{He}$  gas was discovered in the 1960s [2], but applications were initially limited, because of a lack of suitable light sources. Later powerful solid state lasers made it practical to polarize large quantities of  $^3\text{He}$ . Because of  $^3\text{He}$  has a very large spin-dependent neutron cross section polarized  $^3\text{He}$  gas can be used to absorb one of the two neutron spin states, allowing the other spin state to be transmitted through with moderate attenuation. In this report we discuss the  $^3\text{He}$  neutron spin filter. We note that polarized protons can be also used to filter the neutron spin [3].

The goals of this project were to develop the  $^3\text{He}$  technology which then can be used to build the neutron beam polarizer for neutron scattering experiments. Such a technique is of great importance to many areas of basic and applied research. In particular, they promise to open up broad-band polarized thermal-neutron applications at spallation sources like LANSCE. The work consisted of development of  $^3\text{He}$  sample cells and loading techniques, construction of the apparatus to polarize and test  $^3\text{He}$ , development of optics and laser technology, and a test of the  $^3\text{He}$  spin filter in a neutron beam.

The requirements for the neutron spin filter are:

- 1) It should be a broad band, providing highly polarized neutrons from the longest wavelength (about 20 Å) to the "hot" neutron energies, 0.4-1 Å.

2) The polarizer should provide the maximum flux of neutrons (per unit wavelength) at the detector and therefore transport the neutron beam from the source to a sample with the maximum efficiency.

3) In some experiments it is important that the polarizer produces negligible or easily shielded gamma backgrounds and any residual background should be constant.

4) The polarizer may provide an additional reversal of neutron spin without changing any magnetic fields which helps to control systematical errors of an experiment.

The conventional method to polarize neutron beams is to use polarizing supermirrors [4,5]. The polarizing supermirror is a well developed technology which in many neutron scattering experiments, at thermal and cold energies, gives better results than the  $^3\text{He}$  spin filters. But the supermirror polarizer works only with neutron wavelengths of  $2\text{\AA}$  and greater, and is limited to narrow-divergence applications. In principle, the  $^3\text{He}$  spin filter has a broader band, can handle arbitrarily large angular divergences, and can be used to polarize neutrons from the long wavelengths down to approximately  $0.05\text{\AA}$ .

## 2. Optically-polarized $^3\text{He}$ ; a neutron spin filter for neutron scattering

In recent years, neutron beam polarization by transmission through a sample of laser-polarized gaseous  $^3\text{He}$  has rapidly advanced toward practicality. Two methods have been developed in parallel to polarize  $^3\text{He}$  nuclei: exchange of polarization from optically-pumped metastable  $^3\text{He}$  and exchange from optically-pumped Rb. The metastability exchange technique is currently used at Grenoble and Mainz [6]. Since the Rb spin-exchange technique is straightforward and capable of producing thick (high-pressure) polarized  $^3\text{He}$  targets, it was our method of choice. During the project the Rb spin-exchange technique has benefited from Industry's production of high powered laser diode arrays (LDA) [7].

## 3. Neutron transmission through polarized $^3\text{He}$ gas

Polarized  $^3\text{He}$  can be used as a neutron spin filter [8] since  $^3\text{He}$  has a large neutron absorption cross section for the capture reaction  $^3\text{He} + n \rightarrow p + t$ :

$$\sigma_a = \frac{1}{\sqrt{E}} \sqrt{E_0} \sigma_0,$$
 where  $\sigma_0 = 5327$  barn at neutron energy of  $E_0 = 0.025$  eV. The cross section is highly spin dependent due to a broad, unbound resonance in  $^4\text{He}$  of  $J^\pi = 0^+$ . In order to conserve angular momentum for this  $s$ -wave resonance, only the component of neutron spin anti-parallel to the  $^3\text{He}$  spin is resonantly absorbed. When a unpolarized

neutron beam passes through polarized  $^3\text{He}$ , beam polarization  $P_n$  and transmission  $T_n$  are given by

$$\begin{aligned}
 (1) \quad T_{\pm} &= \exp(-n_3\sigma_a l(1 \mp P_3)) \\
 P_n &= \frac{T_+ - T_-}{T_+ + T_-} = \tanh(n_3\sigma_a l P_3) \\
 T_n &= \frac{T_+ + T_-}{2} = \exp(-n_3\sigma_a l) \cosh(n_3\sigma_a l P_3) = T_n^0 \cosh(n_3\sigma_a l P_3),
 \end{aligned}$$

where  $T_+$  ( $T_-$ ) is the transmission when the neutron spin is parallel (antiparallel) with the  $^3\text{He}$  spin,  $n_3$  is the number density of the  $^3\text{He}$ ,  $l$  is the length of the  $^3\text{He}$  gas and,  $P_3$  is the polarization of the  $^3\text{He}$  and  $T_n^0$  is transmission through the  $^3\text{He}$  cell when  $^3\text{He}$  polarization is zero. With simple algebra we get from eq. (1) for beam polarization

$$(2) \quad P_n^2 = 1 - \left(\frac{T_n^0}{T_n}\right)^2.$$

This relationship and eq. (1) show that  $^3\text{He}$  polarization will enhance the transmission. According to equation (2) in order to determine the neutron beam polarization we need only to measure the transmission enhancement ( $T_n/T_n^0$ ). We do not need to know the thickness of the  $^3\text{He}$  or its cross section. Because the neutron -  $^3\text{He}$  cross section depends upon the neutron energy, the transmission and beam polarization have energy dependences which are not indicated in eqs (1) and (2). A  $^3\text{He}$  spin filter can be built to optimize a certain wavelength range as illustrated in figures 1 and 2. Figure 1 shows the calculated figure-of-merit,  $P_n^2 T_n$ , as a function of neutron wavelength for  $^3\text{He}$  polarizations of 40%, 50%, and 60% and a  $^3\text{He}$  thickness of 8 atm-cm. The figure-of-merit (FOM) defines how long the experiment must run to achieve a certain statistical accuracy. Figure 2 shows  $P_n$ ,  $T_n$ , and  $P_n^2 T_n$  as a function of neutron energy for the filter cell with 50%  $^3\text{He}$  polarization and thicknesses of 6 atm-cm and 8 atm-cm. The goal of the design of the spin filter cell and its construction is to optimize figure-of-merit and this includes also practical considerations as well. The shape of the FOM curve depends on the  $^3\text{He}$  target thickness, but is almost independent of  $^3\text{He}$  polarization. Therefore, the optimal thickness does not change appreciably with  $^3\text{He}$  polarization.

#### 4. Spin-exchange optical pumping

Spin-exchange from optically pumped Rb vapor via the hyperfine interaction of the Rb valence electrons with the  $^3\text{He}$  nucleus was discovered in 1960 by Bouchiat [2]. In this method circularly polarized laser light polarizes the Rb atoms and then through the spin-exchange process the  $^3\text{He}$  nuclei will become polarized. The polarization of  $^3\text{He}$  produced by the spin exchange evolves with time as

$$(3) \quad P_3 = P_{\text{Rb}} \frac{\gamma_{\text{SE}}}{\gamma_{\text{SE}} + \Gamma} (1 - e^{-(\gamma_{\text{SE}} + \Gamma)t}),$$

where  $P_{\text{Rb}}$  is the steady state Rb polarization produced by laser pumping, and  $\gamma_{\text{SE}} = k_{\text{SE}}[\text{Rb}]$  is the rate of spin exchange from the Rb to the  $^3\text{He}$  nucleus.  $\Gamma$  is the total  $^3\text{He}$  spin relaxation rate, in general dominated by interactions with paramagnetic impurities on the wall of the cell and in the gas. Due to the weakness of spin exchange,  $\gamma_{\text{SE}} = (0.6 - 1.2) \cdot 10^{-1} \text{ cm}^3/\text{s}$ , maximum  $^3\text{He}$  polarization would require both densities of  $10^{14} - 10^{15} \text{ Rb}/\text{cm}^3$  and  $^3\text{He}$  relaxation times,  $1/\Gamma$ , of many tens of hours [9]. These relaxation times can only be achieved by keeping  $\Gamma$  much smaller than the spin exchange rate. This sets strict requirements for the cell material and preparations of the cells [10]. Studies showed that densities of Rb greater than  $10^{14}$  could be effectively polarized when  $\text{N}_2$  is included to suppress radiation trapping, Corning 1720 alumino-silicate and other low-iron and/or low-helium permeability glasses are typically used to suppress the wall relaxation, and sufficient laser power was absorbed by the Rb atoms to balance Rb spin destruction. The large laser power is required to keep the Rb atoms highly polarized.

## 5. Cell construction

The state of the art of the cell construction has been explained in ref. [10]. The cells must be fabricated from glass material which allows circularly-polarized laser light enter the cell, and the cell strength must be sufficient to tolerate the  $^3\text{He}$  pressures, which can be as high as several atmospheres. The neutron entry and exit windows of the cells should not absorb too many neutrons from the beam. The only parameters which can be influenced in equation (3) are  $P_{\text{Rb}}$ , rubidium polarization, which strongly depends upon the laser power, and  $\Gamma$ , the polarization relaxation rate.  $\Gamma$  depends upon the content of paramagnetic impurities in the glass and gas. In order to achieve the high  $^3\text{He}$  polarization  $\Gamma$  has to be kept as small as possible. Therefore the inside wall surfaces of the cells have to be treated carefully to remove paramagnetic impurities [10] and the glass material itself has to have as low iron content as possible [11]. In this project our choice of glass was Corning 1720 alumino-silicate glass which has very low helium permeability. This glass contains 5%



$B_2O_3$ .  $^{10}B$  abundance in natural boron is 20%. The  $^{10}B$  isotope has a very large neutron absorption cross section at thermal energies and therefore should be replaced in glass with  $^{11}B$ . The parts of the cell which interact with the neutron beam, such as the beam windows, should be made from the  $^{10}B$ -free glass. The typical cell geometry is cylindrical with the diameter of about 3.5 cm and the length of 4-10 cm with 2-3 mm thick flat end caps made from  $^{11}B$ -enriched Corning 1720 glass. The end caps were sealed to the cylindrical body with a  $H_2$  flame [12]. With flat ends every neutron has the same interaction path in the  $^3He$  gas. The use of the flat end caps made the cells weak, and in particular the joints between ends and the body of the cell were weak spots. The strength of the cells were studied by pressure tests. With the proper sealing of the ends the rupture pressure was measured to be about 15 atm. This pressure was high enough that the cells could be loaded up to 10 atm. Loading techniques of the cells were developed in the collaboration with different institutes. At the beginning of the project the loading of the cells were done at TRIUMF, NIST, Princeton and the University of New Hampshire. At the end of the project we built an ultra-high vacuum system that allows the loading to be done at Los Alamos. The quality of the cells and the transport properties of polarized  $^3He$  gas was studied using the magnetic resonance imaging (MRI) technique as described in publication 1. Figure 3 shows a profile picture of a polarized cell done with the MRI technique. In the middle of the cell the  $^3He$  polarization has been destroyed and the evolution of the polarization in the cell is shown.

## 6. Lasers

At present, the most common lasers in use for the Rb optical pumping in high density  $^3He$  gas are high powered arrays of laser diodes (LDA) and Ti:sapphire lasers [7,13]. Due to price considerations and ease of use compared to Ti:sapphire lasers, LDAs dominate. Sufficient laser power is required to polarize the Rb atoms and to balance Rb spin destruction [14]. The bulk Rb spin destruction rate at high Rb densities and  $^3He$  densities below about 5 atm is dominated by Rb-Rb collisions [15] and is given by the total spin destruction rate

$$(4) \quad \Gamma = k_{Rb-^3He} [^3He] + k_{Rb-N_2} [N_2] + k_{Rb-Rb} [Rb],$$

where  $k$  represents the rate constants for the spin destruction, due to collisions of the Rb atoms with the other species and with themselves. For a typical application,  $\Gamma \sim 500 \text{ s}^{-1}$ . Recently these rates have been re-measured at Princeton, and a strong temperature dependence was observed [16,17]. The disadvantage of the LDA is its broad laser linewidth of about 2 nm. This linewidth does not match well with the D1 absorption

linewidth of the Rb atom. The width of this line depends on the  $^3\text{He}$  pressure and at 6 atm pressure is about 0.5 nm. This means that a main part of the laser light is not absorbed by the Rb atoms. Therefore further development of the LDA is still necessary. The use of LDAs in the  $^3\text{He}$  neutron spin filter is described in publication 2.

## 7. Apparatus

Figure 4 shows a schematic of a typical spin-exchange optical pumping apparatus. The cell is in an oven which regulates the Rb density, at temperature of about 175 °C.  $^3\text{He}$  polarization is held by a 30-gauss homogeneous magnetic field. The field homogeneity has to be better than about 1mG/cm. This gradient minimizes the polarization losses during the NMR measurements or spin reversal.  $^3\text{He}$  polarization is measured with the adiabatic fast passage (AFP) NMR [18]. AFP can also be used to reverse the polarization direction of the filter.  $^3\text{He}$  polarization can also be measured with a neutron beam as discussed in the next section.

## 8. Test of a $^3\text{He}$ spin filter in a neutron beam

Use of polarized  $^3\text{He}$  gas to polarize neutron beams was proposed by Postma [19]. The first experiment with a  $^3\text{He}$  spin filter was done at LANSCE in 1989 [20]. Similar techniques have also been used at ILL, KEK, NIST, and the University of Michigan. In our experiment the  $^3\text{He}$  spin filter was used to measure the absolute neutron beam polarization. Using the time-of-flight method, the energy of the neutrons and beam backgrounds can be determined very accurately which then allows accurate transmission measurements. With equations (1) and (2) and results of the transmission measurements the absolute neutron beam polarization can be calculated. Figure 5 shows main components of the experiment performed at MLNSC. Downstream of the bulk shield, a thin  $^3\text{He}$  ion chamber was used to normalized the beam flux with the accuracy of  $10^{-4}$ . The neutrons were then collimated and transported to the polarized  $^3\text{He}$  cell located 9 m from the source. In fact two such cells, one polarized and the other unpolarized, were mounted on a common moveable table within the same oven, so that they could be alternated within the beam. Neutrons were counted with a  $^3\text{He}$  scintillation detector after traversing the 55-m flight path. More detailed description of the experiment and results can be found from the publication 2. In figure 6, the beam polarization has been plotted as a function of neutron energy from 20 meV to 10 eV.  $^3\text{He}$  polarization during the measurement shown in figure 6 was 15%. The maximum  $^3\text{He}$  polarization achieved during the experiments was 55% [21]. The measured neutron yield has been corrected for the beam background, detector

dead time and length of the flight path. The results indicate that we have determined beam polarization with the accuracy of 0.2-0.3%.

### Publications

1. Schmidt, D. M., J. S. George, S. I. Penttila, A. Caprihan, and E. Fukushima, "Diffusion Imaging with Hyperpolarized He-3 Gas," *Journal of Magnetic Resonance* **129**, 184 (1997).
2. D. Rich, J. D. Bowman, B. E. Crawford, P. P. J. Delheij, M. A. Espy, T. Haseyama, G. Jones, C. Keith, J. Knudson, M. B. Leuschner, A. Masaike, Y. Masuda, Y. Matsuda, S. I. Penttila, V. R. Pomeroy, D. A. Smith, M. Snow, S. L. Stephenson, A. K. Thompson and V. Yuan, "Absolute Neutron Beam Polarization with Optically-Polarized  $^3\text{He}$ ", submitted to *Nucl. Instrum. Methods* (1998).

### References

- [1] Papers in *Nucl. Instrum. Methods A* **402**, 250-498 (1998).
- [2] Bouchiat, M., Carver, T. and Varnum, C., *Phys. Rev. Lett.* **5**, 373 (1960).
- [3] Penttila, S. *et al.*, "A Neutron Beam Polarizer for Studies of Parity Violation in Neutron-Nucleus Interactions", *Proc. of the 11th International Symposium on High Energy Spin Physics*, ed. K J. Heller and S. L. Smith (AIP Conference Proceedings No 343,1995)p. 532.
- [4] Mezei, F., "Novel polarized neutron devices: supermirror and spin component amplifier", *Comm. on Physics* **1**, 81 (1976).
- [5] O. Schaerpf, "Comparison of Theoretical and Experimental Behavior of Supermirrors and Discussion of Limitations", *Physica B* **156&157**, 631 (1989).
- [6] Surkau, R. *et al.*, "Realization of a broad band neutron spin filter with compressed, polarized  $^3\text{He}$  gas", *Nucl. Instrum. Methods*, **A384**, 444-450 (1997).
- [7] Cummings, W. J. *et al.*, "Optical Pumping of Rb Vapor using High Power GaAlAs Diode Laser Arrays", *Phys. Rev. A* **51**, 4842 (1995).
- [8] Pasell, L. and Schermer, R. I., "Measurement of the Spin Dependence of the  $^3\text{He}(n,p)\text{T}$  Reaction and of the Nuclear Susceptibility of Adsorbed  $^3\text{He}$ ", *Phys. Rev.* **150**, 146 (1966).
- [9] Fitzsimmons, W., Tankersly, L. and Walters, G., "Nature of Surface-Induced Nuclear-Spin Relaxation of Gaseous  $^3\text{He}$ ", *Phys. Rev.* **179**, 156 (1969).
- [10] Chupp, T. E. *et al.*, "Progress Toward a Spin Exchange Pumped  $^3\text{He}$  Neutron Spin Filter", *J. Neutron Res.* **5**, 11 (1995).

- [11] Timsit, R. S., Daniels, J. M. and May, A. D., "Nuclear Relaxation of  $^3\text{He}$  Gas on Various Solid Surfaces", *Can. J. Physics* **49**, 560 (1971).
- [12] All the cells used in the project were fabricated in the University of Princeton by M. Souza.
- [13] Model number is OPC-A015-795-FCPS, Opto Power Corp., Tucson, AZ.
- [14] Chupp, T., Wagshul, M., Coulter, M., McDonald, A., and Happer, D., *Phys. Rev. C* **36**, 2224 (1987).
- [15] Chupp, T. and Wagshul, M., *Phys. Rev. A* **49**, 3854 (1994).
- [16] Romalis, M., "E154 Target Polarization Technical Note", 1997, private communication.
- [17] Walker, T., *Phys. Rev. A* **40**959 (1989)
- [18] Abragam, A., "The Principles of Nuclear Magnetism", Clarendon Press, Oxford (1973).
- [19] Postma, H., Proceedings of 3rd Int. Symposium on Polarization Phenomena in Nuclear Reactions, ed. H. H. Barschall and W. Haeberli (The University of Wisconsin Press, Madison, 1971) p. 373.
- [20] Coulter, K. P., Chupp, T. E., McDonald, A. B., Bowman, C. D., Bowman, J. D. *et al.*, "Neutron Polarization with a Polarized  $^3\text{He}$  Spin Filter", *Nucl. Instrum Methods*, **A288**, 463 (1990).
- [21] Haseyama, T., "Parity Violating Neutron Spin Rotation in the  $p$ -wave Resonance of the Neutron-Nucleus Interaction", Ph.D. Thesis, Kyoto University (1998), not published.

### Figure Captions

Figure 1: Figure-of-merit,  $P_n^2 T_n$ , for a neutron spin filter with helium polarizations of 40%, 50%, and 60%, and with a target thickness of 8 atm-cm.

Figure 2: Neutron transmission,  $T_n$ , polarization,  $P_n$ , and figure-of-merit,  $P_n^2 T_n$  for a neutron spin filter with 50% helium polarization and a target thickness of 6 atm-cm and 8 atm-cm.

Figure 3: Polarization profile of a polarized  $^3\text{He}$  cell measured with MRI techniques. The polarization has been destroyed in a small volume in the middle of the cell and figures show the evolution of the polarization.

Figure 4: Schematic diagram of the Rb spin-exchange  $^3\text{He}$  spin filter. Shown are the laser, optics, Helmholtz coils of the holding field, RF coils for NMR measurement of  $^3\text{He}$  polarization, oven, pick-up coils for NMR and signal processing electronics.

Figure 5: Conceptual layout of the absolute neutron beam polarization experiment at MLNSC. The most important elements and their distances from the source are indicated.

Figure 6: Neutron beam polarization as a function of neutron energy from 20 meV to 10 eV. The  $^3\text{He}$  thickness is 50 atm·cm and  $^3\text{He}$  polarization is 15%.

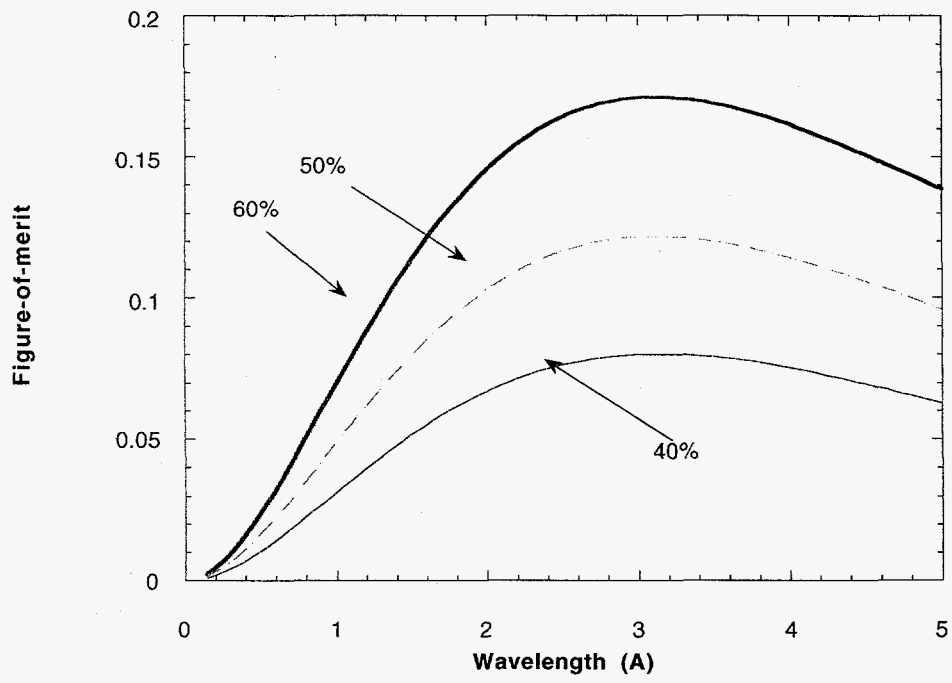


Figure 1

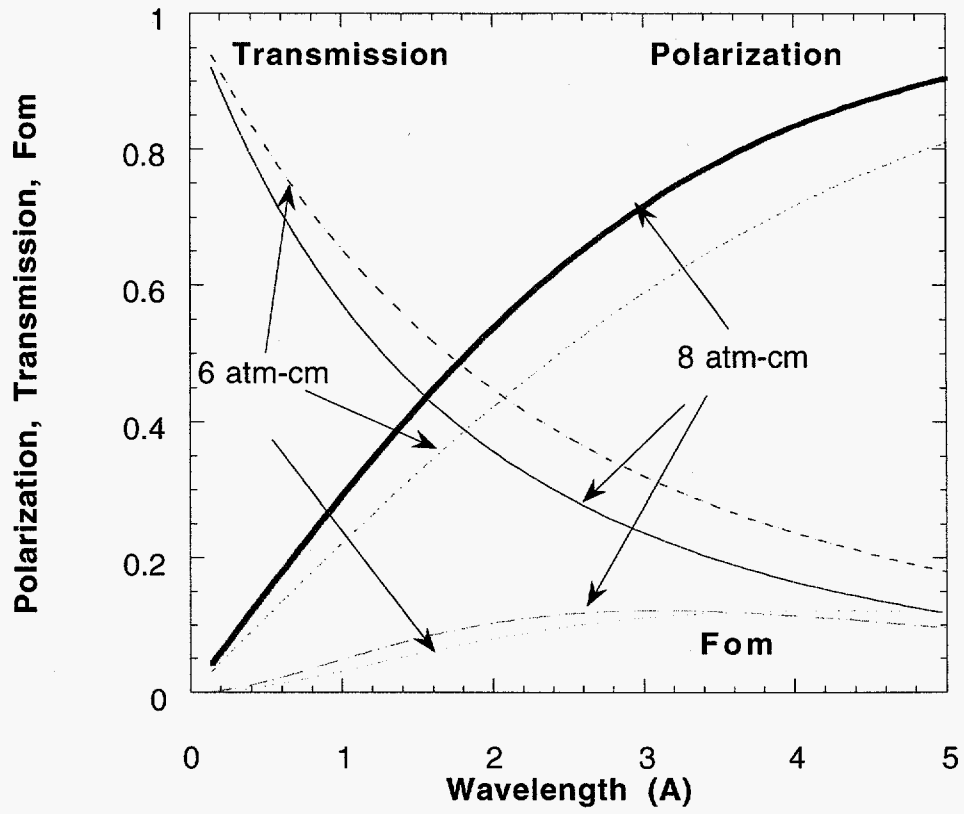


Figure 2

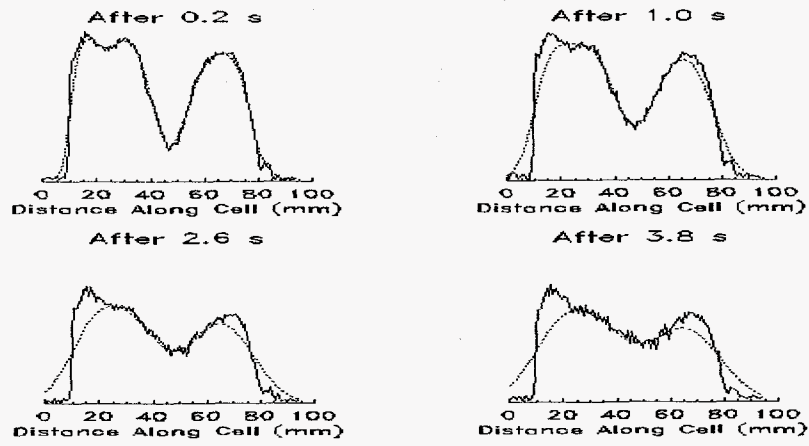


Figure 3



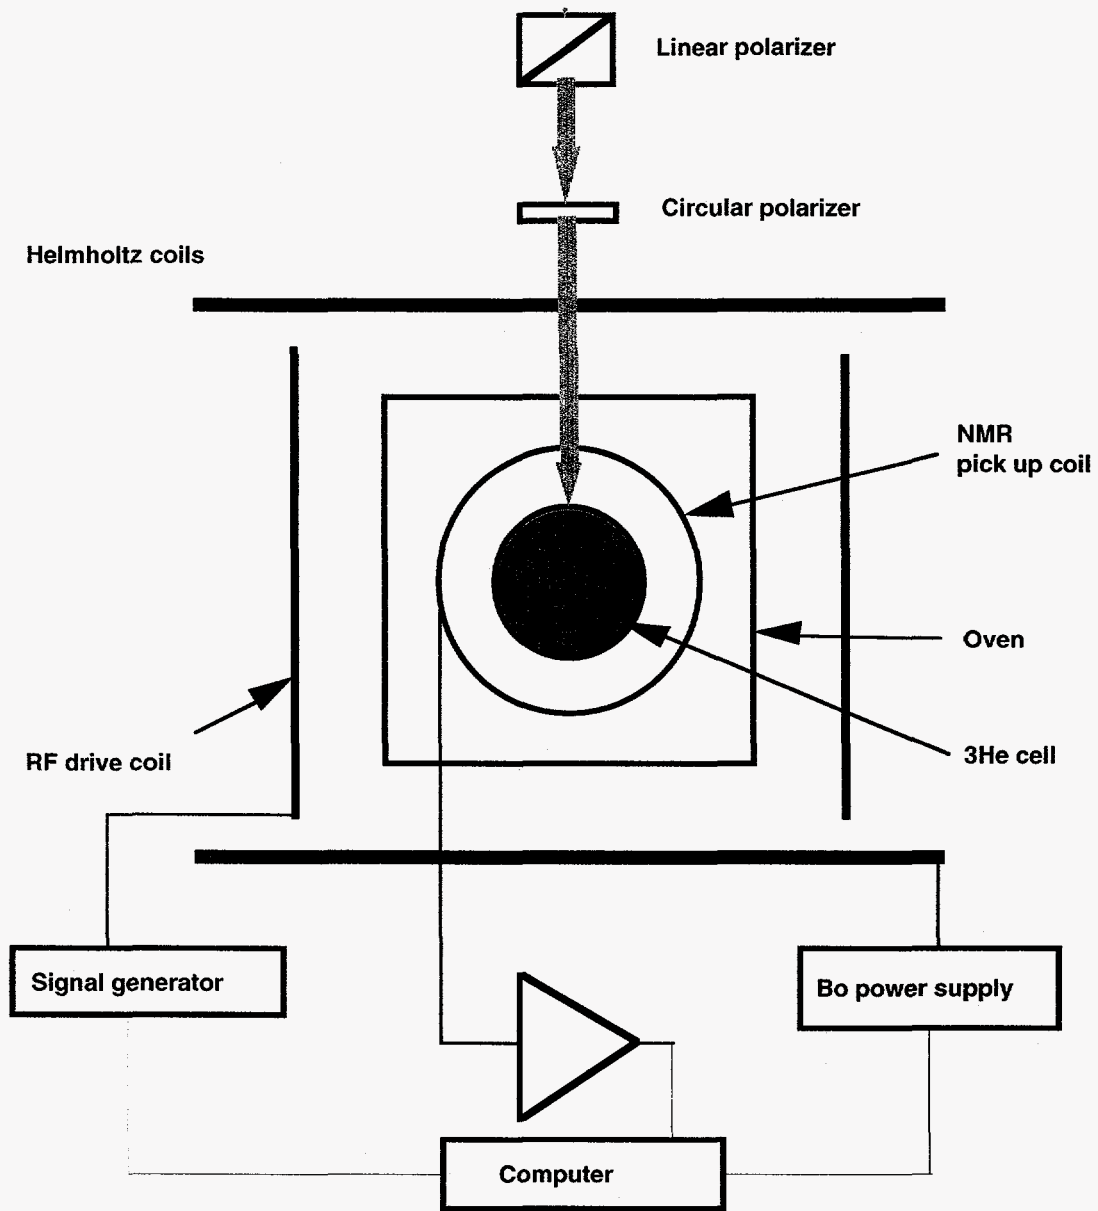


Figure 4

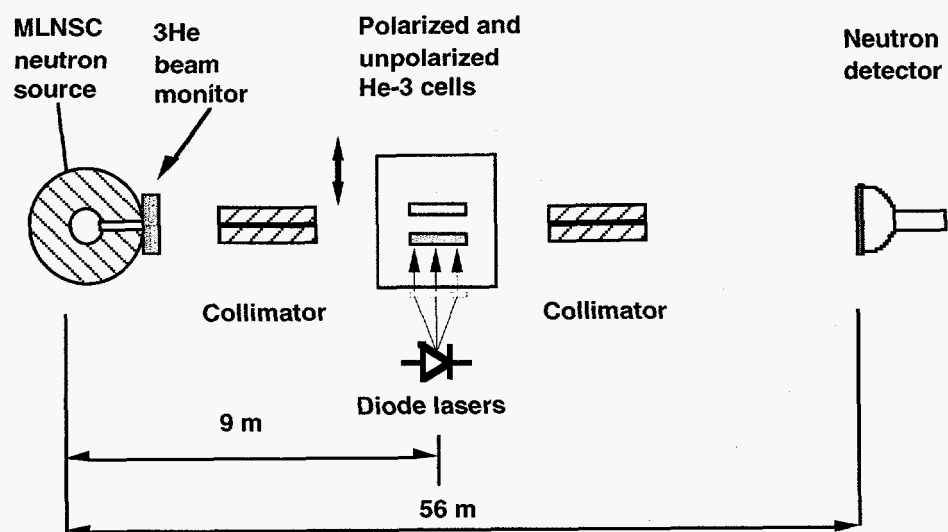


Figure 5

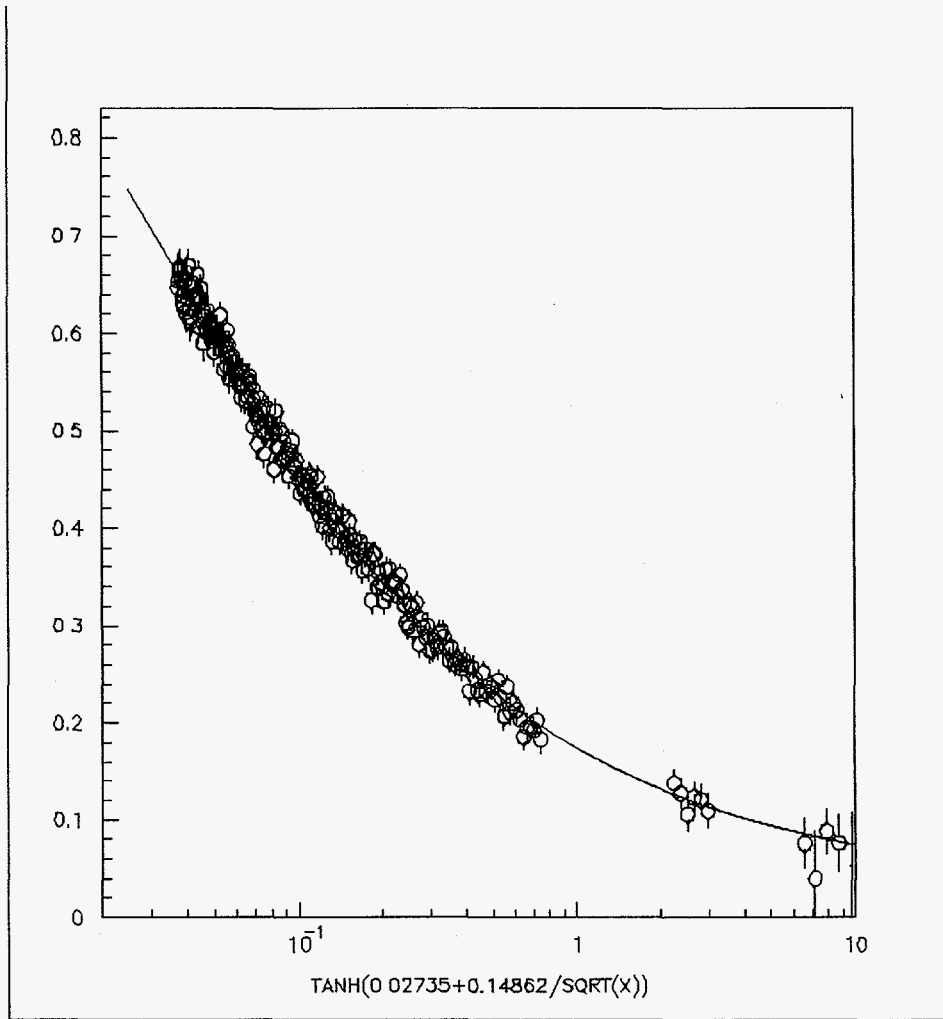


Figure 6