

CONF-971125--

MEASUREMENTS OF INTERFACIAL AREA CONCENTRATION
IN TWO-PHASE BUBBLY FLOW

Q. Wu
S. Kim
D. McCreary
M. Ishii
Purdue University

S. G. Beus

DE-AC11-93PN38195

NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States, nor the United States Department of Energy, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

BETTIS ATOMIC POWER LABORATORY

WEST MIFFLIN, PENNSYLVANIA 15122-0079

Operated for the U.S. Department of Energy
by WESTINGHOUSE ELECTRIC CORPORATION

JUST MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, make any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

Measurements of Interfacial Area Concentration in Two-Phase Bubbly Flow

Q. Wu, S. Kim, D. McCreary, M. Ishii (Purdue Univ.), S.G. Beus (Bettis Atomic Power Lab)

INTRODUCTION

Interfacial area concentration is an important parameter in the two-fluid model [1] for two-phase flow analysis, which is defined as the total interface area per unit mixture volume and has the following local time-averaged expression [1]:

$$\bar{a}^t = \frac{1}{\Delta T} \sum_j \left(\frac{1}{|\mathbf{v}_i \cdot \mathbf{n}_i|} \right)_j, \quad (1)$$

where j denotes the j -th interface that passes the point of interest in a time interval ΔT . \mathbf{v}_i and \mathbf{n}_i refer to the bubble interface velocity and surface normal vector, respectively. To measure this parameter, the double-sensor probe technique is commonly used. Due to the influences of the bubble lateral motions, however, the measurement results should be interpreted via a certain statistic approach [2]. Recently, to take into account the effects of the probe spacing, Wu and Ishii provided the following new formula to correlate the measurable values to the interfacial area concentration [3]:

$$\bar{a}_i^t = \frac{2N_b}{\Delta T} \left(\frac{\bar{\Delta t}}{\Delta s} \right) \left[2 + \left(\frac{1.2\sigma_{\Delta t}}{\bar{\Delta t}} \right)^{2.25} \right], \quad \text{for } D = 1.2 \sim 2.8\Delta s, \quad (2)$$

where N_b refers to the number of the bubbles that hit the probe front tip during time interval ΔT , Δs denotes the distance between the two probe tips, D is the bubble diameter, $\bar{\Delta t}$ represents the measured average time interval for a interface to travel through the two probe tips, and $\sigma_{\Delta t}$ is the standard deviation of Δt . The theoretical accuracy of this formula is within $\pm 5\%$ if the sample size is sufficiently large. The purpose of this study is to evaluate this method experimentally using an image processing method.

DESCRIPTION OF THE ACTUAL WORK

The tests were performed in an acrylic vertical rectangular duct with dimensions of 10 mm × 200 mm × 1800 mm (Fig. 1), and the air-water mixture flows through the duct upwards. A 100 mm wide, 62 mm high flow visualization window is positioned where the double-sensor probe is installed, at an axial location of 1140 mm from the duct inlet. The bubbly flow images in the window are recorded with a Sony 3-CCD camcorder at a shutter speed of 1/10000 s. The gas void fraction of the two-phase flow is controlled below 5% to prevent bubble images from overlapping. These images are then acquired on a personal computer for analysis. A computer code developed by Zhang and Ishii [4] is used to process these images for the information of the location and the diameter of each bubble. For a rectangular coordinate system (Fig. 1), the yz -plane area-averaged interfacial area concentration at any x position is given by:

$$a_i(x) = \frac{\sum_j \pi (D_b(x))_j^2}{A_{yz}}, \quad (3)$$

where $D_b(x)$ is the bubble diameter at a x location and A_{yz} stands for the product of the image height and the duct depth. In this way, the parameter obtained from the image method is area-averaged in the yz -plane. Therefore, the local time-averaged parameter from a double-sensor conductivity probe should be line-averaged in the z -direction for effective comparisons. In the experiment, the conductivity probe traverses a half of the duct depth (5 mm) with 1 mm increment to obtain the z -directional profile. Afterwards, the equivalent yz -plane area-averaged parameter is given by:

$$a_i(x) = \frac{1}{L_z} \int_0^{L_z} \bar{a}_i^t dz. \quad (4)$$

RESULTS

A number of tests have been performed with different mixture velocities and gas void fractions. A typical result is illustrated in Fig. 2. The relative discrepancy of the results from the two methods is

generally within $\pm 10\%$. The data points at the image boundaries are eliminated because the window edge cuts some bubbles resulting in bubble fragments (Fig. 1) and non-realistic measurements. Moreover, as the total image number increases, the data fluctuations become smaller. For good statistic behaviors, the presented data set involves 200 images that contain roughly 20000 bubbles. It should be mentioned that the image method in this study is applicable for bubbles that are approximately spherical.

REFERENCES

- [1] Ishii, M., *Thermo-Fluid Dynamic Theory of Two-Phase Flow*. Collection de la Direction des Etudes et Reserches d'Electricité de France, Eyrolles, Paris, 22, p. 45. (1975).
- [2] Kataoka, I., Ishii, M., & Serizawa, A., "Local formulation and measurements of interfacial area concentration in two-phase flow," *Int. J. Multiphase Flow* Vol. 12 No. 4, p. 505 (1986).
- [3] Q. Wu and M. Ishii, "Sensitivity Studies on Double-Sensor Conductivity Probe for the Measurement of Interfacial Area Concentration in Bubbly Flow," submitted to the *Int. J. Multiphase Flow*, (1997).
- [4] G. Zhang and M. Ishii, "Isokinetic sampling probe and image processing system for droplet size measurement in two-phase flow," *Int. J. Heat and Mass Transfer*, Vol. 38, p. 2019 (1995).

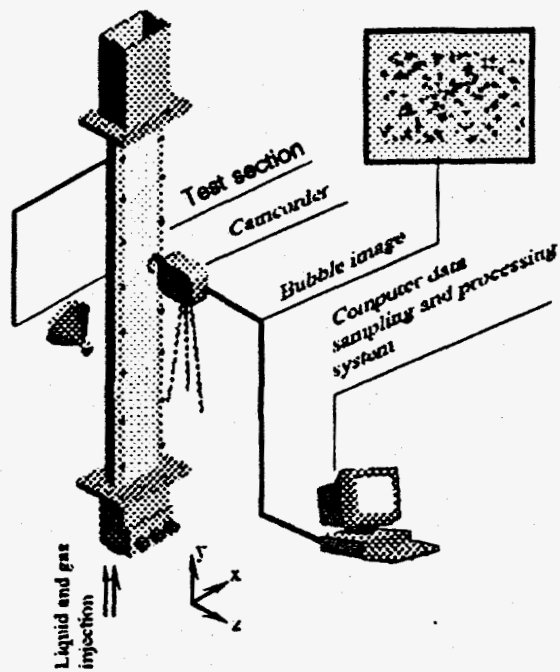


Fig. 1, Schematic of the test facility

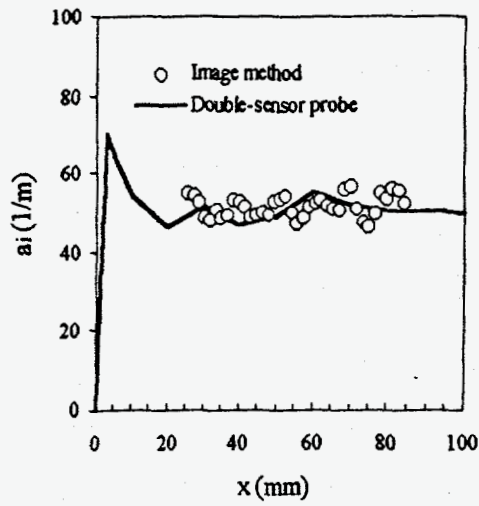


Fig. 2 Typical measurement result ($j_g=0.023$ m/s, $j_f=0.315$ m/s)