

SN: 08/241,907  
FD: 05-12-94

PATENTS-US--A8241907

S - 78,689  
RL - 12,312

W-7405-ENG-48

RECEIVED

DEC 26 1996

OSTI

Thomas John Karr

PASSIVE INFRARED BULLET DETECTION AND TRACKING

By: Thomas John Karr USA  
212 Austin Lane  
Alamo, CA 94507

**DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

PASSIVE INFRARED BULLET  
DETECTION AND TRACKING

241,907

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

7

**DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

5 **PASSIVE INFRARED BULLET DETECTION AND TRACKING****GOVERNMENT RIGHTS**

10           The United States Government has rights in this invention pursuant to Contract No. W-7405-ENG-48 between the United States Department of Energy and the University of California.

15 **TECHNICAL FIELD**

          The present invention relates generally to infrared detection and tracking and more particularly to a passive infrared detection of projectiles such as for example, bullets.

20

**BACKGROUND OF THE INVENTION**

          The detection and tracking of objects such as airplanes, missiles, or other very large projectiles can be achieved using radar. Radar detection and tracking can be used to locate the  
25   aircraft, detect incoming missiles, and aim radar controlled guns. However, the use of radar is not without disadvantages. In radar detection and tracking, the radar must radiate energy. The

energy emitted by the radar enables enemies or other interested parties to determine that radar is being used and further to determine the location of the source of the radar.

Detection and tracking of certain objects has also been  
5 achieved using infrared radiation (IR) detection. IR detection has the advantage that is passive. That is, IR detection devices do not emit radiation, but instead, detect heat or infrared radiation emitted from an object. Thus, because an IR detector does not emit radiation, an object being detected and tracked using an IR  
10 detector can not easily determine the source or location of the IR detector.

IR detection of projectiles such as missiles has been accomplished by observing hot-gas plumes emitted from the rear of projectiles, and the rear surfaces of the projectiles which are  
15 heated by the hot-gases. Unfortunately, the detection and tracking of the rear surfaces of projectiles has the disadvantage that its geometry is only well suited to detecting and tracking one's own projectile as it moves away from its origin wherein the IR detector is located. Although IR detection of a missile moving towards an  
20 observer has been accomplished, IR detection of a projectile is not particularly well suited to detecting and tracking a projectile as it moves towards the IR detector.

Some modern IR detectors have recently been developed with sufficient sensitivity to detect items such as leading edges of  
25 airplane wings. IR detection of such items is accomplished by observing the leading edge of the projectile as it is warmed due to friction occurring while the projectile passes through the

atmosphere. However, such detectors are at present only useful for detecting and tracking the leading edges of large projectiles or very large surface areas such as are found on airplane wings. That is, the IR emitted from smaller surfaces or projectiles is  
5 difficult to observe due to reduced intensity and also because the ratio of the projectile's infrared radiation vs. the infrared radiation emitted by the background is extremely low. Therefore, using present methods of IR detection, the IR emitted from smaller projectiles can not be discerned from constant  
10 background IR emissions.

Thus, a need exists for a detection and tracking method and device, which does not emit radiation, can be used to detect and track items without regard to the direction in which the projectile is moving, and which is not limited to detecting and tracking only  
15 the leading edges of large projectiles or very large surface areas.

#### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a detection and tracking method and device, which does not emit  
20 radiation, can be used to detect and track items without regard to the direction in which the projectile is moving, and which is not limited to detecting and tracking only the leading edges of large projectiles or very large surface areas. This object has been accomplished by observing and recording successive images of the  
25 mid wave infrared radiation present in a region in which a projectile is expected to be located using a passive infrared detector with very short exposure time and a high frame rate. The

background infrared radiation present in the successive images is suppressed thereby leaving only images of infrared radiation emitted by a projectile as the projectile passes through the region being observed.

5           By using a passive infrared detector with a very short exposure rate and a high frame rate, and suppressing background infrared radiation, the present invention provides for the detection and tracking of even very small projectiles such as, for example, bullets. Additionally, the present invention can  
10 detect and track a projectile moving through the observed region regardless of the direction in which the projectile is heading.

          A projectile path calculator determines the path of the projectile by using the successive images of infrared radiation generated by the projectile. The present invention, in certain  
15 embodiments, also determines the origin of the path of the projectile and takes a photograph of the area surrounding the origin and/or fires at least one projectile at the area surrounding the origin of the path of the projectile.

          Thus, the present invention provides a detection and  
20 tracking method and device, which does not emit radiation, can be used to detect and track items without regard to the direction in which the projectile is moving, and which is not limited to detecting and tracking only the leading edges of large projectiles or very large surface areas.

### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention:

FIGURE 1 is an illustration of an arrangement showing a passive infrared detector focused onto a region in which a projectile is expected to be located in accordance with the present invention.

FIGURE 2 is an illustration of a "fisheye" staring array passive infrared detector having a 360 degree field of view in accordance with the present invention.

FIGURE 3A shows overlapped successive images of infrared radiation present in a region, including infrared radiation emitted from a bullet, wherein the images were taken with a staring array passive infrared detector having a very short exposure time and a high frame rate in accordance with the present invention.

FIGURE 3B shows overlapped successive images of infrared radiation present in a region, wherein background infrared radiation present in the region has been almost completely canceled out thereby leaving substantially an image of infrared radiation emitted from a bullet in accordance with the

present invention.

FIGURE 4 is a block diagram of the processing flow of data received by the processor of Figure 1 in accordance with the  
5 present invention.

FIGURE 5 is an illustration of another detector arrangement in which two passive infrared detectors focused onto a region in which a projectile is expected to be located in  
10 accordance with the present invention.

FIGURE 6 is an experimentally prepared graph showing the distance at which a bullet can be detected and tracked under various conditions in accordance with the present invention.  
15

FIGURE 7 is an illustration of the arrangement of Figure 1 wherein a camera is coupled to a data processor in accordance with the present invention.

20 FIGURE 8 is an illustration of the arrangement of Figure 1 wherein a gimbal mounted gun is coupled to a data processor in accordance with the present invention.



DETAILED DESCRIPTION OF THE PREFERRED  
EMBODIMENTS

Reference will now be made in detail to the preferred  
5   embodiments of the invention, examples of which are illustrated  
in the accompanying drawings. While the invention will be  
described in conjunction with the preferred embodiments, it will  
be understood that they are not intended to limit the invention to  
these embodiments. On the contrary, the invention is intended to  
10   cover alternatives, modifications and equivalents, which may be  
included within the spirit and scope of the invention as defined by  
the appended claims.

With reference next to Figure 1, a typical arrangement of  
the present invention is shown in which passive infrared detector  
15   10 is focused onto a region 12 in which a projectile is expected to be  
located. Passive infrared detector 10 is coupled to a data processor  
14. Data processor 14, in turn, is connected to a display unit 16. In  
the present embodiment, passive infrared detector 10 observes a  
series of successive images of infrared radiation emitted from  
20   region 12. The images observed by passive infrared detector 10 are  
sent to data processor 14. Data processor 14 records the images  
received from detector 10, subtracts the images from each other to  
cancel out background infrared radiation, and calculates the path  
of bullet 18. Although subtraction of successive images is used in  
25   the present embodiment to cancel out background radiation, the  
present invention is also well suited to the use of numerous other  
methods of background infrared radiation image suppression

well known in the art.

With reference still to Figure 1, data processor 14 generates an image showing the calculated path of bullet 18. The image generated by data processor 14 is then displayed on display unit 16.

5 In certain embodiments, data processor 14 also determines the origin of bullet 18. The present invention is typically able to detect a bullet and calculate the path and origin of the bullet in approximately 0.05 second after the bullet is fired. In other embodiments, the present invention includes a camera or  
10 projectile launcher for photographing the area proximate to the origin of bullet 18, or for firing at least one projectile into the area proximate to the origin of bullet 18. Furthermore, the present invention is able to detect and track bullets even when the present invention is in motion such as, for example, when mounted on an  
15 armored personnel carrier or other moving or movable object.

With reference again to Figure 1, the above described operation of the present invention will now be set forth in detail. In the present embodiment, passive infrared detector 10 is a staring array passive infrared detector having a very short  
20 exposure time and a high frame rate. Specifically, in the present embodiment the exposure rate of staring array passive infrared detector 10 is in the range of approximately 1 millisecond, and the frame rate is in the range of approximately 200 frames per second. Additionally, in the present embodiment, passive staring array  
25 infrared detector 10 is an InSb, indium-antimonide, detector, however, the present invention is also well suited to the use of other types of staring array passive infrared detectors well known

in the art. Additionally, the present invention is also suited for use with passive infrared detectors capable of achieving scan rates comparable to the approximate 200 frames per second frame rate and the 1 millisecond exposure rate of present staring array passive infrared detector 10. Furthermore, although the staring array passive infrared detector of the present embodiment observes a region 12, the present invention is also well suited to using a "fisheye" staring array passive infrared detector 13 as shown in Figure 2 wherein a 360 degree field of view is observed simultaneously.

With reference still to Figure 1, optimally staring array passive infrared detector 10 will have an exposure rate equal to the time it takes for the infrared radiation image of bullet 18 to move across one pixel of staring array passive infrared detector 10. In so doing, in every frame taken of region 12, the infrared radiation emitted from bullet 18 will be recorded on a separate pixel of staring array passive infrared detector 10. As a result, when the data processor 14 subtracts the images from successive frames to cancel out background infrared radiation, successive frames will have the infrared image of bullet 18 in a slightly different position. Thus, the subtraction process will result in a clearly defined path of bullet 18 through region 12.

With reference again to Figure 1, as a bullet such as, for example, bullet 18 passes through the atmosphere, the air at the nose of bullet 18 stagnates and is heated by compression. The heated air surrounding the nose of bullet 18 heats bullet 18. Eventually, bullet 18 reaches an equilibrium temperature which is

approximately the same as the heated air located at the nose of bullet 18. The temperature to which bullet 18 is heated depends upon the velocity of bullet 18. In the case of a bullet traveling at 1 kilometer per second, the bullet reaches a temperature of  
5 approximately 525 degrees Celsius. Typically, bullets travel in the range of approximately 250-1000 meters per second, and heat up in the range of approximately 60-525 degrees Celsius. Additionally, bullets of most caliber sizes reach their equilibrium temperature in the range of approximately 0.05 second or less. Although the  
10 present embodiment specifically deals with the detection and tracking of bullets, it will be apparent to those of ordinary skill in the art that the present invention is also well suited for the detection of other projectiles and objects.

With reference still to Figure 1, although passive infrared  
15 detector 10 observes infrared radiation emitted from bullet 18 as bullet 18 passes through region 12, the amount of background radiation present in region 12 masks or obscures the infrared radiation emitted by the bullet thereby rendering detection and tracking of the bullet extremely difficult. However, as described  
20 below, the present invention suppresses background infrared radiation thereby making it possible to detect and track projectiles such as bullets.

Referring still to Figure 1, in the present invention, staring  
array passive infrared detector 10 observes infrared radiation  
25 emitted in the mid wave infrared radiation (MWIR) band.  
Specifically, in the present embodiment, staring array passive  
infrared detector 10 observes infrared radiation in the range of

approximately the 4.3-5 micron band in daylight, and in the range of approximately the 3-4.1 micron band at night. By observing in the MWIR band the signal-to-background ratio is optimized. That is, the contrast between the infrared radiation emitted from bullet 5 18 and the infrared radiation emitted by the background in region 12 is maximized. Although the present embodiment observes in the MWIR band, the present invention is also well suited to numerous variations in the parameters of the infrared radiation band being observed.

10           With reference still to Figure 1, data processor 14 receives image data representing the series of successive images of infrared radiation observed by passive staring array infrared detector 10. Data processor 14 records the images in short term memory. Next, using differencing circuitry, data processor 14 15 then subtracts from each successive image the image which was observed immediately prior thereto. In so doing, the relatively unchanging or constant background infrared radiation present in region 12 is canceled out. Only changes in the infrared radiation which occur from one successive image to the next will remain 20 after the subtraction process. Therefore, because bullet 18 changes position from one successive image the next, an image showing substantially only the infrared radiation emitted by bullet 18 will remain after the subtraction process.

          With next to Figure 3A, an image 20 depicting infrared 25 radiation present in region typical region such as, for example, region 12 of Figure 1, including infrared radiation emitted from bullet 18, is shown. Image 20 is composed of several overlapped

successive images of region 12, wherein the images were obtained using staring array passive infrared detector 10.

With reference now to Figure 3B, a second image 30 is shown wherein background infrared radiation present in region 5 12 has been almost completely canceled out by data processor 14 of Figure 1 thereby leaving substantially only an image 32 of infrared radiation emitted from bullet 18. Thus, as shown in Figure 3B, using the present invention, detection and tracking of a bullet is achieved. Furthermore, the present invention is able to detect and 10 track a bullet regardless of the direction in which the bullet is heading. In addition, the present invention is able to detect and track a bullet even when the bullet is several hundred meters away and even if the bullet is not fired towards staring array passive infrared detector 10 of Figure 1.

15 With reference next to Figure 4, a block diagram 40 of the processing flow of data received by data processor 14 of Figure 1 is shown. As shown in Figure 4, images received in the form of image data from staring array passive infrared detector 10 of Figure 1 are recorded in short term memory (FIFO) 42.

20 Additionally, data processor 14 of Figure 1 employs processing circuitry 44 containing differencing 46, background sigma-bounds 48, thresholding 50, segmentation 52, feature extraction 54, and size filtering 56 circuitry for suppressing background radiation by subtracting from each successive image the previously observed 25 and recorded image of the same region and recognizing the bullet in the images which remain after subtraction. Image processor 14 further employs an icon generator 58 which then sends an

image representing the path of bullet 18 of Figure 1 to display unit 16. Also, image processing circuitry 44 of data processor 14 of Figure 1 is able to determine the origin of the path of bullet 18 of Figure 1 by using a backward temporal projection along the path of bullet 18. Additionally, where multiple bullets are fired, the present invention is able to rapidly determine the origin of the bullets by determining the point at which the two bullet paths intersect.

With reference again to Figure 4, the present invention is able to detect and track the angular position of bullet 18 of Figure 1 in numerous ways. In one embodiment, data processor 14 includes computational circuitry which utilizes a mathematical model analysis to calculate the path of bullet 18 based upon the bullet's angular position at a different times. In above-mentioned embodiment including computational circuitry utilizing a mathematical model analysis to calculate the path of bullet 18, a non-linear regression is performed on an initial state vector incorporating source location, time of fire, and weapon type. Two separate regressions, an Azimuth vs. Time and an Elevation vs. Azimuth, are used. Furthermore, the embodiment uses a recursive filter such as, for example, extended Kalman filtering to avoid a matrix inversion calculation. In so doing, the range or distance of a bullet from a passive infrared detector, and the path of a bullet in three dimensions, can be determined using a single passive infrared detector. Although extended Kalman filtering is used in the present embodiment, the present invention is also well suited to the use of other mathematical models based upon other

filtering and estimation techniques.

With reference again to Figure 4, the present invention is also able to determine other aspects of a fired bullet. These aspects include but are not limited to, the speed of the bullet, the muzzle  
5 velocity of the bullet, and ballistic properties such as, for example, ballistic drag coefficients.

With reference still to Figure 4, in the present invention, by determining the range of a bullet from a detector and the path of the bullet, the range or distance of a bullet from a known target is  
10 readily determined. That is, not only is the present invention able to determine the path of a bullet and the range of the bullet from a detector, but the present invention is also able to determine the range or distance of the bullet from a known target at any given time using a single passive infrared detector.

15 With reference next to Figure 5, the present invention is also able to determine the precise range and path of a bullet by stereo observation of a region 12 in which bullet 18 is expected to be located. That is, by using at least two passive infrared detectors 10a and 10b, coupled to data processor 18, the range of bullet 18  
20 from detectors 10a and 10b and the precise path of bullet 18 can be determined. Additionally, in the present embodiment, the range or distance of a bullet from a known target can be readily determined.

With reference again to Figure 1, in yet another  
25 embodiment of the present invention, passive infrared detector 10 has accurate relative radiometric calibration. As a result, the position of bullet 18 within region 12 is determined by measuring the intensity of infrared radiation emitted from bullet 18. The precise path of bullet 18 is determined by measuring changes in



the intensity of infrared radiation emitted from bullet 18 as bullet 18 passes travels through region 12.

With reference still to Figure 1, the present invention provides several advantages over the prior art. By measuring the infrared radiation emitted from bullet 18, the present invention is able to determine range and position of bullet 18 regardless of the direction in which bullet 18 is heading. That, unlike the prior art, the detector 10 does not need to be behind bullet 18 to track the bullet's position. Furthermore, the present invention is able to detect and track bullet 18 even if bullet 18 is not fired towards detector 10 and even if no muzzle flash is observed by detector 10. As an additional advantage, due to the compression of air, bullet 18 is heated, and is therefore detectable and trackable, whether bullet 18 travels at subsonic or supersonic speeds. Thus, the present invention can be used to detect and track even slower bullets such those fired from handguns. Furthermore, because the present invention detects infrared radiation and not reflected radio waves as in radar, the present invention can not be "fooled" or rendered ineffective by radar invisible "stealth bullets. Thus, bullets cannot be "masked" from the present invention.

With reference again to Figure 1, an additional advantage of the present invention is the ability of the invention to detect and track an unresolved point source. That is, at a distance of, for example, 200 meters from passive staring array infrared detector 10, each pixel thereof views a rectangular or square region of approximately 40 cm per side. Bullet 18, is obviously much smaller than the region viewed by a single pixel and is therefore

referred to as an unresolved point source. However, by observing and recording successive images of the infrared radiation present in region 12 in which bullet 18 is expected to be located using passive staring array infrared detector 10, and further by  
5 suppressing background infrared radiation even an unresolved point source such as bullet 18 can be detected and tracked by the present invention.

With reference next to Figure 6, an experimentally prepared graph 60 showing an additional advantage of the present  
10 invention, i.e. the great distance at which the present invention can detect and track bullets, is shown. Knowing the signal-to-background ratio and the speed and size of the bullet being fired, the range at which such a bullet will be first detected can be easily determined. For example, as shown in graph 60 of Figure 6, with  
15 the signal-to-background ratio at .02, and with a rifle firing a 7.62 mm bullet at 900 m/sec, the intersection of line 62 with the x-coordinate of graph 60 gives a range/target diameter reading of 100,000. Thus, the range at which the present invention can detect a 7.62 mm bullet traveling at 900 m/sec is 100,000 x 7.62 mm or  
20 762,000 mm. Thus, the present invention can detect such a bullet traveling under the conditions set forth above from as far as 762 meters. Thus, as set forth in experimentally prepared graph 60, the present invention is able to detect and track bullets even when the bullets are located great distances from the detector. By  
25 detecting a bullet while the bullet is still a great distance from the detector, the present invention provides time for evasive action.

With reference next, to Figure 7, another embodiment of the

present invention is shown in which a camera 70 is coupled to data processor 14. Camera 70 is attached to a fast reacting servo motor, not shown which is able to quickly turn and focus camera 70 onto the desired area. Because the present invention is able to  
5 detect a bullet, and calculate the path an origin of a bullet within approximately 0.05 second, camera 70 can be used to photograph the area proximate to the origin of the bullet almost instantaneously after the bullet is fired. In so doing, the present invention can, for example, take a snapshot of a sniper before the  
10 sniper has time to flee, even if the sniper fires only a single bullet. In fact, the present invention is able to, for example, take a snapshot of a sniper within approximately 0.3 second after the bullet is fired. Although a camera 70 is coupled to data processor 14 in the present embodiment, the present invention is also well  
15 suited to coupling other devices such as, for example, a spotlight to data processor 14.

With reference next to Figure 8, another embodiment of the present invention is shown in which a gimbal mounted gun 80 is coupled to data processor 14. Gimbal mounted gun 80 is able to  
20 quickly turn and fire into the desired area. Because the present invention is able to detect a bullet, and calculate the path an origin of a bullet within approximately 0.05 second, gimbal mounted gun 80 can be used to fire bullets or other projectiles into the area proximate to the origin of bullet 18 almost instantaneously after  
25 bullet 18 is fired. In the present embodiment, the present invention can return fire at a sniper within approximately 0.3 second after the sniper fires a bullet. In so doing, the present

invention can, for example, shoot and kill a sniper before the sniper has time to flee, even if the sniper fires only a single bullet. Although a gimbal mounted gun 80 is coupled to data processor 14 in the present embodiment, the present invention is also well  
5 suited to coupling other devices such as, for example, a tear gas launcher or other such weapon to data processor 14. Furthermore, the present invention is also well suited to coupling data processor 14 to a device for firing "unconventional" projectiles such as, for example, nets, water, gases, or  
10 immobilizing glue at the origin of the path of the bullet.


The foregoing descriptions of specific embodiments of the present invention have been presented for the purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed,  
15 and obviously many modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with  
20 various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

## PASSIVE INFRARED BULLET DETECTION AND TRACKING

5

ABSTRACT OF THE DISCLOSURE

An apparatus and method for passively detecting a projectile such as, for example, a bullet using a passive infrared detector. A passive infrared detector is focused onto a region in which a projectile is expected to be located. Successive images of infrared radiation in the region are recorded. Background infrared radiation present in the region is suppressed such that second successive images of infrared radiation generated by the projectile as the projectile passes through the region are produced. A projectile path calculator determines the path and other aspects of the projectile by using the second successive images of infrared radiation generated by the projectile. The present invention, in certain embodiments, also determines the origin of the path of the projectile and takes a photograph of the area surrounding the origin and/or fires at least one projectile at the area surrounding the origin of the path of the projectile.

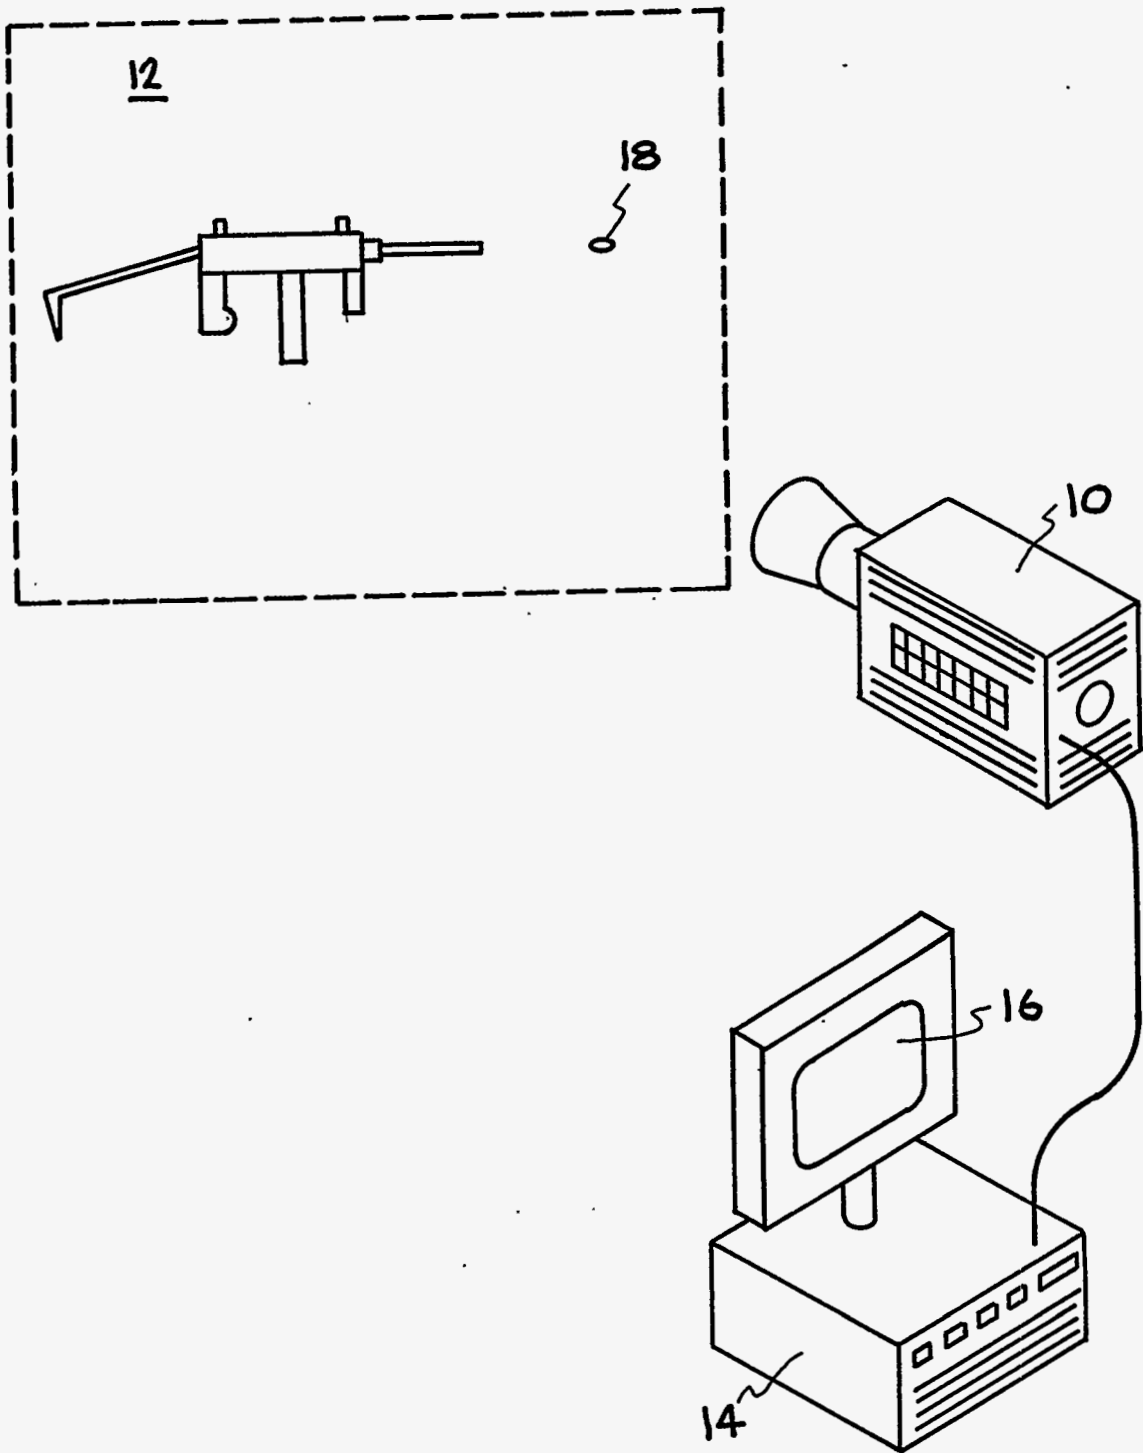

**FIG. 1**



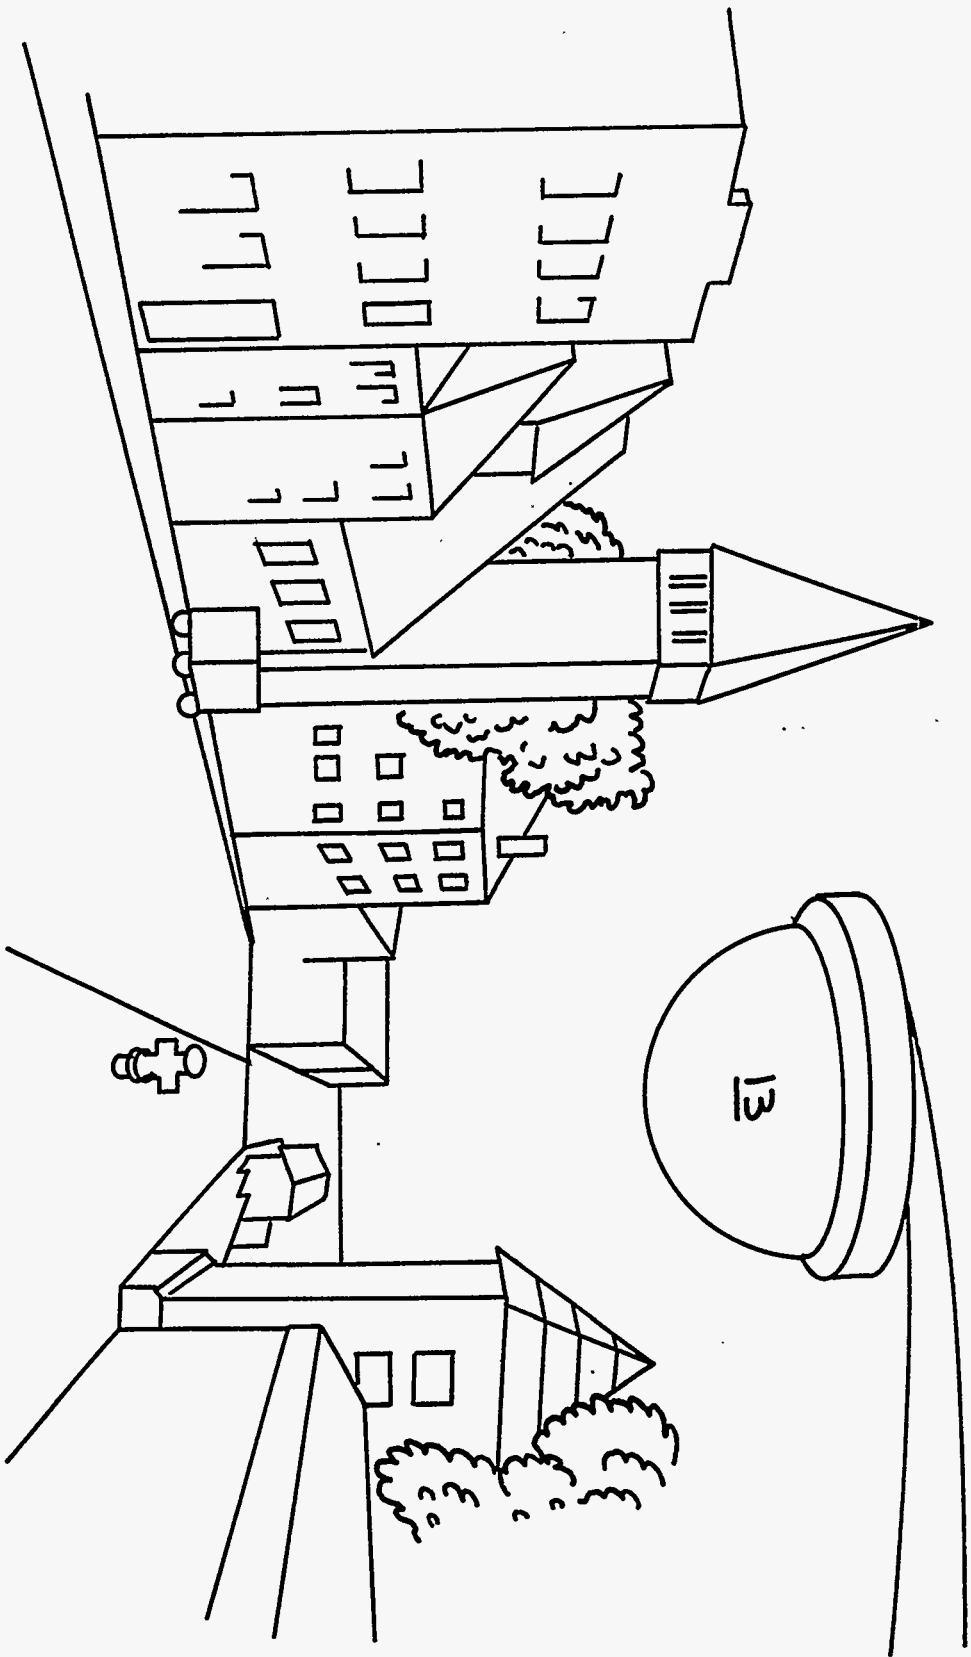


FIG. 2

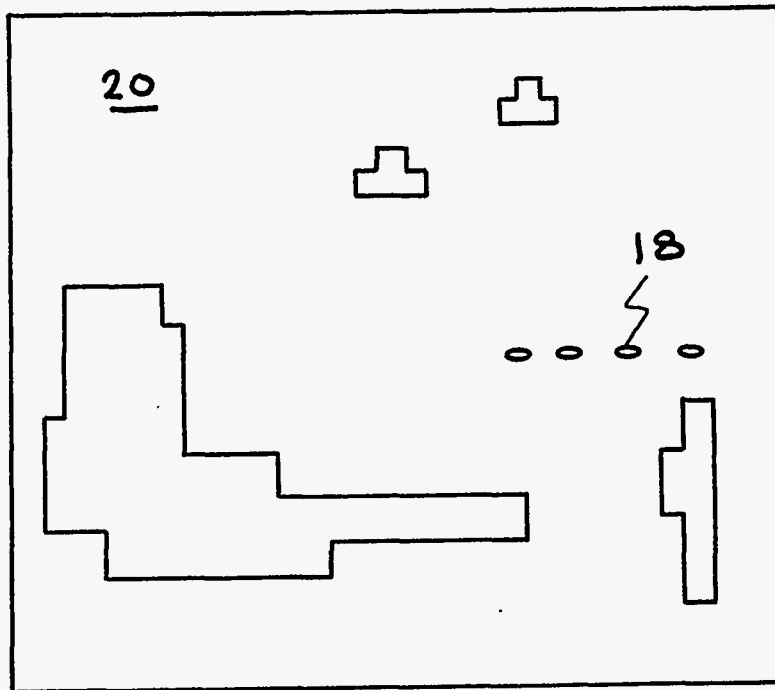


**FIG. 3A**

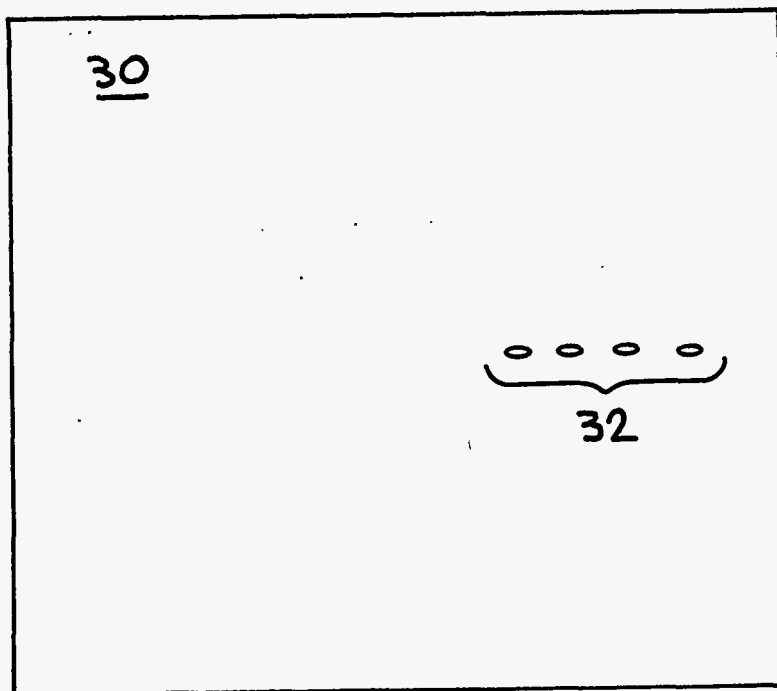


**FIG. 3B**



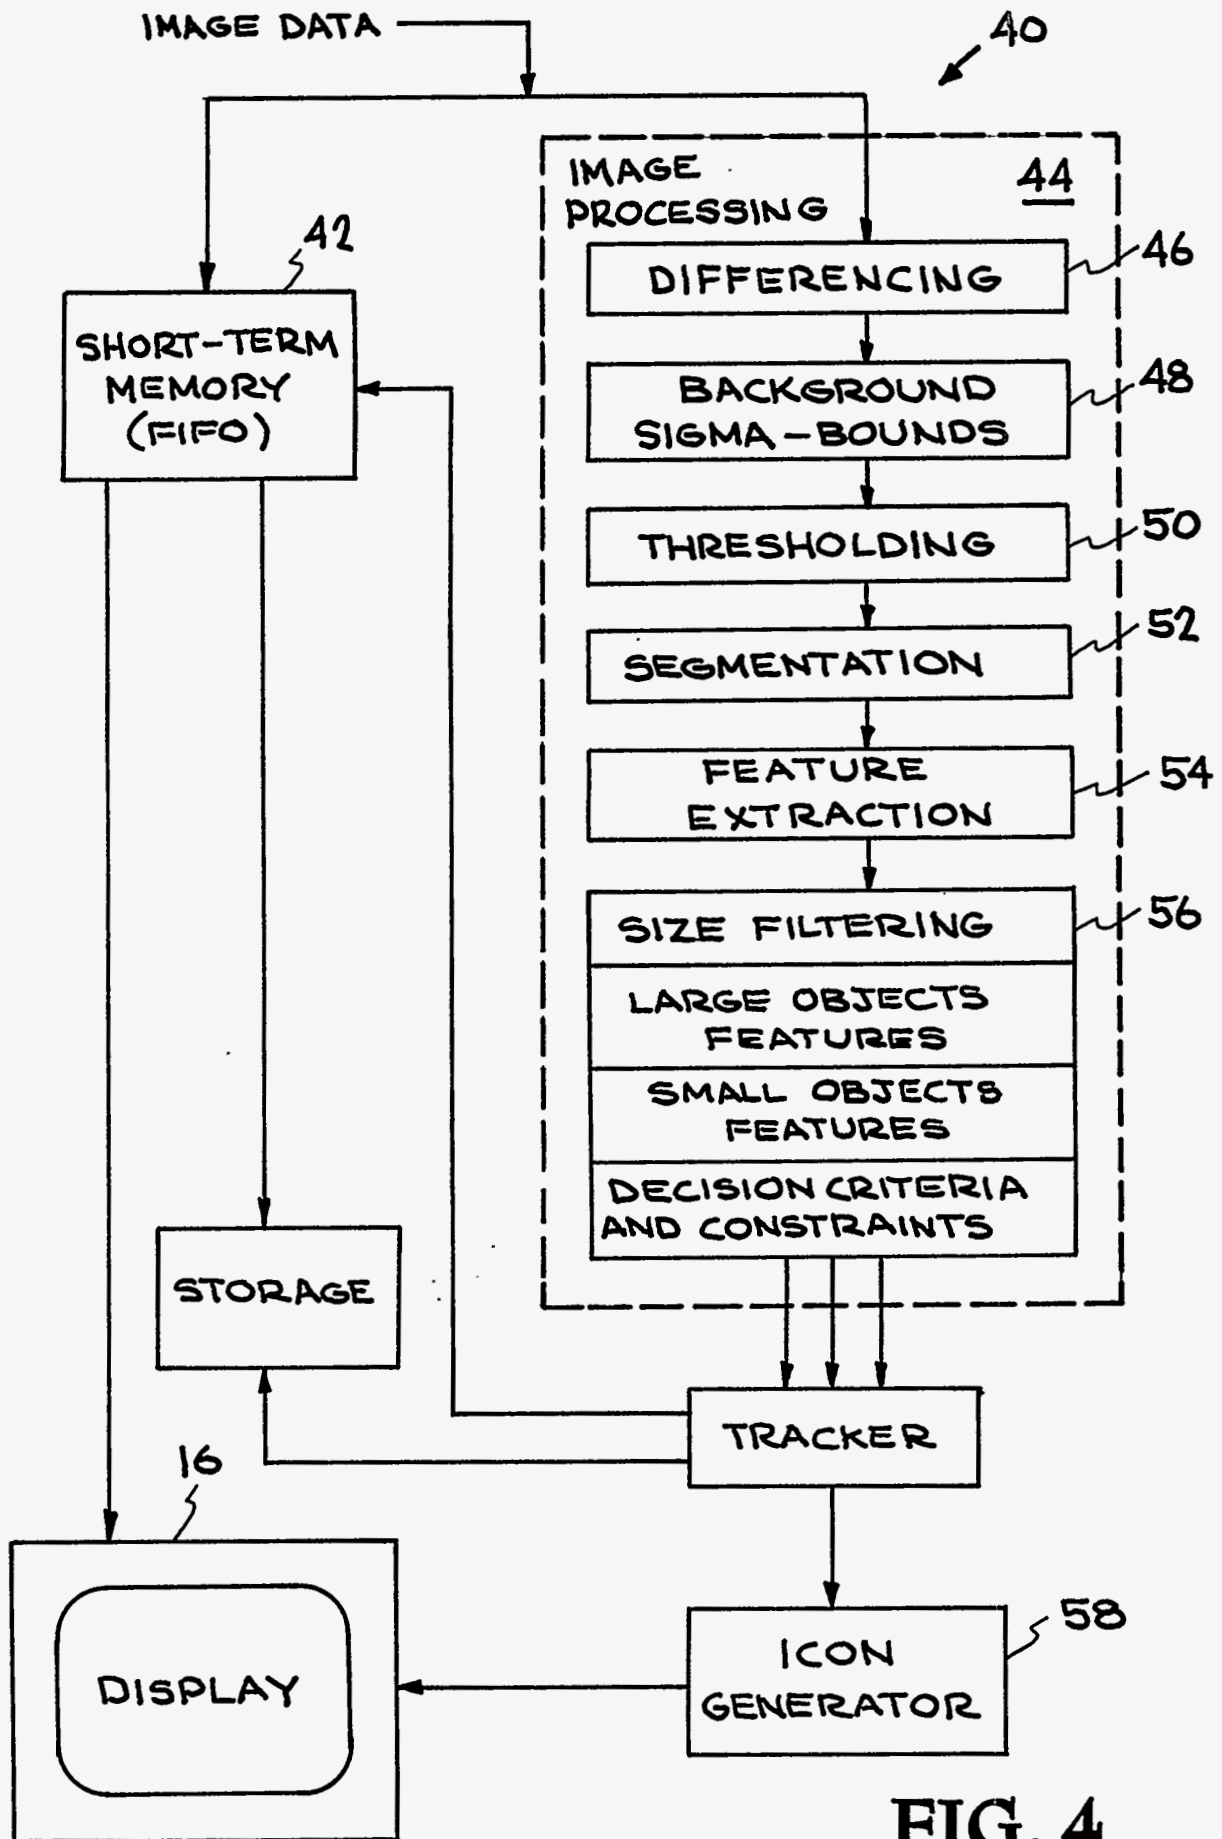

**FIG. 4**

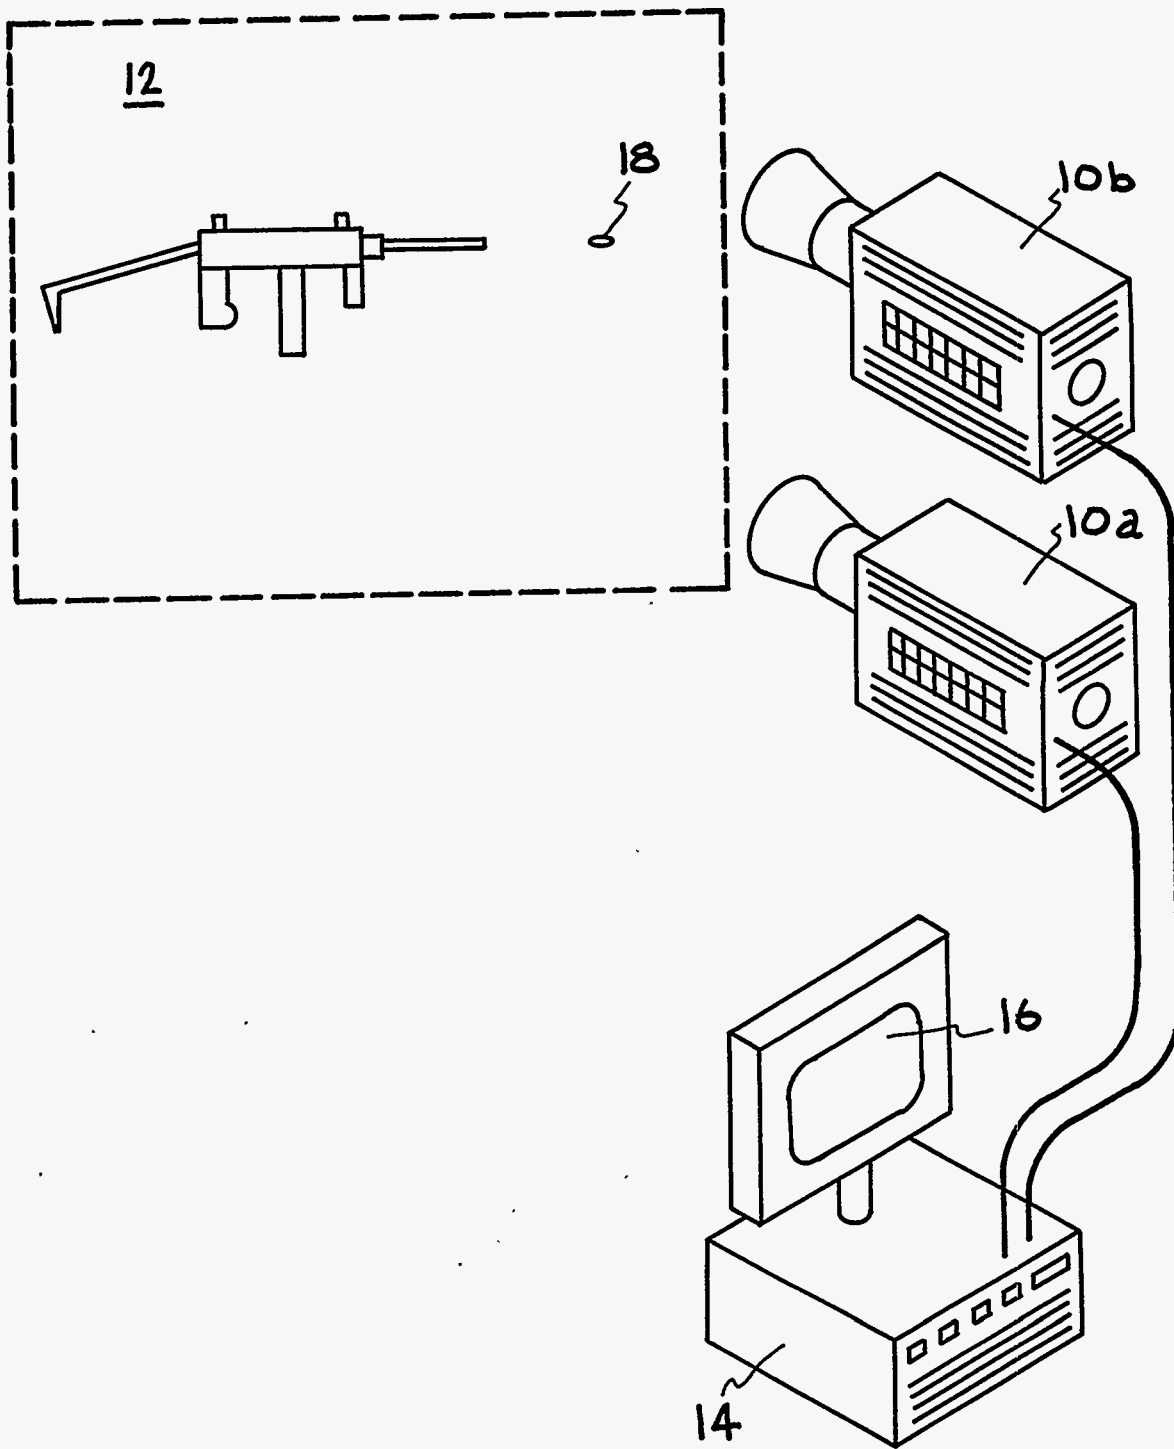

**FIG. 5**




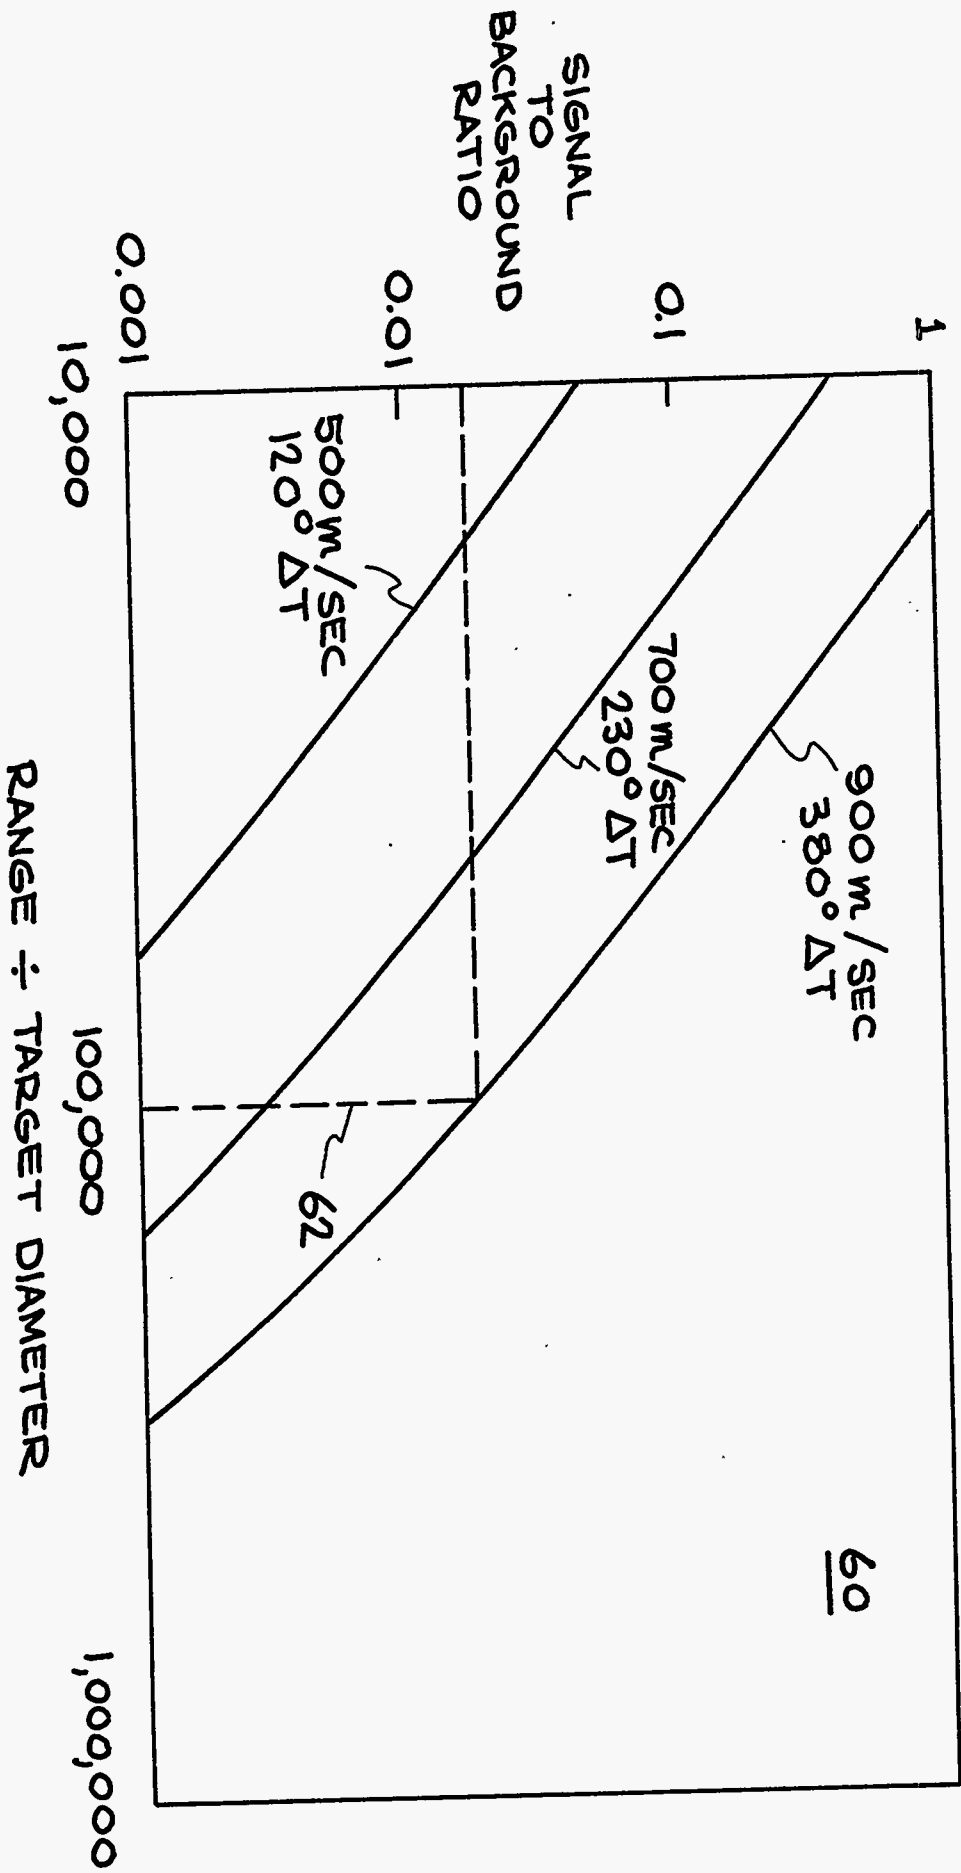


FIG. 6

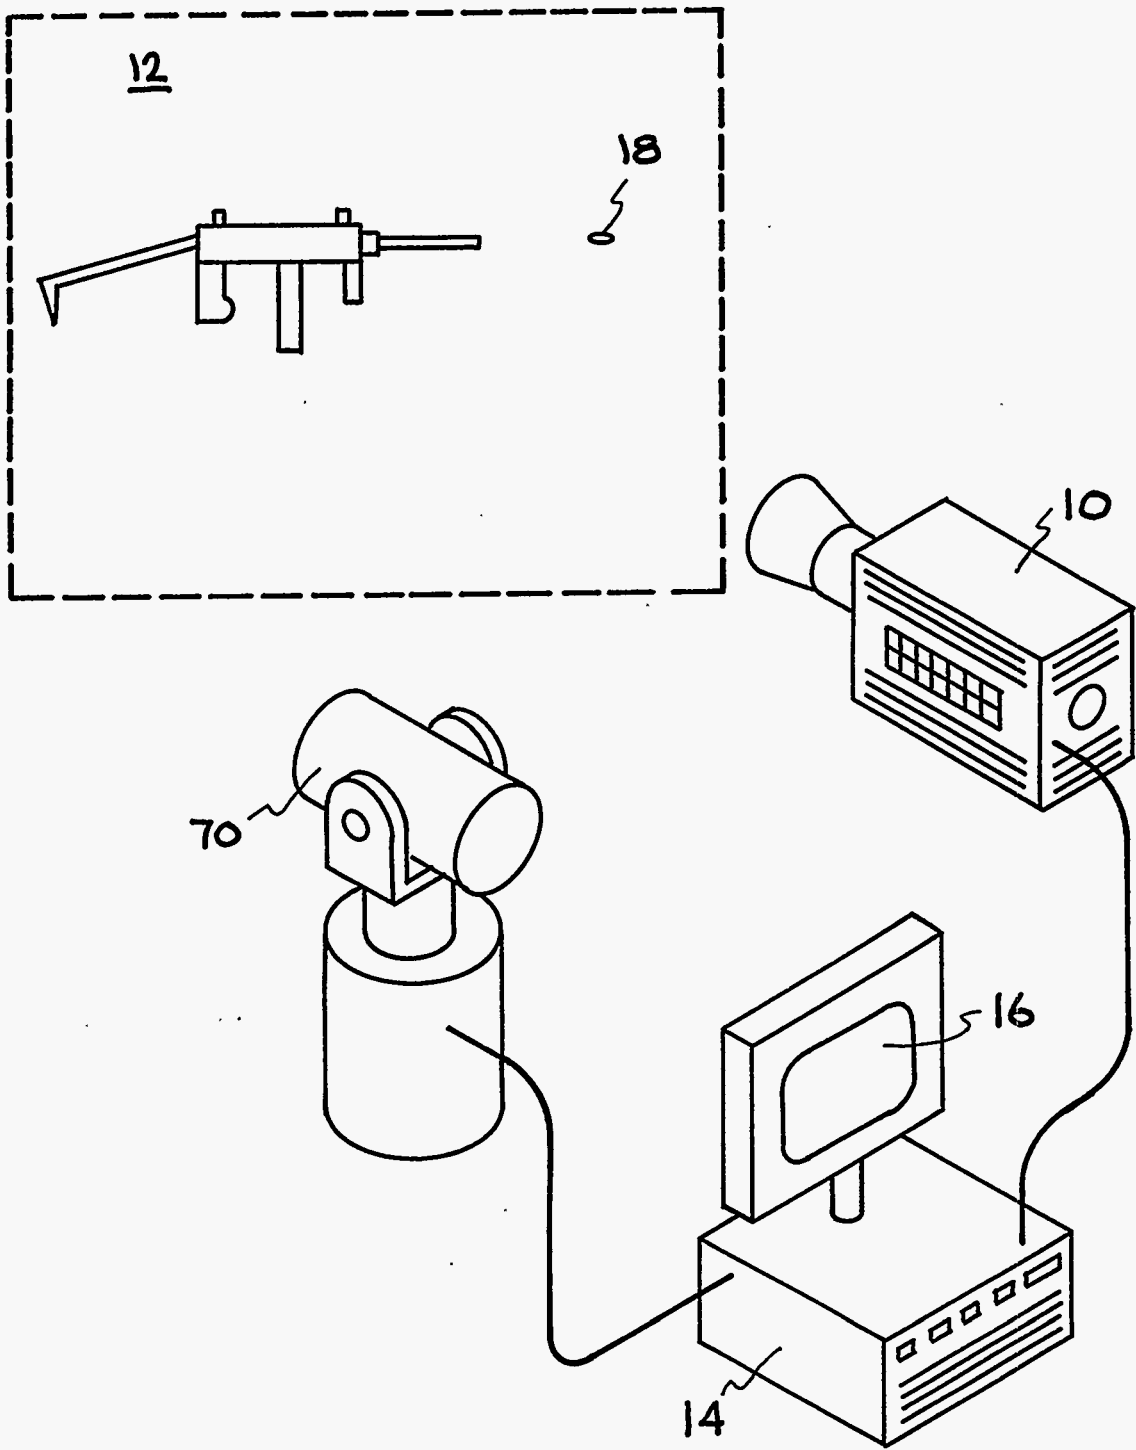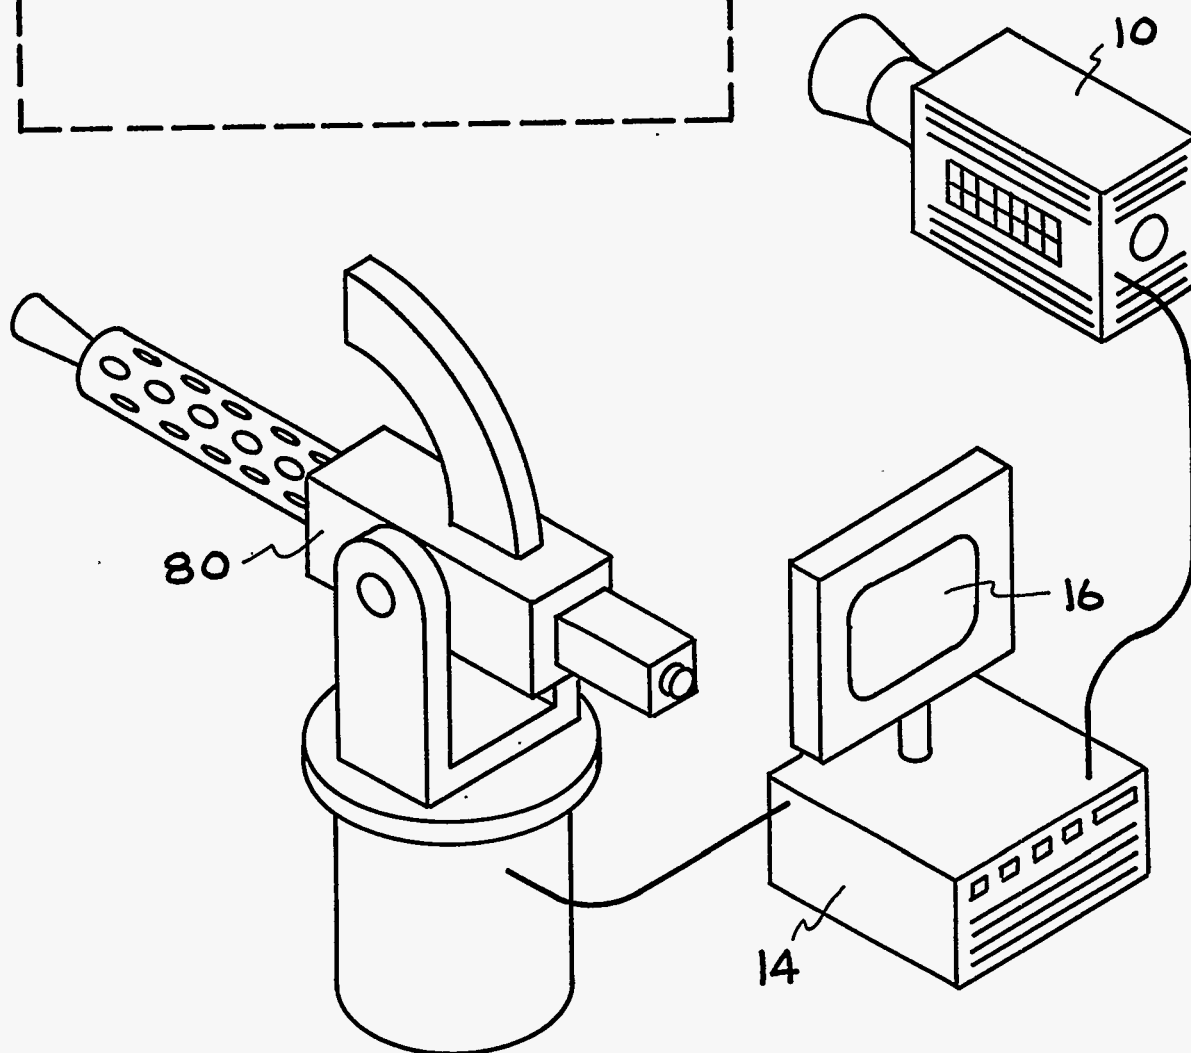

**FIG. 7**

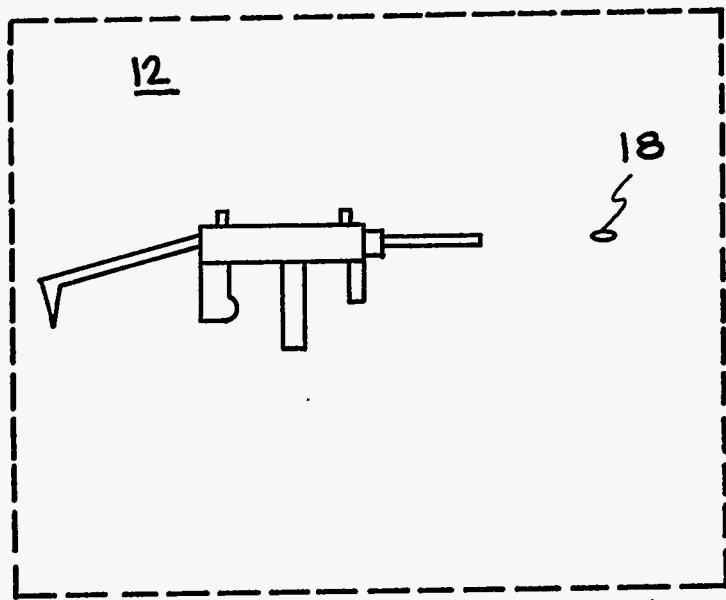

**FIG. 8**