

ornl

RECEIVED

SEP 09 1998

OSTI

ORNL/M-6155

**OAK RIDGE
NATIONAL
LABORATORY**

LOCKHEED MARTIN 

K-Infinite Trends with Burnup, Enrichment, and Cooling Time for BWR Fuel Assemblies

B. L. Broadhead

BLB

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

MANAGED AND OPERATED BY
LOCKHEED MARTIN ENERGY RESEARCH CORPORATION
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

ORNL-27 (3-96)

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.


Computational Physics and Engineering Division

**K-INFINITE TRENDS WITH BURNUP, ENRICHMENT, AND COOLING
TIME FOR BWR FUEL ASSEMBLIES**

B. L. Broadhead

August 1998

Prepared by the
OAK RIDGE NATIONAL LABORATORY
managed by
LOCKHEED MARTIN ENERGY RESEARCH CORP.
for the
U.S. DEPARTMENT OF ENERGY
under contract DE-AC05-96OR22464



CONTENTS

	<u>Page</u>
LIST OF FIGURES	iv
LIST OF TABLES	v
1. INTRODUCTION	1
2. BURNUP MODEL DEVELOPMENT	3
3. KENO MODEL DESCRIPTION	13
4. PROCESSING CODE DESCRIPTION	15
5. K-INFINITE RESULTS	17
6. RANKING RESULTS	23
7. REFERENCES	27

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1.	EIA enrichment-vs-burnup data, each point represents at least 100 assemblies.	2
2.	Axial description of BWR assembly used in this work.	4
3.	BWR burnup profile used in this study	7
4.	Water density and void fractions as a function of node number	11
5.	Plot showing BWR assembly geometry	14
6.	BWR k_{inf} vs burnup/enrichment and cooling time; average enrichment excludes reflectors	19
7.	BWR k_{inf} vs burnup/enrichment and cooling time; average enrichment over entire assembly.	20
8.	Influence of initial enrichment on final k_{inf} . Low and high enrichments differ from average by 0.2 wt %.	21
9.	Effect of Gd-rod removal from final k_{inf} calculation.	22

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1a. Fuel-pin-cell mixing table	5
1b. Larger-unit-cell mixing table for lattice type A	5
1c. Larger-unit-cell mixing table for lattice types B, C	6
1d. Larger-unit-cell mixing table for lattice types D, E	6
2. Depletion model parameters for 33-GWd/t burnup, 3.21 wt % cases	8
3. Depletion model parameters for 40-GWd/t burnup, 3.79 wt % cases	9
4. Depletion model parameters for 45-GWd/t burnup, 4.24 wt % cases	10
5. K-infinite values for infinite array of BWR assemblies for various burnup, enrichment, and cooling time scenarios	18
6. Comparison of BWR and PWR absorption rankings for actinides	24
7. Comparison of PWR and BWR absorption rankings for fission products	25

1. INTRODUCTION

This report documents the work performed by ORNL for the Yucca Mountain Project (YMP) M&O contractor, Framatome Cogema Fuels. The goal of this work was to obtain k_{inf} values for infinite arrays of flooded boiling-water-reactor (BWR) fuel assemblies as a function of various burnup/enrichment and cooling-time combinations. These scenarios simulate expected limiting criticality loading conditions (for a given assembly type) for drift emplacements in a repository. Upon consultation with the YMP staff, a Quad Cities BWR fuel assembly was selected as a baseline assembly. This design consists of seven axial enrichment zones, three of which contain natural uranium oxide. No attempt was made to find a "bounding" or even "typical" assembly design due to the wide variety in fuel assembly designs necessary for consideration. The current work concentrates on establishing a baseline analysis, along with a small number of sensitivity studies which can be expanded later if desired.

As a result of similar studies of this nature, several effects are known to be important in the determination of the final k_{inf} for spent fuel in a cask-like geometry. For a given enrichment there is an optimal burnup: for lower burnups, excess energy (and corresponding excess reactivity) is present in the fuel assembly; for larger burnups, the assembly is overburned and essentially driven by neighboring fuel assemblies. The majority of the burnup/enrichment scenarios included in this study were for some near-optimum burnup/enrichment combinations as determined from Energy Information Administration (EIA) data (see Fig. 1). Several calculations were performed for under- and over-burned fuel to show these effects.

The particular primary burnup/enrichments combinations that were studied in this work include the following:

Case 1	33 GWd/t with 2.9 wt % average enrichment
Case 2	40 GWd/t with 3.4 wt % average enrichment
Case 3	45 GWd/t with 3.8 wt % average enrichment.

Even though these burnup/enrichment combinations were obtained from the curves in Fig. 1 to be appropriate for near-optimally burned fuel, some uncertainty existed over the actual definition of the average enrichment. For one assumption, the average enrichment given is an average over the active fuel region, excluding the two top and one bottom natural uranium sections of the assembly; in the other the average is over the entire assembly. Calculations were performed for both sets of assumptions. The actual assembly contains typically ten different enrichments across an assembly, in addition to the previously mentioned axial enrichment zones. Within each of the seven axial enrichment zones, the various pin enrichments (so-called pin splits) were averaged, resulting in a single enrichment within each axial zone for all remaining calculations. Fuel rods containing Gd (i.e., Gd rods) were treated to the extent possible using standard methods.

The k_{inf} values for infinite arrays of BWR fuel assemblies with these characteristics and cooled for 5, 10, 20 and 40 years were evaluated in this study. To study the effects of over- and under-burned fuels, cases were analyzed corresponding to average enrichments of 2.7 wt % and 3.1 wt % for 33 GWd/t burnups; 3.2 wt % and 3.6 wt % for 40 GWd/t burnups; and 3.6 wt % and 4.0 wt % for 45 GWd/t burnups.

BWR Enrichment vs Burnup (>100 assm)

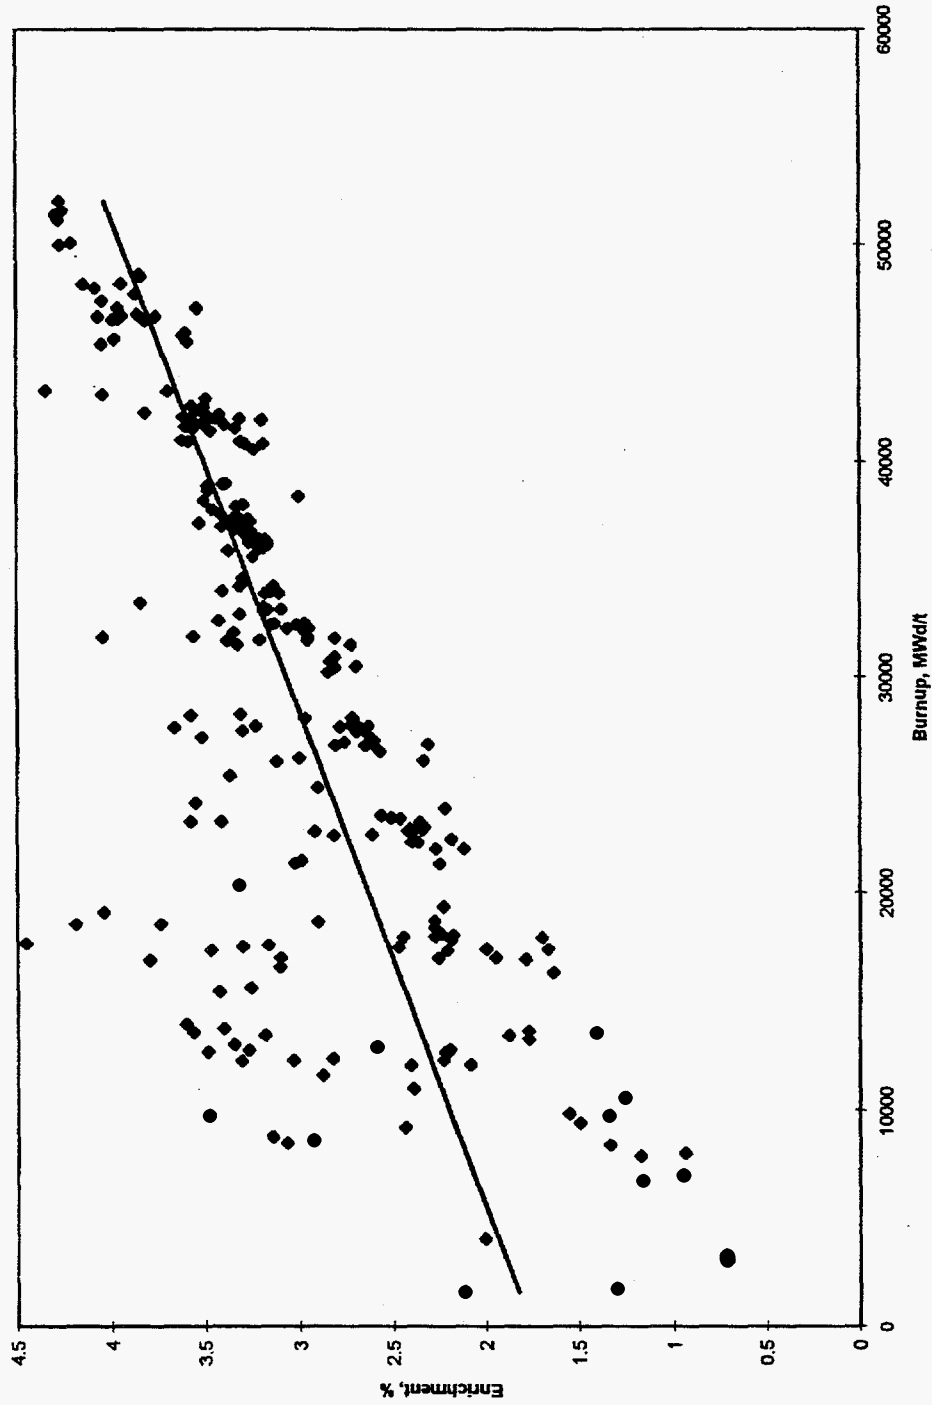


Fig. 1. EIA enrichment-vs-burnup data. Each point represents at least 100 assemblies.

2. BURNUP MODEL DEVELOPMENT

The SCALE module SAS2H¹ was used to obtain burnup and decay-dependent isotopics for input into multidimensional k_{inf} calculations. SAS2H uses a two-step approach to quantify the average fluxes and cross sections across an assembly. The first step is a pin-cell calculation which computes effective pin-lattice cross sections for input into a second calculation which determines assembly-averaged parameters while approximating the heterogenous aspects of the full assembly (i.e., water holes, Gd rods, burnable poison rods, etc.).

In this study, the fuel assembly under consideration contains seven different axial enrichment zones, as shown in Fig. 2. The isotopics were determined for each of 24 equally spaced axial nodes. For each axial node the power history and assembly model were specified, with the resulting isotopics passed automatically into a KENOv.a² model of the entire fuel assembly.


The pin-cell and full-assembly models used in SAS2H are given in Table 1. In each case, the radii shown in Table 1 are determined based on the pellet and clad diameters, and pitch for the pin-cell model; and additionally the number of Gd rods, the channel dimensions, and the assembly pitch for the assembly models. For the assembly model, a Gd rod is modeled explicitly with dimensions identical to the pin-cell model in Table 1, but surrounded by a fraction of the remaining assembly, channel, and channel moderator. The fraction depends on the number of Gd rods in each axial section of the assembly (i.e., 1/9 if nine Gd rods, and 1/7 if seven Gd rods). In this manner, the moderator-to-fuel volume fractions are conserved for the assembly.

The power history for all calculations consisted of three cycles of length 333.33 days, zero days downtime between cycles, and a variable specific power corresponding to the desired burnup. This specific power for each node is assumed to be constant over the life of the assembly. This assumption is felt to be appropriate for near fully-burned assemblies as treated in this work. Obviously, for severely under-burned assemblies, this assumption would not be valid. Using this power history scheme, numerical values of the specific power in MW/t and the total burnup in GWd/t are equivalent. The specific power (and burnup) by axial node were obtained from the burnup shape (see Fig. 3) as provided by YMP staff^{3,4} and renormalizing to the overall desired assembly burnup. The resulting burnups/specific powers for each axial node are given in Tables 2 through 4 for burnups of 33, 40, and 45 GWd/t, respectively.

The procedure for obtaining averaged enrichments for each of the seven axial enrichment zones was previously discussed. However, to study various burnup/enrichment combinations, these enrichment profiles were renormalized to other average enrichments. However, in all cases the enrichments in the natural uranium portions of the fuel remained constant. As can be seen in Tables 2 through 4 the enrichments by node are normalized to an assembly average of 2.9, 3.4 and 3.8 wt %, respectively. This renormalization allows these calculations to retain the axial power flattening characteristics of the natural uranium reflectors, while allowing for variable enrichments in the remaining portions of the fuel assembly.

The moderator densities were determined in the following manner using the YMP-supplied void fractions shown in Fig. 4. The reactor operating pressure was assumed to be 1040 psia⁵ with saturation fluid and vapor densities of 0.7365 g/cc and 0.0377 g/cc, respectively. The effective water density for each node (see Fig. 4 and Tables 2 through 4) was then determined from the following relationship:

$$\rho_{\text{water}} = 0.0377V_f + 0.7365(1 - V_f), \text{ where } V_f \text{ is the void fraction.}$$

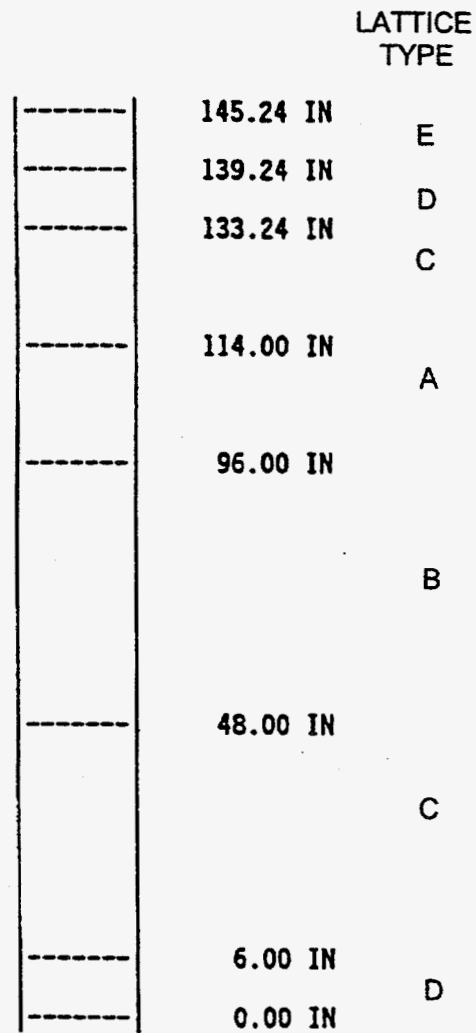

AVERAGE ENRICHMENT = 3.103 Wt % U-235

BUNDLE MASS = 172.948 kgs

Fig. 2. Axial description of BWR assembly used in this work.

Table 1a. Fuel-pin-cell mixing table

Mixture No.	Component	Wt %	Density ^a	VF	T,K	Radius (cm)
1	UO ₂		9.87	1.0	840	0.53213
	²³⁴ U	0.007731 (²³⁵ U) ^{1.0837}				
	²³⁵ U	2.7 - 4.0				
	²³⁶ U	0.0046 (²³⁵ U)				
	²³⁸ U	Remainder				
2	Zircaloy			1.0	620	0.61341
3	H ₂ O			Variable	Variable	0.91715

^aInput as keyword DEN=.

Table 1b. Larger-unit-cell mixing table for lattice type A

Mixture No.	Component	Wt %	Density ^a	VF	T,K	Radius (cm)
9	UO ₂		9.87	1.0	840	0.53213
	Gd ₂ O ₃		9.87	0.03		
	¹⁵⁴ Gd	2.18				
	¹⁵⁵ Gd	14.80				
	¹⁵⁶ Gd	20.47				
	¹⁵⁷ Gd	15.65				
	¹⁵⁸ Gd	24.84				
	¹⁶⁰ Gd	21.86				
	O	150.00 ^b				
2	Zircaloy			1.0	620	0.61341
3	H ₂ O			Variable	Variable	0.91715
500	(Smearred fuel calculated by SAS2)					2.3681
10	Zircaloy			1.0	558	2.4079
11	H ₂ O			0.743	552	2.8661

^aInput as keyword DEN=.

^bEquivalent oxygen, considering total gadolinium = 100.

Table 1c. Larger-unit-cell mixing table for lattice types B, C

Mixture No.	Component	Wt %	Density ^a	VF	T,K	Radius (cm)
9	UO ₂		9.87	1.0	840	0.53213
	Gd ₂ O ₃		9.87	0.03		
	¹⁵⁴ Gd	2.18				
	¹⁵⁵ Gd	14.80				
	¹⁵⁶ Gd	20.47				
	¹⁵⁷ Gd	15.65				
	¹⁵⁸ Gd	24.84				
	¹⁶⁰ Gd	21.86				
	O	150.00 ^b				
2	Zircaloy			1.0	620	0.61341
3	H ₂ O			Variable	Variable	0.91715
500		(Smear fuel calculated by SAS2)				2.6851
10	Zircaloy			1.0	588	2.7303
11	H ₂ O			0.743	552	3.2498

^aInput as keyword DEN=.

^bEquivalent oxygen, considering total gadolinium = 100.

Table 1d. Larger-unit-cell mixing table for lattice types D, E

Mixture No.	Component	VF	T,K	Radius (cm)
3	H ₂ O	0.743	552	1.8343
500	(Smear fuel calculated by SAS2)			7.3372
10	Zircaloy	1.0	588	7.4529
11	H ₂ O	0.743	552	8.5983

BWR Burnup Profile

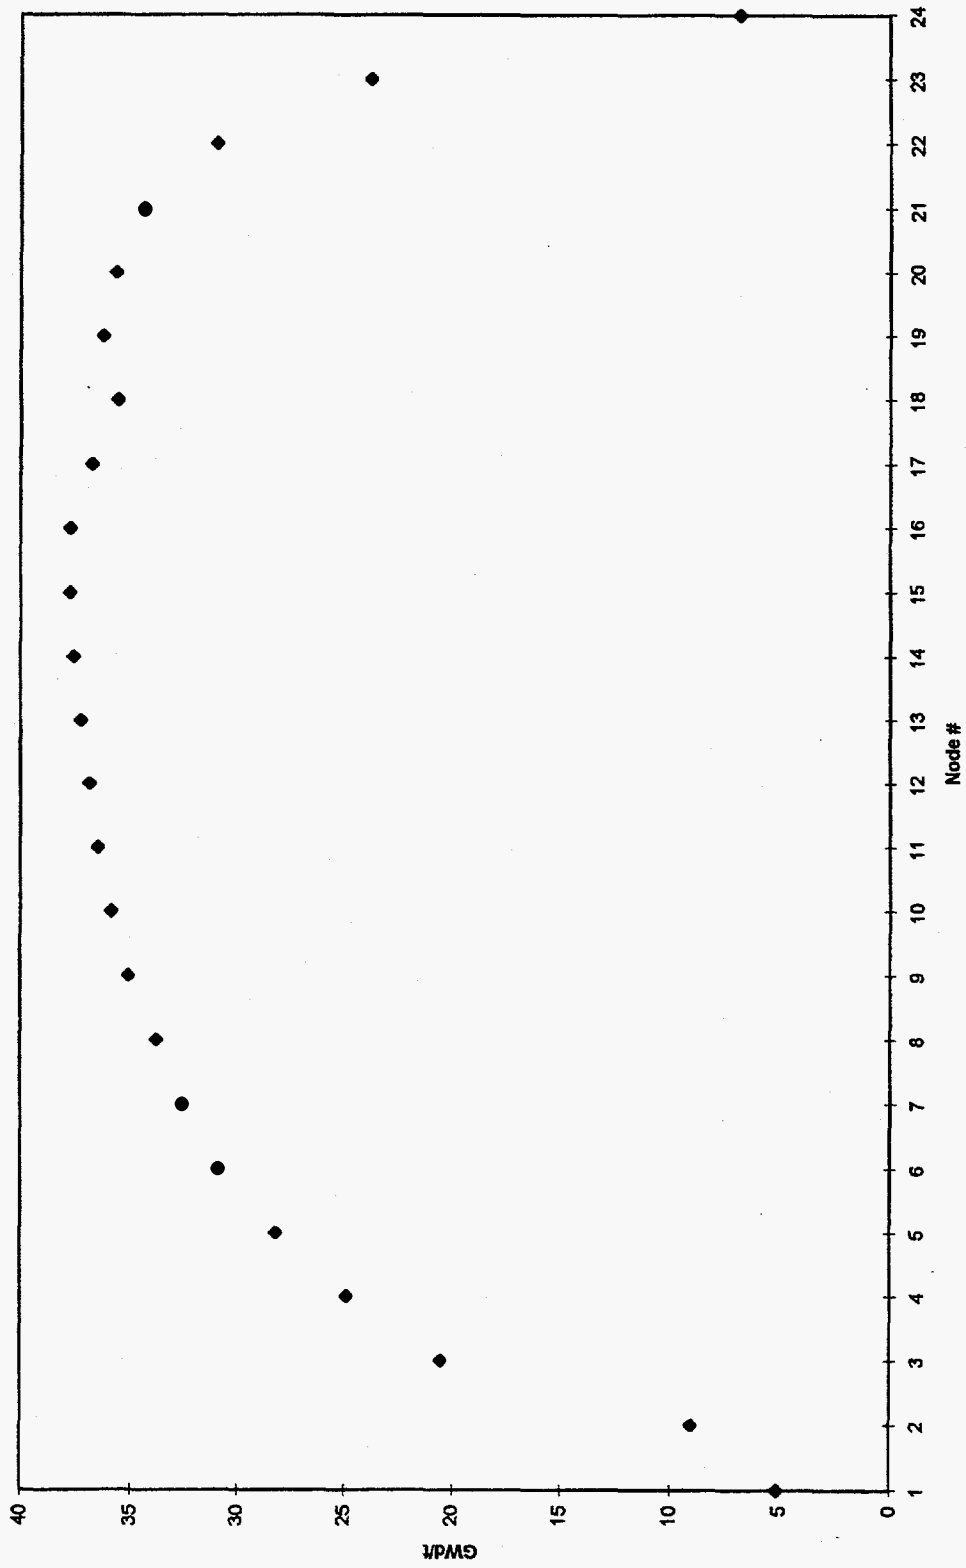


Fig. 3. BWR burnup profile used in this study.

Table 2. Depletion model parameters for 33-GWd/t burnup, 3.21 wt % cases

Cell No.	Midpoint (cm from bottom)	Burnup (GWd/t)	Moderator density	Moderator temperature	Enrichment
1	7.686	7.478	0.754	548.561	0.710
2	23.057	26.200	0.749	550.244	3.132
3	38.428	34.113	0.732	551.927	3.132
4	53.799	37.818	0.699	553.609	3.132
5	69.171	39.287	0.655	555.292	3.132
6	84.542	39.880	0.608	556.975	3.132
7	99.913	39.093	0.562	557.990	3.132
8	115.284	40.453	0.520	558.000	3.132
9	130.656	41.559	0.482	558.000	3.283
10	146.027	41.569	0.449	558.000	3.283
11	161.398	41.372	0.419	558.000	3.283
12	176.769	41.027	0.393	558.000	3.283
13	192.141	40.592	0.370	558.000	3.283
14	207.512	40.071	0.350	558.000	3.283
15	222.883	39.425	0.332	558.000	3.283
16	238.254	38.563	0.316	558.000	3.283
17	253.626	37.199	0.302	558.000	3.283
18	268.997	35.792	0.289	558.000	3.283
19	284.368	34.000	0.277	558.000	3.283
20	299.739	31.050	0.267	558.000	3.132
21	315.111	27.376	0.258	558.000	3.132
22	330.482	22.546	0.250	558.000	3.132
23	345.853	9.904	0.246	558.000	0.710
24	361.224	5.632	0.243	558.000	0.710

Table 3. Depletion model parameters for 40-GWd/t burnup, 3.79 wt % cases

Cell No.	Midpoint (cm from bottom)	Burnup (GWd/t)	Moderator density	Moderator temperature	Enrichment
1	7.686	9.064	0.754	548.561	0.710
2	23.057	31.758	0.749	550.244	3.697
3	38.428	41.350	0.732	551.927	3.697
4	53.799	45.840	0.699	553.609	3.697
5	69.171	47.620	0.655	555.292	3.697
6	84.542	48.340	0.608	556.975	3.697
7	99.913	47.386	0.562	557.990	3.697
8	115.284	49.034	0.520	558.000	3.697
9	130.656	50.375	0.482	558.000	3.876
10	146.027	50.387	0.449	558.000	3.876
11	161.398	50.148	0.419	558.000	3.876
12	176.769	49.730	0.393	558.000	3.876
13	192.141	49.202	0.370	558.000	3.876
14	207.512	48.570	0.350	558.000	3.876
15	222.883	47.788	0.332	558.000	3.876
16	238.254	46.744	0.316	558.000	3.876
17	253.626	45.090	0.302	558.000	3.876
18	268.997	43.384	0.289	558.000	3.876
19	284.368	41.212	0.277	558.000	3.876
20	299.739	37.636	0.267	558.000	3.697
21	315.111	33.182	0.258	558.000	3.697
22	330.482	27.329	0.250	558.000	3.697
23	345.853	12.005	0.246	558.000	0.710
24	361.224	6.827	0.243	558.000	0.710

Table 4. Depletion model parameters for 45-GWd/t burnup, 4.24 wt % cases

Cell No.	Midpoint (cm from bottom)	Burnup (GWd/t)	Moderator density	Moderator temperature	Enrichment
1	7.686	10.197	0.754	548.561	0.710
2	23.057	35.728	0.749	550.244	4.136
3	38.428	46.518	0.732	551.927	4.136
4	53.799	51.570	0.699	553.609	4.136
5	69.171	53.573	0.655	555.292	4.136
6	84.542	54.382	0.608	556.975	4.136
7	99.913	53.309	0.562	557.990	4.136
8	115.284	55.163	0.520	558.000	4.136
9	130.656	56.672	0.482	558.000	4.337
10	146.027	56.685	0.449	558.000	4.337
11	161.398	56.417	0.419	558.000	4.337
12	176.769	55.946	0.393	558.000	4.337
13	192.141	55.352	0.370	558.000	4.337
14	207.512	54.642	0.350	558.000	4.337
15	222.883	53.762	0.332	558.000	4.337
16	238.254	52.587	0.316	558.000	4.337
17	253.626	50.726	0.302	558.000	4.337
18	268.997	48.807	0.289	558.000	4.337
19	284.368	46.364	0.277	558.000	4.337
20	299.739	42.340	0.267	558.000	4.136
21	315.111	37.330	0.258	558.000	4.136
22	330.482	30.745	0.250	558.000	4.136
23	345.853	13.505	0.246	558.000	0.710
24	361.224	7.680	0.243	558.000	0.710

A fuel temperature of 840 K and a clad temperature of 620 K were taken from sample problem 4 in the SCALE SAS2 manual. The moderator temperature⁶ was assumed to be represented by

$$T_{\text{fuel}} = \begin{cases} 0.11z + 547 & \text{if } z < 93.98 \text{ cm} \\ 558 & \text{if } z > 93.98 \text{ cm.} \end{cases}$$

The resulting moderator temperatures are given in Tables 2 through 4 for each of the 24 axial nodes used in this analysis.

Nodal Water Density and Void Fractions


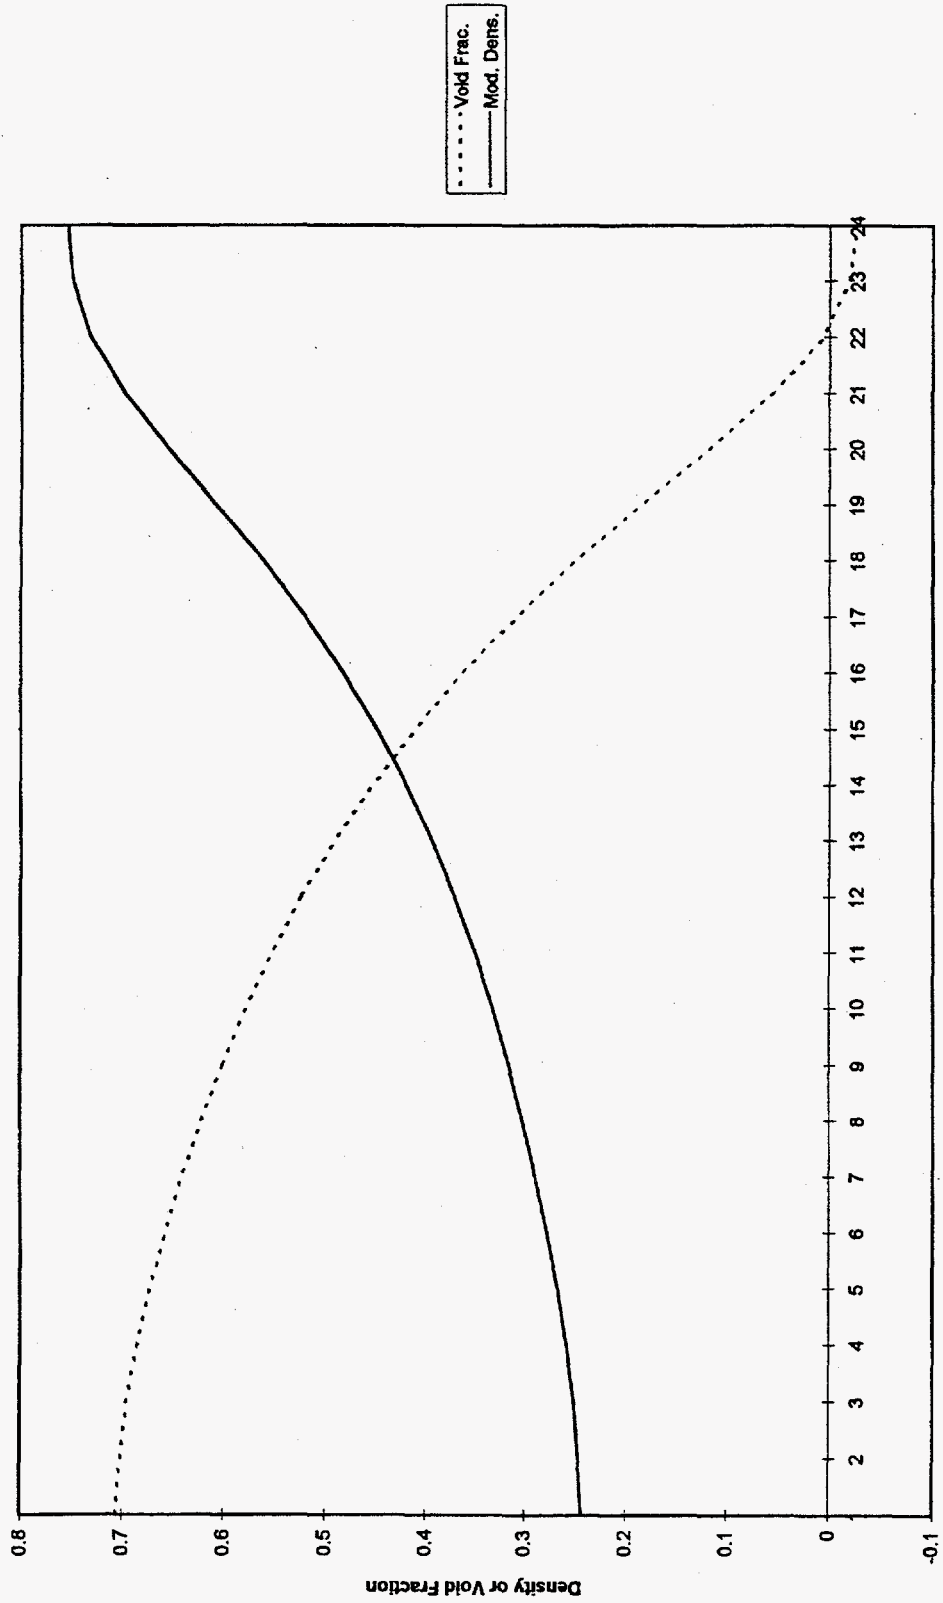


Fig. 4. Nodal water density and void fractions as a function of node number.



3. KENO MODEL DESCRIPTION

The KENO V.a model for the BWR fuel assemblies consists of an 8×8 array of fuel pins with dimensions as given for the pin-cell case in Table 1. The fuel pins from the central four locations are removed and contain only water, as shown in Fig. 5. The positions that contain Gd rods are modeled explicitly, as seen in Fig. 5. The fuel assembly nodes containing Gd rods have either 7 or 9 Gd rods per node. For simplicity and conservatism, only 7 Gd rods per node were modeled in KENO. The 2 Gd rods omitted in the three-dimensional models were replaced by standard fuel pins. As stated previously, only an average fuel enrichment is used and therefore, all non-Gd rods contain the same burned fuel concentrations; the Gd rods contain the same burned fuel material plus the remaining Gd in the Gd rods. The fuel assembly can or channel is also modeled with inside dimensions of 13.13 by 13.13 cm and outside dimensions of 13.34 by 13.34 cm, and an assembly pitch of 15.24 cm. The boundary conditions specify reflected surfaces on four sides of the fuel assembly, with the top and bottom reflected with 30 cm of water, which effectively gives an infinite array of these fuel assemblies.

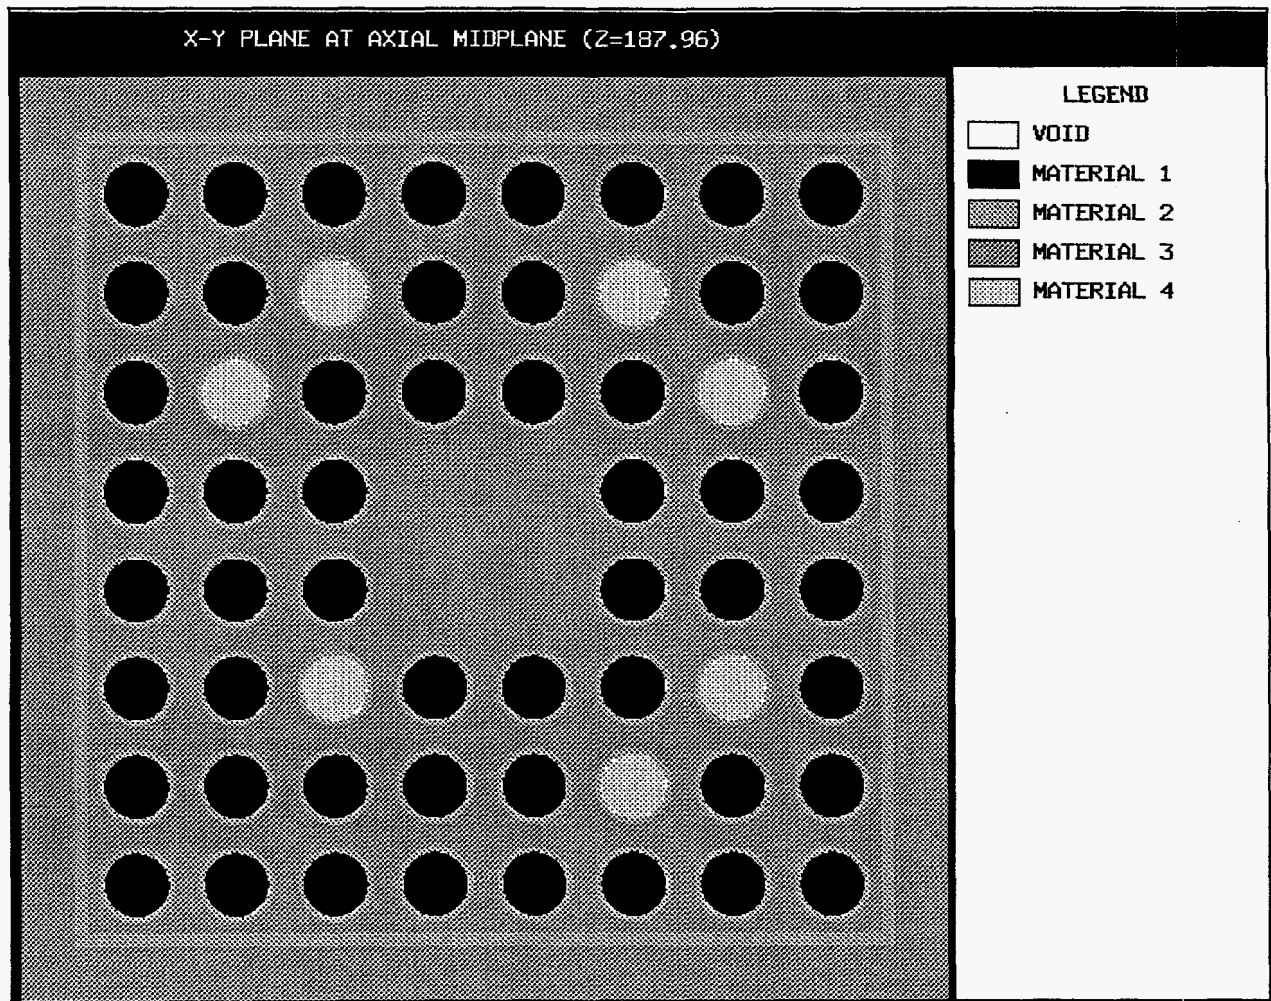



Fig. 5. Plot showing BWR assembly geometry.

4. PROCESSING CODE DESCRIPTION

In order to facilitate the generation of k_{inf} values for the various burnup/enrichment combinations with 24-node-dependent isotopics, a previously developed internal program was modified to assemble the appropriate SCALE input files. This program, termed BWRP, performs the following series of operations:

1. reads the number of nodes, desired burnup, enrichment, cooling time, and enrichment/burnup profile options;
2. correlates equally spaced nodes to built-in seven axial enrichment zones;
3. renormalizes built-in burnup and enrichment profiles to input values of burnup and average enrichment;
4. sets nodal water temperatures and densities from built-in data;
5. sets up and executes a SAS2 case for each node;
6. after each SAS2 case, the module SNIKR reads SAS2 output and constructs SCALE standard composition and KENO mixing-table input; and
7. using the SCALE standard composition data for each node, sets up a final input stream which executes CSASN to process cross sections for each node, sets up and executes WAX to combine cross-section libraries for node, then sets up and runs final KENO case with combined cross-section library and previously prepared KENO mixing-table data.

The only user interaction with BWRP occurs in step 1. All other operations are performed within a single execution of the program. Although the code has some inherent inefficiencies (e.g., the entire procedure must be repeated for each decay time), the user time per problem is minimal.



5. K-INFINITE RESULTS

The k-infinite results for an infinite array of BWR assemblies with "typical" burnup/enrichment parameters are given in Table 5 and Figs. 6 and 7 as a function of cooling time after end of life (EOL). The results shown in Fig. 6 correspond to a definition of assembly-average enrichments, where the natural uranium reflectors are omitted from the average; thus the nonreflector enrichments for Fig. 6 are effectively about 10% lower than those used for Fig. 7, which include the reflectors in the average. The corresponding k_{inf} results in Fig. 7 are about 4% higher than those shown in Fig. 6. In Fig. 8 the k_{inf} results are trended with high, average, and low enrichments. In all cases, the low enrichment is 0.02 wt % less than the typical value, and the high enrichment is 0.02 wt % higher than typical. These differences amount to between 5 and 7% in the enrichments. It can be seen from these plots that the variation of k_{inf} values with initial enrichment is nearly linear since for a given burnup the change in k_{inf} should be similar between several systems. The magnitude of the ending k_{inf} values should depend primarily on the amount of initial excess reactivity.

The obvious conclusions are that the value of k_{inf} decreases with decay (due primarily to the loss of ^{241}Pu) up to 40 years of cooling time, decreases with burnup for a given enrichment, and increases with higher enrichments for the same burnup.

Following the generation of the results reported above, a series of sensitivity studies were performed to determine the effect of removal of the Gd rods from the final k_{inf} calculations, and the effect of lower specific power/longer burn times for the same integral burnup. In Fig. 9, the k_{inf} results are presented for the 45 GWd/t and 3.8 wt % case with and without Gd rods in the final 3-D calculation. The results show that the effect of the omission of the Gd rods from the final calculation is an increase of approximately 0.4 to 0.5% in k_{inf} for the cases considered with cooling times between 5 and 40 years. This increase in k_{inf} is due to simply the removal of a poison from the final k calculation, since the depletion analyses are identical for the two cases.

The effect of a decrease in the specific power input from 45 MW/t to 40 MW/t for the 45 GWd/t and 3.8 wt % case was an increase in the value of k_{inf} from 0.9147 to 0.9163. Although a very small change, the increase is consistent with the results from a previous study⁷ where decreased specific power levels led to increased k_{inf} values. This increase in k_{inf} is caused by the reduced equilibrium fission product concentrations resulting from reduced specific powers.

Table 5. The k-infinite values^a for an infinite array of BWR assemblies for various burnup, enrichment, and cooling-time scenarios

Assembly average enrichment (wt %)	Burnup/enrichment (GWd/t /wt %)	Cooling time (years)			
		5	10	20	40
2.63	33/2.90	0.9366	0.9161	0.8947	0.8754
3.06	40/3.40	0.9321	0.9091	0.8860	0.8645
3.41	45/3.80	0.9324	0.9097	0.8833	0.8628
2.45	33/2.70	0.9106	0.8906	0.8672	0.8472
2.80	33/3.10	0.9613	0.9417	0.9210	0.9034
2.89	40/3.20	0.9085	0.8866	0.8603	0.8395
3.24	40/3.60	0.9541	0.9328	0.9095	0.8901
3.24	45/3.60	0.9111	0.8865	0.8588	0.8375
3.59	45/4.00	0.9540	0.9313	0.9060	0.8859
2.90	33/3.21	0.9750	0.9561	0.9346	0.9184
3.40	40/3.79	0.9753	0.9553	0.9314	0.9138
3.80	45/4.24	0.9788	0.9569	0.9327	0.9135

^aThe k-infinite values in this table may be approximately represented by the following equation: $k = 0.9683 + 0.1197E - 0.0315 \ln(T) - 0.00986B$, where E, T, and B are the values of enrichment, cooling time, and burnup, respectively.

BWR K-inf Versus Enrichment and Cooling Time

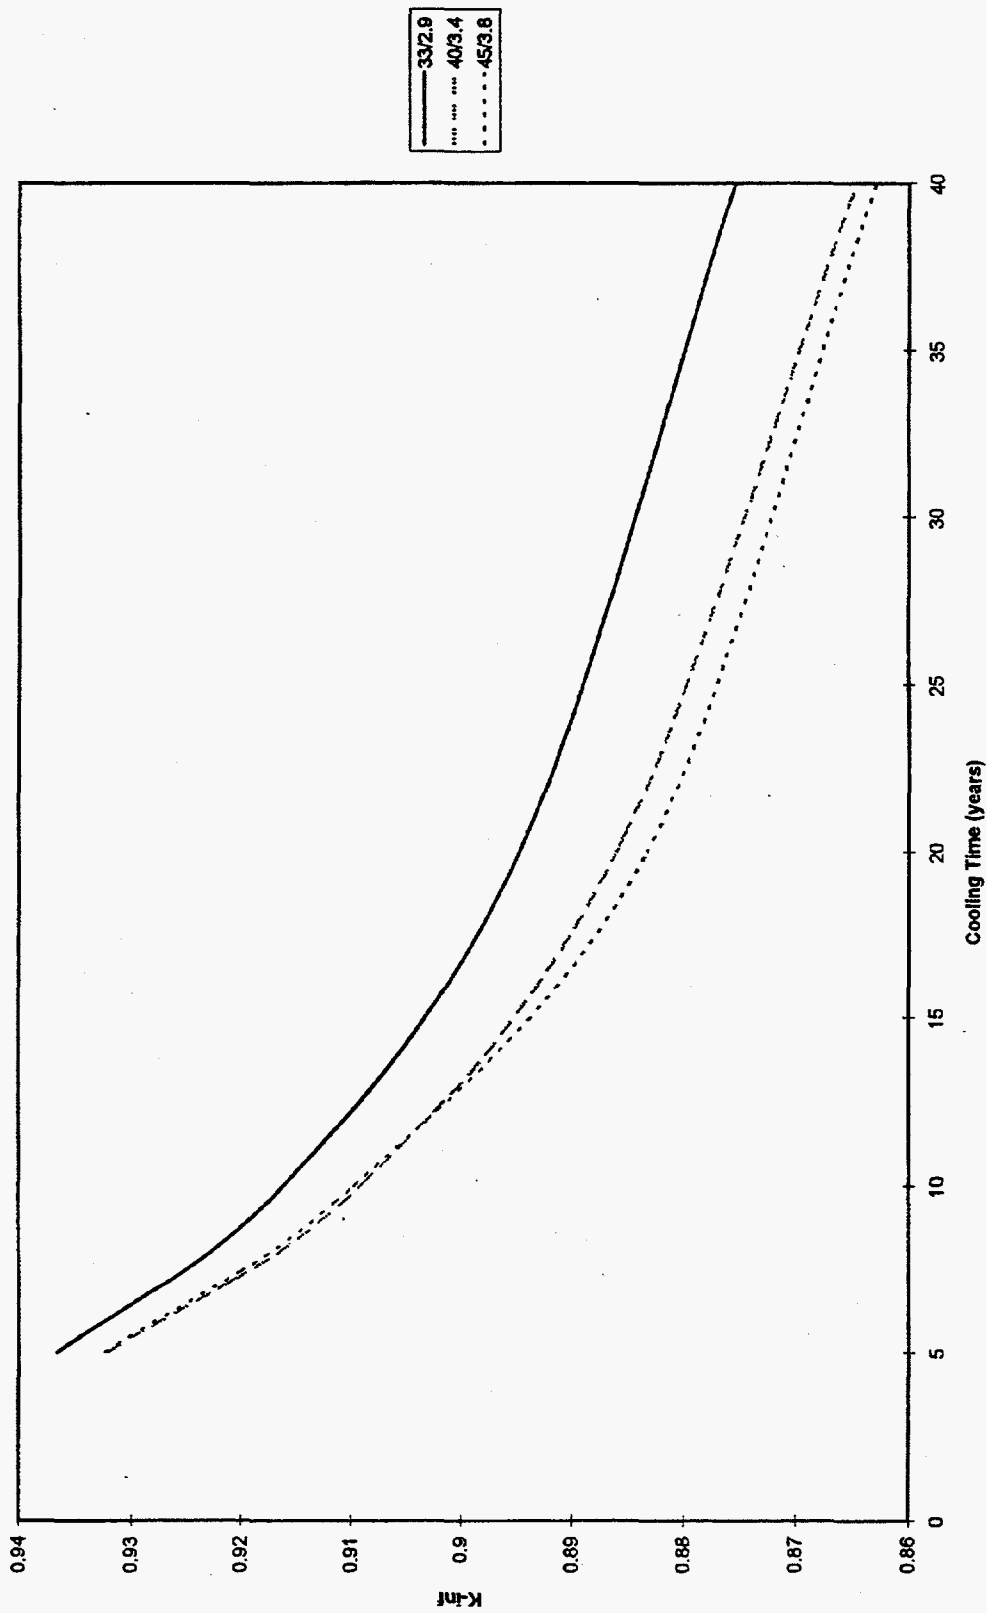


Fig. 6. BWR k_{inf} vs burnup/enrichment and cooling time; average enrichment excludes reflectors.

BWR K-inf versus Average Enrichment and Cooling Time

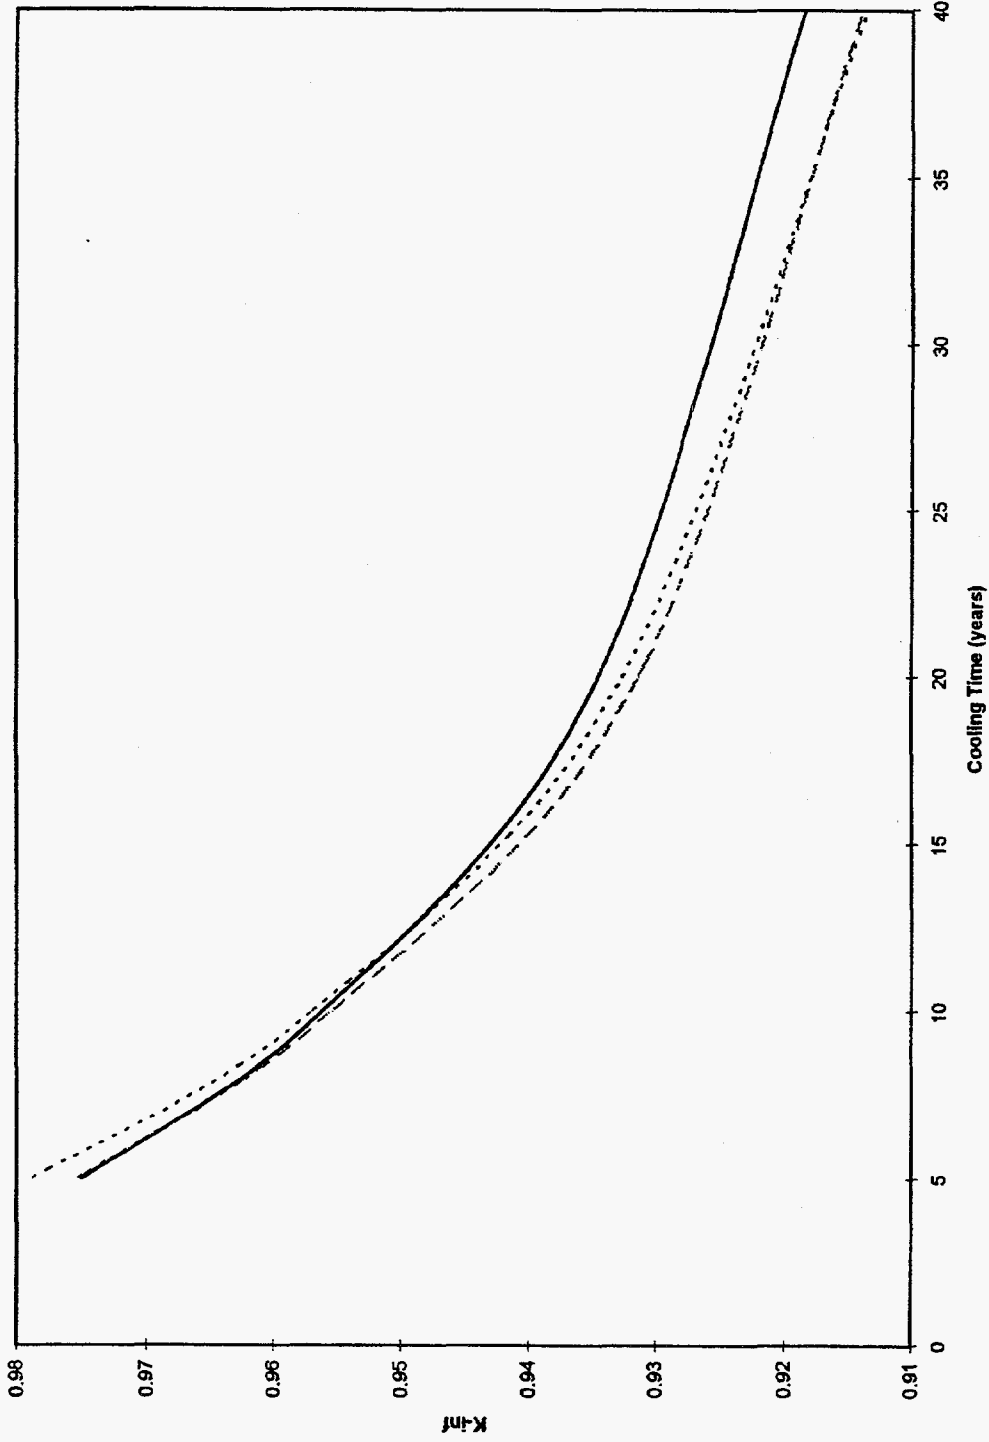


Fig. 7. BWR k_{inf} vs burnup/enrichment and cooling time; average enrichment over entire assembly.

K-inf trends with Enrichment

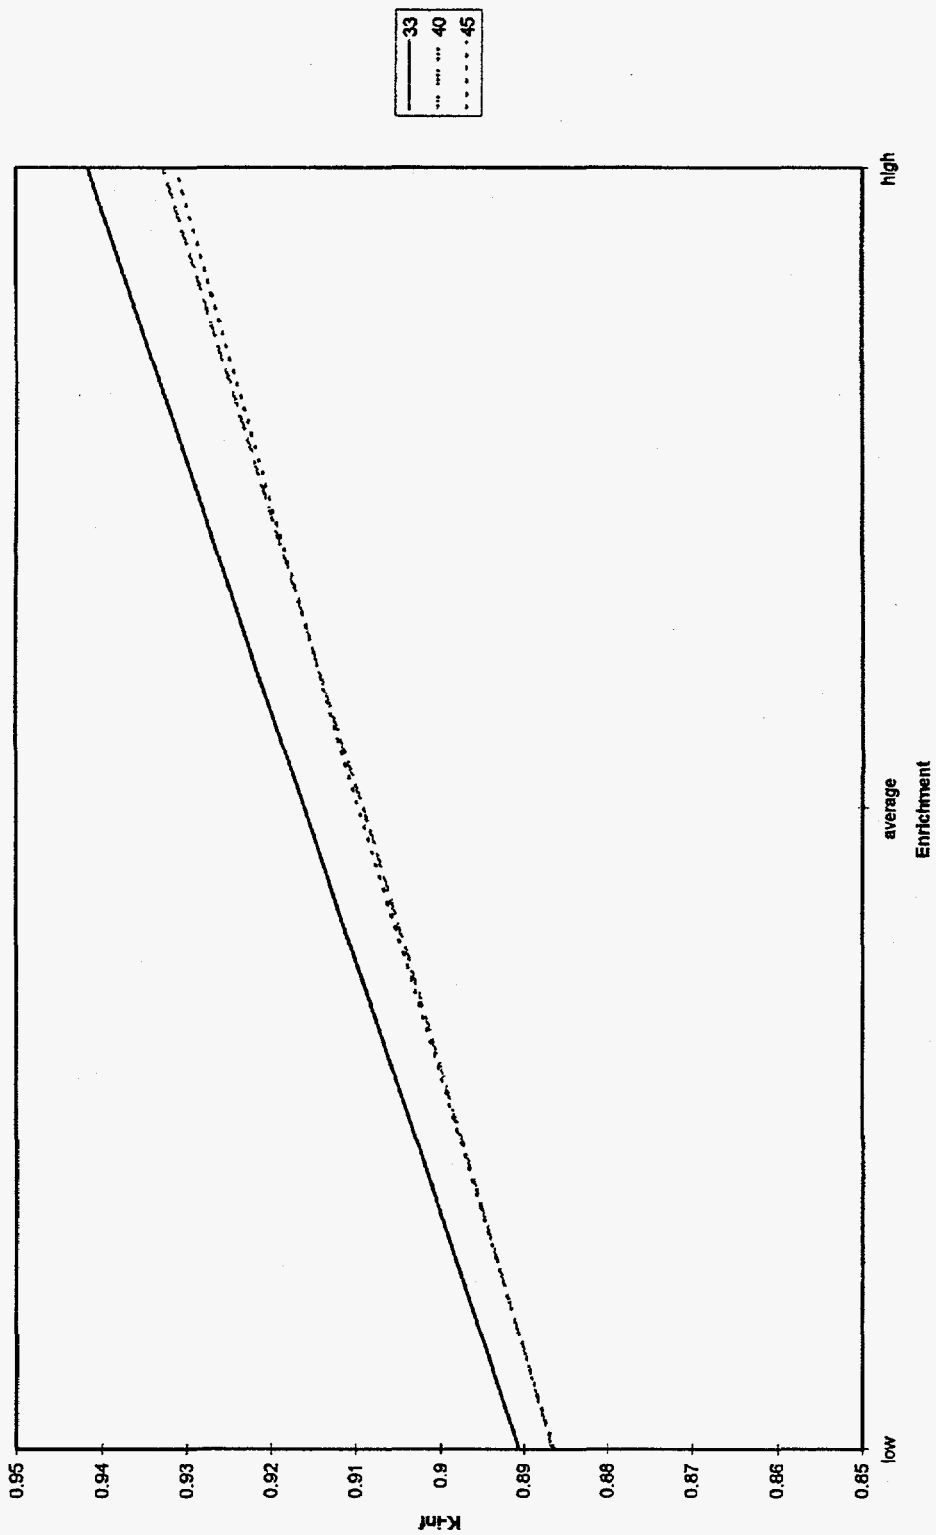


Fig. 8. Influence of initial enrichment on final k_{inf} . Low and high enrichments differ from average by 0.2 wt %.

Effect of Gd Rods

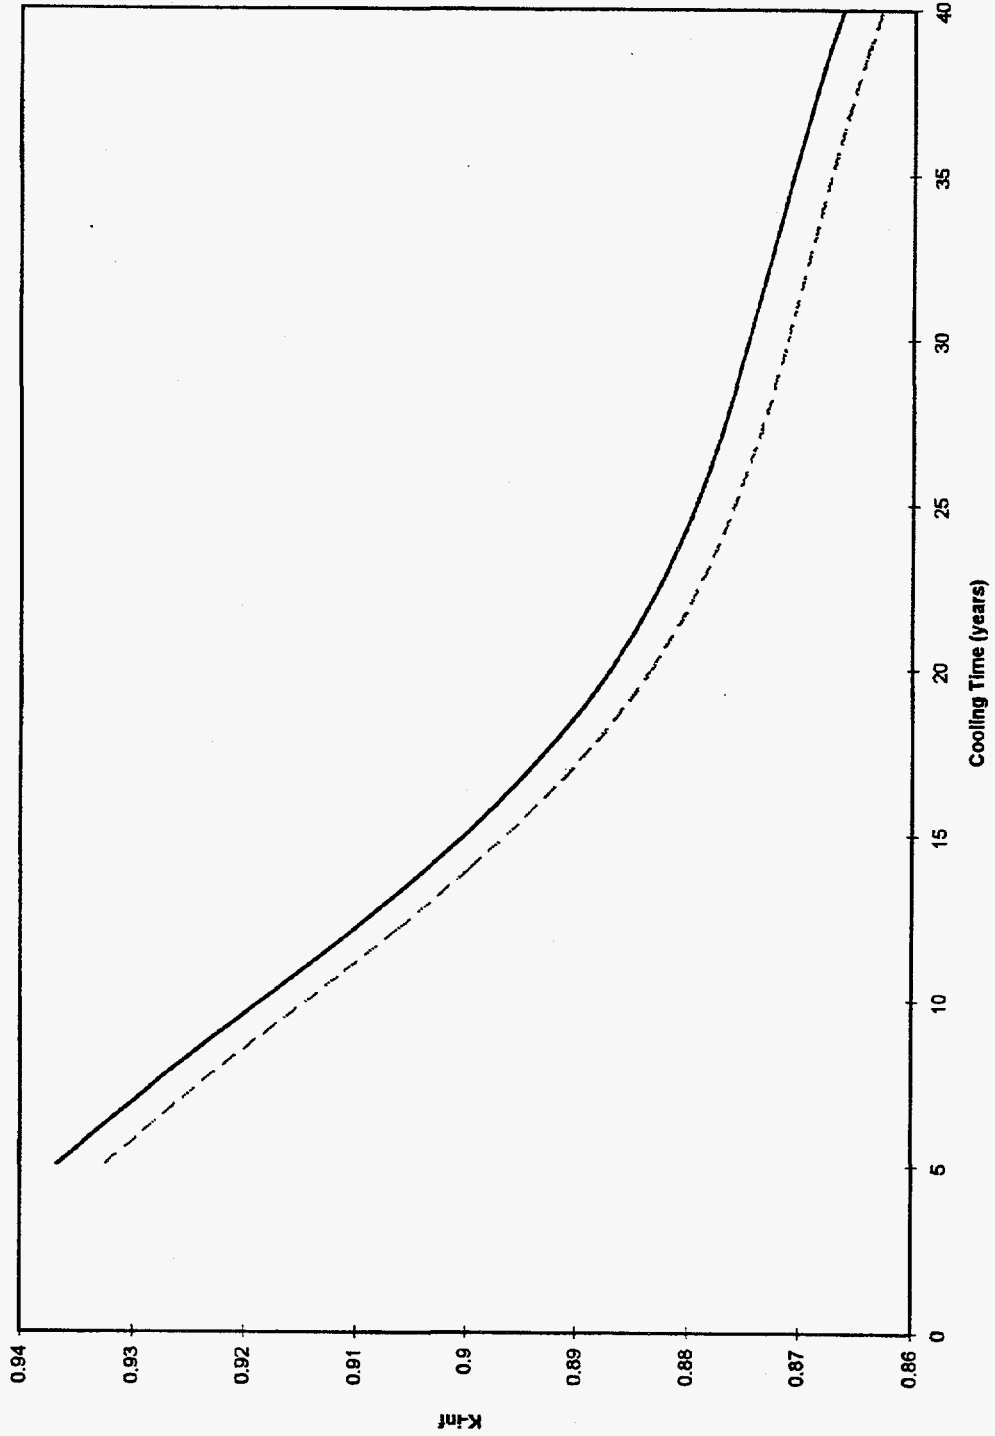


Fig. 9. Effect of Gd-rod removal from final k_{inf} calculation.

6. RANKING RESULTS

A final task in this work determined actinide and fission product absorption rankings and compared them with previous 17×17 PWR rankings.⁸ The absorption rankings in this work were determined for a 33 GWd/t, 3.1 wt % and 5-year-cooled BWR assembly. Tables 6 and 7 compare the current rankings with previous PWR rankings for actinides and fission products, respectively. The rankings are in general quite comparable with those of a PWR fuel assembly with only minor differences in rankings of 1 to 2 places. The only major difference is in the fission products ^{155}Gd and ^{157}Gd . These differences are quite understandable, considering the presence of Gd rods in a BWR model. The relatively large amount of these isotopes present in the Gd rods makes the additional amount built up due to fission much less important. Tables 6 and 7 give isotopic rankings for BWR assemblies that correspond to two different axial locations, near the top (low water density) and near the bottom (high water density) of the fuel assembly. These rankings are essentially identical, indicating that no differences exist in the importance of isotopes over the axial range of the assembly.

Upon further investigation of the differences in rankings for the top 3–4 isotopes shown in Tables 6 and 7, it was noted that these rankings are sensitive to a number of parameters, including burnup, enrichment, and the assembly-to-assembly spacing in the reactor. The rankings for a second PWR assembly type were determined for comparison. The rankings for a 14×14 PWR are very similar to those of the BWR cases, with the burnups and enrichments being very much the same for all cases. The key parameter appears to be the assembly-to-assembly spacings which are quite different between the two PWR cases. The ranking changes are spectral related in that the assembly with the hardest spectrum is the 17×17 PWR, and, hence, has the highest ^{239}Pu ranking.

Table 6. Comparison of PWR^a and BWR^b absorption rankings for actinides

Case	BWR (top) absorption fraction rank	BWR (bottom) absorption fraction rank	17 × 17 PWR ^a absorption fraction rank	14 × 14 PWR ^c absorption fraction rank
²³⁹ Pu	2	2	1	2
²³⁸ U	1	1	2	1
²³⁵ U	3	4	3	4
²⁴⁰ Pu	4	3	4	3
²⁴¹ Pu	5	5	5	5
²⁴¹ Am	7	7	6	6
²³⁷ Np	9	9	8	9
²³⁶ U	6	6	7	7
²⁴² Pu	8	8	9	8
²⁴³ Am	10	11	10	11
²³⁴ U	12	12	11	12
²³⁸ Pu	11	10	NA ^d	10
^{242m} A	13	13	NA	13

^aCorresponds to 17 × 17 PWR, 3% enrichment, 35-GWd/t with 5-year cooling time. These values were taken from ref. 8.

^bCorresponds to 8 × 8 BWR, 3.1% enrichment, 33-GWd/t with 5-year cooling time.

^cCorresponds to 14 × 14 PWR, 3% enrichment, 33-GWd/t with 5-year cooling time.

^dNot available.

Table 7. Comparison of PWR^a and BWR^b absorption rankings for fission products


Case	PWR Δk rank	PWR ^a absorption fraction rank	PWR ^c absorption fraction rank	BWR (top) absorption fraction rank	BWR (bottom) absorption fraction rank
¹⁴⁹ Sm	1	1	3	3	3
¹⁴³ Nd	2	2	2	2	2
¹⁰³ Rh	3	3	1	1	1
¹⁵¹ Sm	4	4	9	8	8
¹⁵⁵ Gd	5	6	4	17	15
¹³¹ Xe	6	5	5	5	5
¹³³ Cs	7	7	6	4	4
⁹⁹ Tc	8	8	7	6	6
¹⁵² Sm	9	9	8	7	7
¹⁵³ Eu	10	10	10	9	9
¹⁴⁵ Nd	11	11	11	10	10
¹⁵⁰ Sm	12	12	15	14	13
¹⁴⁷ Sm	13	13	12	11	11
¹⁰⁹ Ag	14	14	14	13	14
⁹⁵ Mo	15	15	13	12	12
¹⁰¹ Ru	16	16	17	15	17
¹⁵⁷ Gd	17	18	28	46	44
¹⁰⁵ Pd	18	17	20	19	20
¹⁴¹ Pr	19	19	21	21	21
¹⁴⁷ Pm	NA ^c	NA	18	16	16
¹⁵⁴ Eu	NA	NA	16	18	18
¹⁵⁵ Eu	NA	NA	19	20	19

^aCorresponds to 17 × 17 PWR, 3% enrichment, 35 GWd/t with 5-year cooling time. These values were taken from ref. 8.

^bCorresponds to 8 × 8 BWR, 3.1% enrichment, 33 GWd/t with 5-year cooling time.


^cCorresponds to 14 × 14 PWR, 3% enrichment, 33 Gwd/t with 5-year cooling time.

^dNot available.



7. REFERENCES

1. O. W. Hermann and C. V. Parks, "SAS2H: A Coupled One-Dimensional Depletion and Shielding Analysis Module," Sect. S2 in *SCALE: A Modular Code System for Performing Standardized Computer Analyses for Licensing Evaluations*, NUREG/CR-0200, Rev. 5 (ORNL/NUREG/CSD-2/R5), Vols. I, II, and III (March 1997). Available from Radiation Shielding Information and Computational Center as CCC-545.
2. L. M. Petrie and N. F. Landers, "KENO V.a: An Improved Monte Carlo Criticality Program with Supergrouping," Sect. F11 of *SCALE: A Modular Code System for Performing Standardized Computer Analyses for Licensing Evaluations*, NUREG/CR-0200, Rev. 5 (ORNL/NUREG/CSD-2/R5), Vols. I, II, and III (March 1997). Available from Radiation Shielding Information and Computational Center as CCC-545.
3. Personal correspondence from David Henderson, Framatome Cogema Fuels, to Bryan Broadhead, ORNL, June 18, 1997.
4. Personal correspondence from David Henderson, Framatome Cogema Fuels, to Bryan Broadhead, ORNL, July 23, 1997.
5. James H. Rust, *Nuclear Power Plant Engineering*, Haralson Publishing Company, Buchanan, Ga., 1979.
6. O. W. Hermann, C. V. Parks, J. P. Renier, J. W. Roddy, R. C. Ashline, W. B. Wilson, and R. J. LaBauve, *Multicode Comparison of Selected Source Term Computer Codes*, ORNL/CSD/TM-251, Oak Ridge National Laboratory, Oak Ridge, Tenn., April 1989.
7. M. D. DeHart, *Sensitivity and Parametric Evaluations of Significant Aspects of Burnup Credit for PWR Spent Fuel Packages*, ORNL/TM-12973, Oak Ridge National Laboratory, Oak Ridge, Tenn., May 1996.
8. B. L. Broadhead, M. D. DeHart, J. C. Ryman, J. S. Tang, and C. V. Parks, *Investigation of Nuclide Importance to Functional Requirements Related to Transport and Long-Term Storage of LWR Spent Fuel*, ORNL/TM-12742, Oak Ridge National Laboratory, Oak Ridge, Tenn., June 1995.



INTERNAL DISTRIBUTION

- | | | | |
|-------|-----------------|--------|---|
| 1. | S. M. Bowman | 18. | B. D. Murphy |
| 2-6. | B. L. Broadhead | 19-23. | C. V. Parks |
| 7. | W. C. Carter | 24. | L. M. Petrie |
| 8-12. | M. D. DeHart | 25. | C. H. Shappert |
| 13. | M. B. Emmett | 26. | R. M. Westfall |
| 14. | W. E. Ford III | 27. | Central Research Library |
| 15. | O. W. Hermann | 28-29. | Laboratory Records Department
(for submission to OSTI) |
| 16. | C. M. Hopper | 30. | Laboratory Records, ORNL (RC) |
| 17. | M. A. Kuliasha | | |

EXTERNAL DISTRIBUTION

31. T. W. Doering, Framatome Cogema Fuels, 1180 Town Center Drive, Las Vegas, NV 89134
32. P. Gottlieb, Framatome Cogema Fuels, 1180 Town Center Drive, Las Vegas, NV 89134
33. D. Henderson, Framatome Cogema Fuels, 1180 Town Center Drive, Las Vegas, NV 89134
34. D. A. Thomas, Framatome Cogema Fuels, 1180 Town Center Drive, Las Vegas, NV 89134