


# A Hydrogen Ion Beam Method of Molecular Density Measurements Inside a 4.2-K Beam Tube

N. Alinovsky  
V. Anashin  
P. Beschasny  
G. Derevyankin  
V. Dudnikov  
A. Evstigneev  
A. Lysenko  
O. Malyshev  
V. Osipov  
I. Maslennikov  
W. Turner

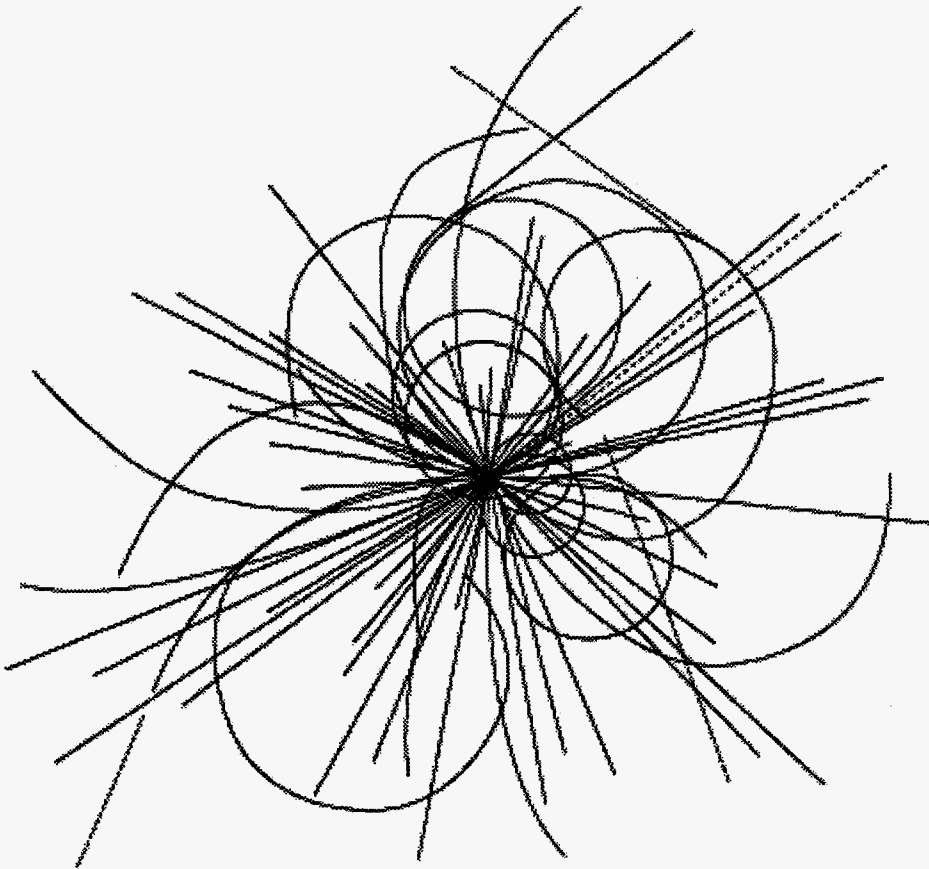

**Superconducting Super Collider  
Laboratory**

APPROVED FOR RELEASE OR  
PUBLICATION - O.R. PATENT/GR  
BY...*[Signature]*.....DATE 4/3/95

### Disclaimer Notice

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government or any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

*Superconducting Super Collider Laboratory is an equal opportunity employer.*

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

**A Hydrogen Ion Beam Method of Molecular Density  
Measurement Inside a 4.2-K Beam Tube\***

N. Alinovsky, V. Anashin, P. Beschasny, G. Derevyankin, V. Dudnikov,  
A. Evstigneev, A. Lysenko, O. Malyshev and V. Osipov

Budker Institute of Nuclear Physics  
Novosibirsk, Russia

I. Maslennikov and W. Turner

Superconducting Super Collider Laboratory†  
2550 Beckleymeade Ave.  
Dallas, TX 75237, USA

June 1994

---

\*To be presented at the Fourth European Particle Accelerator Conference June 27 – July 1, 1994.

†Operated by the Universities Research Association, Inc., for the U.S. Department of Energy under Contract No. DE-AC35-89ER40486.

# A Hydrogen Ion Beam Method of Molecular Density Measurement Inside a 4.2-K Beam Tube

N. Alinovsky, V. Anashin, P. Beschasny, G. Derevyankin, V. Dudnikov,  
A. Evstigneev, A. Lysenko, O. Malyshev, and V. Osipov

Institute of Nuclear Physics  
Novosibirsk, Russia

I. Maslennikov and W. Turner  
Superconducting Super Collider Laboratory\*  
Dallas, Texas 75237, USA


## Abstract

In our first experiments on synchrotron radiation-induced photodesorption in a 4.2-K beam tube, the molecular density was measured by room temperature ion gauges and RGAs outside the beam tube. The molecular density inside the 4.2-K beam tube was therefore unknown, since the mean molecular speed of photodesorbed molecules had not been measured. To determine the density inside the 4.2-K beam tube we have developed a direct method of measurement utilizing the neutralization of  $H^+$  beams, which are proportional to gas density. The hydrogen ion beams (up to 20 keV,  $\sim 1 \mu A$ ) are extracted from an rf ion source and guided into the cold beam tube by a bending magnet. The  $H^0$  and  $H^-$  produced in the beam tube are magnetically separated from  $H^+$  and detected with secondary electron multipliers (SEMs). Small superconducting dipole magnets located near the center of the beam tube allow a  $\sim 20$ -cm segment of the injected ion beam to be offset a few mm from the injection axis; detection of  $H^0$  and  $H^-$  produced along this offset segment provides a localized density measurement. If necessary, detector background due to synchrotron radiation photons can be discriminated against by gating the detector on between the bursts of synchrotron radiation. The experimental setup and initial data will be presented.

## 1. INTRODUCTION

Photon-stimulated gas desorption can be a serious problem in achieving desirable vacuum inside a beam tube in the next generation of proton colliders — the 20-TeV Superconducting Super Collider (SSC), which was to be built in the USA [1], and the 7.7-TeV Large Hadron Collider, which is being planned for construction at CERN [2]. The proper design of the beam tube requires performing some special photodesorption experiments at LHe temperature. The main parameter that must be determined is the gas density inside the cold beam tube. The usual techniques of pressure measurement by vacuum gauges and residual gas analyzers (RGAs) installed in the warm part of the experimental setup do not give the cold density directly, since the mean molecular speed of the photodesorbed molecules is not known [3].

A direct method for measurement of the gas density using an  $H^+$  ion beam injected into the cold tube is described in this article. This method uses charge exchange of the  $H^+$  beam with the molecules of the desorbed gas, and it is based on the well-known cross section values for the following elementary processes:



The amounts of  $H^0$  and  $H^-$  are proportional to gas density. Cross sections in other gases ( $CO, CO_2, CH_4$ ) are also known to some extent. The different energy dependence of the cross sections for these gases may allow measurement of the density of each gas species.

## 2. EXPERIMENTAL SETUP

The experiments have been performed on the synchrotron radiation beamline SSC1 of the VEPP-2M electron-positron storage ring at Budker Institute of Nuclear Physics in Russia. The schematic of this experiment is shown in Figure 1. The details and parameters of the beamline and LHe cryostat are given in ref. [3,4]. The photon critical energy and intensity of the SSC1 beamline are the same as in the SSC (284 eV,  $\sim 10^{16}$  photons/m/s).

An rf ion source is used for generation of the  $H^+$  ions. An rf generator with frequency 33 MHz provides the discharge plasma. All equipment was shielded from the rf power. The energy spread of the  $H^+$  beam was minimized by filtering the rf from the beam extraction electrodes. A 10-keV, 100- $\mu A$  ion beam is extracted through a 1-mm-diameter hole and focussed with a 6-7 kV einzel lens immediately outside the ion source. From the ion source the beam passes into a 90° magnet mass analyzer M1 (bending radius  $R = 8$  cm, magnetic index  $n = 0.5$ ). A collimator COL1 with a 1-mm-diameter hole is at the exit of M1. Measurement of the current to four split-plate electrodes in front of C1 is used for optimizing the focussing and steering of the beam. A similar collimator, COL2, is located at the entrance to the 127° bending magnet M2 ( $R = 8$  cm,  $n = 0.5$ ), which guides the beam along the axis of the cold beam tube.

The focussing system includes triplet (Q1-Q3) and doublet (Q4,Q5) magnetic quadrupole Panofsky lenses, two electrostatic einzel lenses (L1,L2), an electrostatic octopole

\* Operated by the Universities Research Association Inc., for the U.S. Department of Energy under Contract No. DE-AC35-89ER40486.

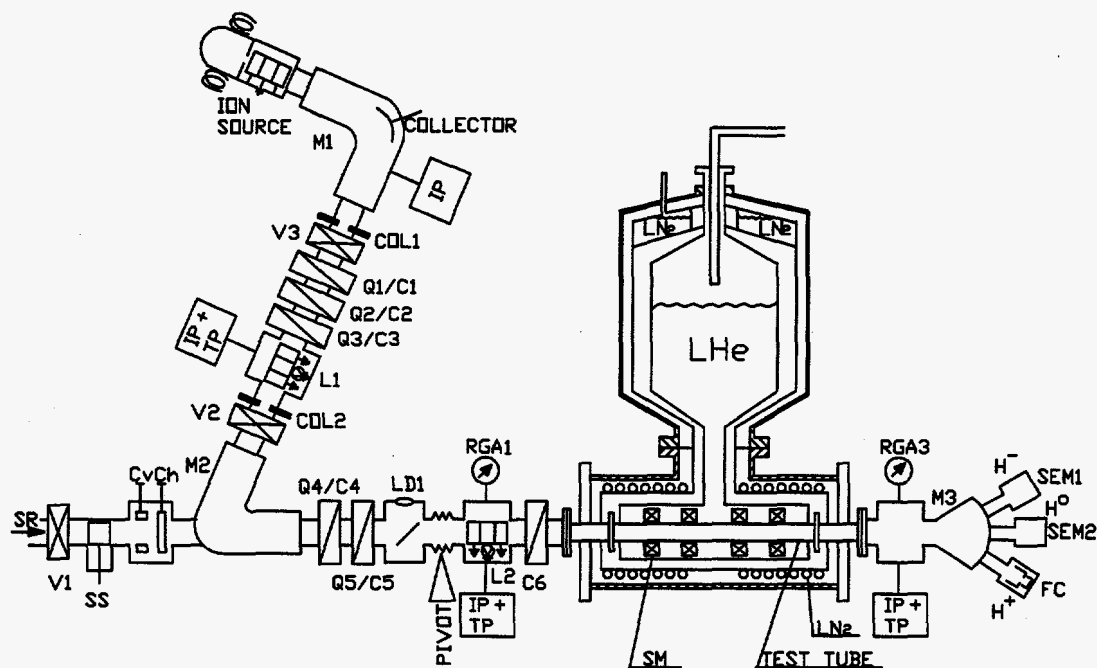


Figure 1. Setup for direct measurement of molecular density inside a 4.2-K beam tube by the ion beam method. L1,L2; einzel lenses; M1-M3: bending magnets; SM: superconducting magnets (4); C1-C6: correctors; Q1-Q5: quadrupoles; FC: Faraday cup; SEM1, SEM2: secondary electron multipliers; COL1, COL2: ion beam collimators; V1-V3: vacuum valves; SS: safety shutter; LD1: phosphor; IP+TP: combination ion and Ti sublimation pump; RGA1-RGA3: residual gas analyzers; Cv, Ch: SR vertical and horizontal collimators.

corrector-stigmator (behind L1), and magnetic dipole correctors (C1-C6). The  $H^+$  beam diameter is within 1-3 mm at the detectors. A movable phosphor (LD1) is used for observation of the ion beam and synchrotron radiation (SR) position. The high-voltage power supplies for the ion source and electrostatic lenses are voltage-regulated with accuracy  $10^{-4}$ . All power supplies for bending magnets, quadrupoles, and correctors are regulated with accuracy  $10^{-4}$ .

across this dual Faraday cup detector allows measurement of the spatial structure of the beam. Neutrals and negative ions are transported to the corresponding SEMs. The SEMs can be operated in both the current and counting modes. The counting mode is used to measure the absolute calibration of  $H^-$  and  $H^0$  intensity. Every  $H^-$  or  $H^0$  particle with energy  $\sim 10$  keV produces an output pulse with an amplitude of order of  $10^5$ - $10^6$  electrons. A pulse of this magnitude can be easily read by the data acquisition system.

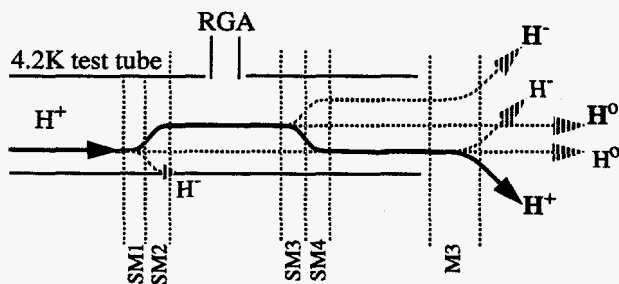


Figure 2. Illustration of secondary particle beam separation inside the beam tube. (The beams in bold font were used in the experiments.)

In the cold beam tube the ion beam can be displaced from the tube axis by four superconducting bending magnets (SM1-SM4) installed in the middle of the beam tube. This allows measurement of the secondary particle beams created on the 20-cm section of the beam tube (Figure 2). The secondary beams  $H^0$  and  $H^-$  are separated at the detectors by the dipole magnet M3. The  $\sim 2\mu A$   $H^+$  beam is directed to a 25-mm-diameter Faraday cup with a 1-mm-diameter hole. A second Faraday cup is behind the 1-mm hole. Scanning the beam

To distinguish the beam charge exchange signals from SR-induced background, the ion beam is intensity-modulated with alternating voltages on the electrode-collector inside the M1 magnet or on the octopole corrector. The frequency of the modulation was 0.1-1 kHz.

The influence of ion-stimulated desorption due to scattered protons was eliminated by using the ion beam in a pulse mode (pulse width = 0.3-1 ms, pulse repetition time = 1.5 s). Observation of ion-stimulated desorption was used to check the ion beam alignment along the beam tube. The absence of ion-stimulated desorption was used as a criterion of good alignment.

Gas pressure was measured simultaneously with the ion beam by calibrated rf quadrupole RGAs at room temperature. An RGA was connected to the center of the beam tube and at each warm end.

A differential pumping system including three vacuum pumps IP1-IP3 and two collimators COL1 and COL2 provides the necessary pressure drop from  $5 \cdot 10^{-6}$  Torr in the M1 magnet vacuum chamber to  $5 \cdot 10^{-10}$  Torr in the test tube. Opening and closing the valve V3 produced no measurable change in beam tube pressure at RGA1. The pressure in the ion source is about  $1 \cdot 10^{-3}$  Torr.

### 3. EXPERIMENTAL RESULTS AND DISCUSSION

In the first series of experiments we have simultaneously measured the amount of  $H^-$  by the ion beam technique and the  $H_2$  pressure by RGA in the middle of the 4.2-K beam tube. These measurements were done both with SR photons on and off.

With the SR gated off, the  $H_2$  molecules inside the tube have temperature 4.2 K. Thus the  $H_2$  density  $n_1$  can be calculated by the following formula:

$$n_1 = n_{293} \frac{\bar{v}_{293}}{\bar{v}_{4.2}} \quad (1)$$

where  $n_{293}$  ( $n=P/kT$ ) is the  $H_2$  density at room temperature measured by RGA, and  $\bar{v}_{293}$  and  $\bar{v}_{4.2}$  are effective mean molecular speed for 293 K and 4.2 K, respectively. At the same time the  $H^-$  intensity  $I_1^-$  is:

$$I_1^- = n_1 \cdot L \cdot \sigma \cdot I^+ \quad (2)$$

where  $L$  is the path length where the negative ions have been created,  $\sigma$  is the cross section of the reaction, and  $I^+$  is the intensity of  $H^+$ s.

In the presence of synchrotron radiation, the effective mean molecular speed  $\bar{v}$  is unknown. The  $H_2$  density in this case can be determined by the following expressions:

$$n_2 = n_1 \frac{\bar{v}_{293}}{\bar{v}_{4.2}} + \Delta n \frac{\bar{v}_{293}}{\bar{v}} \quad (3)$$

and

$$I_2^- = L \cdot \sigma \cdot I^+ \cdot (n_1 + \Delta n) \quad (4)$$

where  $\Delta n$  is the density increase due to photodesorption. The combination of expressions 1-4 gives the following formula for the effective mean molecular speed of the photodesorbed molecules:

$$\bar{v} = \frac{(P_2 - P_1)}{P_1} \frac{I_1^-}{I_2^- - I_1^-} \bar{v}_{4.2} \quad (5)$$

where  $P_2$  is the  $H_2$  pressure measured by the RGA with SR on and  $P_1$  with the SR off.

It is necessary to mention that in this case we do not have to determine  $\sigma$  and  $L$ . We have only to keep creating the negative ions within the cold beam tube or to keep the density in the warm ends of the tube much lower than inside the beam tube.

The typical results of the volume density measurements inside the 4.2-K beam tube are presented in Table 1.

Table 1. Results of volume density measurements.

	$I(H^+)$ , nA	$P_{H_2}(RGA)$ , Torr
Photons on	360	$1.5 \cdot 10^{-8}$
Photons off	235	$5.0 \cdot 10^{-9}$

The proton beam current  $I(H^+)$  was about 0.5  $\mu A$  for photons on and off.

By using this data and formula (5), the mean molecular speed  $\bar{v}$  of desorbed molecules due to synchrotron radiation can be estimated. This speed is equal to  $8 \cdot 10^4$  cm/s, which corresponds to 60 K. Using the value of  $H_2$  molecular speed and RGA measurements, the density increase due to photodesorption can be calculated.

### 4. CONCLUSIONS

1. A special hydrogen ion experimental setup has been designed, built, and operated. This setup allows the direct determination of the molecular gas density inside a cryosorbing beam tube by measuring the intensity of charge exchange products  $H^-$  and  $H^0$ . The sensitivity of gas density measured by this setup is better than  $10^8$  1/cm<sup>3</sup>.
2. The first results of the measurement of speed of  $H_2$  molecules desorbed from the surface of a 4.2-K simple beam tube due to synchrotron radiation have been obtained. This speed is equal to  $8 \cdot 10^4 \pm 1.5 \cdot 10^4$  cm/s and corresponds to an effective temperature of  $60 \pm 20$  K. Using this value of speed we can eliminate the uncertainty for gas density measurements in ref. [3].
3. Plans for work with this experimental setup include the measurements of molecular speed and density:
  - a. in beam tube liner configurations,
  - b. in beam tubes with different surface coverage of physisorbed  $H_2$  molecules, and
  - c. for other gases ( $CO$ ,  $CO_2$ ) by variation of the energy of the proton beam.

### 5. REFERENCES

- [1] SSC Central Design Group, "Conceptual Design of the Superconducting Super Collider," SSC-R-2020, March (1986).
- [2] LHC Study Group, "Design Study of the Large Hadron Collider (LHC)," CERN 91-03 (1991).
- [3] V. V. Anashin, O. B. Malyshev, V. N. Osipov, I. L. Maslennikov and W. C. Turner, "Experimental Investigation of Dynamic Pressure in a Cryosorbing Beam Tube Exposed to Synchrotron Radiation," (this conference).
- [4] I. Maslennikov, W. Turner, V. Anashin, et al., "Photodesorption Experiments on SSC Collider Beam Tube Configurations," *Proc. of 1993 IEEE Part. Acc. Conf.*, pp. 3876-3878, Washington, D.C.