

# Minnesota Energy and Cost Savings for New Single- and Multifamily Homes:

**2009 and 2012 IECC**  
as Compared to the  
**Minnesota Residential**  
**Energy Code**



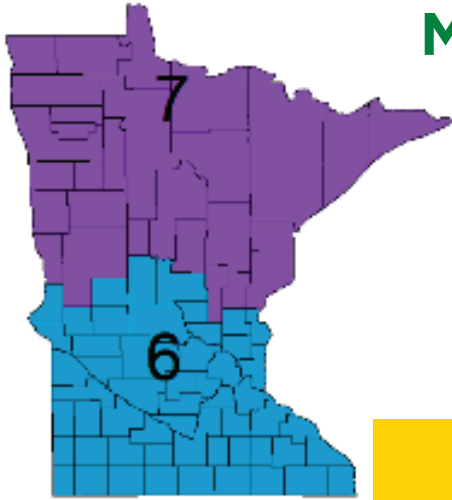



Figure 1. Minnesota Climate Zones

# Minnesota Energy and Cost Savings for New Single- and Multifamily Homes: **2009** and **2012 IECC** as Compared to the **Minnesota Residential Energy Code**

The 2009 and 2012 International Energy Conservation Codes (IECC) yield positive benefits for Minnesota homeowners.

Moving to either the 2009 or 2012 IECC from the current Minnesota Residential Energy Code is cost-effective over a 30-year life cycle. On average, Minnesota homeowners will save \$1,277 over 30 years under the 2009 IECC, with savings still higher at \$9,873 with the 2012 IECC.

Each year, the reduction to energy bills will significantly exceed increased mortgage costs. After accounting for up-front costs and additional costs financed in the mortgage, homeowners should see net positive cash flows (i.e., cumulative savings exceed cumulative cash outlays) in 3 years for the 2009 IECC and 1 year for the 2012 IECC. Average annual energy savings are \$122 for the 2009 IECC and \$669 for the 2012 IECC.

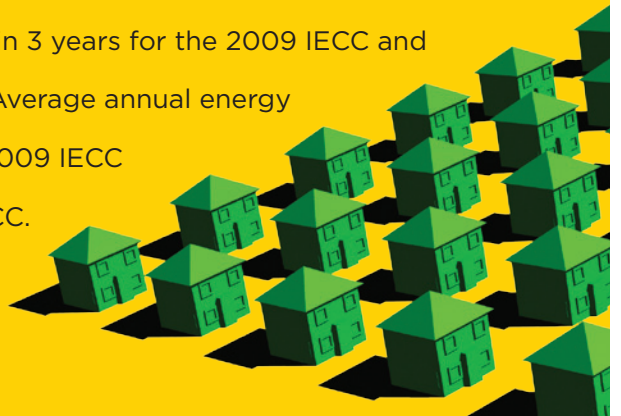

## Highlights

### Cost-effectiveness against a Minnesota Residential Energy Code baseline:

- Life-cycle cost savings, averaged across climate zones and building types, are \$1,277 for the 2009 IECC and \$9,873 for the 2012 IECC
- Simple payback periods are 9.7 years for the 2009 IECC and 5.7 years for the 2012 IECC

### Consumer savings compared to a Minnesota Residential Energy Code baseline:

- Households save an average of \$122 per year on energy costs with the 2009 IECC
- Household energy savings rise significantly to an average of \$669 per year with the 2012 IECC
- Net annual consumer savings, including energy savings, mortgage cost increases, and other associated costs in the first year of ownership, average \$54 for the 2009 IECC and \$450 for the 2012 IECC
- Energy costs, on average, are 6.2% lower for the 2009 IECC and 34.1% lower for the 2012 IECC

## Cost-Effectiveness

The U.S. Department of Energy (DOE) evaluates the energy codes based on three measures of cost-effectiveness:

- **Life-Cycle Cost:** Full accounting over a 30-year period of the cost savings, considering energy savings, the initial investment financed through increased mortgage costs, tax impacts, and residual values of energy efficiency measures
- **Cash Flow:** Net annual cost outlay (i.e., difference between annual energy cost savings and increased annual costs for mortgage payments, etc.)
- **Simple Payback:** Number of years required for energy cost savings to exceed the incremental first costs of a new code

Life-cycle cost is the primary measure by which DOE assesses the cost-effectiveness of the IECC. These savings assume that initial costs are mortgaged, that homeowners take advantage of the mortgage interest deductions, and that long-lived efficiency measures retain a residual value after the 30-year analysis period. As shown in Table 1, life-cycle cost savings, averaged across climate zones are \$1,277 for the 2009 IECC and \$9,873 for the 2012 IECC.

Table 1. Average Life-Cycle Cost Savings from Compliance with 2009 and 2012 IECC, Relative to the Minnesota State Code

	Life-Cycle Cost Savings (\$)	Net Positive Cash Flow (Years)	Simple Payback (Years)
2009 IECC	\$1,277	3	9.7
2012 IECC	\$9,873	1	5.7

## Consumer Savings

Annual consumer cash flows impact the affordability of energy-efficient homes. Based on this analysis, Minnesota homeowners, on average, should see annual energy cost savings of \$122 and achieve a net cumulative savings that accounts for an increased down payment in addition to energy costs, mortgage costs, and tax-related costs and

benefits in 3 years when comparing the 2009 IECC to the Minnesota Residential Energy Code. When moving to the 2012 IECC from the Minnesota Residential Energy Code, the average annual energy cost savings increase substantially to \$669, and it is only 1 year before cumulative savings exceed cumulative costs. Table 2 summarizes these results.

Table 2. Impacts to Consumers' Cash Flow from Compliance with the 2009 and 2012 IECC Compared to the Minnesota State Code

	Consumers' Cash Flow (Average)	2009 IECC	2012 IECC
A	Down payment and other up-front costs	\$126	\$406
B	Annual energy savings (year one)	\$122	\$669
C	Annual mortgage increase	\$68	\$220
D	Net annual cost of mortgage interest deductions, mortgage insurance, and property taxes (year one)	\$0	-\$1
E = [B-(C+D)]	Net annual cash flow savings (year one)	\$54	\$450
F = [A/E]	Years to positive savings, including up-front cost impacts	3	1

The U.S. Department of Energy (DOE) provides estimates of energy and cost savings from code adoption:

- **National:** Energy cost savings (only)
- **Climate Zone:** Energy cost savings, life-cycle cost savings, and consumer cash flows
- **State:** Energy cost savings, life-cycle cost savings, consumer cash flows, and simple paybacks

For more information on how these estimates were developed, visit the DOE Building Energy Codes website: [www.energycodes.gov/development/residential](http://www.energycodes.gov/development/residential)

# Technical Appendix A

## *Methodology*

An overview of the methodology used to calculate these impacts is provided below. Further information as to how these estimates were developed is available at the U.S. Department of Energy's (DOE) Building Energy Codes website.<sup>1</sup>

### **Cost-Effectiveness**

Pacific Northwest National Laboratory (PNNL) calculated three cost-effectiveness metrics in comparing the 2009 and 2012 International Energy Conservation Codes (IECC) to the Minnesota Residential Energy Code (Chapter 1322 of the Minnesota Administrative Rules) effective on June 1, 2009 (referred to herein as the Minnesota state code). These are:

- Life-Cycle Cost (LCC): Full accounting over a 30-year period of the cost savings, considering energy savings, the initial investment financed through increased mortgage costs, tax impacts, and residual values of energy efficiency measures
- Cash Flow: Net annual cost outlay (i.e., difference between annual energy cost savings and increased annual costs for mortgage payments, etc.)
- Simple Payback: Number of years required for energy cost savings to exceed the incremental first costs of a new code

LCC is a robust cost-benefit metric that sums the costs and benefits of a code change over a specified time period. LCC is a well-known approach to assessing cost-effectiveness. DOE uses LCC for determining the cost-effectiveness of code change proposals, and for the code as a whole, because it is the most straightforward approach to achieving the desired balance of short- and long-term perspectives.

The financial and economic parameters used for these calculations are as follows:

- New home mortgage parameters:
  - 5.0% mortgage interest rate (fixed rate)
  - Loan fees equal to 0.7% of the mortgage amount
  - 30-year loan term
  - 10% down payment
- Other rates and economic parameters:
  - 5% nominal discount rate (equal to mortgage rate)
  - 1.6% inflation rate
  - 25% marginal federal income tax and 7.05% marginal state income tax
  - 0.9% property tax
  - Insulation has 60-year life with linear depreciation resulting in a 50% residual value at the end of the 30-year period
  - Windows, duct sealing, and envelope sealing have a 30-year life and hence no residual value at the end of the analysis period
  - Light bulbs have a 6-year life and are replaced four times during the 30-year analysis period

---

<sup>1</sup> [www.energycodes.gov/development/residential](http://www.energycodes.gov/development/residential)

## Energy and Economic Analysis

This analysis determined the energy savings and economic impacts of the 2009 and 2012 IECC compared to the Minnesota state code. Energy usage was modeled using DOE's EnergyPlus™ software for two building types:

1. Single-Family: A two-story home with a 30-ft by 40-ft rectangular shape, 2,400 ft<sup>2</sup> of floor area excluding the basement, and windows that cover 15% of the wall area, equally distributed on all sides of the house
2. Multifamily: A three-story building with 18 units (6 units per floor), each unit having conditioned floor area of 1,200 ft<sup>2</sup> and window area equal to approximately 10% of the conditioned floor area, equally distributed on all sides of the building

Each of these building types, single-family and apartment/condo in a multifamily building, has four unique foundation types:

1. Slab on grade
2. Heated basement
3. Unheated basement
4. Crawlspace

Each building type also has four unique heating system types:

1. Natural gas
2. Heat pump
3. Electric resistance
4. Oil

This results in 32 unique scenarios (2 x 4 x 4) for each of the two climate zones.

PNNL incorporated the prescriptive requirements of the 2006, 2009, and 2012 IECC when modeling the impacts of changes to the code. Whenever possible, PNNL uses DOE's EnergyPlus model software to simulate changes to code requirements. However, in some cases, alternative methods are employed to estimate the effects of a given change. As an example, in order to give full consideration of the impacts of the 2012 IECC requirement for insulating hot water pipes (or shortening the pipe lengths), a separate estimate was developed for hot water pipe insulation requirements in the 2012 IECC, which results in a 10% savings in water heating energy use (Klein 2012).

Energy and economic impacts were determined separately for each unique scenario, including the single-family and multifamily buildings, the four unique foundation types, and the four unique heating system types. However, the cost-effectiveness results are reported as a single average for each climate zone and as an overall state average. To determine this average, first the results were combined across foundation types and heating system types for single-family and multifamily prototypes as shown in Table A.1 and Table A.2 (single-family and multifamily have the same shares for foundation types). For example, the primary heating system type in new residential units in Minnesota is a natural gas furnace. Therefore, the combined average energy usage calculations were proportionally weighted to account for the predominance of natural gas heating. Then single-family and multifamily results were combined for each climate zone in the state and the climate zone results were combined to determine a state average weighted by housing starts from 2010 U.S. Census data as shown in Table A.3.

**Table A.1. Heating Equipment Shares**

Heating System	Percent Share	
	Single-Family	Multifamily
Natural gas	56.7	68.0
Heat pump	39.6	24.8
Electric resistance	3.4	4.3
Oil	0.2	3.0

**Table A.2. Foundation Type Shares**

Foundation Type	Slab on Grade	Heated Basement	Unheated Basement	Crawlspace
Percent share	22.1	46.9	15.5	15.5

**Table A.3. Construction by Building Type and Climate Zone**

Climate Zone	Housing Starts	
	Single-Family	Multifamily
6	5,440	1,839
7	1,613	117

### Differences Between the 2006 IECC, the 2009 IECC, and the 2012 IECC

All versions of the IECC have requirements that apply uniformly to all climate zones, and other requirements that vary by climate zone. Highlights of the mandatory requirements across all buildings include:

- Building envelope must be caulked and sealed. The 2012 IECC adds a requirement that the building must be tested and a level of leakage that is no more than a maximum limit must be achieved.
- Ducts and air handlers must be sealed. Testing against specified maximum leakage rates is required in the 2009 and 2012 IECC if any ducts pass outside the conditioned space (e.g., in attics, unheated basements). The 2012 IECC leakage requirements are more energy efficient.
- Supply and return ducts in attics, and all ducts in crawlspaces, unheated basements, garages, or otherwise outside the building envelope must be insulated.
- For the 2009 and 2012 IECC, a minimum percentage of the lighting bulbs or fixtures in the dwelling must be high-efficacy lighting.
- A certificate listing insulation levels and other energy efficiency measures must be posted on or near the electric service panel.

A comparison of significant IECC requirements that do not vary by climate zone is contained in Table A.4. Of these, the most significant changes in the 2009 and 2012 IECC compared to the Minnesota state code are the requirements for pressure testing of the building envelope and ducts/air handlers, and for insulating service hot water pipes (2012 IECC only). The requirement for high-efficacy lamps, while significant, is somewhat abated by a superseding federal regulation banning the manufacture or import of less efficient lamps at common watt levels that takes effect in 2012 to 2014.

**Table A.4. Comparison of Major Requirements That Do Not Vary by Climate Zone**

Requirement	Minnesota State Code	2009 IECC	2012 IECC
Building envelope sealing	Caulked and sealed, verified by visual inspection	Caulked and sealed, verified by visual inspection against a more detailed checklist	Caulked and sealed, verified by visual inspection and a pressure test against a leakage requirement
Ducts and air handlers	Sealed, verified by visual inspection	Sealed, verified by visual inspection, and pressure tested, or all ducts must be inside building envelope	Sealed, verified by visual inspection, and pressure tested against a leakage requirement, or all ducts must be inside building envelope
Supply ducts in attics	R-8	R-8	R-8
Return ducts in attics and all ducts in crawlspaces, unheated basements, garages, or otherwise outside the building envelope	R-8	R-6	R-6
Insulation on hot water pipes for service water heating systems	None	None	R-3 except where pipe run length is below a diameter-dependent threshold
Insulation on hot water pipes for hydronic (boiler) space heating systems	R-3	R-3	R-3
High-efficacy lamps (percent of lighting in the home)	None	50% of lamps	75% of lamps or 75% of fixtures
Certificate of insulation levels and other energy efficiency measures	Yes	Yes	Yes

Requirements such as insulation levels and fenestration (window, door, and skylights) U-factors can vary by the eight zones in the United States. Table A.5 shows these requirements from a national perspective for three versions of the IECC: the 2006, 2009, and 2012 IECC. Minnesota has two climate zones (Zones 6 and 7) as defined in the IECC. The Minnesota state code is equivalent to the Zone 6 and 7 requirements of the 2006 IECC with the following exceptions:

- The Minnesota state code has improved air sealing requirements compared to the 2006 IECC
- The 2006 IECC requires R-49 ceilings in both Zones 6 and 7 whereas the Minnesota state code requires R-38 ceilings in Zone 6 and R-44 in Zone 7
- The 2006 IECC requires R-21 above-grade walls in Zone 7 whereas the Minnesota state code requires R-19 above-grade walls in Zone 7



**Table A.5. Comparison of Major Requirements That Vary by Climate Zone**

Climate Zone	IECC	Components										
		Ceiling (R-value)	Skylight (U-factor)	Fenestration (Windows and Doors)		Wood Frame Wall (R-value)	Mass Wall* (R-value)	Floor (R-value)	Basement Wall** (R-value)	Tested Max Air Leakage Rate (air changes per hour)	Slab*** (R-value and depth)	Crawl Space** (R-value)
				U-factor	SHGC							
1	2006				0.4							NR
	2009	30	0.75	NR	0.3	13	3/4	13	NR	NR	NR	NR
	2012				0.25					5		
2	2006	30	0.75	0.75	0.4							NR
	2009	30	0.75	0.65	0.3	13	4/6	13	NR	NR	NR	NR
	2012	38	0.65	0.4	0.25					5		
3	2006	30	0.65	0.65	0.4	13	5/8		0	NR		
	2009	30	0.65	0.5	0.3	13	5/8	19	5/13****	NR	NR	5/13
	2012	38	0.55	0.35	0.25	20	8/13		5/13****	3		
4	2006	38	0.6	0.4		13	5/13		10/13	NR		10/13
	2009	38	0.6	0.35	NR	13	5/10	19	10/13	NR	10, 2ft	10/13
	2012	49	0.55	0.35	0.4	20	8/13		10/13	3		10/13
5	2006	38	0.6	0.35		19	13/19		10/13	NR		10/13
	2009	38	0.6	0.35	NR	20	13/17	30	10/13	NR	10, 2ft	10/13
	2012	49	0.55	0.32		20	15/19		15/19	3		15/19
6	2006		0.6	0.35		19	10/13		10/13	NR		10/13
	2009	49	0.6	0.35	NR	20	15/19	30	15/19	NR	10, 4 ft	10/13
	2012		0.55	0.32		20+5	15/19		15/19	3		15/19
7 and 8	2006		0.6	0.35		21		30	10/13	NR		10/13
	2009	49	0.6	0.35	NR	21	19/21	38	15/19	NR	10, 4 ft	10/13
	2012		0.55	0.32		20+5		38	15/19	3		15/19

\* The second number applies when more than half the insulation is on the interior side of the high mass material in the wall.

\*\* The first number is for continuous insulation (e.g., a board or blanket directly on the foundation wall) and the second number is for cavity insulation (i.e., if there is a furred-out wall built against the foundation wall). Only one of these two has to be met.

\*\*\* The first number is R-value. The second value refers to the vertical depth of the insulation around the perimeter.

\*\*\*\* Basement wall insulation is not required in the warm-humid region of Zone 3 in the southeastern United States.

NR = not required

SHGC = solar heat gain coefficient

While exemptions or allowances in the code in are not included in this analysis, the code does allow for some of these depending on the compliance path. Examples include the following:

- One door and 15 ft<sup>2</sup> of window area are exempt
- Skylight U-factors are allowed to be higher than window U-factors
- Five hundred square feet or 20% of ceiling area of a cathedral ceiling, whichever is less, is allowed to have R-30 insulation in climate zones where more than R-30 is required for other ceilings

## Incremental First Costs

Table A.6 shows the costs of implementing the prescriptive measures of the new codes. Costs are provided for both the reference home and apartment/condo, and for the cost of moving from the Minnesota state code to the 2009 IECC, as well as from the Minnesota state code to the 2012 IECC. The costs derive from estimates assembled by Faithful + Gould (2012) and a number of other sources.<sup>2</sup> The original cost data were based on a national average. The costs are adjusted upwards by 6.0% (multiplied by 1.06) to reflect local construction costs based on location factors provided by Faithful + Gould (2011).

**Table A.6. Total Construction Cost Increase for the 2009 and 2012 IECC Compared to the Minnesota State Code**

	2,400 ft <sup>2</sup> House			1,200 ft <sup>2</sup> Apartment/Condo		
	Unheated Basement or Crawlspace	Heated Basement	Slab on Grade	Unheated Basement or Crawlspace	Heated Basement	Slab on Grade
<b>2009 IECC</b>						
Zone 6	\$1,224	\$1,495	\$1,224	\$630	\$669	\$630
Zone 7	\$1,336	\$1,301	\$1,030	\$667	\$604	\$565
<b>2012 IECC</b>						
Zone 6	\$4,189	\$4,459	\$4,189	\$1,994	\$2,033	\$1,994
Zone 7	\$4,300	\$4,265	\$3,995	\$2,031	\$1,968	\$1,929

## Results

### Life-Cycle Cost

Table A.7 shows the LCC savings (discounted present value) of the new codes over the 30-year analysis period. These savings assume that initial costs are mortgaged, that homeowners take advantage of the mortgage interest tax deductions, and that efficiency measures retain a residual value at the end of the 30 years. As shown in Table A.7, life-cycle cost savings, averaged across climate zones, are \$1,277 for the 2009 IECC and \$9,873 for the 2012 IECC.

<sup>2</sup> The Faithful + Gould cost data and other cost data for energy efficiency measures are available on the “BC3” website at <http://bc3.pnnl.gov/>.

**Table A.7. Life-Cycle Cost Savings Compared to the Minnesota State Code**

	Zone 6	Zone 7	State Average
2009 IECC	\$1,211	\$1,608	\$1,277
2012 IECC	\$9,031	\$13,502	\$9,873

## Cash Flow

Because most houses are financed, consumers will be very interested in the financial impacts of buying a home that complies with the 2009 or 2012 IECC requirements compared to the Minnesota state code. Mortgages spread the payment for the cost of a house over a long period of time (the simple payback fails to account for the impacts of mortgages). In this analysis, a 30-year fixed-rate mortgage was assumed. It was also assumed that homebuyers will deduct the interest portion of the payments from their income taxes.

Table A.8 and Table A.9 show the impacts to consumers' cash flow resulting from the improvements in the 2009 and 2012 IECC, respectively. Up-front costs include the down payment and loan fees. The annual values shown in the table are for the first year.

The savings from income tax deductions for the mortgage interest will slowly decrease over time while energy savings are expected to increase over time because of escalating energy prices. These tables also include increases in annual property taxes because of the higher assessed house values. The net annual cash flow includes energy costs, mortgage payments, mortgage tax deductions, and property taxes but not the up-front costs. The time to positive cash flow includes all costs and benefits, including the down payment and other up-front costs.

As shown in Table A.8, on average, there is a net positive cash flow to the consumer of \$54 per year beginning in year one for the 2009 IECC. Positive cumulative savings, including payment of up-front costs, are achieved in 3 years. The positive cash flow is more significant with the 2012 IECC. Here state average net annual cash flow savings are \$450, with only 1 year to positive cumulative savings after covering up-front costs (see Table A.9).

**Table A.8. Impacts to Consumers' Cash Flow from Compliance with 2009 IECC Compared to the Minnesota State Code**

	Cost/Benefit	Zone 6	Zone 7	State Average
A	Down payment and other up-front costs	\$126	\$129	\$126
B	Annual energy savings (year one)	\$118	\$142	\$122
C	Annual mortgage increase	\$68	\$70	\$68
D	Net annual cost of mortgage interest deductions, mortgage insurance, and property taxes (year one)	-\$1	\$0	\$0
E	Net annual cash flow savings (year one)	\$51	\$72	\$54
[B-(C+D)]				
F	Years to positive savings, including up-front cost impacts	3	2	3
[A/E]				

Note: Item D includes mortgage interest deductions, mortgage insurance, and property taxes for the first year. Deductions can partially or completely offset insurance and tax costs. As such, the "net" result appears relatively small or is sometimes even negative.

**Table A.9. Impacts to Consumers' Cash Flow from Compliance with 2012 IECC Compared to the Minnesota State Code**

	<b>Cost/Benefit</b>	<b>Zone 6</b>	<b>Zone 7</b>	<b>State Average</b>
A	Down payment and other up-front costs	\$399	\$435	\$406
B	Annual energy savings (year one)	\$624	\$862	\$669
C	Annual mortgage increase	\$216	\$236	\$220
D	Net annual cost of mortgage interest deductions, mortgage insurance, and property taxes (year one)	-\$2	-\$2	-\$1
E = [B-(C+D)]	Net annual cash flow savings (year one)	\$410	\$628	\$450
F = [A/E]	Years to positive savings, including up-front cost impacts	1	1	1

### Simple Payback

Table A.10 shows the simple payback period, which consists of the construction cost increase divided by first-year energy cost savings. This calculation yields the number of years required for the energy cost savings to pay back the initial investment. Simple payback does not consider financing of the initial costs through a mortgage or favored tax treatment of mortgages.

As Table A.10 shows, the simple payback period from moving to the 2009 IECC from the Minnesota state code averages 9.7 years across climate zones. The simple payback for the 2012 IECC is slightly longer at 5.7 years.

**Table A.10. Simple Payback Period, Relative to the Minnesota State Code (Years)**

<b>Code</b>	<b>Zone 6</b>	<b>Zone 7</b>	<b>State Average</b>
2009 IECC	9.9	8.5	9.7
2012 IECC	6	4.7	5.7

### Energy Cost Savings

All fuel prices were obtained from the DOE Energy Information Administration and are recent residential prices specific to Minnesota (DOE 2012a, 2012b, 2012c). For this analysis, natural gas fuel prices were set to \$0.833/therm. Electricity prices were set to \$0.103/kWh for space heating and \$0.108/kWh for air conditioning. Oil prices were set to \$23.7/MBtu. Energy prices are assumed to escalate at the rates published in DOE's *Annual Energy Outlook* (DOE 2012d).

Table A.11 shows the estimated annual energy costs, including heating, cooling, water heating, and lighting per home that result from meeting the requirements in the Minnesota state code, the 2009 IECC, and the 2012 IECC. Table A.12 shows the total energy cost savings as both a net dollar savings and as a percentage of the total

energy use.<sup>3</sup> Results are averaged across home type (single- and multifamily), foundation type, and heating system type.

**Table A.11. Annual Energy Costs for the Minnesota State Code and the 2009 and 2012 IECC**

	Minnesota State Code					2009 IECC					2012 IECC				
	Heating	Cooling	Water Heating	Lighting	Total	Heating	Cooling	Water Heating	Lighting	Total	Heating	Cooling	Water Heating	Lighting	Total
Zone 6	\$1,187	\$199	\$287	\$179	\$1,852	\$1,110	\$188	\$287	\$149	\$1,734	\$666	\$176	\$258	\$128	\$1,228
Zone 7	\$1,769	\$103	\$340	\$205	\$2,417	\$1,667	\$97	\$340	\$171	\$2,275	\$1,005	\$99	\$305	\$146	\$1,555
<b>State Average</b>	<b>\$1,299</b>	<b>\$181</b>	<b>\$297</b>	<b>\$183</b>	<b>\$1,960</b>	<b>\$1,217</b>	<b>\$171</b>	<b>\$297</b>	<b>\$153</b>	<b>\$1,838</b>	<b>\$731</b>	<b>\$161</b>	<b>\$267</b>	<b>\$132</b>	<b>\$1,291</b>

As can be seen from Table A.12, energy cost savings per year for the 2009 IECC compared to the Minnesota state code range from \$118 in Zone 6 to \$142 in Zone 7. Annual energy cost savings rise significantly with the 2012 IECC, ranging from \$624 for Zone 6, up to \$862 in Zone 7. On a percentage basis, energy cost savings average about 34% with the 2012 IECC depending on climate zone.

**Table A.12. Total Energy Cost Savings Compared to the Minnesota State Code**

	2009 IECC		2012 IECC	
	Savings (\$/yr)	Percent Savings	Savings (\$/yr)	Percent Savings
Zone 6	\$118	6.4	\$624	33.7
Zone 7	\$142	5.9	\$862	35.7
<b>State Average</b>	<b>\$122</b>	<b>6.2</b>	<b>\$669</b>	<b>34.1</b>

### Alternate Analysis Reflecting a Lower Air Leakage Rate in All Codes

The results presented in the previous sections reflect an assumption that the typical new dwelling built to the current Minnesota state code or the 2009 IECC has an air leakage rate of seven air changes per hour when tested at 50 pascals pressure (ACH50). The 2012 IECC requires a maximum of 3 ACH50, a substantial improvement. The above analysis reflects this reduction in air leakage and much of the energy savings attributed to the 2012 IECC results from this improvement.

There is some evidence that the assumed 7 ACH50 rate may be too high based on typical rates achieved by Minnesota builders. A proposed code change (RE-12) to the 1322 Advisory Committee in 2012 from the Builders Association of Minnesota reports that recently built homes in Minnesota had an average air leakage of 1.7 ACH50, substantially better than required by any version of the IECC. The analysis presented above was revised to assume the 1.7 ACH50 rate for the current Minnesota state code, the 2009 IECC, and the 2012 IECC. Table

<sup>3</sup> The percent savings is the annual energy cost savings for heating, cooling, water heating, and lighting divided by the total baseline annual energy cost for heating, cooling, water heating, and lighting.

A.13 through Table A.16 show the revised construction costs, LCC savings, simple payback, and total energy savings, respectively. The lower air leakage assumption results in reduced energy savings and LCC savings. However, the other energy efficiency improvements in the 2009 and 2012 IECC are still cost-effective compared to the Minnesota state code.

**Table A.13. Total Construction Cost Increase for the 2009 and 2012 IECC Compared to the Minnesota State Code with Lower Air Leakage Rate Assumption**

	2,400 ft <sup>2</sup> House			1,200 ft <sup>2</sup> Apartment/Condo		
	Unheated Basement or Crawlspace	Heated Basement	Slab on Grade	Unheated Basement or Crawlspace	Heated Basement	Slab on Grade
<b>2009 IECC</b>						
Zone 6	\$1,224	\$1,495	\$1,224	\$630	\$669	\$630
Zone 7	\$1,336	\$1,301	\$1,030	\$667	\$604	\$565
<b>2012 IECC</b>						
Zone 6	\$3,680	\$3,951	\$3,680	\$1,739	\$1,779	\$1,739
Zone 7	\$3,792	\$3,757	\$3,486	\$1,777	\$1,714	\$1,675

**Table A.14. Life-Cycle Cost Savings Compared to the Minnesota State Code with Lower Air Leakage Rate Assumption**

Code	Zone 6	Zone 7	State Average
2009 IECC	\$705	\$940	\$750
2012 IECC	\$1,814	\$2,747	\$1,982

**Table A.15. Simple Payback Period, Relative to the Minnesota State Code (Years) with Lower Air Leakage Rate Assumption**

Code	Zone 6	Zone 7	State Average
2009 IECC	12.6	11.1	12.3
2012 IECC	13.3	11.6	12.9

**Table A.16. Total Energy Cost Savings Compared to the Minnesota State Code with Lower Air Leakage Rate Assumption**

	2009 IECC		2012 IECC	
	Savings (\$/yr)	Percent Savings	Savings (\$/yr)	Percent Savings
Zone 6	\$93	6.8	\$248	18
Zone 7	\$109	6.4	\$308	18
State average	\$96	6.7	\$259	18

## References

Faithful + Gould. 2012. *Residential Energy Efficiency Measures – Prototype Estimate and Cost Data*. Portland, Oregon. <http://bc3.pnnl.gov/wiki/index.php/Downloads>

Faithful + Gould. 2011. *Residential Energy Efficiency Measures – Locations Factors*. Portland, Oregon. <http://bc3.pnnl.gov/wiki/index.php/Downloads>

Klein, G. 2012. *Cost Estimation for Materials and Installation of Hot Water Piping Insulation*. Affiliated International Management, LLC, Newport Beach, California.

U.S. Department of Energy (DOE). 2012a. *Electric Power Monthly*. DOE/EIA-0226. Washington, D.C. [http://www.eia.doe.gov/cneaf/electricity/epm/table5\\_6\\_a.html](http://www.eia.doe.gov/cneaf/electricity/epm/table5_6_a.html)

U.S. Department of Energy (DOE). 2012b. *Natural Gas Monthly*. DOE/EIA-0130. Washington, D.C. [http://www.eia.gov/oil\\_gas/natural\\_gas/data\\_publications/natural\\_gas\\_monthly/ngm.html](http://www.eia.gov/oil_gas/natural_gas/data_publications/natural_gas_monthly/ngm.html)

U.S. Department of Energy (DOE). 2012c. *Petroleum Marketing Monthly*. DOE/EIA-0380. Washington, D.C. <http://www.eia.gov/petroleum/marketing/monthly/>

U.S. Department of Energy (DOE). 2012d. *Annual Energy Outlook*. DOE/EIA-0383. Washington, D.C.