

Accelerator Development Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, New York 11973

AD/RHIC-36

RHIC TECHNICAL NOTE No. 36

VERIFYING THE STRENGTH OF A SHRINK FIT JOINT  
FOR THE RHIC POST LEG

*D. P. Brown*  
*R. J. Gibbs*  
*K. C. Wu*  
*R. B. Ceruti*

*March 2/88*

RHIC Technical Note

VERIFYING THE STRENGTH OF A SHRINK FIT JOINT FOR THE RHIC POST LEG


D. P. Brown  
R. J. Gibbs  
K. C. Wu  
R. B. Ceruti

ABSTRACT

The strength of a shrink fit joint for the RHIC magnet support post leg has always been difficult to verify. Primarily this is due to small clearances used between the metal rings and the G-11 tubes, and the difficulties in testing a partially assembled leg. Although the strength of an assembled leg, consisting of series of joints, can be checked on a tensile test machine, it is desirable that an individual joint can be verified independently during assembly without using the tensile testing machine. A measurable quantity has been found as an useful means to determine the strength of the joint. The measurement can be performed on each joint during assembly. This procedure is suitable for quality control purposes.

SHRINK FIT JOINT

The sectional view of a typical joint consisting of the G-11 tube and the metal rings is shown in Fig. 1. The contact pressures between the inner ring and the G-11 tube, and between the outer ring and the G-11 tube are obtained through the interferences among the surfaces. The strength of a shrink fit joint is then obtained from these contact pressures and the friction coefficient between the metal and the G-11 surfaces. Primary concerns of this technical note are the contact pressures.

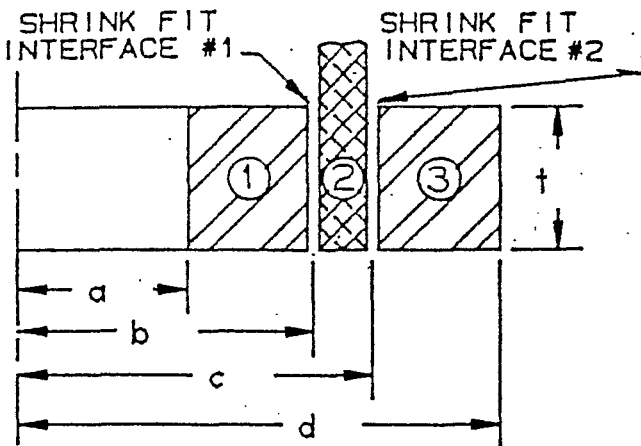

**MATERIAL PROPERTIES**

Elastic Modulus:  $E_1, E_2, E_3$   
Poisson's Ratio:  $\nu_1, \nu_2, \nu_3$

**INTERFACE PROPERTIES**

Contact Pressure:  $P_1, P_2$   
Radial Interference:  $\Delta_1, \Delta_2$   
Coefficient of Friction:  $\mu_1, \mu_2$

Fig. 1. Sectional View and Nomenclature of a Shrink Fit joint

Equation 1 to 4 relate the contact pressures with interferences, forces, and bending moments required to cause a joint to slip as given by T. H. Nicol<sup>1</sup> in a study for SSC.

$$P_1 = \frac{P_2(K_4 + K_5) - \Delta_2}{K_6} ; P_2 = \frac{\Delta_1 K_6 + \Delta_2(K_1 + K_2)}{(K_4 + K_5)(K_1 + K_2) - K_3 K_6} \quad (1)$$

where

$$K_1 = \frac{b}{E_1} \left[ \frac{b^2 + a^2}{b^2 - a^2} - \nu_1 \right] ; K_2 = \frac{b}{E_2} \left[ \frac{c^2 + b^2}{c^2 - b^2} + \nu_2 \right] ; K_3 = \frac{b}{E_2} \left[ \frac{2c^2}{c^2 - b^2} \right] \quad (2)$$

$$K_4 = \frac{c}{E_3} \left[ \frac{d^2 + c^2}{d^2 - c^2} + \nu_3 \right] ; K_5 = \frac{c}{E_2} \left[ \frac{c^2 + b^2}{c^2 - b^2} - \nu_2 \right] ; K_6 = \frac{c}{E_2} \left[ \frac{2b^2}{c^2 - b^2} \right]$$

$$F_1 = P_1 (2\pi b t \mu_1) ; F_2 = P_2 (2\pi c t \mu_2) \quad (3)$$

$$M_1 = 4P_1 \mu_1 b^2 t ; M_2 = 4P_2 \mu_2 c^2 t \quad (4)$$

Equation 1 through 4 provide straightforward calculations for designing a shrink fit joint. When a joint is formed, equation 1 through 4 can not be used to determine the pressures built in the joint and tension or compression test must be performed on test machine to verify the strength of the joint. It becomes impractical to test every joint.

#### VERIFICATION PROCEDURE

The procedure presented here employs the relationship of the metal ring displacement U at position d and a to the contact pressures P<sub>2</sub> and P<sub>1</sub> as given in equation 5 and 6.

$$U_d = \frac{P_2}{E_3} \frac{2c^2 d}{(d^2 - c^2)} \quad (5)$$

$$U_a = \frac{P_1}{E_1} \frac{(-2ab^2)}{(b^2 - a^2)} \quad (6)$$

The minimum design requirement for P<sub>1</sub> and P<sub>2</sub> suggests a minimum set of values for U<sub>a</sub> and U<sub>d</sub>. By measuring the diameter displacements of the rings before and after the shrink fit, the displacements U<sub>a</sub> and U<sub>d</sub> are obtained and the contact pressures can be determined. In practice it is not necessary to measure both U<sub>a</sub> and U<sub>d</sub> for each joint, because both the thickness and the elastic modulus of the G-11 tube are quite small compared to the outer and the inner metal rings. The difference in contact pressure between the inner

surface and the outer surface are small. The sum of  $U_a$  and  $U_d$  are slightly less than the sum of the radial interferences of the joint. Therefore by measuring either the displacement of the outer ring or the inner ring whichever is more convenient, the contact pressures of the shrink fit joint can be verified.

Nominal values for the outer ring diameter displacement  $2 U_d$  and for the inner ring diameter displacement  $2 U_a$  are given in Table 1. The maximum values for  $2 U_a$  and  $U_d$  shown in Table 1 are the displacements resulting if the parts are produced such that the maximum interference possible results. A measured value for the outer ring displacement is also shown in Table 1.

Table 1

Outer Ring and Inner Ring Displacements

|                | 7" Tube<br>Bottom<br><u>Outer Ring</u> | 7" Tube<br>Top<br><u>Outer Ring</u> | 5" Tube<br>Bottom<br><u>Outer Ring</u> | 5" Tube<br>Top<br><u>Outer Ring</u> |
|----------------|--|-------------------------------------|--|-------------------------------------|
| Minimum: Inch  | 0.0024                                 | 0.0080                              | 0.0074                                 | 0.0029                              |
| Maximum: Inch  | 0.0028                                 | 0.0090                              | 0.0085                                 | 0.0036                              |
| Measured: Inch |  |                                     |  | 0.003                               |
|                | <u>Inner Ring</u>                      | <u>Inner Ring</u>                   | <u>Inner Ring</u>                      | <u>Inner Ring</u>                   |
| Minimum: Inch  | -0.0053                                | -0.0081                             | -0.0047                                | -0.0013                             |
| Maximum: Inch  | -0.0061                                | -0.0091                             | -0.0054                                | -0.0017                             |

CONCLUSION

The technique of measuring either the outer ring or the inner ring displacement for each shrink fit joint following assembly is a useful tool to verify the design contact pressure and avoid lengthy mechanical tests of each joint for design verification.

REFERENCE

1. T. H. Nicol, R. C. Niemann and J. D. Gonczy. "A Suspension System for Superconducting Super Collider Magnets," SSC-N-196.