

Final Technical Report for

DOE Project:

Beam Stripping Solutions for RIA

Colorado School of Mines

P.I.: Dr. Uwe Greife, Associate Professor

DE-FG02-03ER41242

Possibilities for Beam Stripping Solutions at a Rare Isotope Accelerator (RIA)

Faculty:

Uwe. Greife*

Graduate Students:

Ellen Simmons (graduated 2005 with a M.Sc. from this project), Luke. Erikson, Cybele Jewett,
Jake Livesay and Kelly Chipps

Department of Physics, Colorado School of Mines, Golden, Colorado, USA

() corresponding author: Department of Physics, Colorado School of Mines, 1523 Illinois
Street, Golden, CO 80401, USA; phone: (303) 273 3618; fax: (303) 273 3919; email:
ugreife@mines.edu*

Executive Summary

As part of the DOE RIA R&D effort we investigated the possibilities and problems of beam strippers in the different heavy ion accelerator components of a possible Rare Isotope Accelerator (RIA) facility. We focused on two beam stripping positions in the RIA heavy ion driver where benchmark currents of up to 5 particle μA ^{238}U were projected at energies of 10.5 MeV/u and 85 MeV/u respectively. In order to select feasible stripper materials, data from experiments with Uranium beams at Texas A&M and GSI were evaluated. Based on these results

thermal estimates for a possible design were calculated and cooling simulations with commercially available software performed. Additionally, we performed simulations with the GEANT4 code on evaluating the radiation environment for our beam stripping solution at the 85 MeV/u position in the RIA driver.

I. Introduction

The most recent concept for the RIA accelerator complex foresaw two beam-stripping positions in the driver accelerator [1, 2]. This design is optimized for accelerating high power uranium beams starting from an ECR ion source at charge state 29. To keep the total accelerating voltage relatively low, two stripping stages are assumed, the first at ~ 10.5 MeV/u and the second at ~ 85 MeV/u for uranium ions. For the final design goal of 400 kW of uranium beam at 400 MeV/u, the beam current at the first stripper location will be ~ 5 particle μA . In order to increase efficiency several charge states are to be accelerated after each stripping position, requiring similar current stability also from the second stripper.

In all stripping stages, the use of solid materials is preferred compared to gaseous materials, as a multitude of measurements [3] show that solid strippers achieve the higher average charge state distribution. In order to keep energy and angle straggling low, low Z materials, just thick enough to achieve charge state equilibrium, are preferred. In many energy regimes lower Z materials also lead to higher average charge state distributions [4]. In the area around the stopping power maximum, carbon foils have been used as target backing for experiments at GSI searching for super heavy elements with incident ion beam currents up to 0.5 μA of 5 MeV/u Nickel ions [5]. In order to achieve reasonable target lifetimes, several foils are here mounted on a rotating target

wheel. From the current data on the benchmark Uranium beam it is not clear if a foil stripper could withstand the necessary 5 μA beam current at 9 MeV/u which is still near the region of the stopping power maximum. At higher beam energies (~ 85 MeV/u) in the driver the deposited energy is lower by about a factor 2. As an alternative to solid stripper materials, Argonne National Laboratory has started the development of liquid Lithium strippers [6].

In the following we describe some of the efforts of our group to provide data and simulations to explore the technical viabilities of the different proposed stripper solutions.

II. Measured charge state probabilities at RIA energies

An experiment was performed at the Texas A&M cyclotron facility with a 10.5 MeV/u ^{238}U beam impinging on a stripper foil and the emerging charge states being measured by the MDM separator and a multi-wire chamber. The stripping foils in the Texas A&M experiment were Carbon, Beryllium evaporated on Carbon and a thick Beryllium foil. Our analysis shows that the lighter element produces the charge state distribution with the higher centroids. The widths of the distributions are comparable for all stripping foils leaving the advantage for the lighter element also for the anticipated simultaneous transport of 5 charge states after this stripper position. If 5 charge states (70-74) can be transported, about 75% of the incident beam can be further accelerated (Fig.1). The equilibrium charge state distribution of 10.5 MeV/u ^{238}U through Carbon foils is well described by the semi-empirical formula of Baron et al. [7]. For Beryllium foils though, the formula of Leon et al. [4] seems to underestimate the real distribution by about two charge states. As straggling seemed to be dominated in all foils by thickness variations (10-20%), numbers on energy straggling could not be extracted.

In December 2003 an experiment was performed at GSI with our participation to determine parameters similar to the Texas A&M experiment at 85 MeV/u Uranium beam energy. A 73^+ Uranium beam was selected with the first half of the FRS separator and guided onto a selection of Carbon and Beryllium foils. The second half of the FRS dispersed the different charge states onto the focal plane where they were detected by a multi-wire chamber. Directly from the raw data it was obvious that the Carbon foils from some inexpensive suppliers had to be eliminated as possible candidates due to significant density and thickness variations. One foil type produced by Panasonic seems to be a viable solution and was further investigated. We also analyzed Beryllium foils as we expected to achieve higher charge state distributions with the lighter elements. However, adding up 4 charge states, as it is planned to further accelerate 4 charge states after this stripper position, the Carbon foil produces the more advantageous charge state distribution as a sum of four higher charge states (87-90) (compared to 86-89 in the Beryllium case) can be used in achieving larger than 80% probability (Fig. 2). As the density variations in the Carbon foils produced energy straggling that was not satisfactory, in a follow-up experiment at NSCL (MSU) also a Vanadium foil was studied [6]. As this foil also produced an agreeable charge state distribution with reduced (density variation dominated) straggling, metal foils of higher Z have now to be regarded as possible stripper materials and were therefore included in our temperature calculations.

III. Thermal simulations of a gas cooled Carbon foil stripper

Extensive thermal calculations using the Mathematica software have been performed by our group [8], which included thermal radiation into the surrounding, thermal conductivity through

the axis of the wheel, as well as thermal conduction and convection through a cooling gas (Helium). The wheel simulated had an ion beam (of 1 cm diameter) traverse the foils mounted around 100 cm circumference moving with rotations up to 10 Hz. The 1 cm beam diameter might need to be realized at RIA by scanning the beam over the foil [6].

Our simulations showed the principal viability of this approach for both Carbon (at 10.5 and 85 MeV/u) and Titanium (at 85 MeV/u). Additional simulations with the CosmosWorks software package also showed that the principal cooling mechanism is thermal radiation. Conduction through the wheel and axis as well as the influence of the cooling gas lower the maximum temperature on the beam spot only by about 100 K each. Without both mechanisms for reasonable rotation speeds the foils still remain with their temperature comfortably below the melting point. Therefore, we think at this point that gas cooling will not be necessary. This will lead to a significant simplification of the stripper setup and avoid gas flow into the neighboring accelerator components. Care will though have to be taken to provide significant cooling to all surfaces surrounding the foil wheel.

In conclusion, at 10.5 MeV/u charge state distribution centroids and widths favor the use of light stripper materials. Argonne's liquid Lithium stripper, if it can be made to work, seems to be the preferred stripper solution at this station. A backup solution would be the use of a rotating Carbon wheel stripper. However, our design studies show that it will be very difficult to construct, operate and maintain a system like this at these energies due to the small thickness of the foils ($\sim 500 \mu\text{g}/\text{cm}^2$). At 85 MeV/u it seems that the use of Carbon or even higher Z metal foils will be more advantageous than Beryllium and probably also liquid Lithium, leading to a preferred use of a rotating foil wheel.

IV. GEANT4 simulations of the radiation environment

In order to provide data for area classification and shielding considerations we have investigated the possibility of describing the radiation environment around the second stripper position by using simulations of nuclear reactions in the stripper foils. Reaction products could also serve as a diagnostic monitoring the integrity of stripping foils. Taking advantage of the new capabilities of GEANT4 with the inclusion of the IONMARSE code (heavy ion reactions) we simulated the impact of 85 MeV/u ^{208}Pb ions on a Titanium foil. In the geometry we include beam lines and target chamber surrounded by water subjects to look for energy deposited related to radiation exposure as well as metal subjects to look for activation. Fig. 3 shows for example the total energy deposit in each of the water subjects (15cmx15cmx10cm; at a distance of 1 meter from the stripping foil) as a function of angle using 10^9 incoming ^{208}Pb ions. Converted into absorbed dose from a 10 mg/cm^2 Titanium stripper foil we get 3.7 mGy/s (0.37 rad/s) under 10 degrees to the beam direction and 34 $\mu\text{Gy/s}$ (3.4 mrad/s) under a 170 degree backward angle. All equipment necessary to operate the stripper will have to withstand these doses and preferably needs to be installed under backward angles.

V. Summary and Outlook

With the macroscopic problems like cooling seemingly under control, attention has to shift to the microscopic impact the ion beam has on the stripper foils. In order to get an idea of the orders of magnitude involved we performed a quick calculation of the radiation dose that the foil receives in our wheel setup following the equations in Lee [9]. Just taking into account the linear energy

transfer due to electronic stopping (18.5 keV/nm) results in a surprisingly high radiation dose of 170 GigaGy/day. Doing a literature search we found though no publication, which could explain us what influence this dose could have on the foils. Another way to estimate possible damage is to estimate the displacement per atom (dpa). Again a formula out of Lee [9] was used and we arrive at a dpa = 0.52 per day for our benchmark situation. As Titanium is considered as a vessel material for fusion reactors some publications [10, 11, 12] on material properties after light ion irradiation exist. These show significant changes (hardening and microstructure) in material properties starting around 0.2 dpa. This dpa value would already be reached in half a day at RIA. Further simulations and preferably test measurements with strongly focused beams seem to be advisable.

Acknowledgements

We thank Jerry Nolen from ANL for many enlightening discussions. He also provided us with the raw data of the Texas A&M experiment. The data at GSI was taken during an experimental campaign headed by Maurizio Portillo from MSU.

Bibliography

- [1] K.W. Shepard et al., Proc. 9th Workshop on RF Superconductivity, Santa Fe (1999)
- [2] P.N. Ostroumov, Proc. 9th International Conf. On Heavy Ion Accelerator Technology (2002) 1
- [3] H.-D. Betz, Rev. Mod. Phys 44 (1972) 465

- [4] A. Leon et al. *Atomic Data and Nucl. Data Tables* 69 (1998) 217
- [5] H. Folger et al., *Nucl. Instrum. Meth. A* 362 (1995) 64
- [6] J. Nolan, private communication (2002)
- [7] E. Baron et al., *Nucl. Instrum. Meth. A* 328 (1993) 177
- [8] E. Simmons, M.S. Thesis, Colorado School of Mines (2005)
- [9] E.H. Lee, *Nucl. Instrum. Meth. B*151 (1999) 29
- [10] K. Nakata et al., *J. Nucl. Mat.* 240 (1997) 221
- [11] P. Marmy and T. Leguey, *J. Nucl. Mat.* 296 (2001) 155
- [12] T. Leguey et al., *J. Nucl. Mat.* 307-311 (2002) 696

Figure 1: Sum of highest five charge state fractions (which could be transmitted in the RIA driver) emerging from different foil types and thicknesses as measured with a 10.5 MeV/u Uranium beam at Texas A&M.

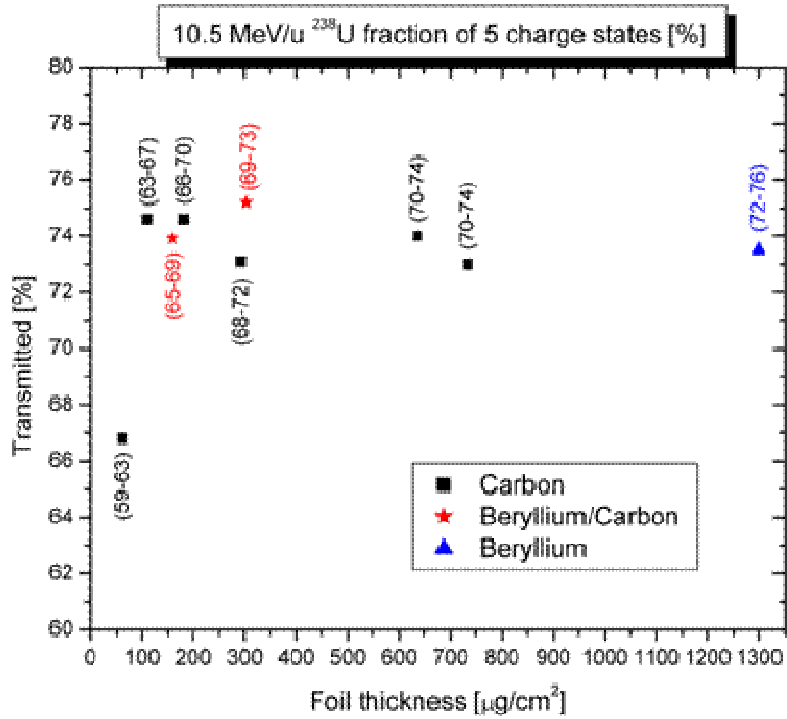


Figure 2: Sum of highest four charge state fractions (which could be transmitted in the RIA driver) emerging from different foil types and thicknesses as measured with an 85 MeV/u Uranium beam at GSI.

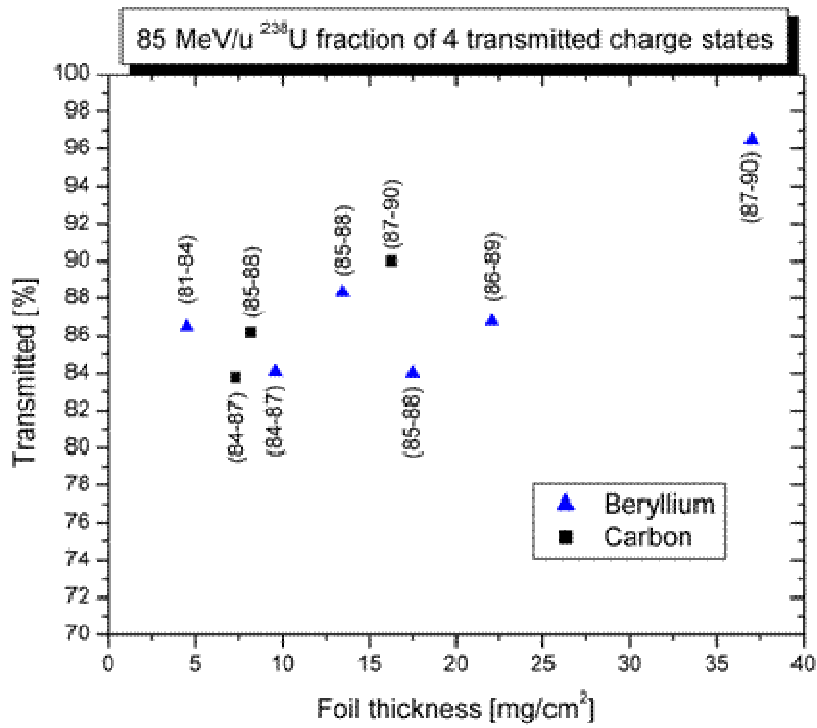


Figure 3: GEANT4 simulation of energy deposited in water objects at 1 meter distance around a 4.5 mg/cm² Titanium stripper foil bombarded with 10⁹ 85 MeV/u ²⁰⁸Pb ions.

