

UCRL-CONF-222421



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Scaling to Ultra-High Intensities by High-Energy Petawatt Beam Combining

C.W. Siders, I. Jovanovic, J. Crane, M. Rushford,
A. Lucianetti, C.P.J. Barty

June 26, 2006

International Conference on Ultrahigh Intensity Lasers
Cassis, France
September 25, 2006 through September 29, 2006

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

Scaling to Ultra-high Intensities by High-Energy Petawatt Beam Combining

C.W. Siders, I. Jovanovic, J. Crane, M. Rushford, A. Lucianetti, and C. P. J. Barty

Lawrence Livermore National Laboratory, 7000 East Ave., L-470, Livermore, CA 94550, USA
Phone: (925) 424-4058, FAX: (925)423-6195, email: siders2@llnl.gov

The output pulse energy from a single-aperture high-energy laser amplifier (e.g. fusion lasers such as NIF and LMJ) are critically limited by a number of factors including optical damage, which places an upper bound on the operating fluence; parasitic gain, which limits together with manufacturing costs the maximum aperture size to ~ 40 -cm; and non-linear phase effects which limits the peak intensity. For 20-ns narrow band pulses down to transform-limited sub-picosecond pulses, these limiters combine to yield 10-kJ to 1-kJ maximum pulse energies with up-to petawatt peak power. For example, the Advanced Radiographic Capability (ARC) project at NIF is designed to provide kilo-Joule pulses from 0.75-ps to 50-ps, with peak focused intensity above 10^{19} W/cm². Using

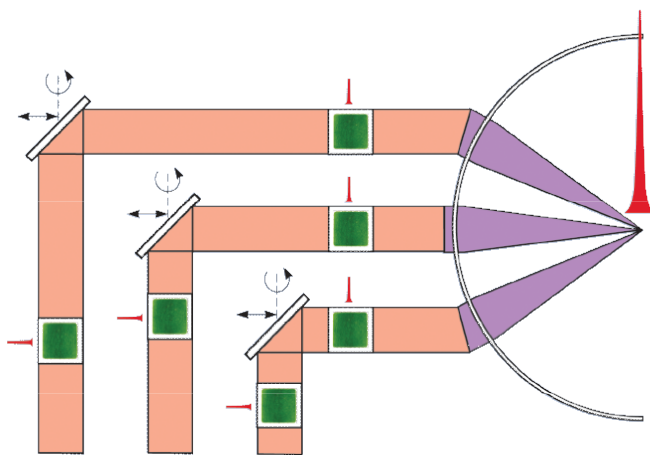


Figure 1: The CAPE geometry. Pulses output from independent amplifiers (with a common seed) are rephased to coherently add in their common focal plane. The peak intensity scales quadratically with the number of apertures.

such a high-energy petawatt (HEPW) beamline as a modular unit, we will discuss large-scale architectures for coherently combining multiple HEPW pulses from independent apertures, called CAPE (Coherent Addition of Pulses for Energy), to significantly increase the peak achievable focused intensity.

Importantly, the maximum intensity achievable with CAPE increases non-linearly. Clearly, the total integrated energy grows linearly with the number of apertures N used. However, as CAPE combines beams in the focal plane by increasing

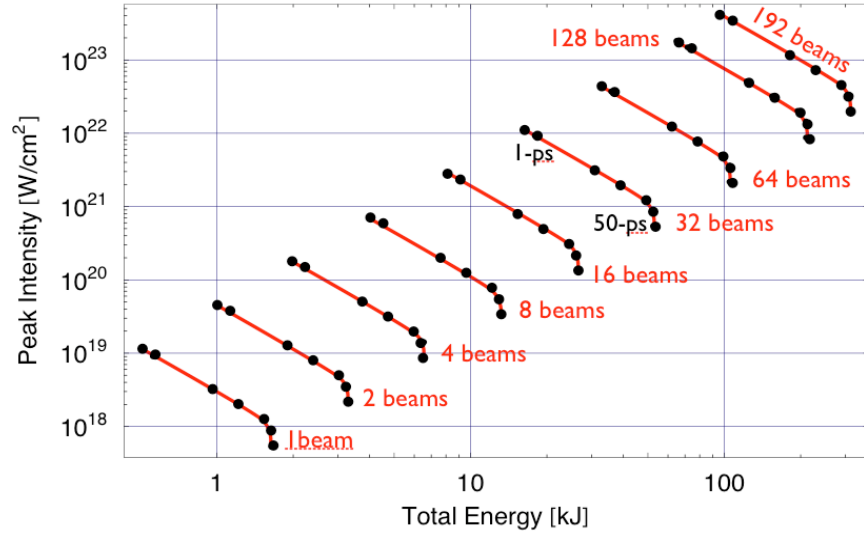


Figure 2: Scaling of peak intensity achievable using CAPE on NIF ARC beamlines as a function of total energy. For each aperture set shown (1, 2, 4, 8, etc.), the peak intensity is shown in red for pulse durations from 50-ps down to the transform limit (approximately 0.75-ps).

the angular convergence to focus (i.e. the f-number decreases, see Fig. 1), the focal spot diameter scales inversely with N . Hence the peak intensity scales as N^2 .

Using design estimates for the focal spot size and output pulse energy (limited by damage fluence on the final compressor gratings) versus compressed pulse duration in the ARC system, Figure 2 shows the scaled focal spot intensity and total energy for various CAPE configurations from 1, 2, 4, ..., up to 192 total beams. We see from the figure that the peak intensity for even modest 8 to 16 beam combinations reaches the 10^{21} to 10^{22} W/cm² regime. With greater number of apertures, or with improvements to the focusability of the individual beams, the maximum peak intensity can be increased further to $\sim 10^{24}$ W/cm².

Lastly, an important feature of the CAPE architecture is the ability to coherently combine beams to produce complex spatio-temporal intensity distributions for laser-based accelerators (e.g. all-optical electron injection and acceleration) and high energy density science applications such as fast ignition.