

# Fleet Performance Results Using Biodiesel

Robb Barnitt  
National Renewable Energy Laboratory  
Golden, Colorado

*Clean Cities Coordinators Webcast  
March 24, 2007*

U.S. Department of Energy  
Office of FreedomCAR and Vehicle Technologies

# Agenda

## 1. Fleet Evaluation Team Background

## 2. NREL Fleet Test Activities

## 3. RTD B20 Evaluation Results

- Project objectives and approach
- Mileage accumulation, fuel economy
- Road calls and maintenance
- Fuel and fuel filter analysis
- Lube oil analysis
- Chassis dynamometer emission results
- Conclusions

# B20 Fleet Evaluation Team

- Early NBB requests of OEMs
  - Warranty support for B20
  - All wanted more field data
- Major OEMs, industry experts, and stakeholders participate
- Biodiesel proponents: “No B20 issues in the field”
- OEMs: “Prove it with quantifiable data”
- Active since 2003
- Gather information about the B20 usage experience
- Now known as the Biodiesel Blend Evaluation Team (BBET), with a focus on B20

3

# B20 FET Team Members


- Bosch
- Case New Holland
- Caterpillar
- Cummins
- DaimlerChrysler
- Delphi Diesel Systems
- Department of Defense
- Engine Manufacturers Association
- Fleetguard
- Ford Motor Co.
- General Motors
- International
- John Deere
- National Biodiesel Board
- NREL
- Parker - Racor
- Siemens Diesel Systems
- Stanadyne Corp.
- Volkswagen AG
- Volvo Truck

# NREL's Fleet Test and Evaluation Team

- Focused on evaluating advanced technologies in medium and heavy vehicle applications
- Main goals:
  - Facilitate the transition of advanced technologies from R&D to the marketplace
  - Provide potential users with accurate and unbiased information on vehicle performance and costs
- Fleet projects
  - Denver Regional Transportation District (RTD)
  - United States Postal Service (USPS)
  - St. Louis Metro

# B20 Fleet Evaluation – Objectives

- Compare vehicles operating in the field on B20 and conventional diesel over 24 months:
  - Engine performance
  - Fuel economy
  - Vehicle maintenance cost
  - Fuel-induced variations in operation and maintenance
  - Lube oil performance
  - Emissions

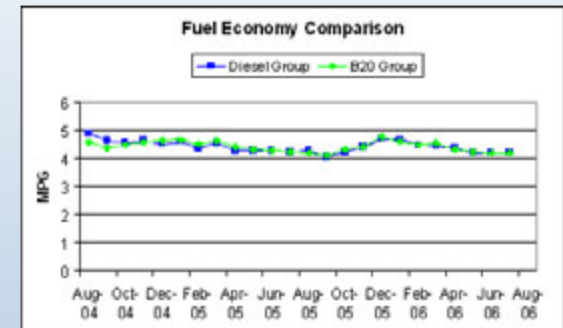


- Exhibit high degree of experimental control in vehicle selection and duty cycle
- Aid engine OEMs in exploring effects of B20 on engine durability
- Aid potential B20 users in understanding costs, benefits, and differences in operation

# B20 Fleet Evaluation – Approach




- Nine mechanically identical Denver RTD transit buses:
  - 2000 Orion V, Cummins ISM
  - Five operated on B20, four on diesel
- Dedicated to Skip Route in Boulder identical duty cycle
- RTD submitted data electronically from their internal database
  - Fuel, labor, parts
- In-use fuel economy and maintenance costs analyzed by NREL

- Fuel delivery and vehicle tank sample analysis
- Periodic oil sampling at drain interval and analysis
- Two study buses emissions tested on chassis dyno at NREL's ReFUEL facility

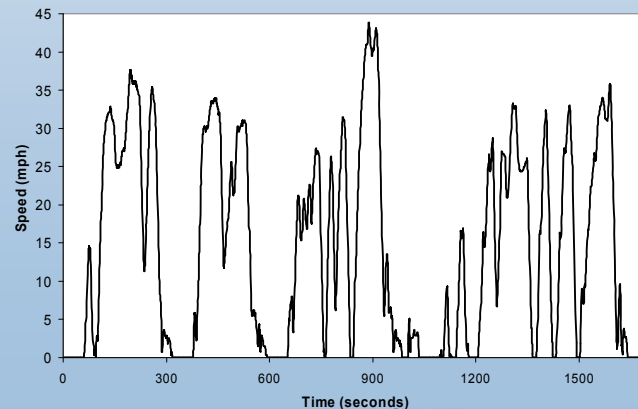


# Mileage Accumulation

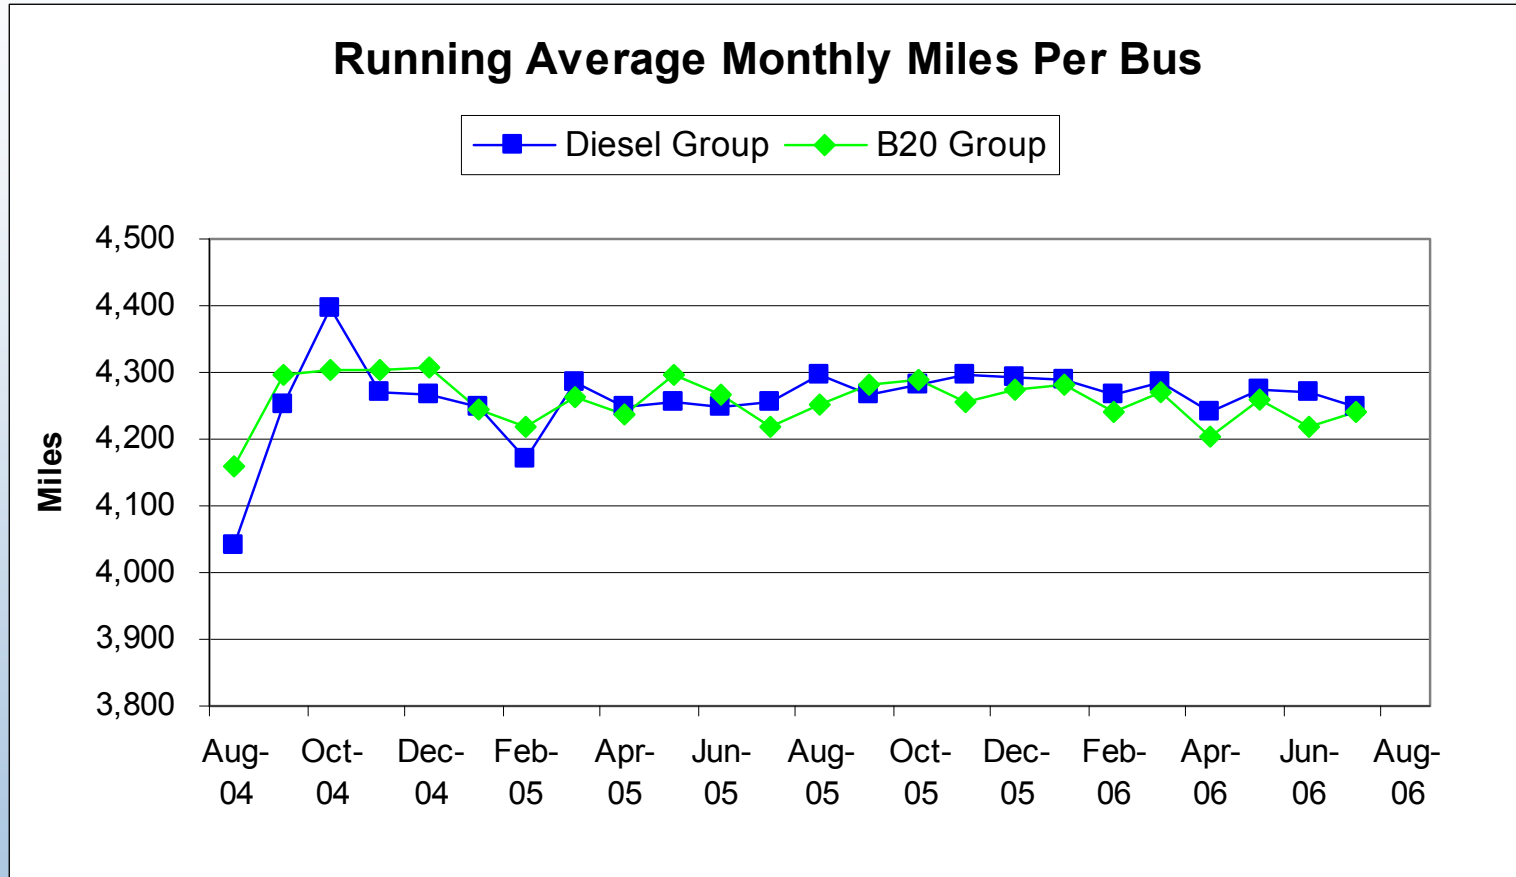

- 4,200 miles per month per bus




# On-Road Fuel Economy

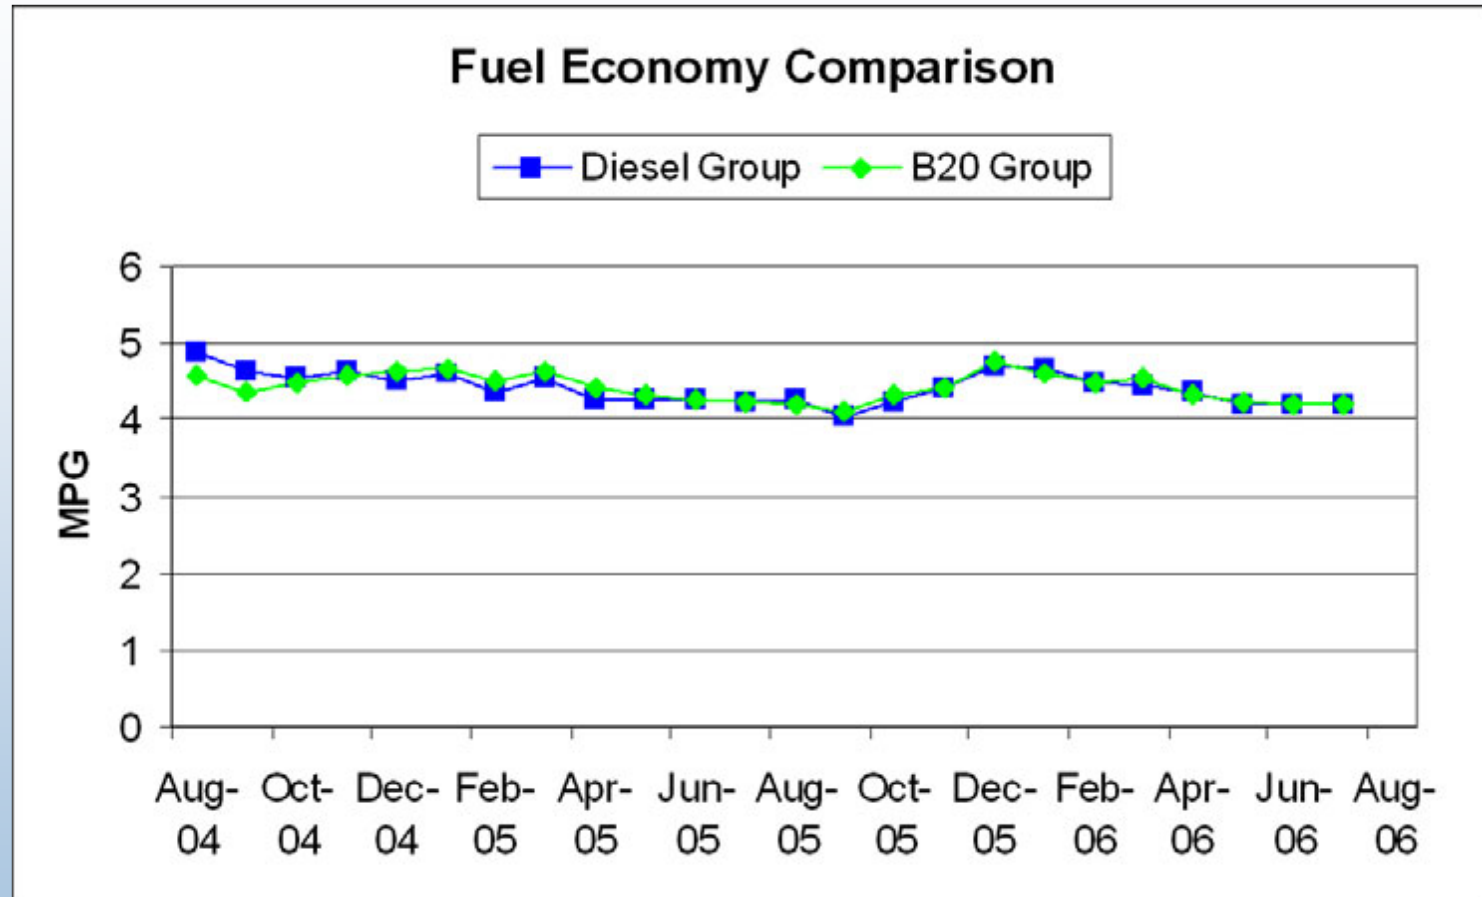


- 4.41 mpg Diesel, 4.41 mpg B20

# Maintenance Costs – Total

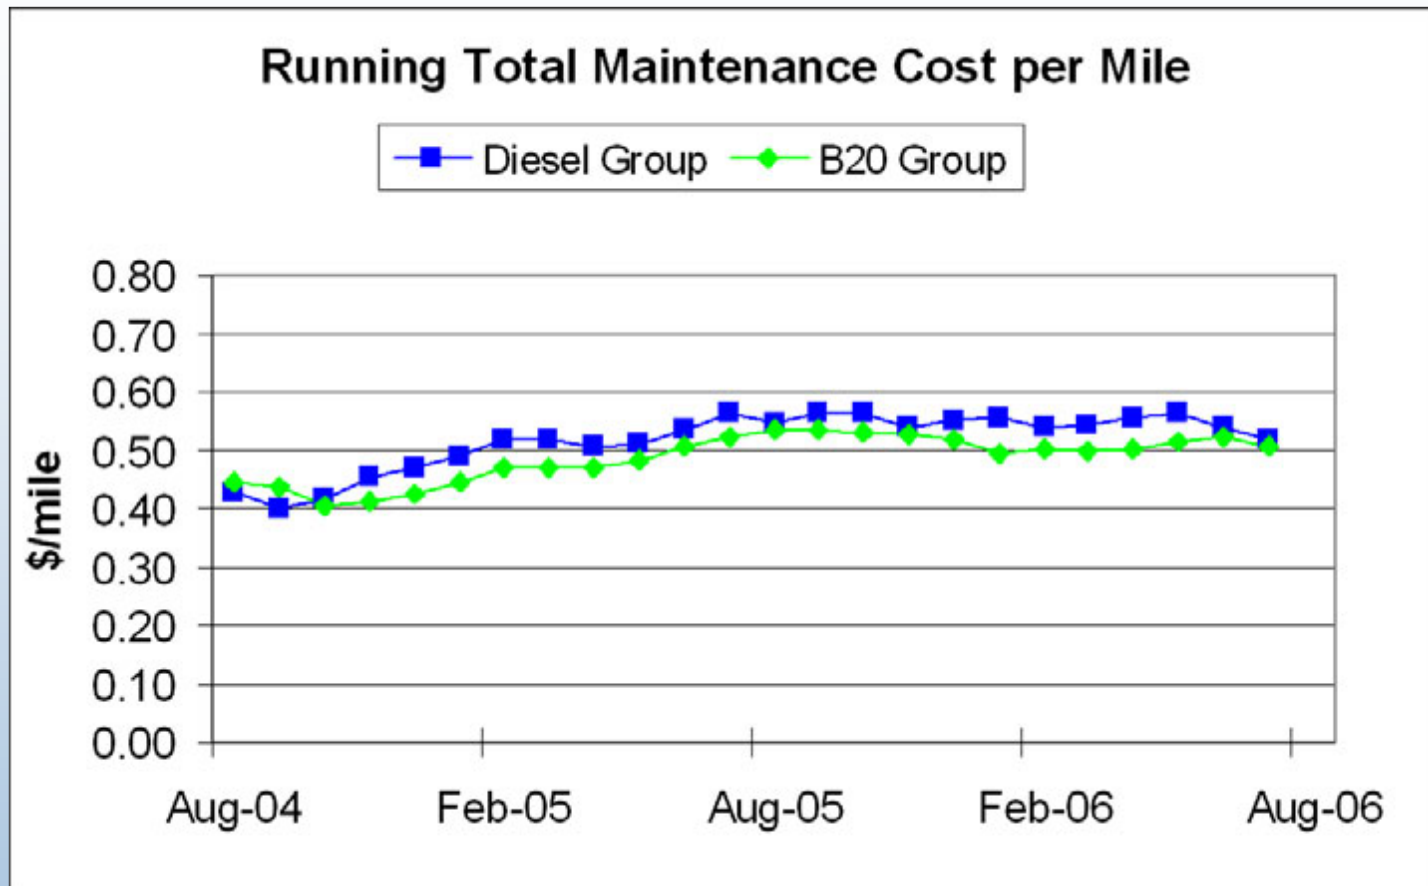

- 24-month average maintenance costs:
  - \$0.54/mile diesel, \$0.51/mile B20
  - Diesel transmission repairs drive difference

# Maintenance Costs – Engine, Fuel System

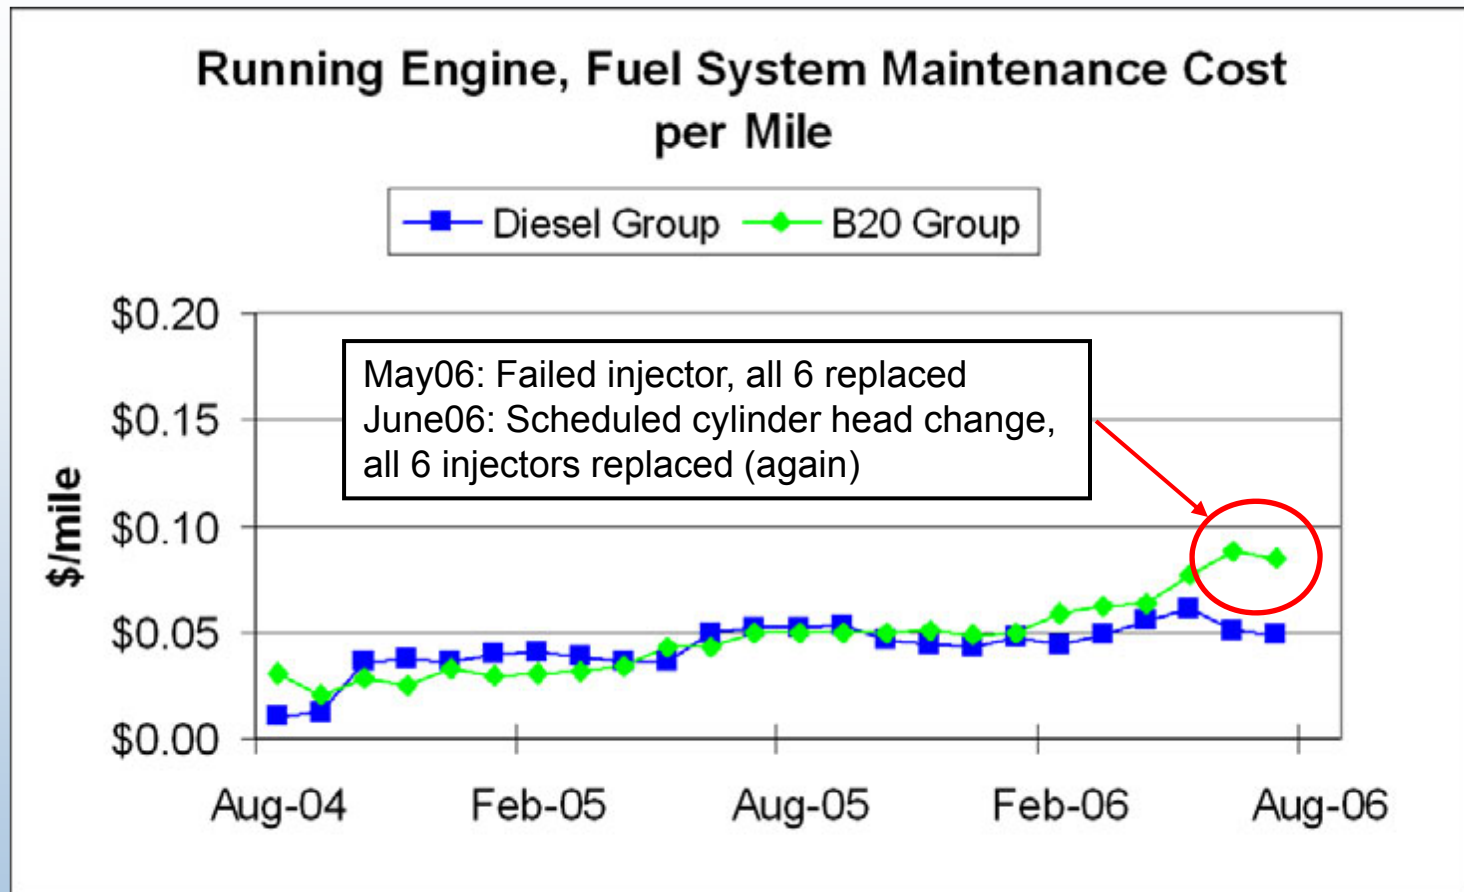


- 24-month average engine and fuel system maintenance costs:
  - \$0.05/mile diesel, \$0.07/mile B20

# Maintenance Costs – Engine, Fuel System

	<b>Diesel</b>	<b>B20</b>
<b>Fuel pump</b>	2	1
<b>Fuel injector</b>	1	13

- Injector discrepancy driven by replacement of full set, then cylinder head replacement
- No reason to suspect B20 fuel currently
  - Cummins tear-down analysis of 6-injector set that failed

# Road Calls

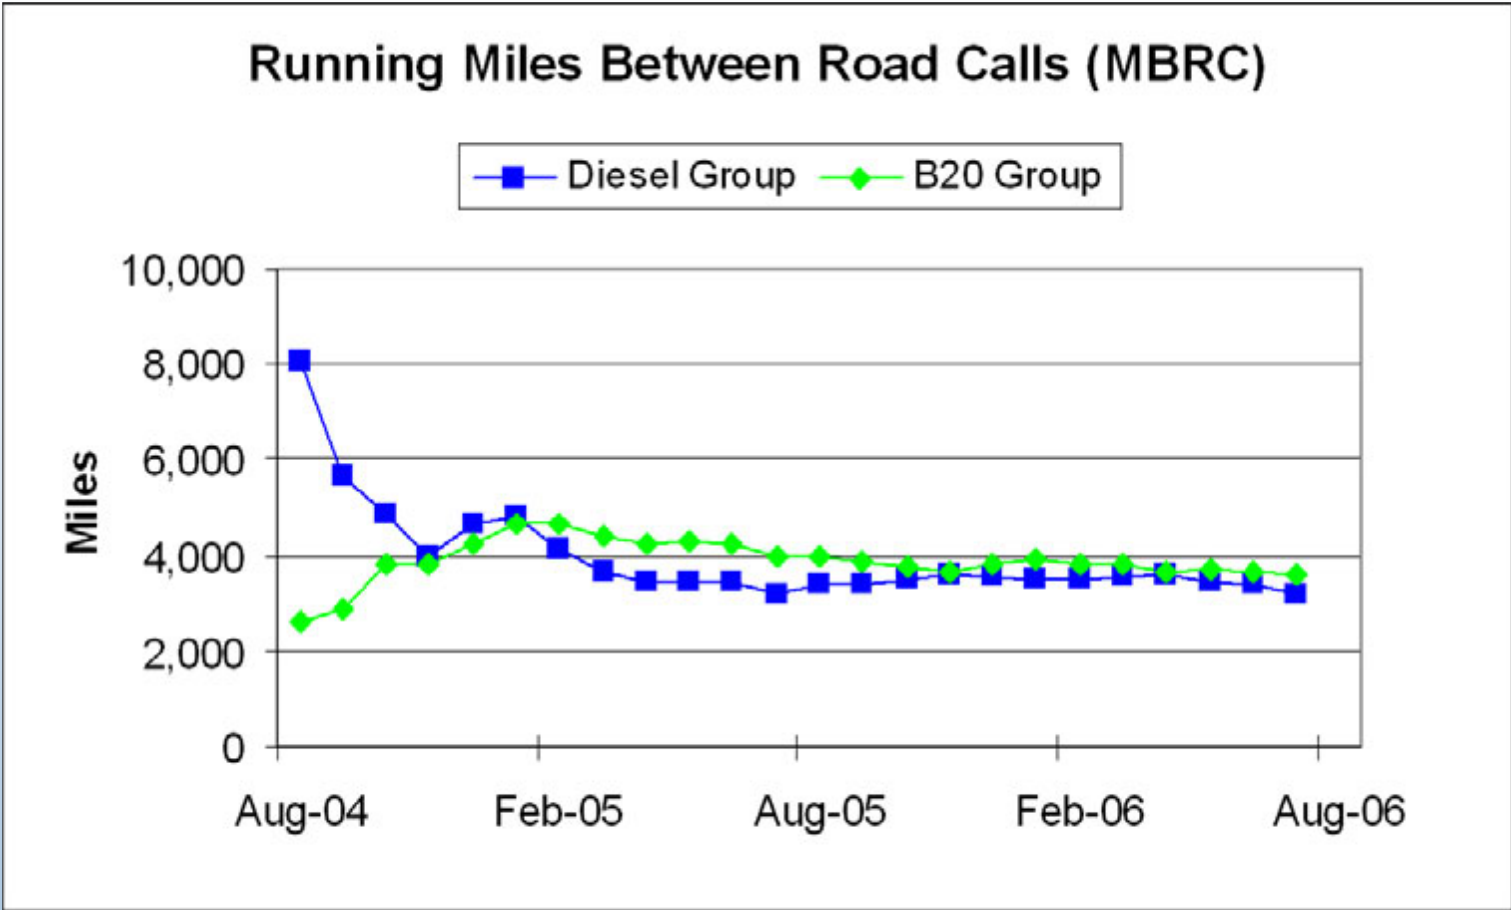

- Average MBRCs are comparable
  - 3,197 Diesel, 3,632 B20



# Fuel Analysis

- March 2006 vehicle fuel sample analysis
  - Acid value, peroxides, aldehydes (alkanals) determined by Saftest
  - Acid value and peroxides consistently low as compared to NREL B20 fuel quality survey
  - Alkanals indicate some oxidative degradation, but are not high

Vehicle Number	B100 Content Volume %	Acid Value mgKOH/g	Peroxide Saftest™ ppm	Aldehyde Saftest mmol/mL
2207	20.3	<0.1		58.212
2208	18.4	<0.1	13.22	57.902
2209	17.4	<0.1	11.59	55.696
2210	18.7	<0.1	16.75	73.35
2211	19.7	<0.1	11.42	61.546

# Fuel Analysis

- Composite March 2006 vehicle fuel samples had more detailed analysis
  - Higher cetane number
  - Lower sulfur content
  - 2.4% lower B20 energy content

Analysis	ASTM Method	B20 Composite	Diesel Composite
Water and sediment vol %	D2709	0.01	0.01
Cloud point °C	D2500	-13	-14
Sulfur ppm	D5453		<b>324</b>
	D2622	<b>272</b>	
Aromatics vol %	D1319		25.6
Olefins vol %			1.3
Saturates vol %			73.1
C mass%	D5291	84.7	86.6
H mass%		12.9	13.2
Derived cetane number	D6890	<b>51</b>	<b>48</b>
LHV BTU/lb	D240	<b>17,860</b>	<b>18,307</b>




# B20 Fuel Filter Plugging

Three filter plugging events:

1. April 2005 – Two buses
  - Brown slime. Cold snap?
  - Biocide applied to next fuel delivery

Bus	% Biodiesel	CFPP °C	Water (ppm)	Bug Alert
	18.4			(med)
2208	16.9	-25	77	27 (low)
2209	19.2	-25	88	57 (low)
2210	20.3	-25	97	1 (very low)
2211	15	-30	78	93 (low-med)

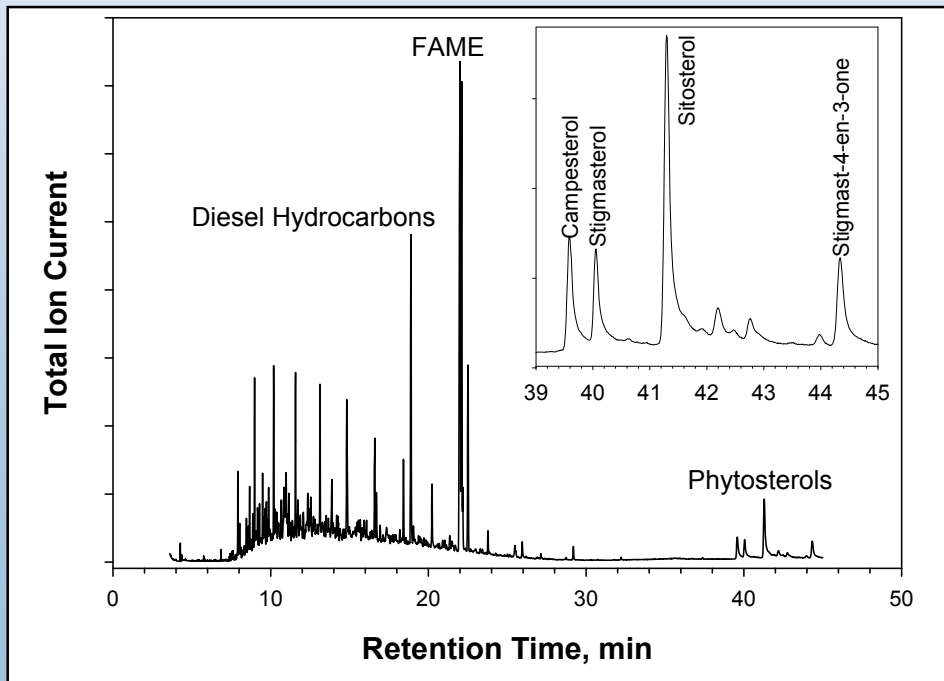

- Filter residue analysis indicated presence of plant sterols

# B20 Fuel Filter Plugging





2. June 2005 – One bus
  - B20 storage tank fuel level low
  - Sediment plugged dispenser and fuel filters
  - Fuel filter samples collected
  - Preliminary GC-MS results indicate high levels of phytosterols

3. July 2006 – Two buses
  - B20 storage tank fuel level low (end of project)
  - Sediment plugged fuel filters (Soap?)
  - Fuel filter samples, fuel storage tank samples collected
  - Preliminary GC-MS results indicate high levels of phytosterols

# Lube Oil Analysis

- One set of oil drain samples (March/April 2006) analyzed by Cummins
- Exponential decay of ZDDP and TBN consistent with previous Cummins testing
- No difference in ZDDP decay between diesel and B20 samples
- TBN decay may be occurring more slowly in B20 samples

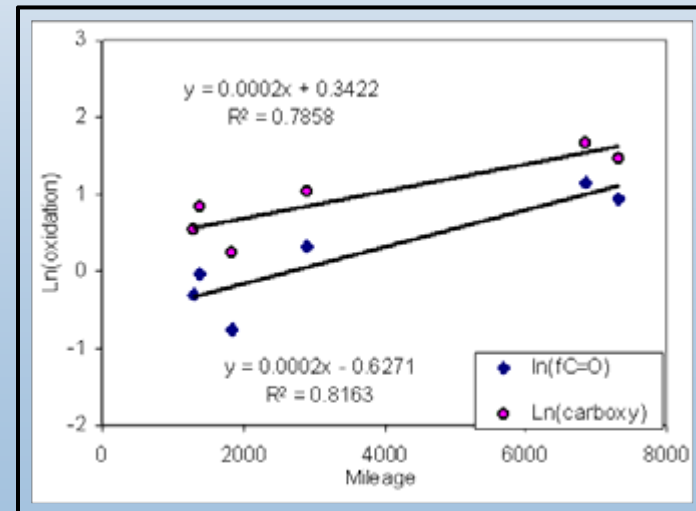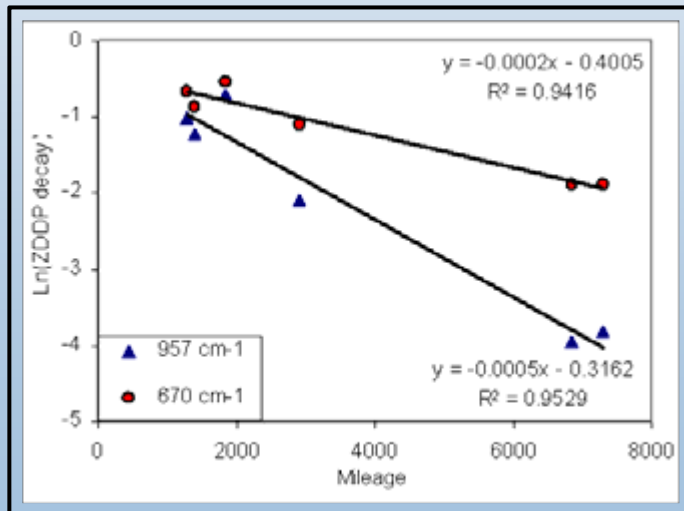


# Lube Oil Analysis

	<b>Diesel</b>	<b>B20</b>
<b>Fuel Dilution</b>	Low	Lower
<b>Metals (evaporative)</b>	No difference	
<b>Metals (engine wear)</b>	Low	Lower @ high mileage
<b>Soot</b>	Low	50% lower
<b>Viscosity, Viscosity Index</b>	No difference	

# Bus Chassis Dynamometer Testing




- Two in-use buses tested
- Cummins ISM 2000 engine – no EGR
- In-use B20 vs. diesel fuel

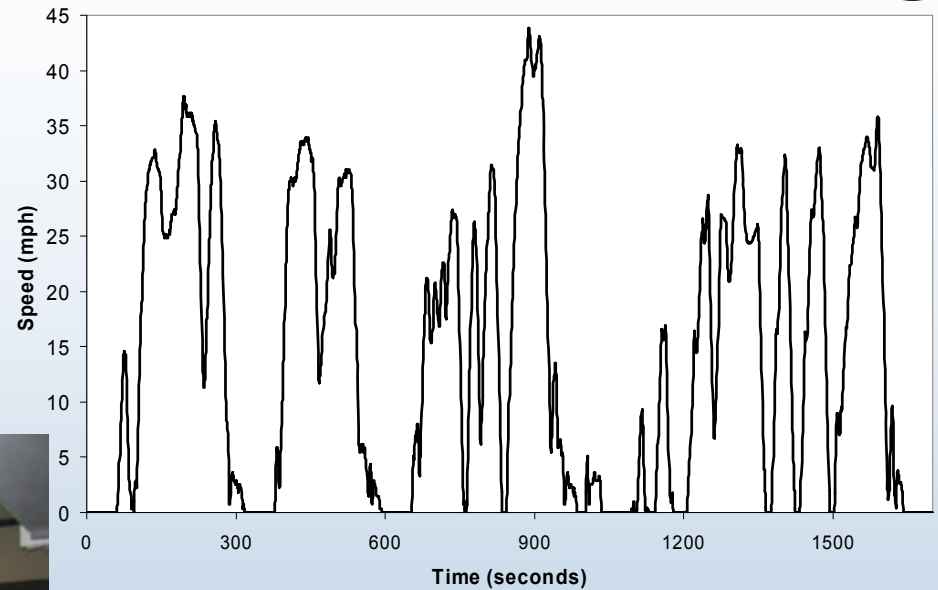

	Skip Bus Route	CSHVC
<b>Avg Speed</b>	15.6 mph	14.2 mph
<b>Max Speed</b>	40 mph	44 mph
<b>Stops/Mile</b>	0.78	0.75 <sup>21</sup>

# Bus Chassis Dynamometer Test Results

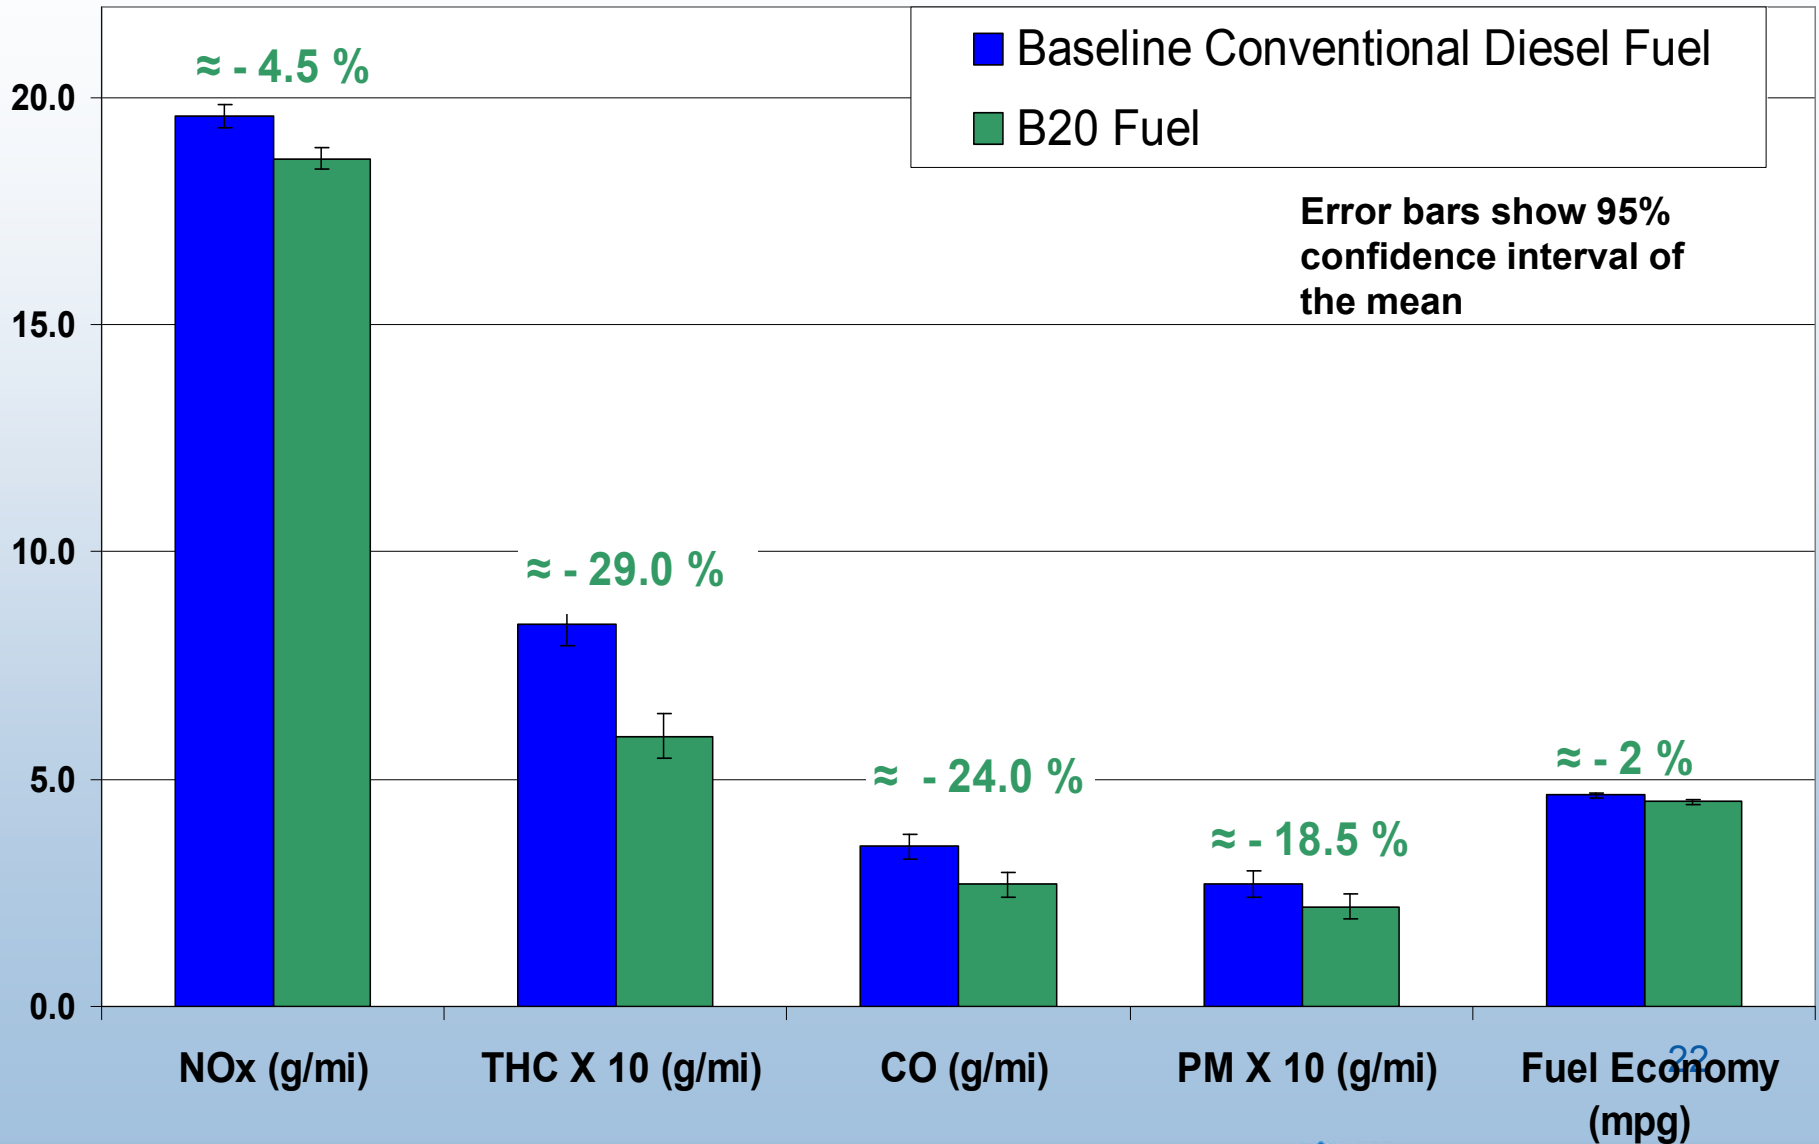

# Conclusions

- No significant difference between B20 and diesel baseline:
  - On-road fuel economy
  - Reliability (road calls)
  - Total maintenance costs
  - Fuel System and engine maintenance costs
- Filter plugging issues – plant sterols one potential cause
- Early B20 splash-blending issues, generally B20 in tank
- Limited lube oil data suggests no harm with B20 use, some potential benefits
- Significant emissions reductions including NOx
- **SAE Paper 2006-01-3253**

