

CAVITATION DESCALING TECHNIQUES FOR

GEOHERMAL APPLICATIONS

Alagu P. Thiruvengadam
Chairman
Daedalean Associates, Inc.
Woodbine, Maryland 21797

A simple and more efficient technique for descaling hard silica scales is urgently needed in order to exploit geothermal energy resources economically. With this objective in mind, DAEDALEAN ASSOCIATES, Incorporated is engaged in a research and development program utilizing the phenomenon of cavitation for cleaning and descaling under the sponsorship of ERDA, Division of Geothermal Research. The highlights of the research carried out so far under this program is reviewed in this presentation.

Various effects of the phenomenon of cavitation erosion are presented. The intensity of cavitation erosion and its use in descaling applications are explained. The parameters governing the intensity of erosion are discussed. The overall objectives of the program are to demonstrate the engineering feasibility of utilizing cavitation and to generate engineering design data for its application in geothermal technology.

The test facility used for this research consists of flow equipment, test chamber, and associated instrumentation. The performance of cavitating nozzles have been evaluated over a range of sizes. The intensity of erosion for one specific nozzle has been measured. The cleaning rates, the quality of cleaned surface and the intensity margin available so as not to damage the pipe wall have been determined for this specific design. Further work is under progress.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency Thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISCLAIMER

Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.

CAVITATION DESCALING TECHNIQUES FOR GEOTHERMAL APPLICATIONS

PROGRAM OBJECTIVES

- DEMONSTRATE THE FEASIBILITY OF
CAVITATION DESCALING TECHNIQUES
FOR GEOTHERMAL SCALES

- COLLECT DESIGN DATA ON:
 - CLEANING RATE
 - JET SPEED
 - FLOW RATE
 - NOZZLE GEOMETRY
 - SCALE THICKNESS
 - PIPE DIAMETER
 - CLEANING PROCEDURE
 - HORSEPOWER REQUIRED

ACCOMPLISHMENTS TO-DATE

- **EXPERIMENTAL FACILITY WAS COMPLETED AND CALIBRATED**
- **FEASIBILITY OF CAVITATION DESCALING TECHNIQUE WAS ESTABLISHED**
- **DESIGN DATA ARE BEING COLLECTED**
 - **NOZZLE SIZE**
 - **PRESSURE**
 - **VELOCITY**
 - **SCALE THICKNESS**
 - **THRESHOLD INTENSITY FOR PIPE WALL**
 - **CLEANING RATES ON TYPICAL SCALES**

INTENSITY OF CAVITATION DAMAGE

$$E_a = \Delta V \cdot S_e$$

$$P_a = \frac{\Delta V \cdot S_e}{t}$$


$$\text{Intensity} = \frac{\text{POWER ABSORBED}}{\text{AREA OF EROSION}}$$

$$I = \frac{\Delta V \cdot S_e}{A_e \cdot t} = \frac{i S_e}{t}$$

i = AVERAGE DEPTH OF EROSION

S_e = EROSION STRENGTH
OF MATERIAL

t = DURATION OF EROSION

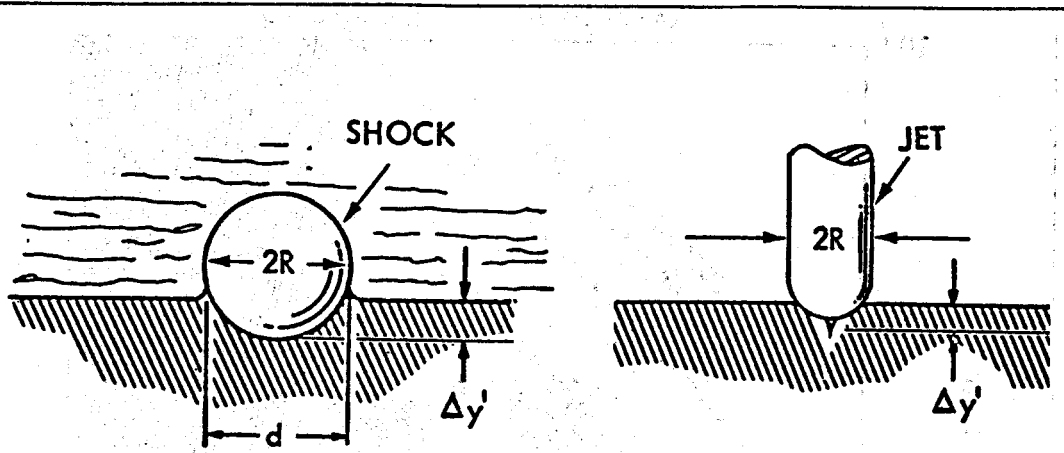

Single Impact

$$\Delta y' \cdot S_e \propto P_i \cdot R$$

Multiple Impact

$$\frac{\Delta y}{\Delta t} \cdot S_e \propto P_i \cdot R \cdot f$$

SPHERICAL COLLAPSE

$$P_i \propto P_o (R_o / R_c)^2$$

For example:

$$R_o / R_c \propto \exp(P_o / Q_o)$$

STAGNATION
PRESSURE
(Macrojet)

$$P_i \propto \frac{1}{2} \rho V_j^2$$

$$P_i \propto \frac{1}{2} \rho \cdot P_o / \rho$$

$$P_i \propto P_o$$


WATER-HAMMER
PRESSURE
(Microjet)




$$P_i \propto \rho C V_j$$

$$P_i \propto \rho C (P_o / \rho)^{\frac{1}{2}}$$

$$P_i \propto C (\rho P_o)^{\frac{1}{2}}$$

PARAMETERS GOVERNING INDENTATION AND RATE OF EROSION

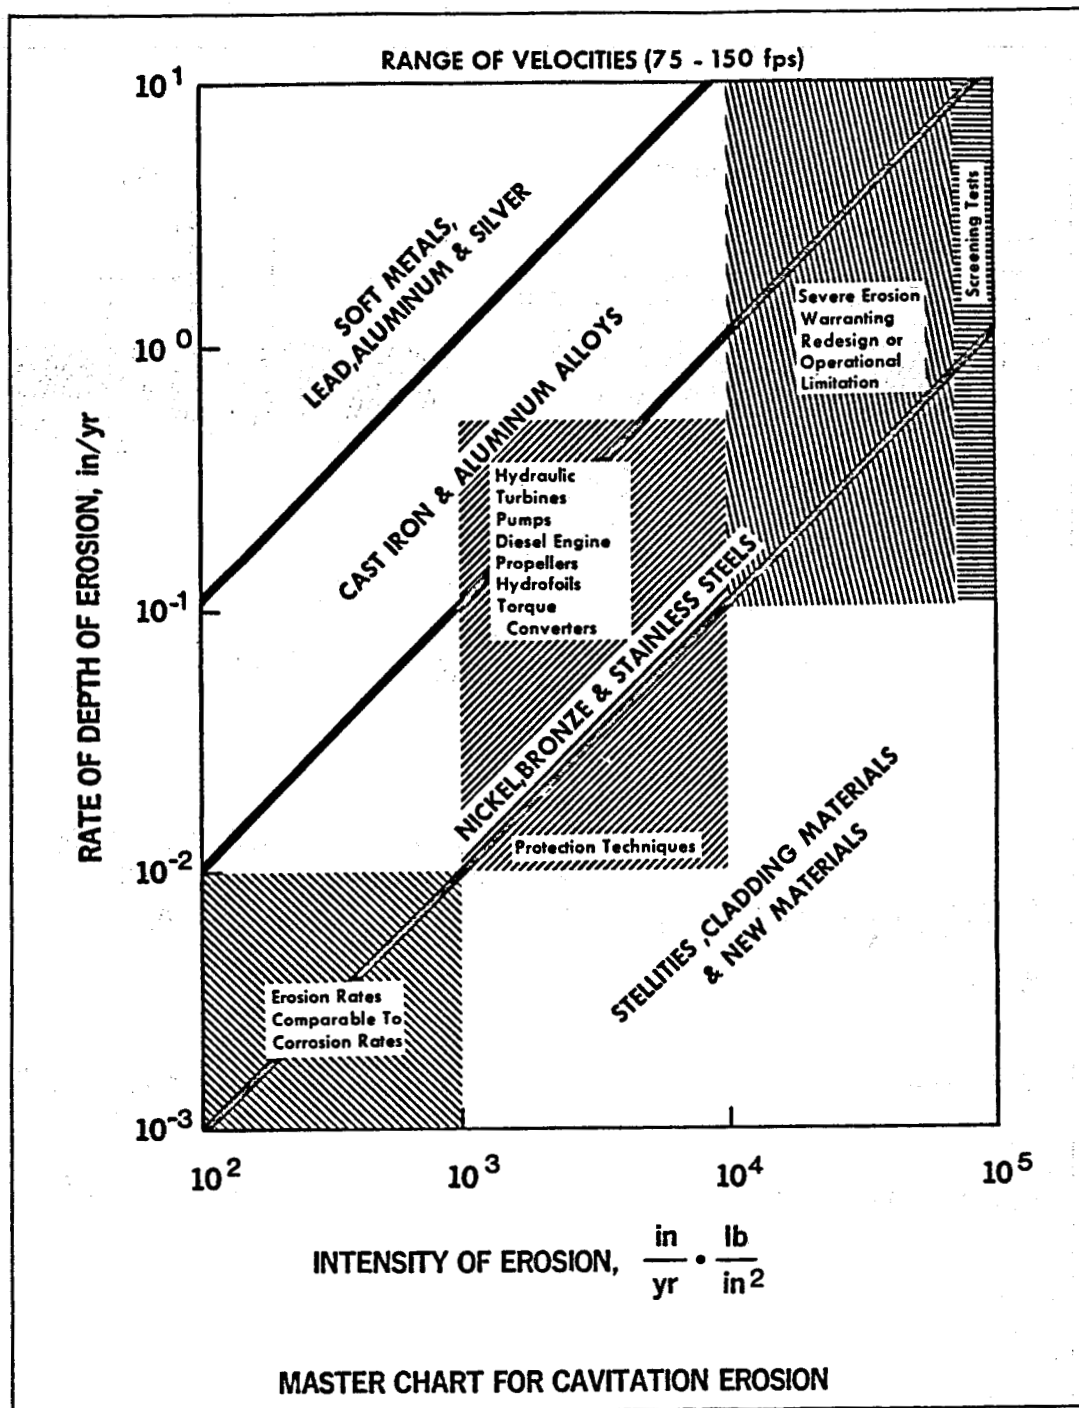

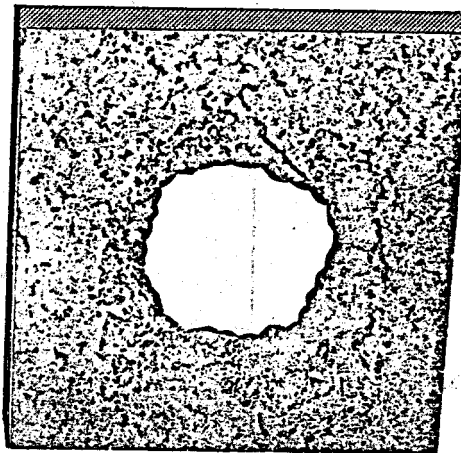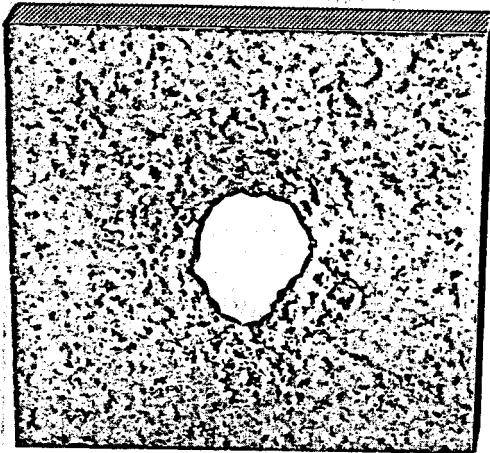

GRANITE

COMP. STRENGTH -
35,000 psi.


DRILLING RATE -
3.0 inches/minute

BASALT

COMP. STRENGTH -
40,000 psi.

DRILLING RATE -
2.5 inches/minute

DRILLING RATES ON HARD ROCKS

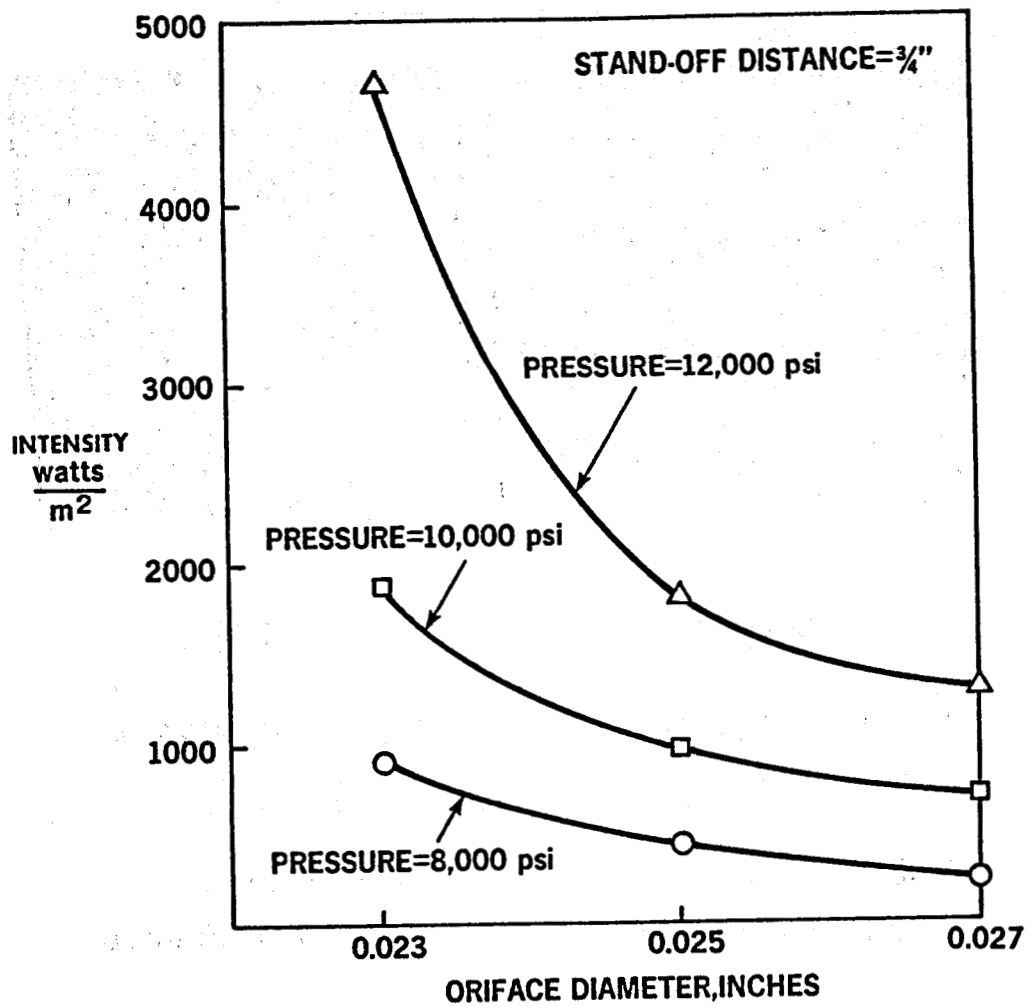

INTENSITY OF CAVITATION EROSION vs. NOZZLE SIZE
AT CONSTANT PRESSURE

