

University of New Hampshire University of New Hampshire Scholars' Repository

Center for Coastal and Ocean Mapping

Center for Coastal and Ocean Mapping

3-2003

Fusing Information in a 3D Chart-of-the-Future Display

Roland J. Arsenault

University of New Hampshire, Durham, Roland.Arsenault@unh.edu

Matthew D. Plumlee

University of New Hampshire, Durham, Matthew.Plumlee@unh.edu

Shep M. Smith LT

NOAA

Colin Ware


University of New Hampshire, Durham, colin.ware@unh.edu

Rick Brennan

University of New Hampshire, Durham

See next page for additional authors

Follow this and additional works at: <https://scholars.unh.edu/ccom>

 Part of the [Oceanography and Atmospheric Sciences and Meteorology Commons](#)

Recommended Citation

Arsenault, Roland J.; Plumlee, Matthew D.; Smith, Shep M. LT; Ware, Colin; Brennan, Rick; and Mayer, Larry A., "Fusing Information in a 3D Chart-of-the-Future Display" (2003). *Center for Coastal and Ocean Mapping*. 1158.
<https://scholars.unh.edu/ccom/1158>

This Poster is brought to you for free and open access by the Center for Coastal and Ocean Mapping at University of New Hampshire Scholars' Repository. It has been accepted for inclusion in Center for Coastal and Ocean Mapping by an authorized administrator of University of New Hampshire Scholars' Repository. For more information, please contact nicole.hentz@unh.edu.

Authors

Roland J. Arsenault, Matthew D. Plumlee, Shep M. Smith LT, Colin Ware, Rick Brennan, and Larry A. Mayer

Fusing Information in a 3D Chart-of-the-Future Display



Roland Arsenault, Matthew Plumlee, Shep Smith, Colin Ware,
Richard Brennan, and Larry Mayer

Center for Coastal and Ocean Mapping/Joint Hydrographic Center,


University of New Hampshire, USA




The goal of the "Chart of the Future" project is to take a revolutionary, rather than evolutionary approach to building decision support systems for the mariner. We pay attention to current ENC's as sources of functional requirements rather than as foundations on which to build. Our design strategy is to build proof-of-concept prototypes, and thereby take better advantage of new technologies such as inexpensive 3D displays. We carry out prototype development on our GeoNav3D platform, which is based on GeoZui3D, a flexible interactive 3D data visualization system supporting georeferenced and time-referenced data. With GeoNav3D installed in limited real-world environments, prototype elements can be evaluated against each other, against existing charting technology, and against emerging ENC technologies. Here we present two design concepts in prototype form.

Fusing Tide, Depth, and Planning Information


In our design of GeoNav3D, we assume that the chart of the future will have available to it various forms of detailed information, including continuous bathymetry such as a navigation surface, real time tides, estimated currents, AIS information about other vessels, radar, and weather. GeoNav3D can display tides in real-time by continuously adjusting the color contours to take into account the estimated water surface based on modeled tides. Below is the Great Bay estuary, and the entrance to Little Bay from the Piscataqua River at the General Sullivan Bridge. The color scheme illustrates the under keel clearance by using blues for safe areas, yellow for warning areas, and red for danger areas. At high tide, a mariner can safely transit under the bridge. At low tide, the mariner must be cautious or elect to wait for higher tides.

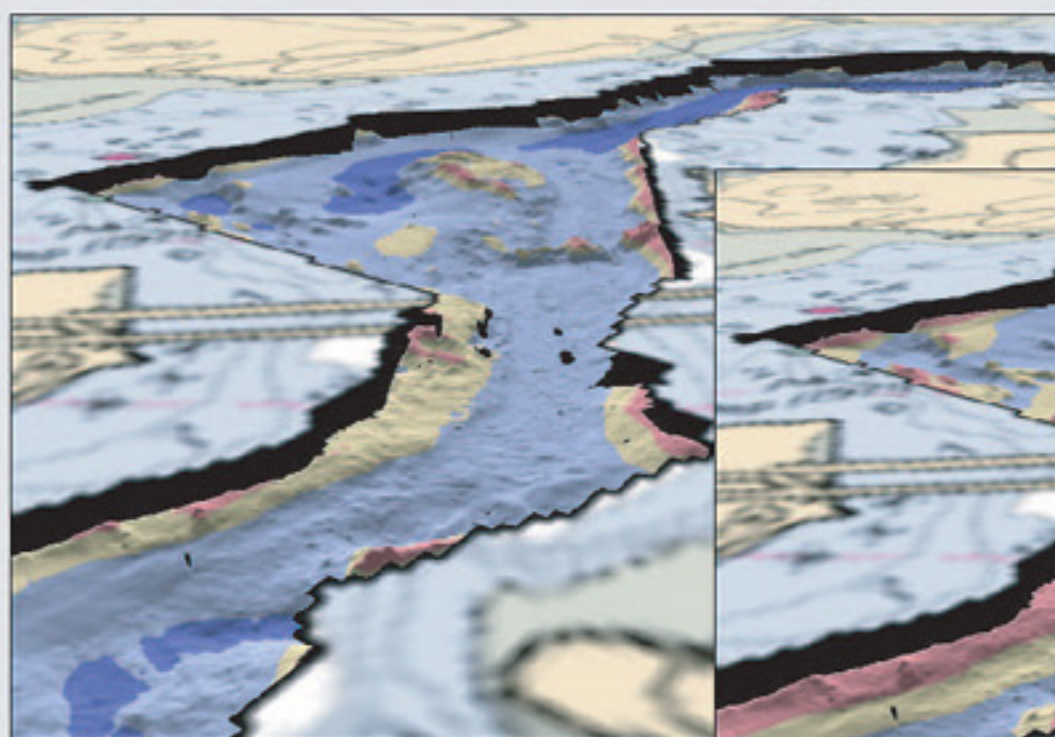

High Tide

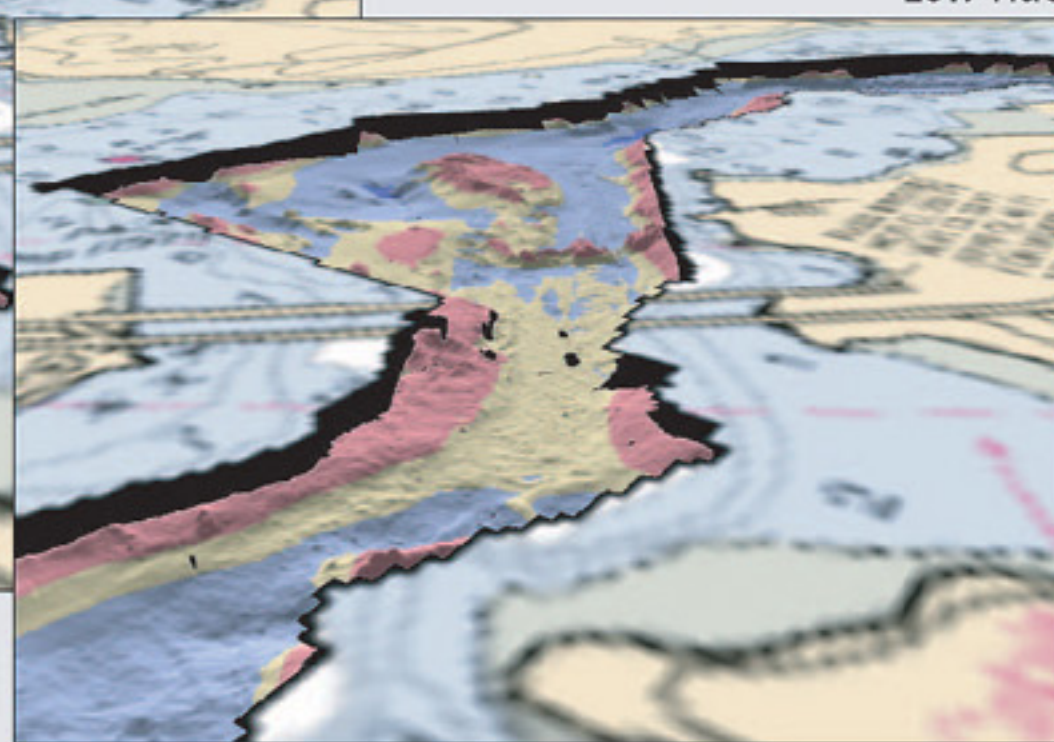


Low Tide

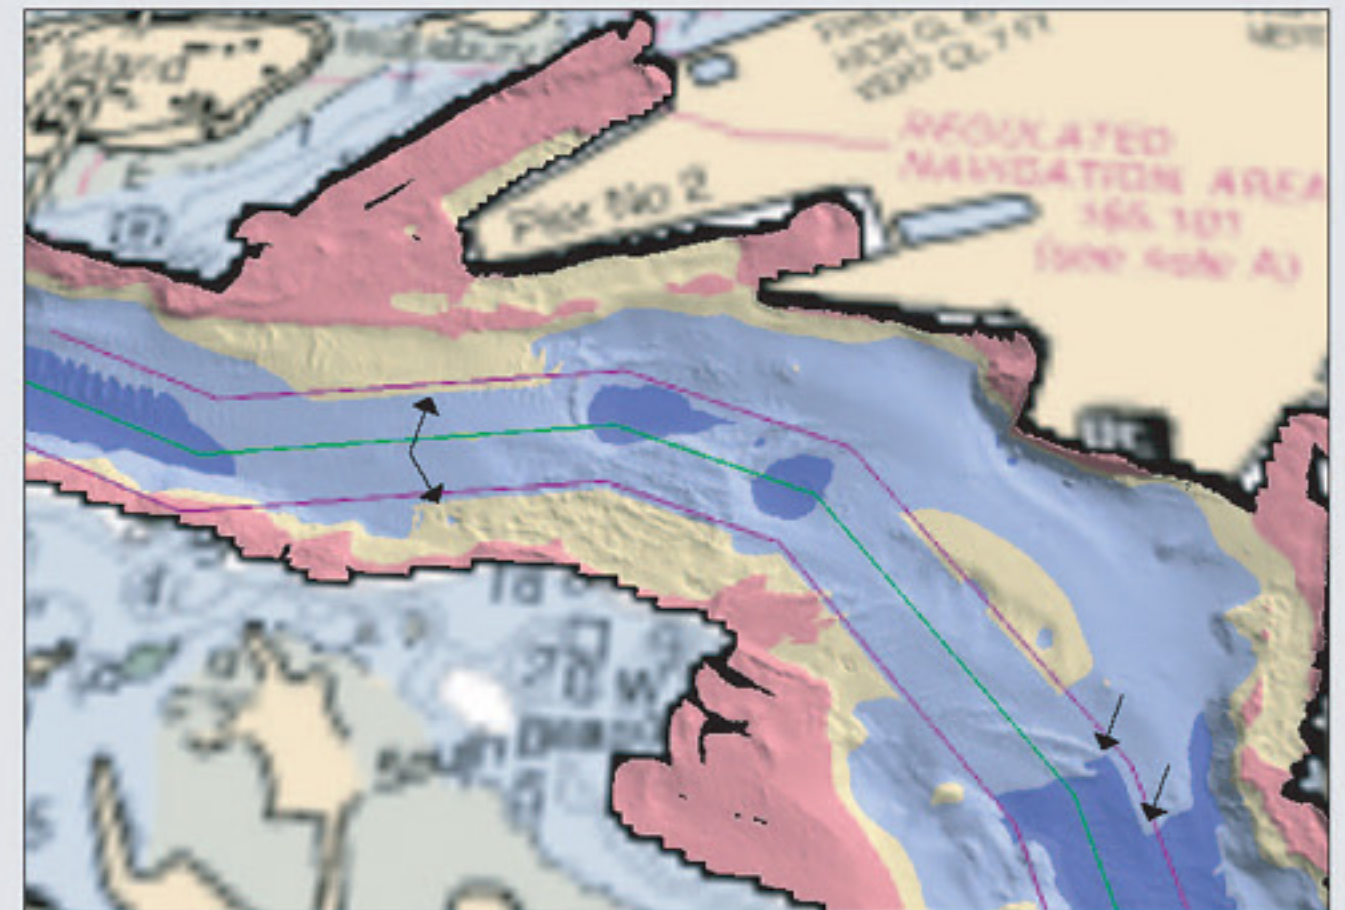

GeoNav3D also supports voyage planning through display of anticipated tides in a corridor along a planned path. The mariner can enter a series of waypoints and anticipated arrival times, and GeoNav3D automatically computes adjusted depths along a navigation corridor. Above is a navigation path plotted on the Piscataqua river. At the present time, the path passes through an area where the under-keel clearance is at a warning level (yellow zone outside the corridor). However, the under keel clearance is adequate when we expect to reach each waypoint, (blue zone inside the corridor). Note the discontinuities in color near the arrows, indicating the difference in time and tide inside the corridor.

Plan View

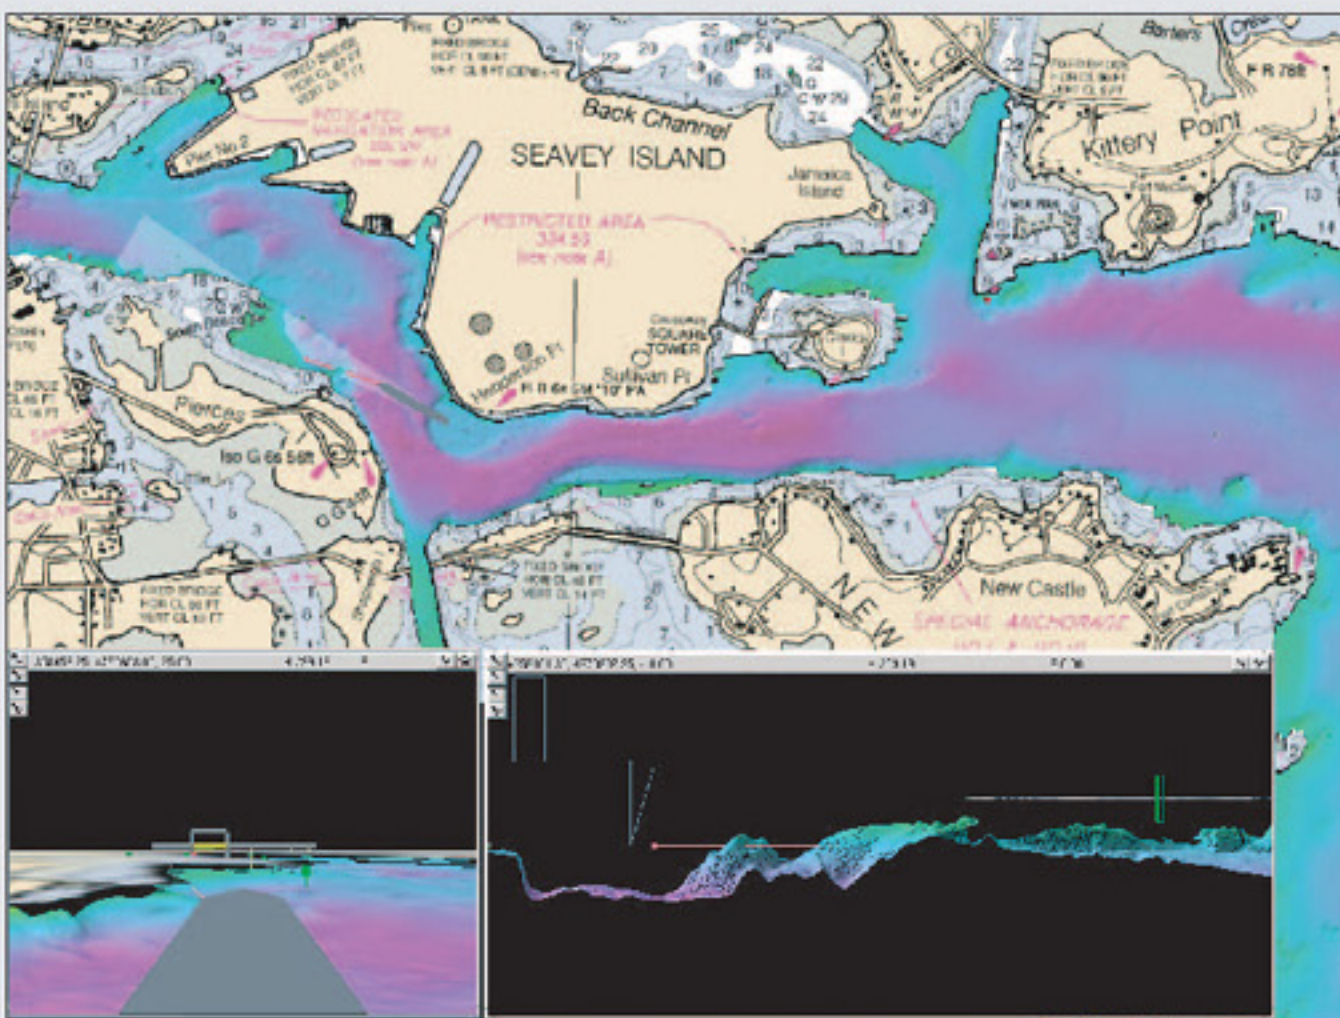

Bridge View

Profile View

Linking Multiple 3D Views

We expect the chart of the future to require multiple views, with each view specialized to support specific tasks. At left is a display that combines an existing chart with bathymetry, buoys, and a bridge. The plan view provides context for the two inset views, with information for addressing longer-term and larger-scale questions. The profile view is height-exaggerated and displays in wire-frame everything immediately in front of the vessel, for instant information about depth (the bottom) and height (bridges). The bridge view helps the mariner link real-world features seen out the window with charts and data displayed by the navigation system. It supports situational awareness and makes apparent the vessels and obstacles requiring the most immediate attention.

Information from distinct individual views must often be fused to make good decisions. GeoNav3D supports such fusion through various linking mechanisms. One such mechanism is a view proxy—a representation of one view within another. Another mechanism is the use of tethers that connect a view to its proxy in another view. Above, a view proxy appears as a headlight shining from the front of a vessel, representing what is visible in the profile view. At right is a prototype vessel traffic-control display with one view monitoring for collisions and the other following a fleet formation. Two proxies are shown, connected by tethers to the windows they represent. Other mechanisms are prototyped in GeoNav3D as well, including view coupling (for creating forward-up map views or object-following views like the bridge view and profile view) and a multi-view 3D mouse cursor.

